



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**DUAL INDUCTION
LOG**

Company	MULL DRILLING COMPANY, INC.		
Well	#1-14 McDONALD BROTHERS UNIT		
Field	PFAFF		
County	NESS		
State	KANSAS		
Company	MULL DRILLING COMPANY, INC.		
Well	#1-14 McDONALD BROTHERS UNIT		
Field	PFAFF		
County	NESS		
State	KANSAS		
Location:	API # : 15-135-25804-0000		Other Services CDL/CNL/PE MEL/SONIC
Permanent Datum	GROUND LEVEL		Elevation
Log Measured From	KELLY BUSHING 5' A.G.L.		2196
Drilling Measured From	KELLY BUSHING		K.B. 2201 D.F. 2199 G.L. 2196
Date	9/17/14		
Run Number	ONE		
Depth Driller	4400		
Depth Logger	4401		
Bottom Logged Interval	4399		
Top Log Interval	00		
Casing Driller	8 5/8"@214'		
Casing Logger	214		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 9,400 PPM
Density / Viscosity	9.0/52		
pH / Fluid Loss	9.5/11.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.650@85F		
Rmf @ Meas. Temp	.488@85F		
Rmc @ Meas. Temp	.780@85F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.460@120F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	9:15 A.M.		
Maximum Recorded Temperature	120F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEVIN KESSLER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
NESS CITY, KS., 4E. ON HWY 96 TO "RD. W", 4S., 2. INTO



NABORS

**COMPLETION
& PRODUCTION**

MAIN SECTION

Database File:

25882pe.db

Dataset Pathname:

pass3.6

Presentation Format:

dil2


Dataset Creation:


Wed Sep 17 10:34:38 2014

Charted by:

Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
0	RWA (Ohm-m)	1	1000	CILD (mmho/m)	0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

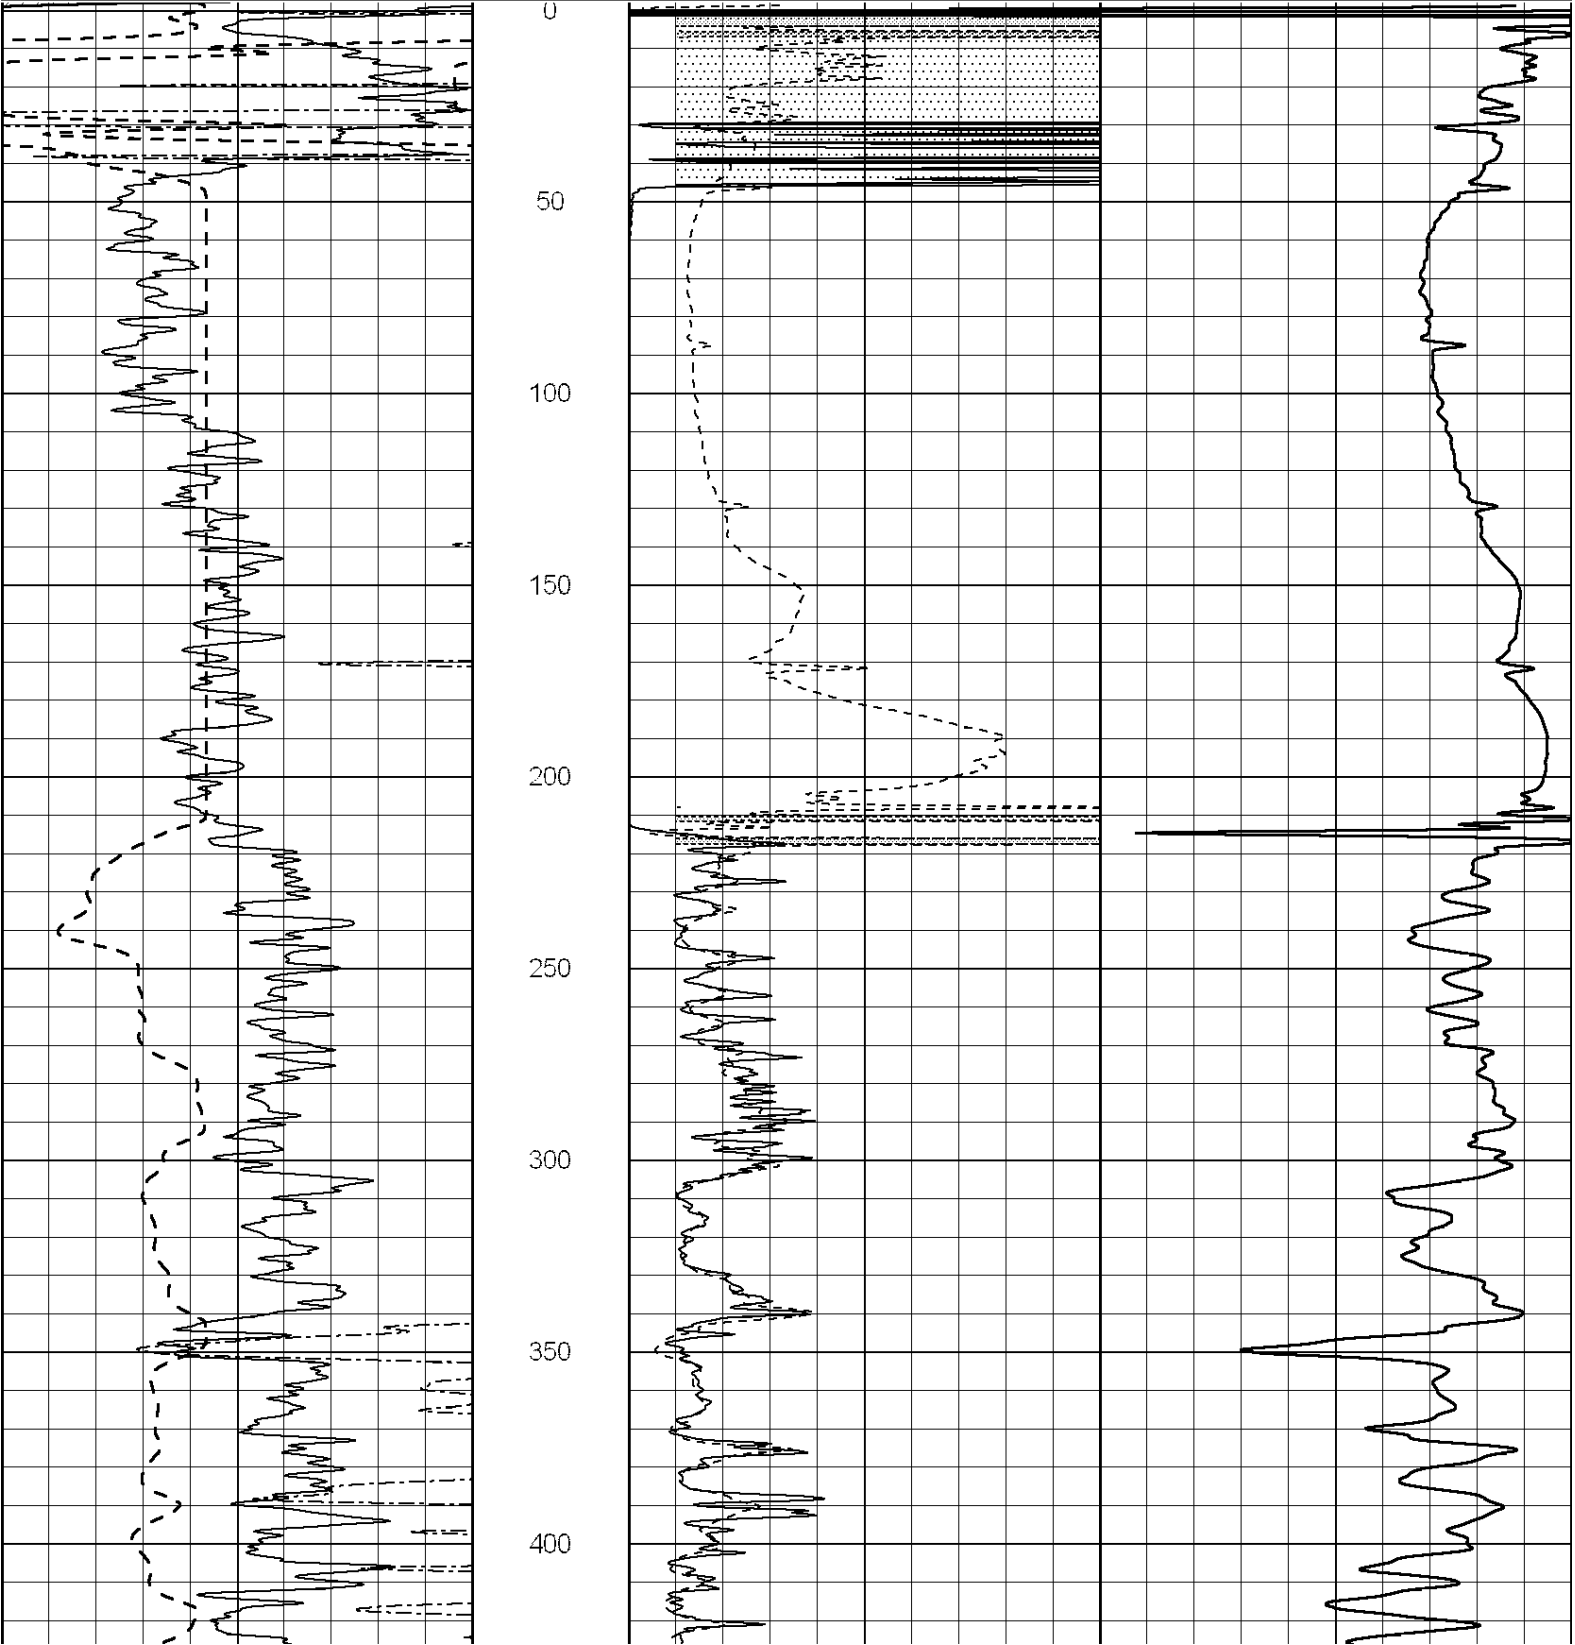

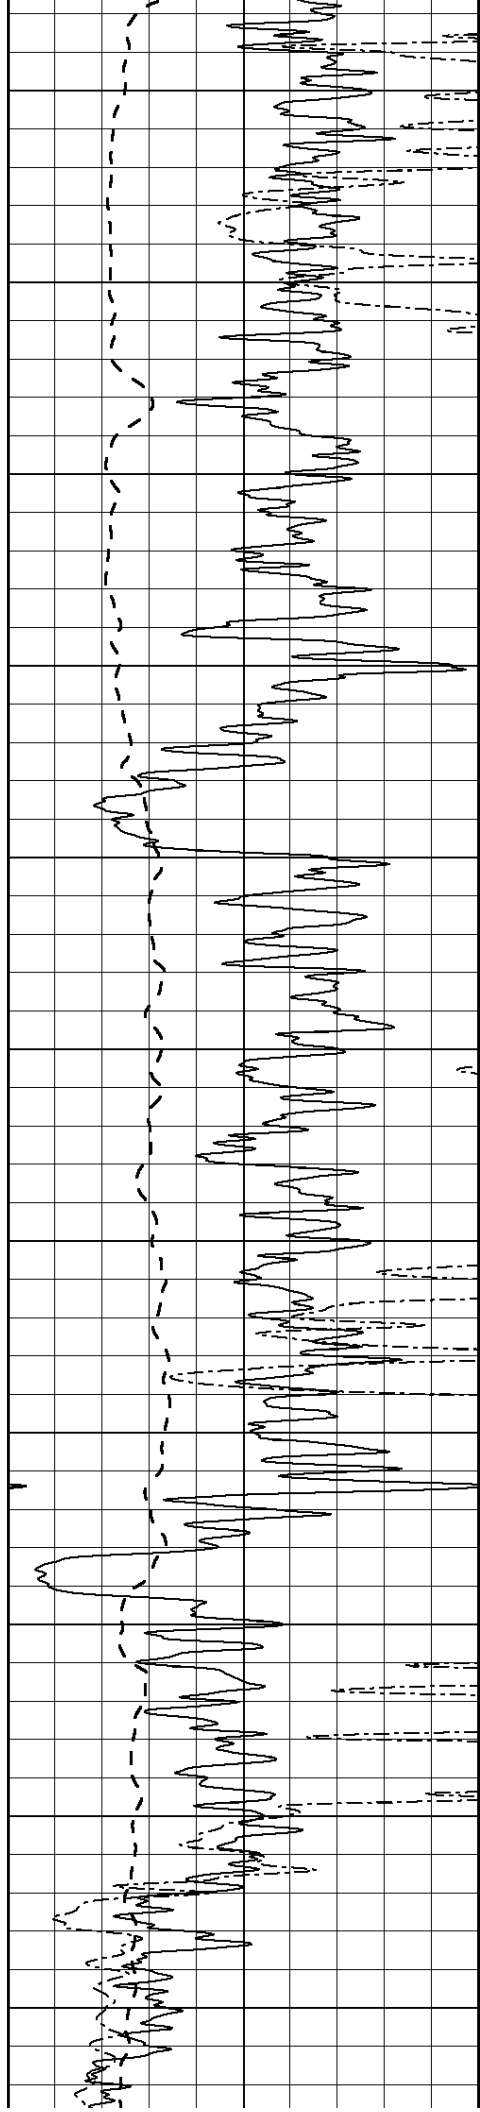

450

500

550

600

650

700


750



800



850


900

950

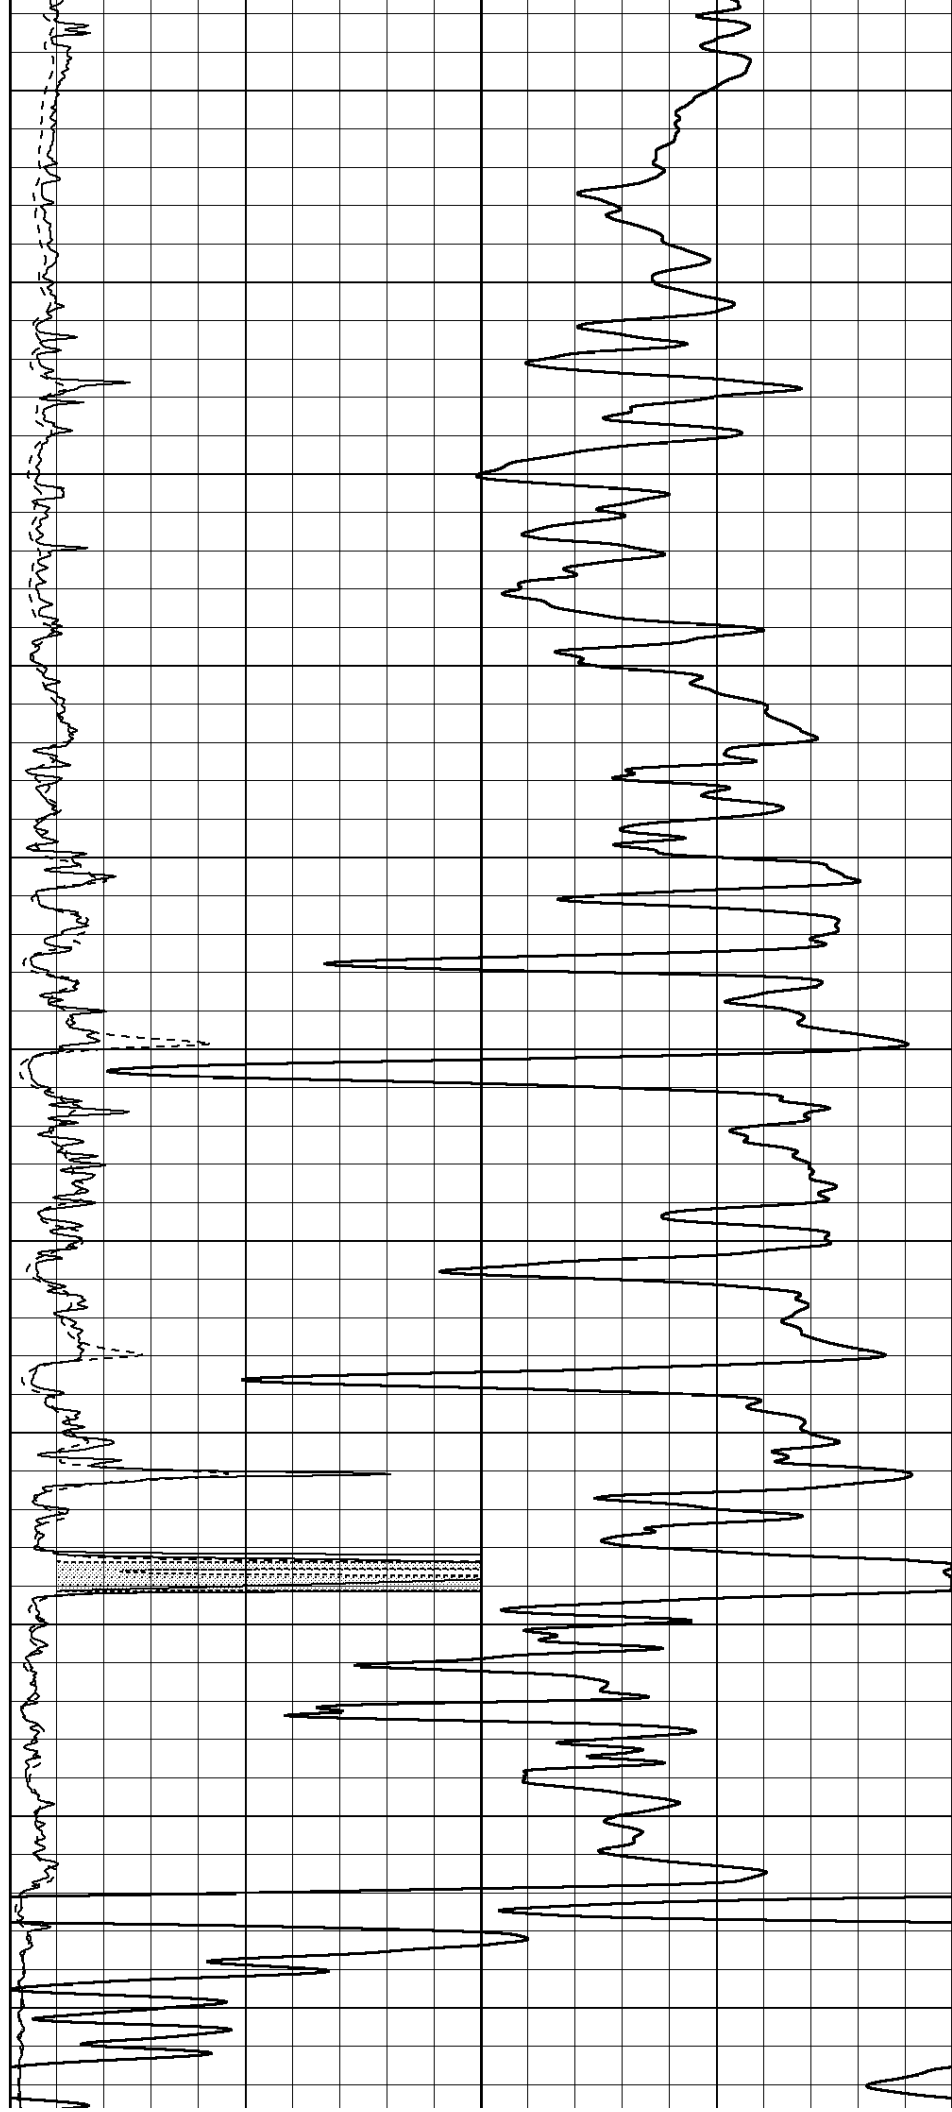

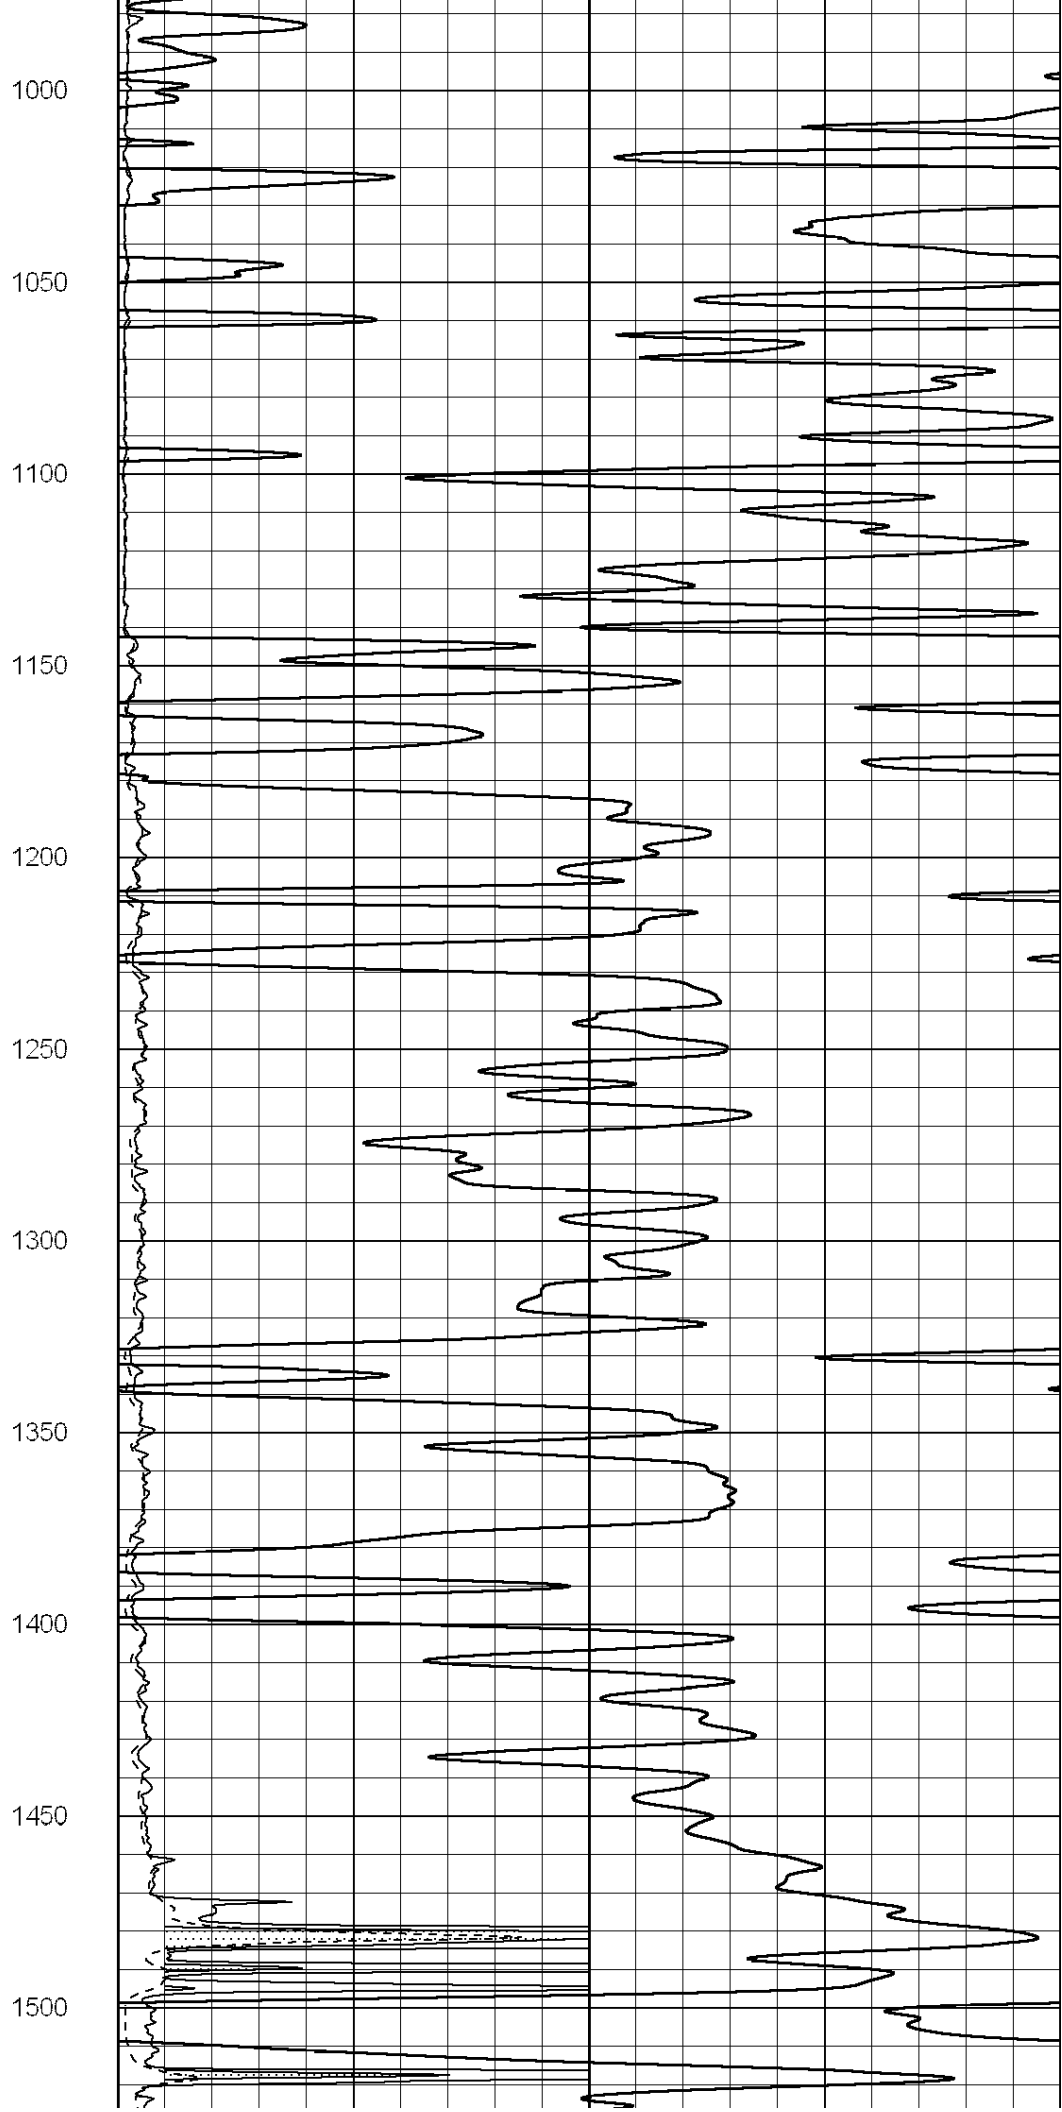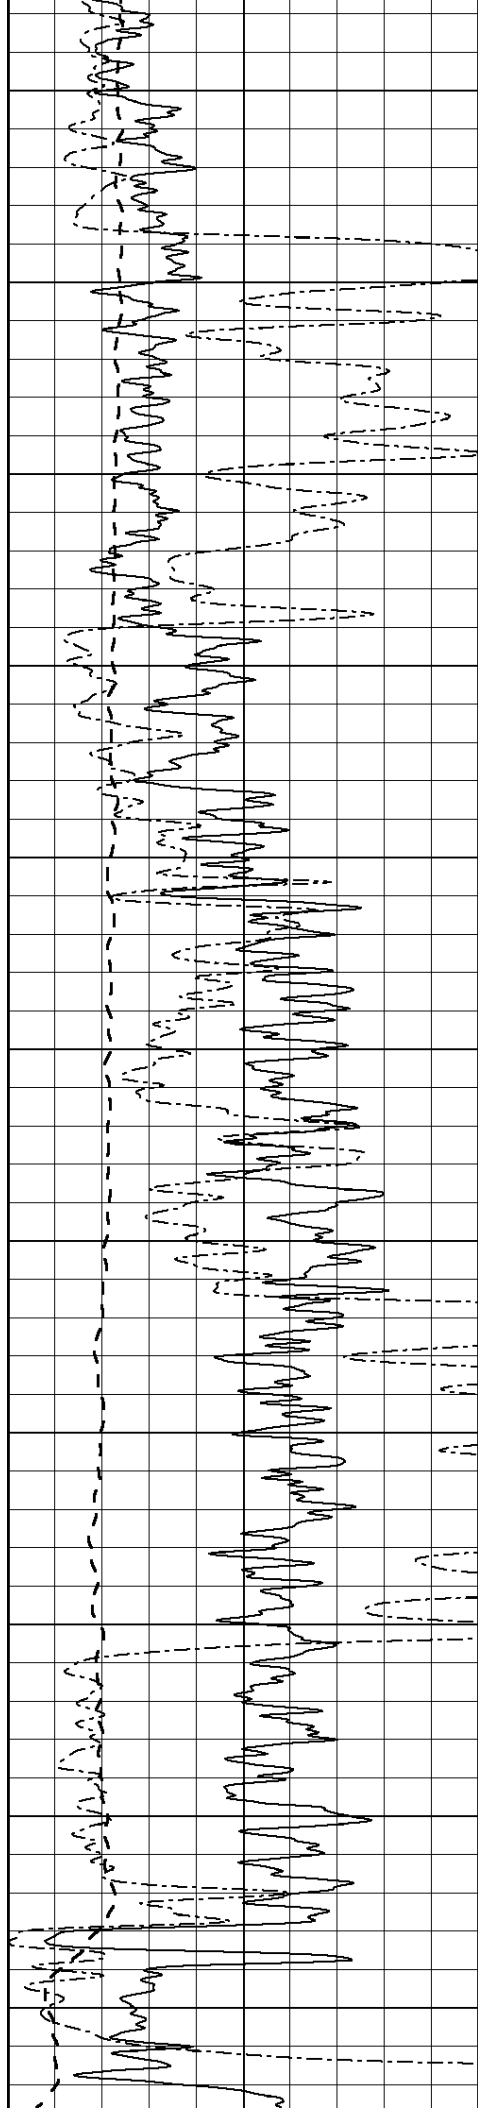

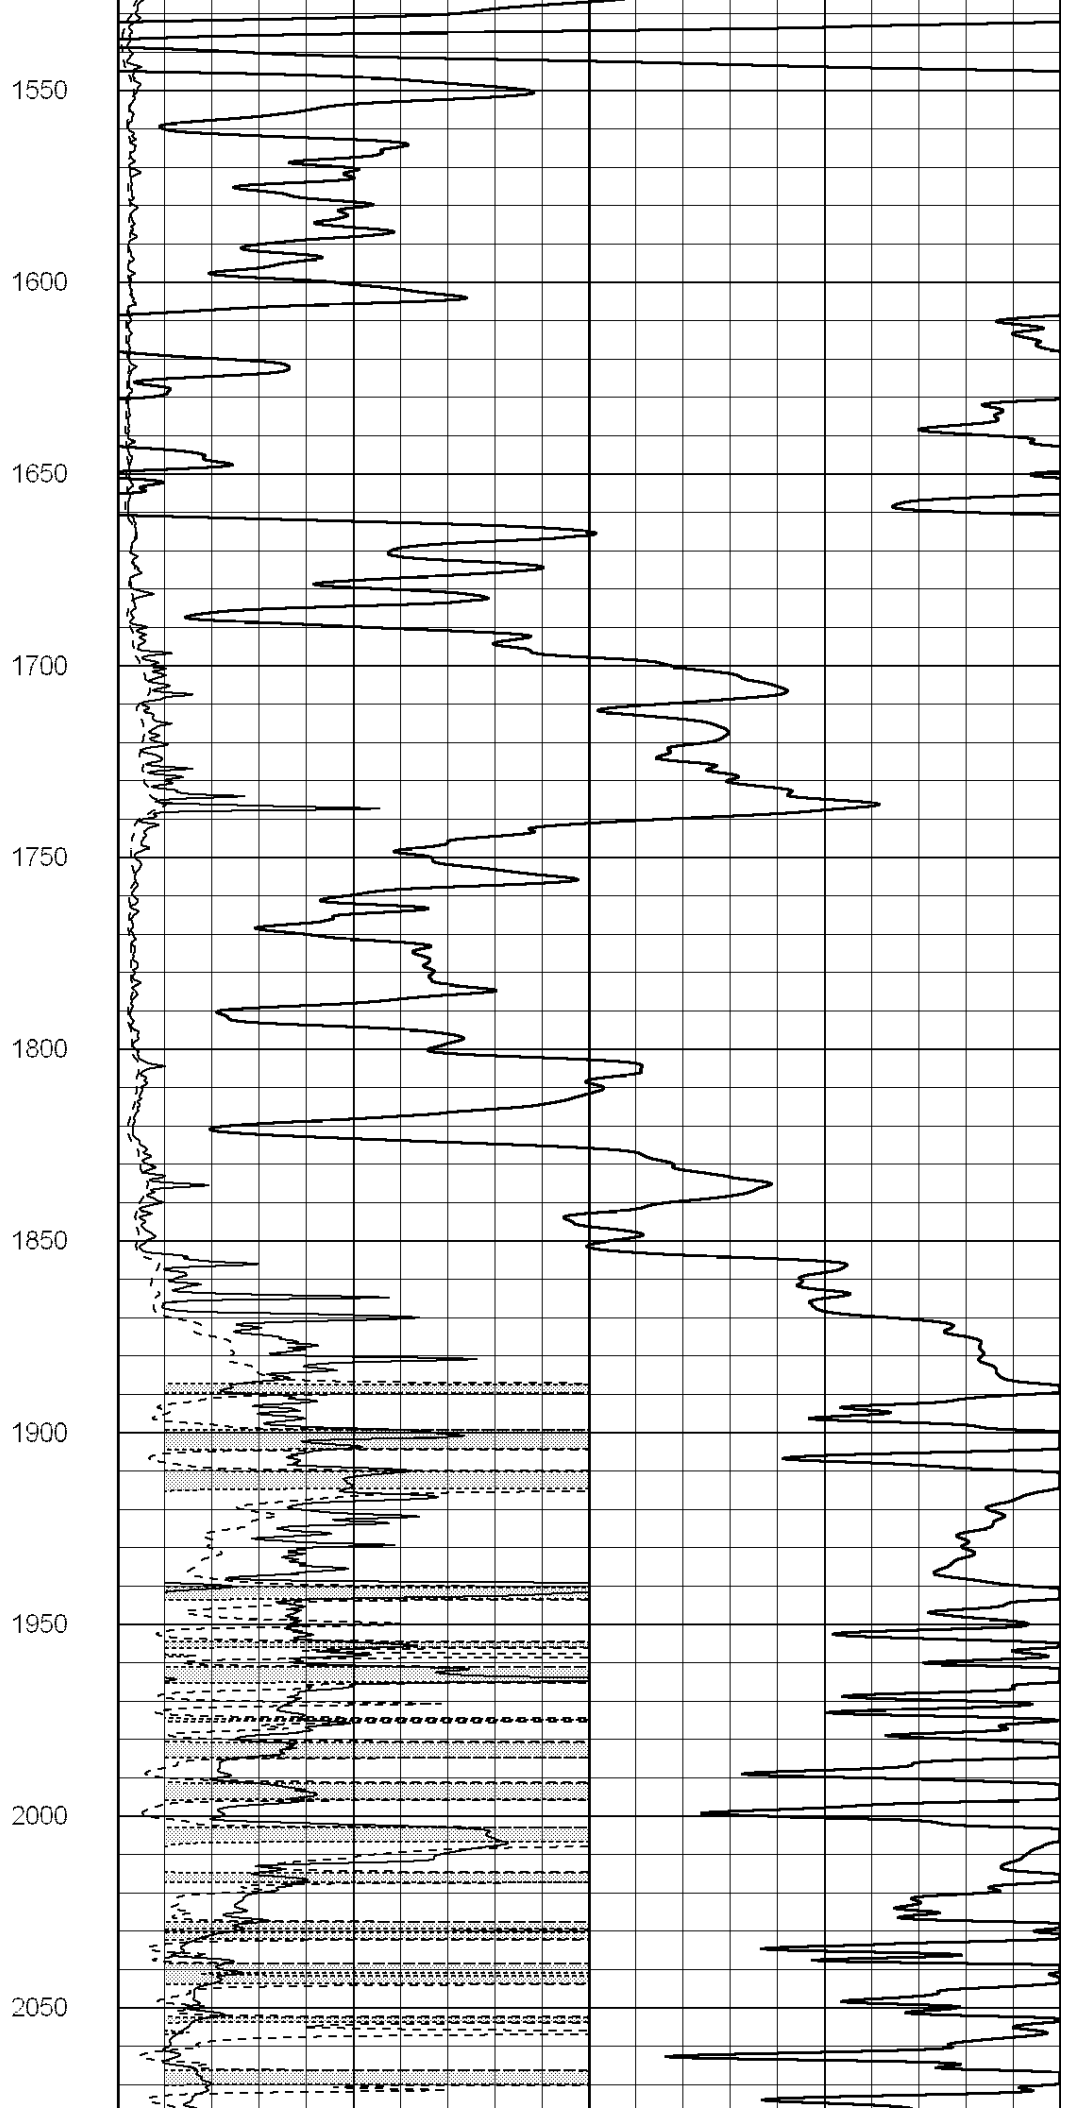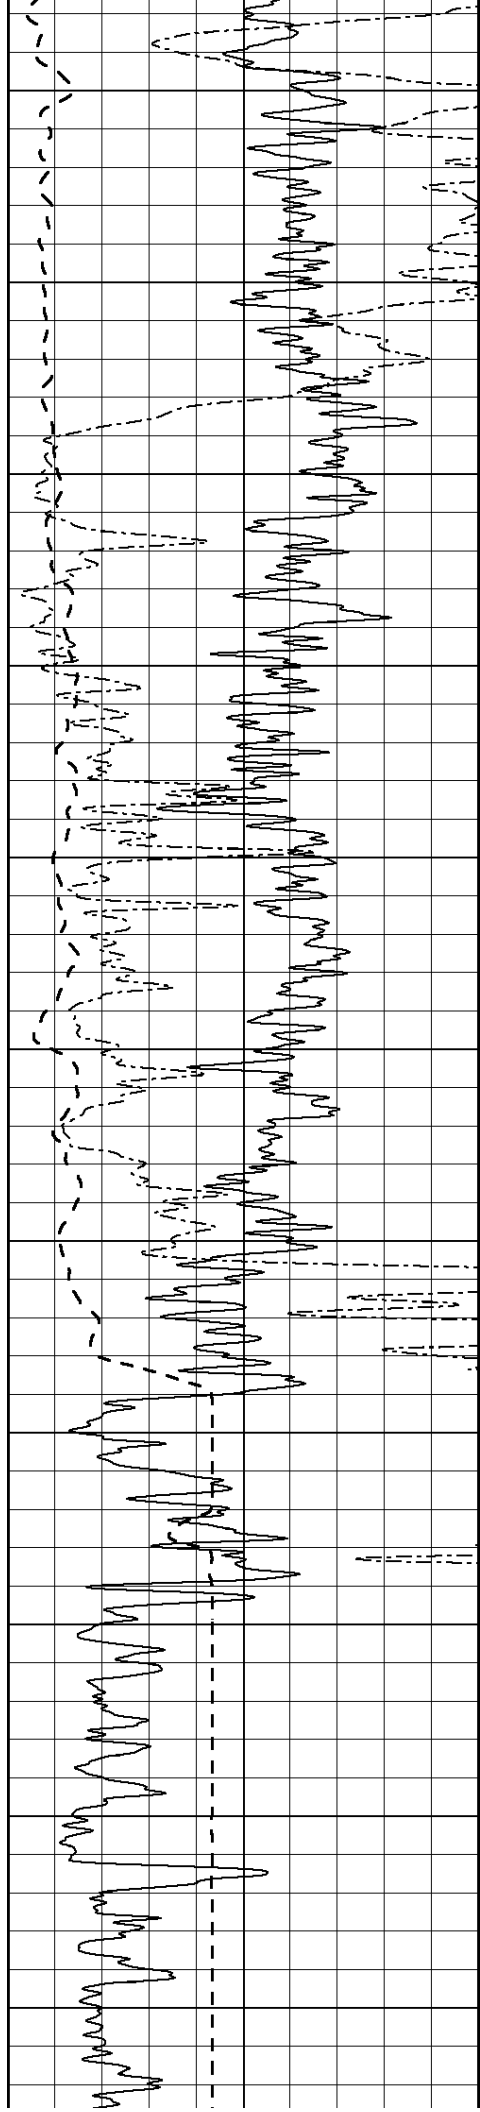

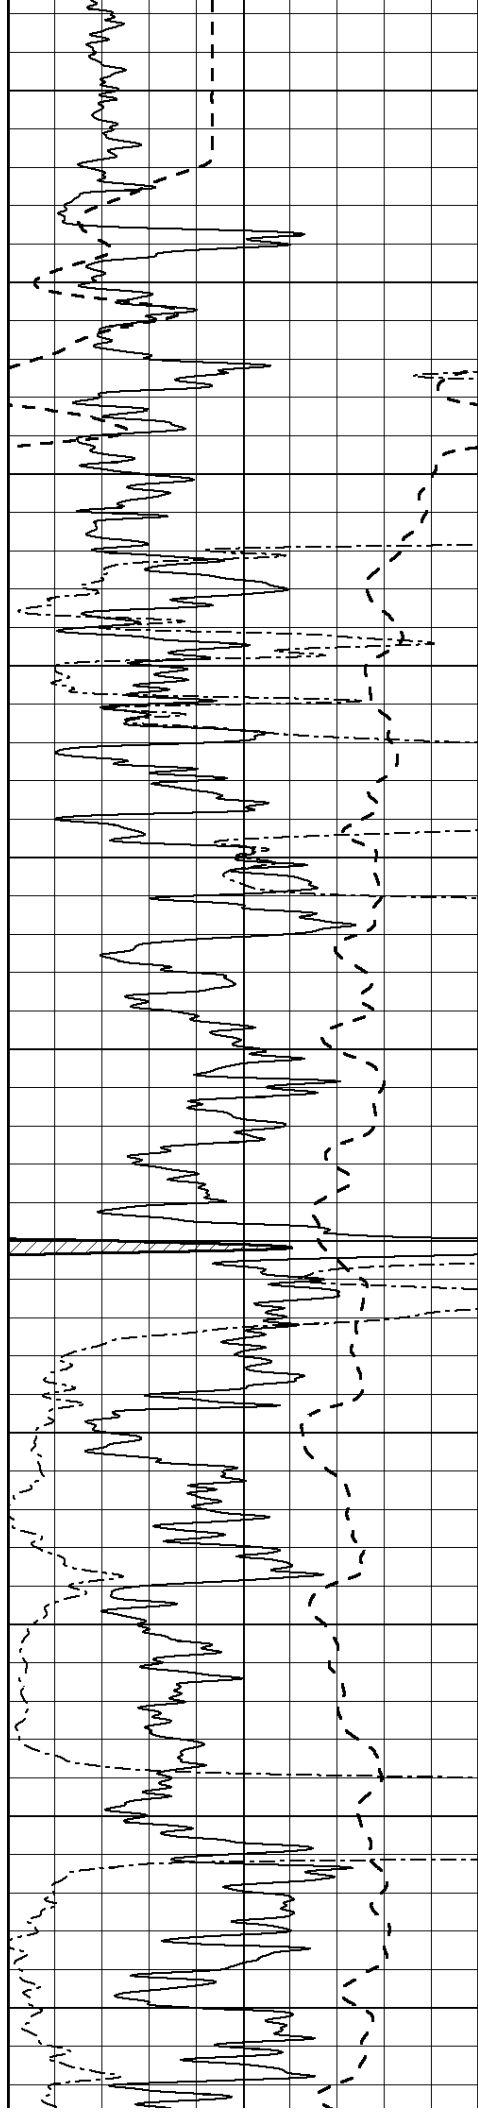

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

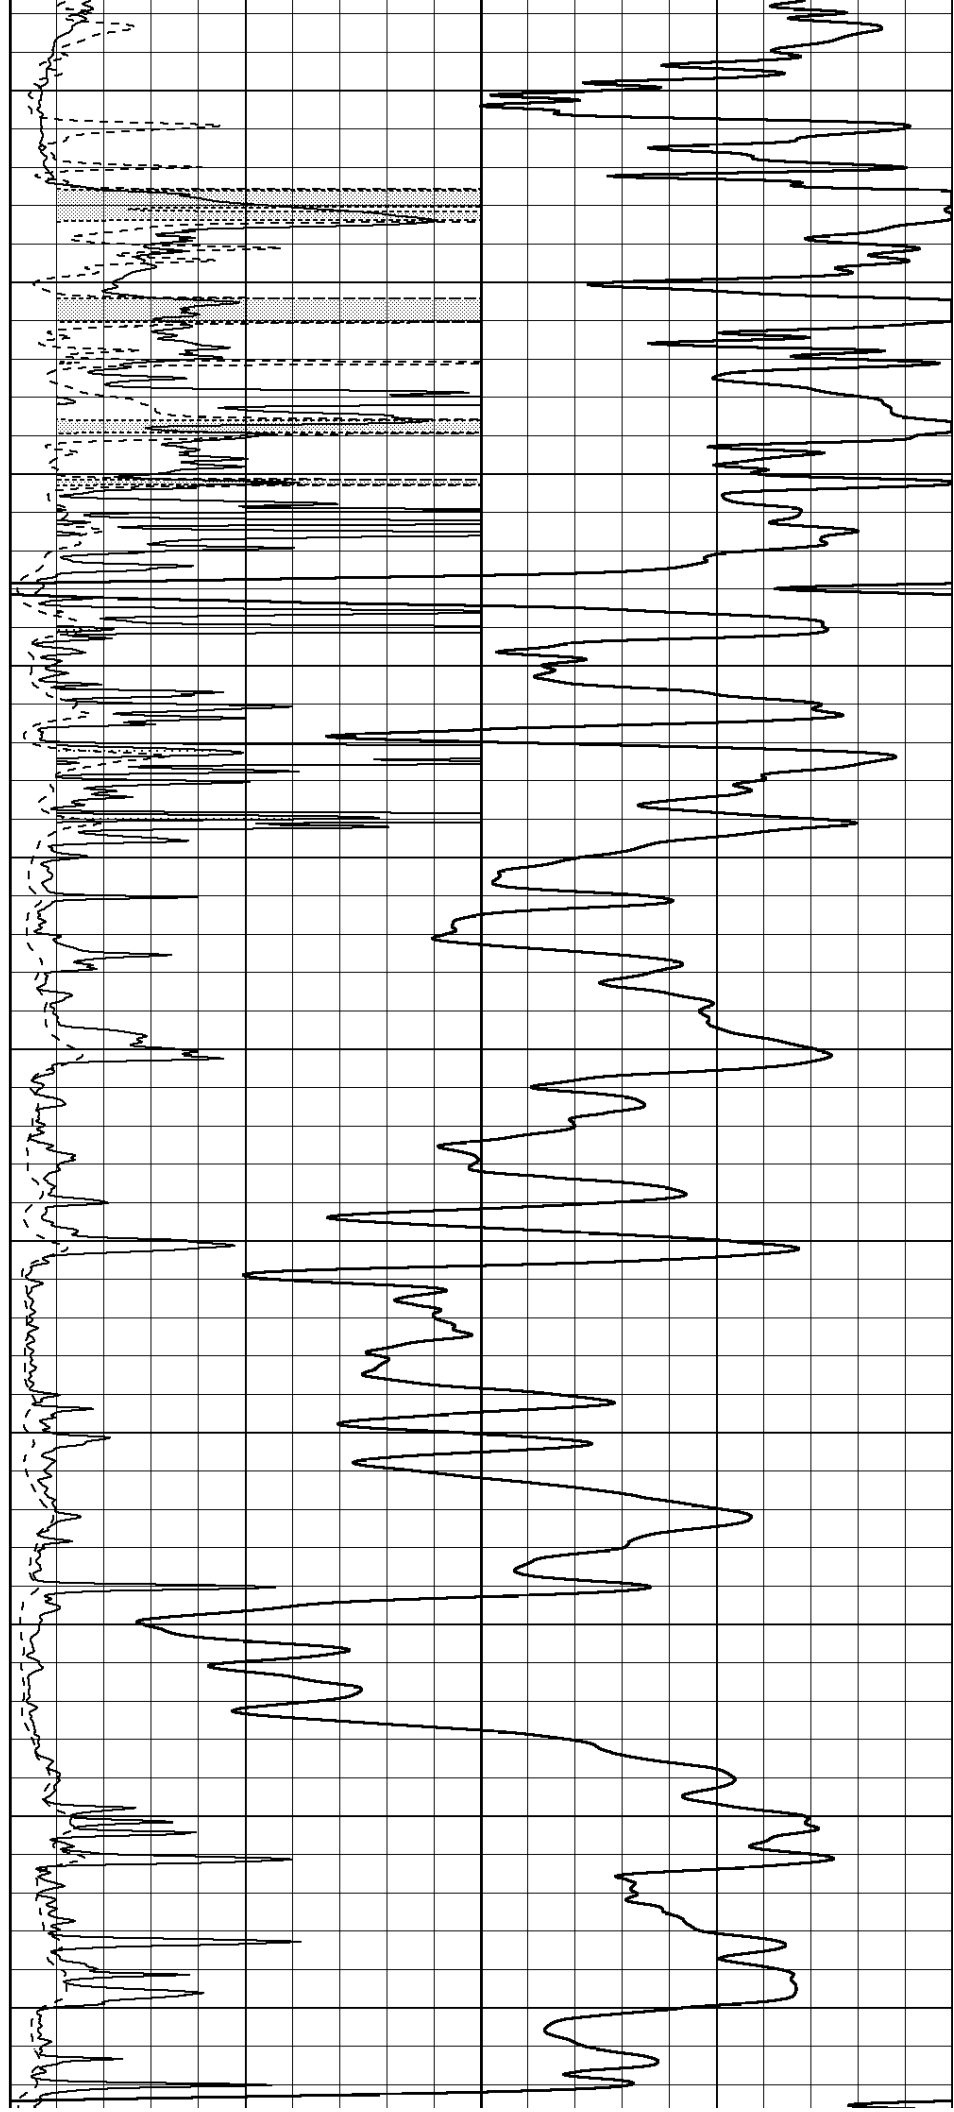

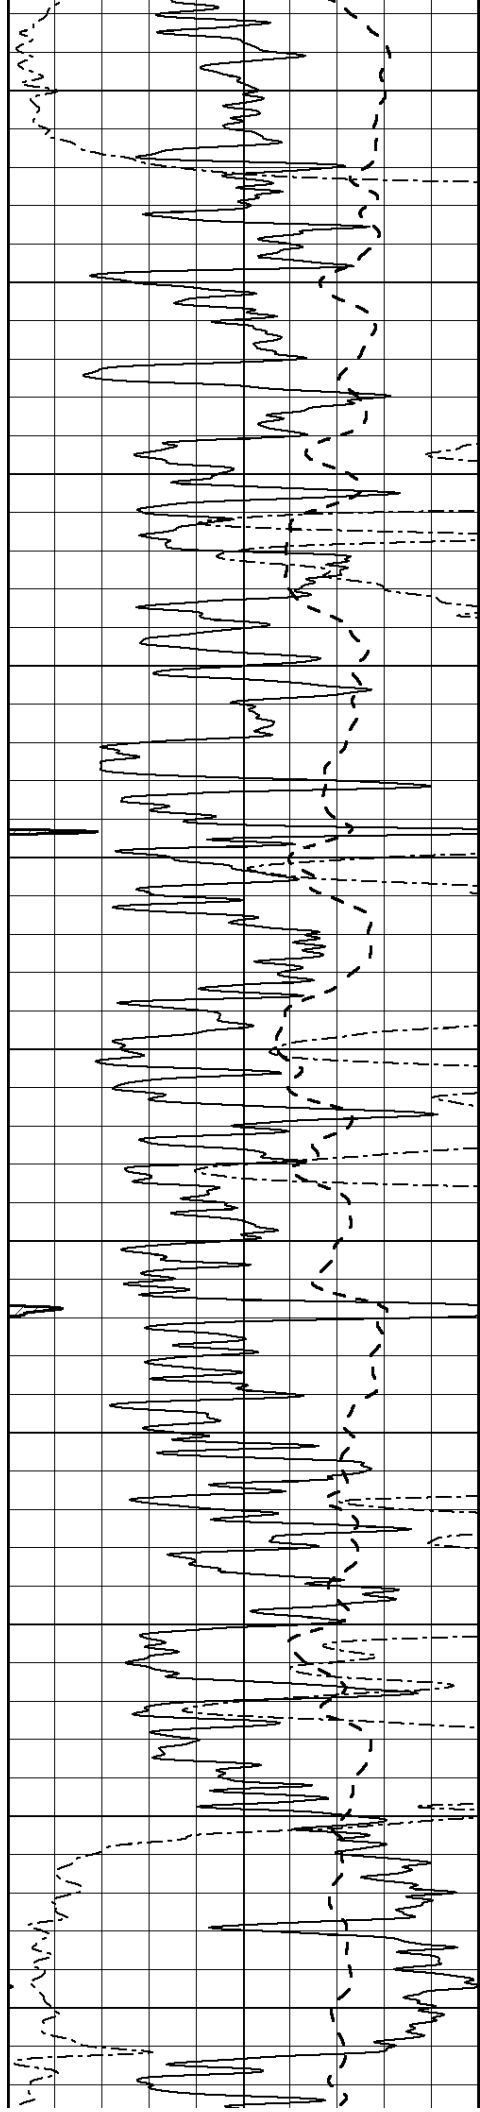

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

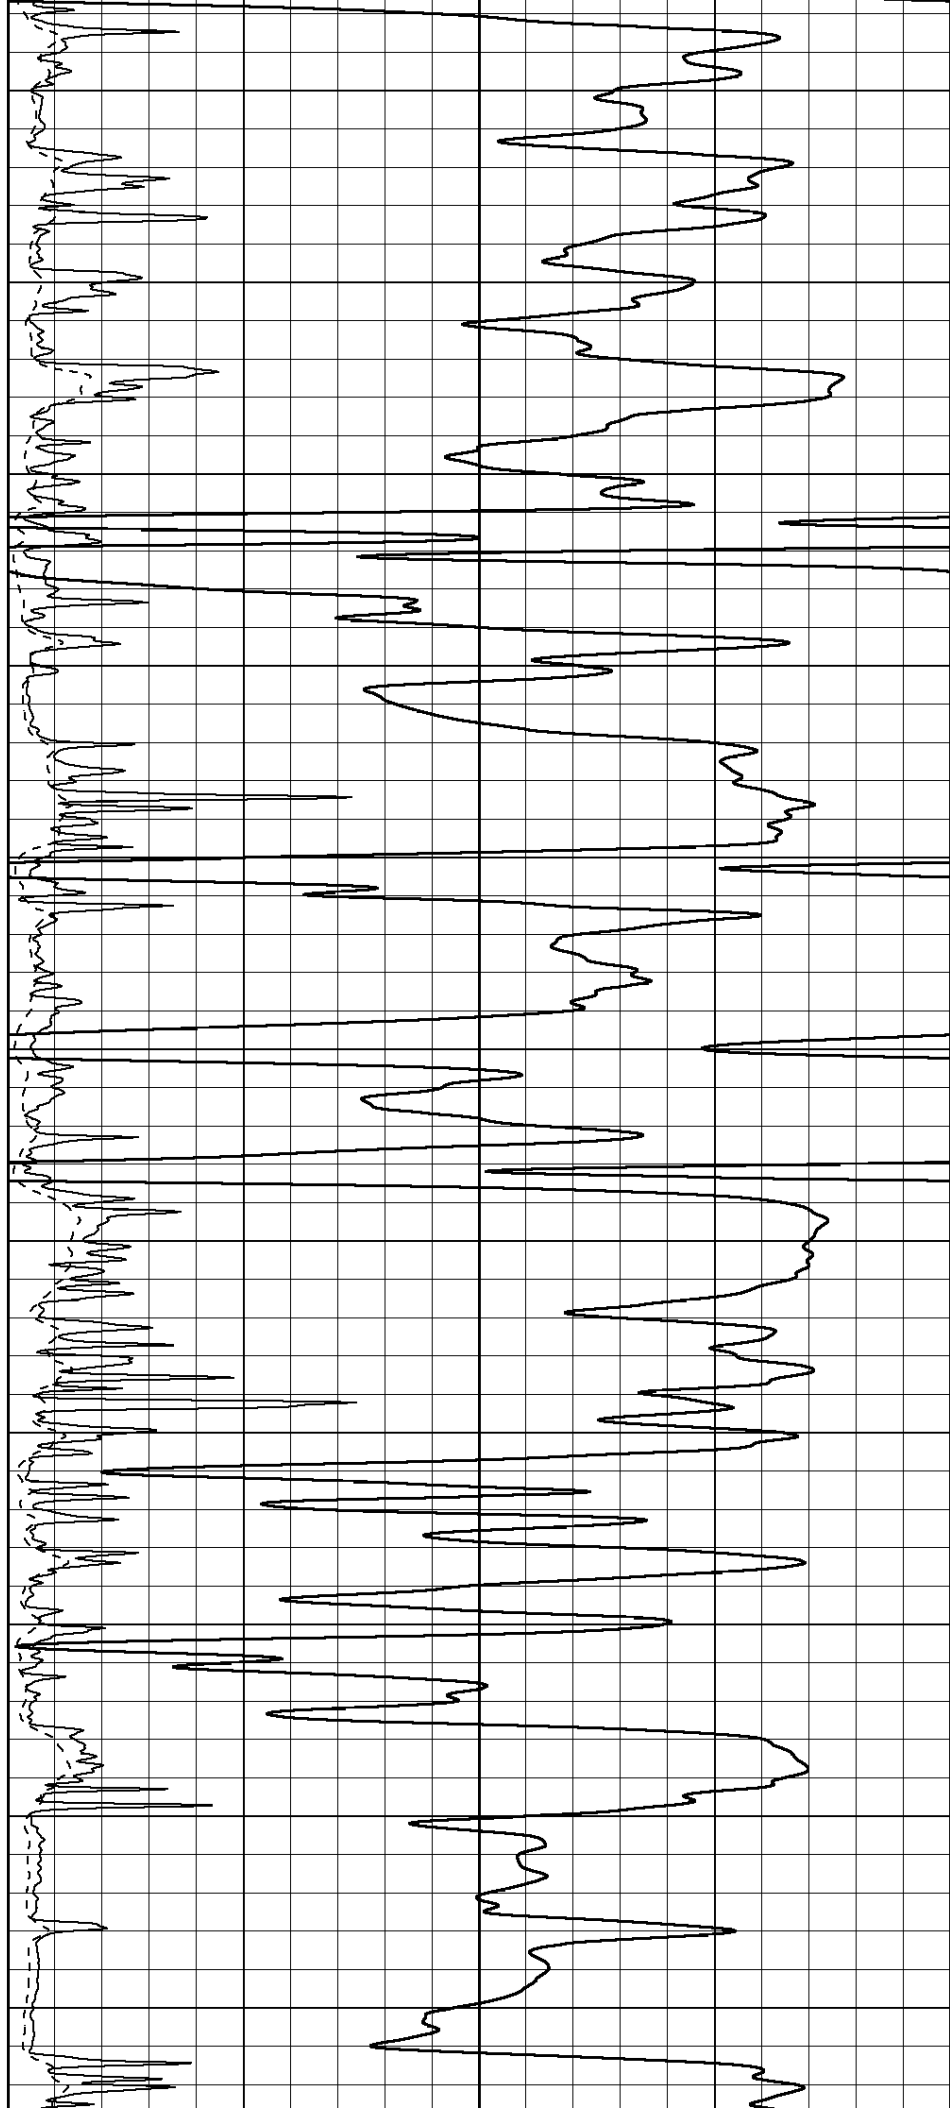

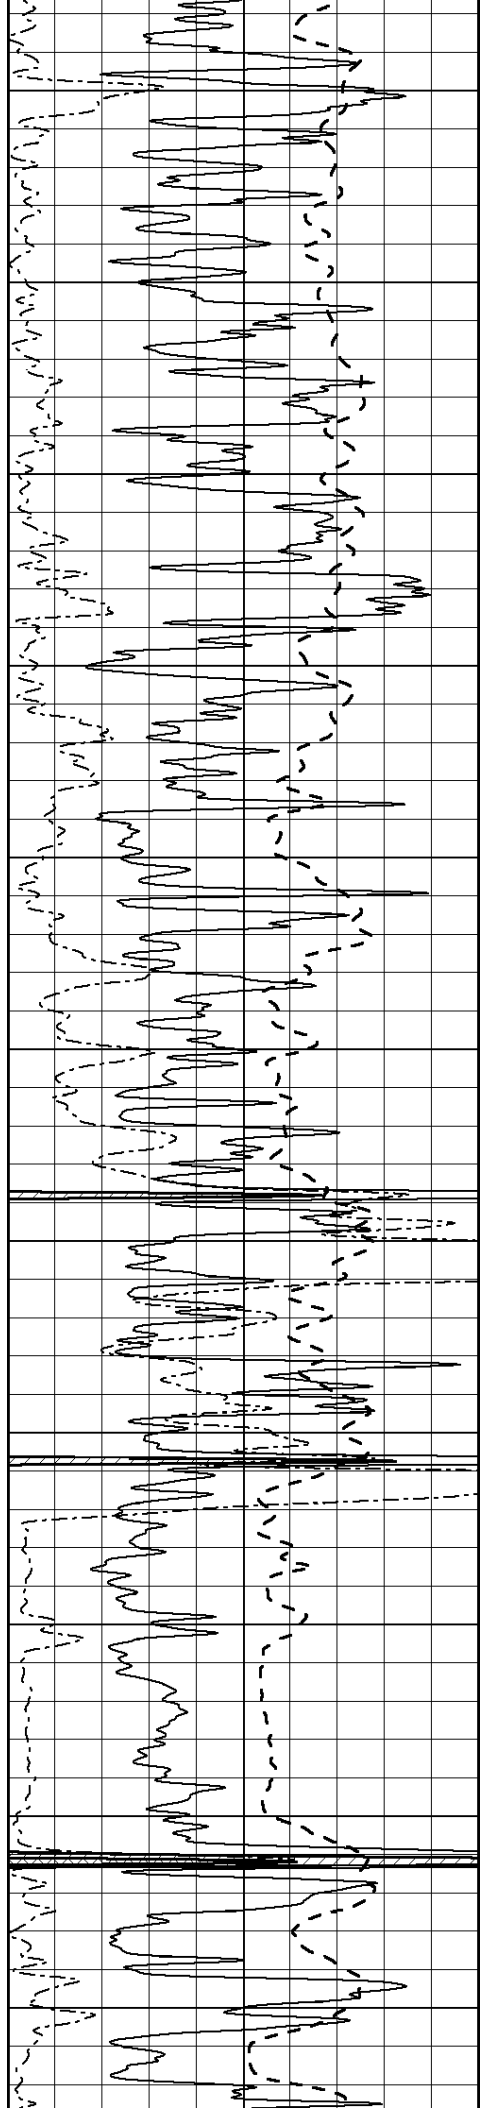

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

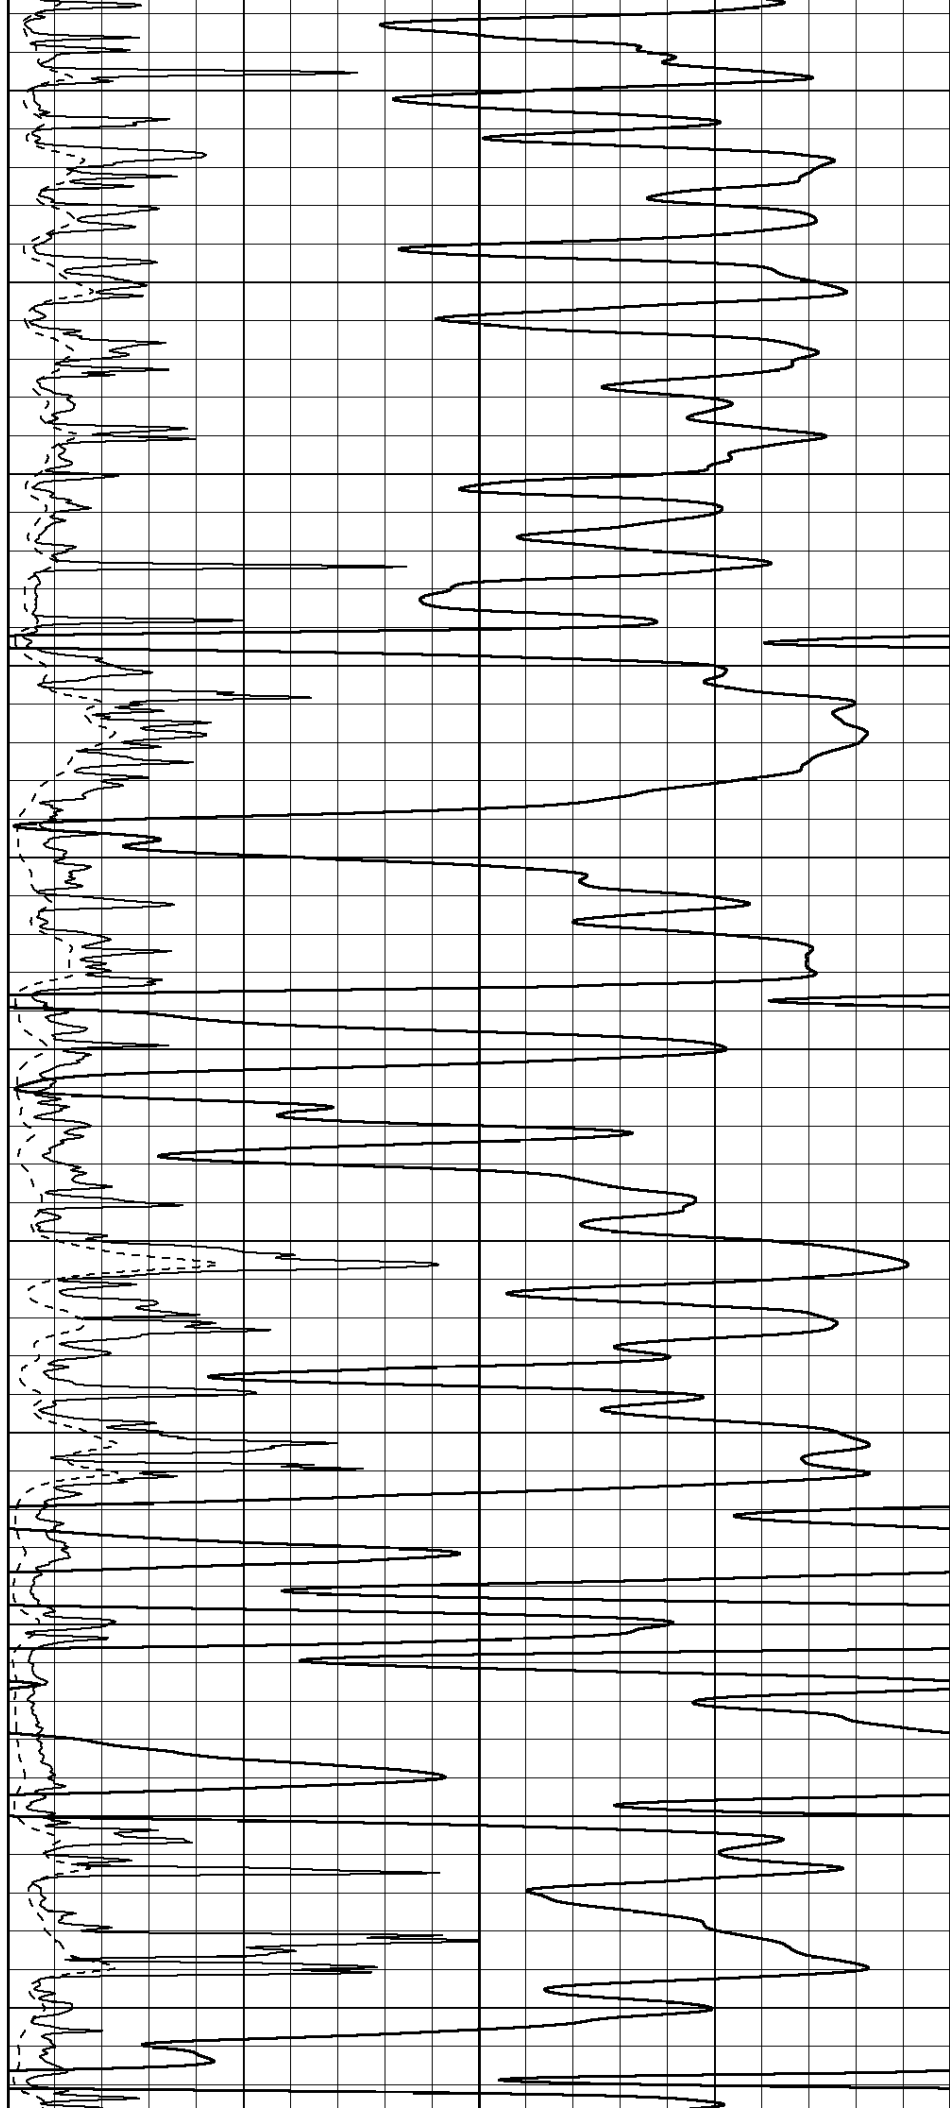

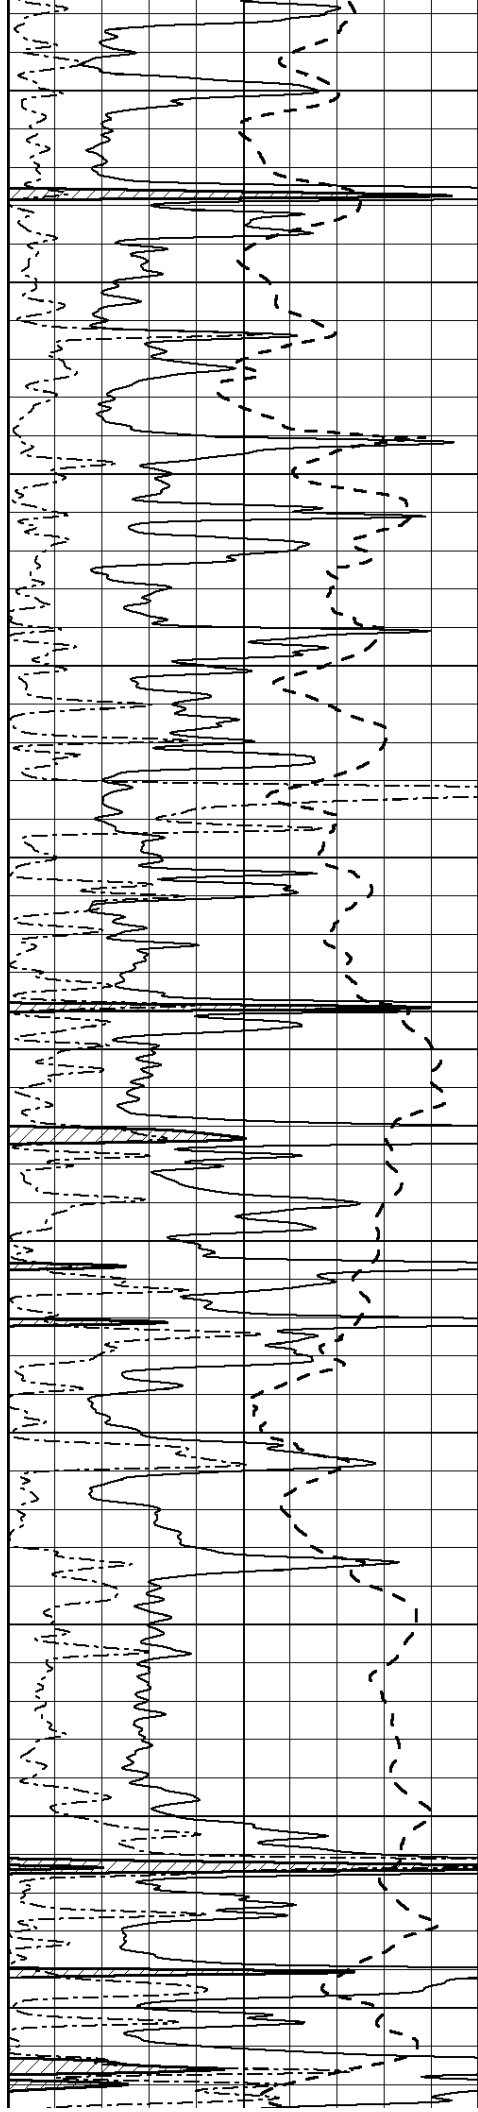

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

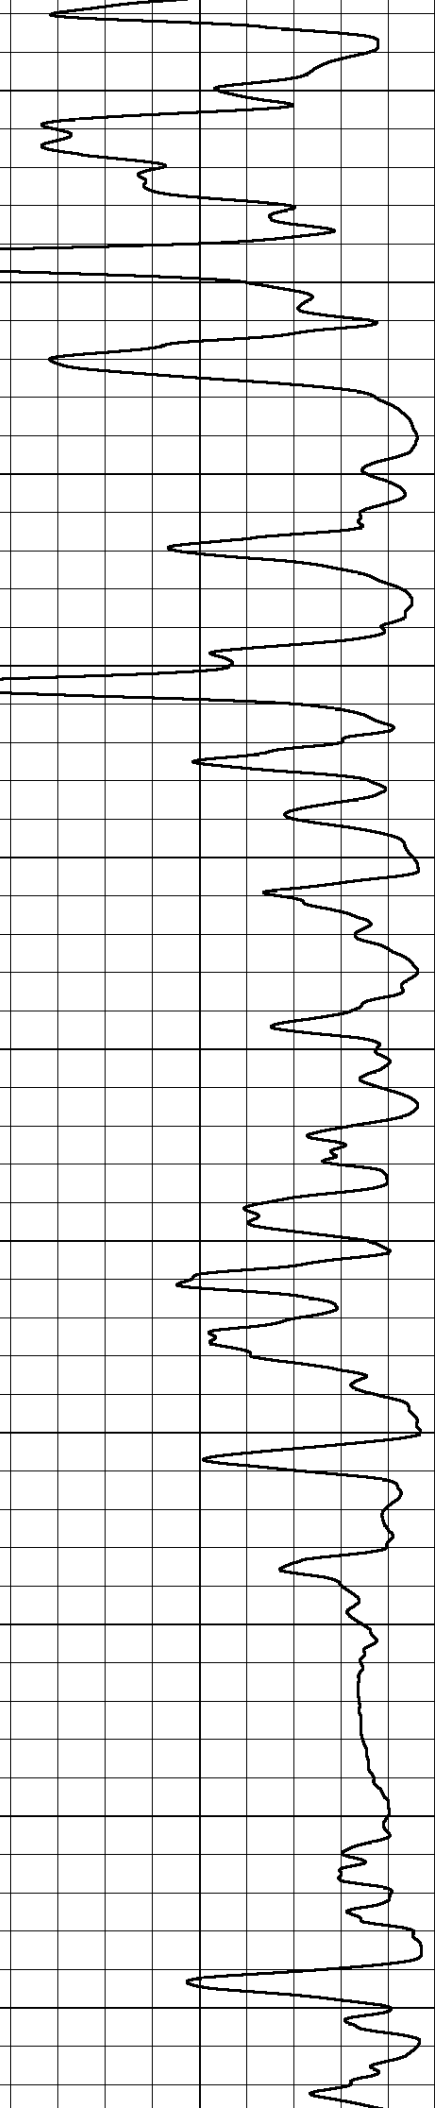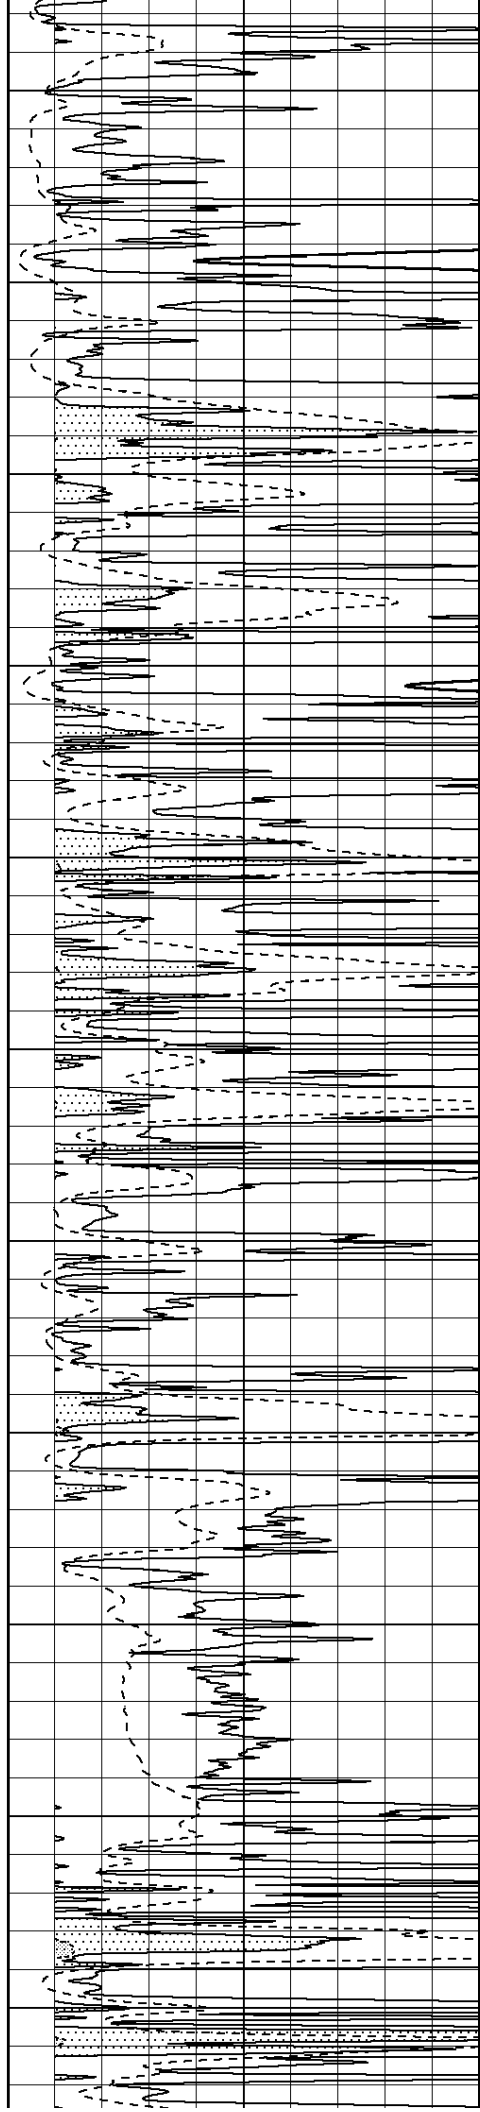


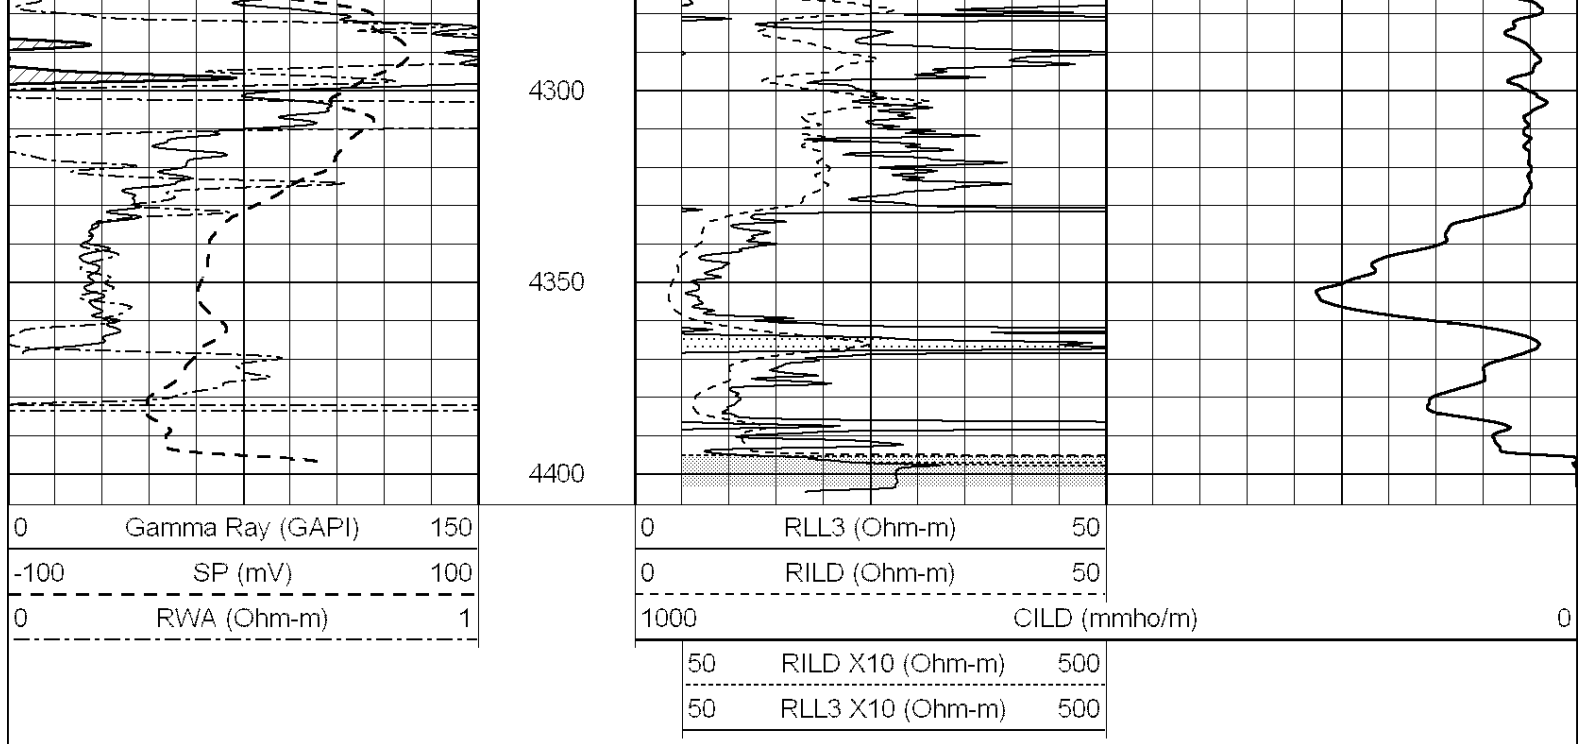


ANHYDRITE

Database File: 25882pe.db
Dataset Pathname: pass3.7
Presentation Format: _dil
Dataset Creation: Wed Sep 17 10:35:07 2014
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

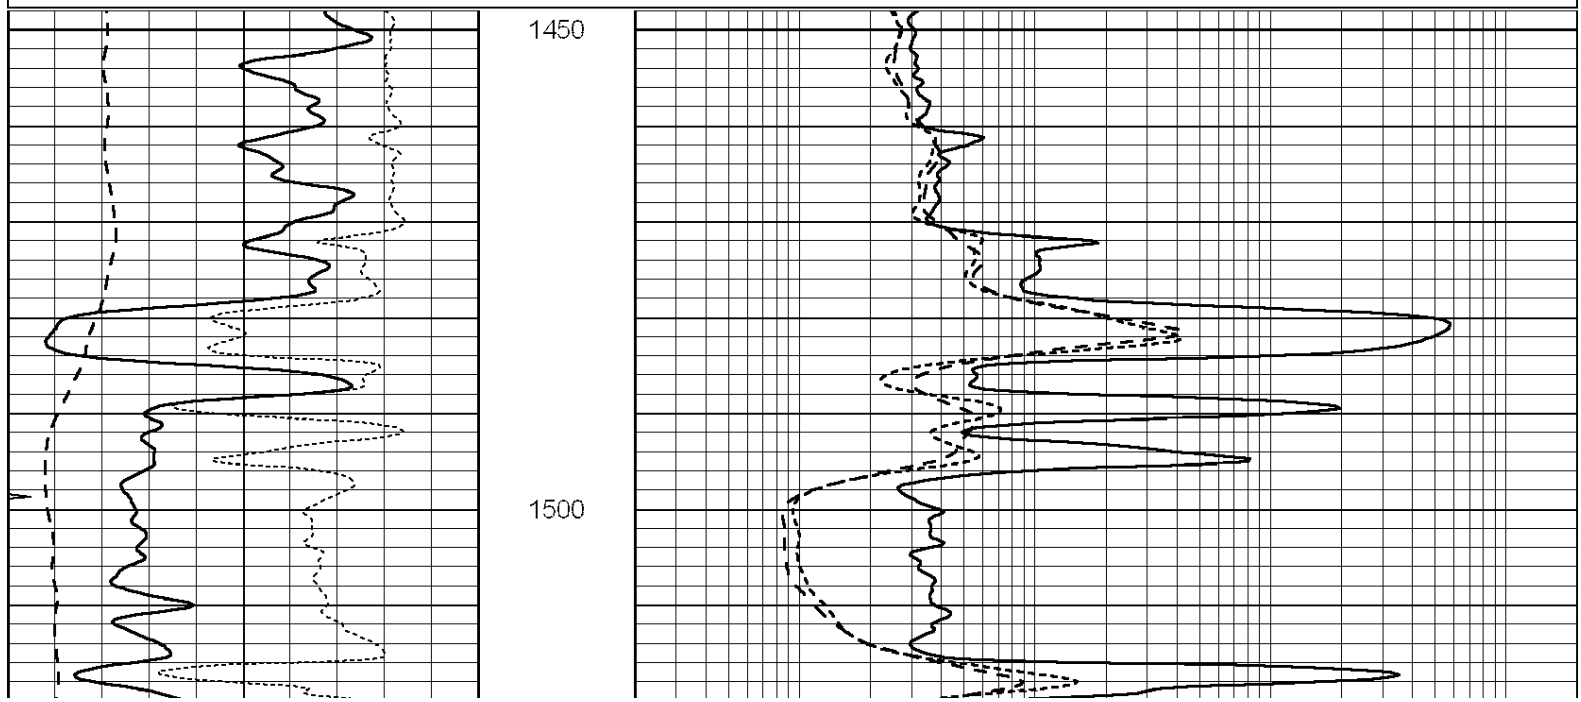

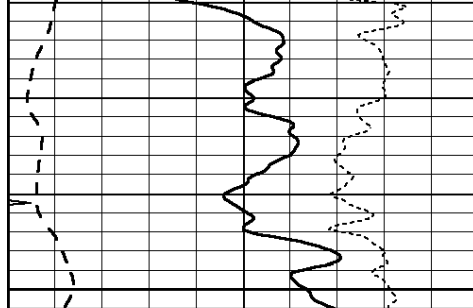

1550

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

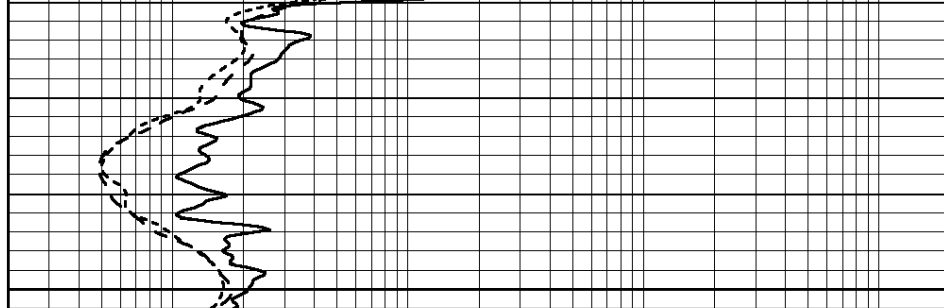

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




**COMPLETION
& PRODUCTION
SERVICES CO.**

MAIN SECTION

Database File: 25882pe.db
Dataset Pathname: pass3.6
Presentation Format: _dil
Dataset Creation: Wed Sep 17 10:34:38 2014
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

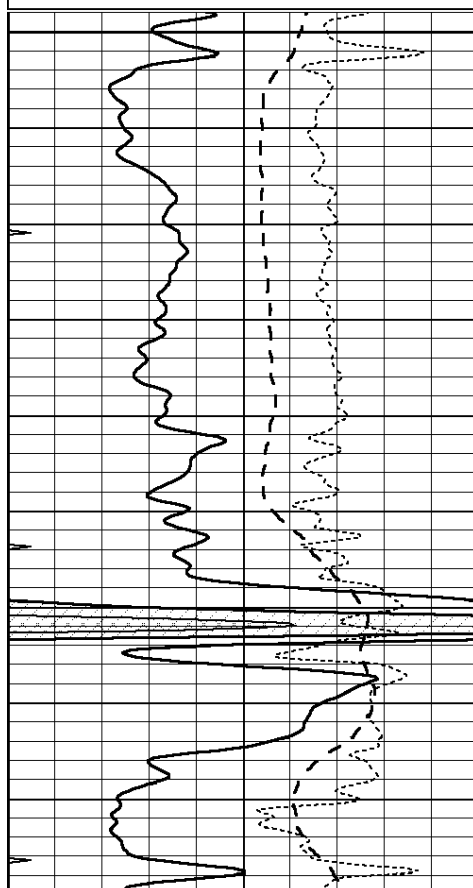

3600

3650

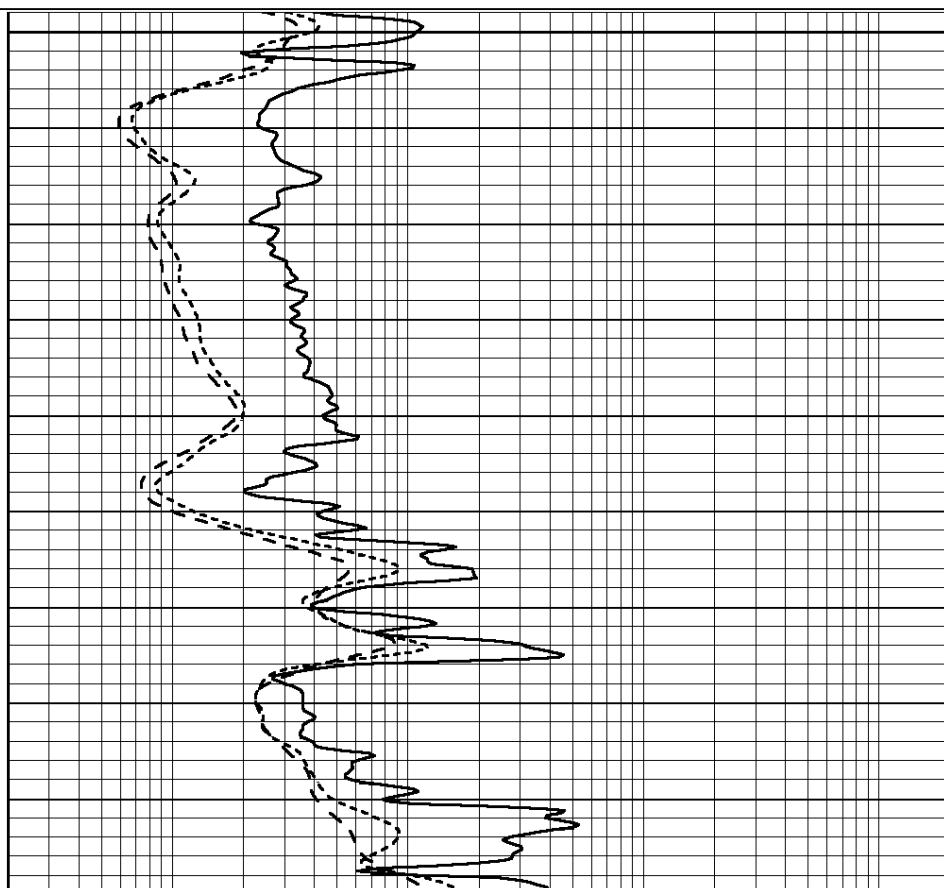

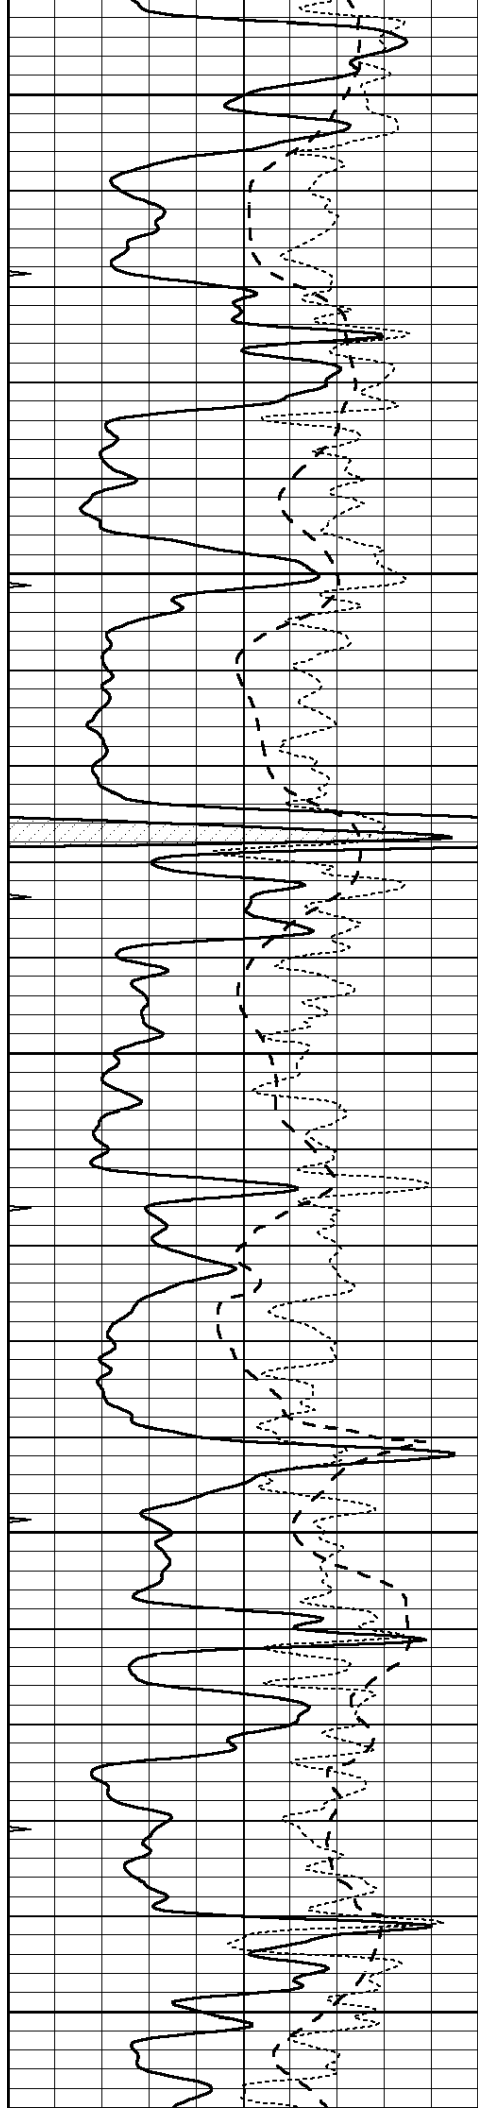


3700


3750

3800

3850

3900

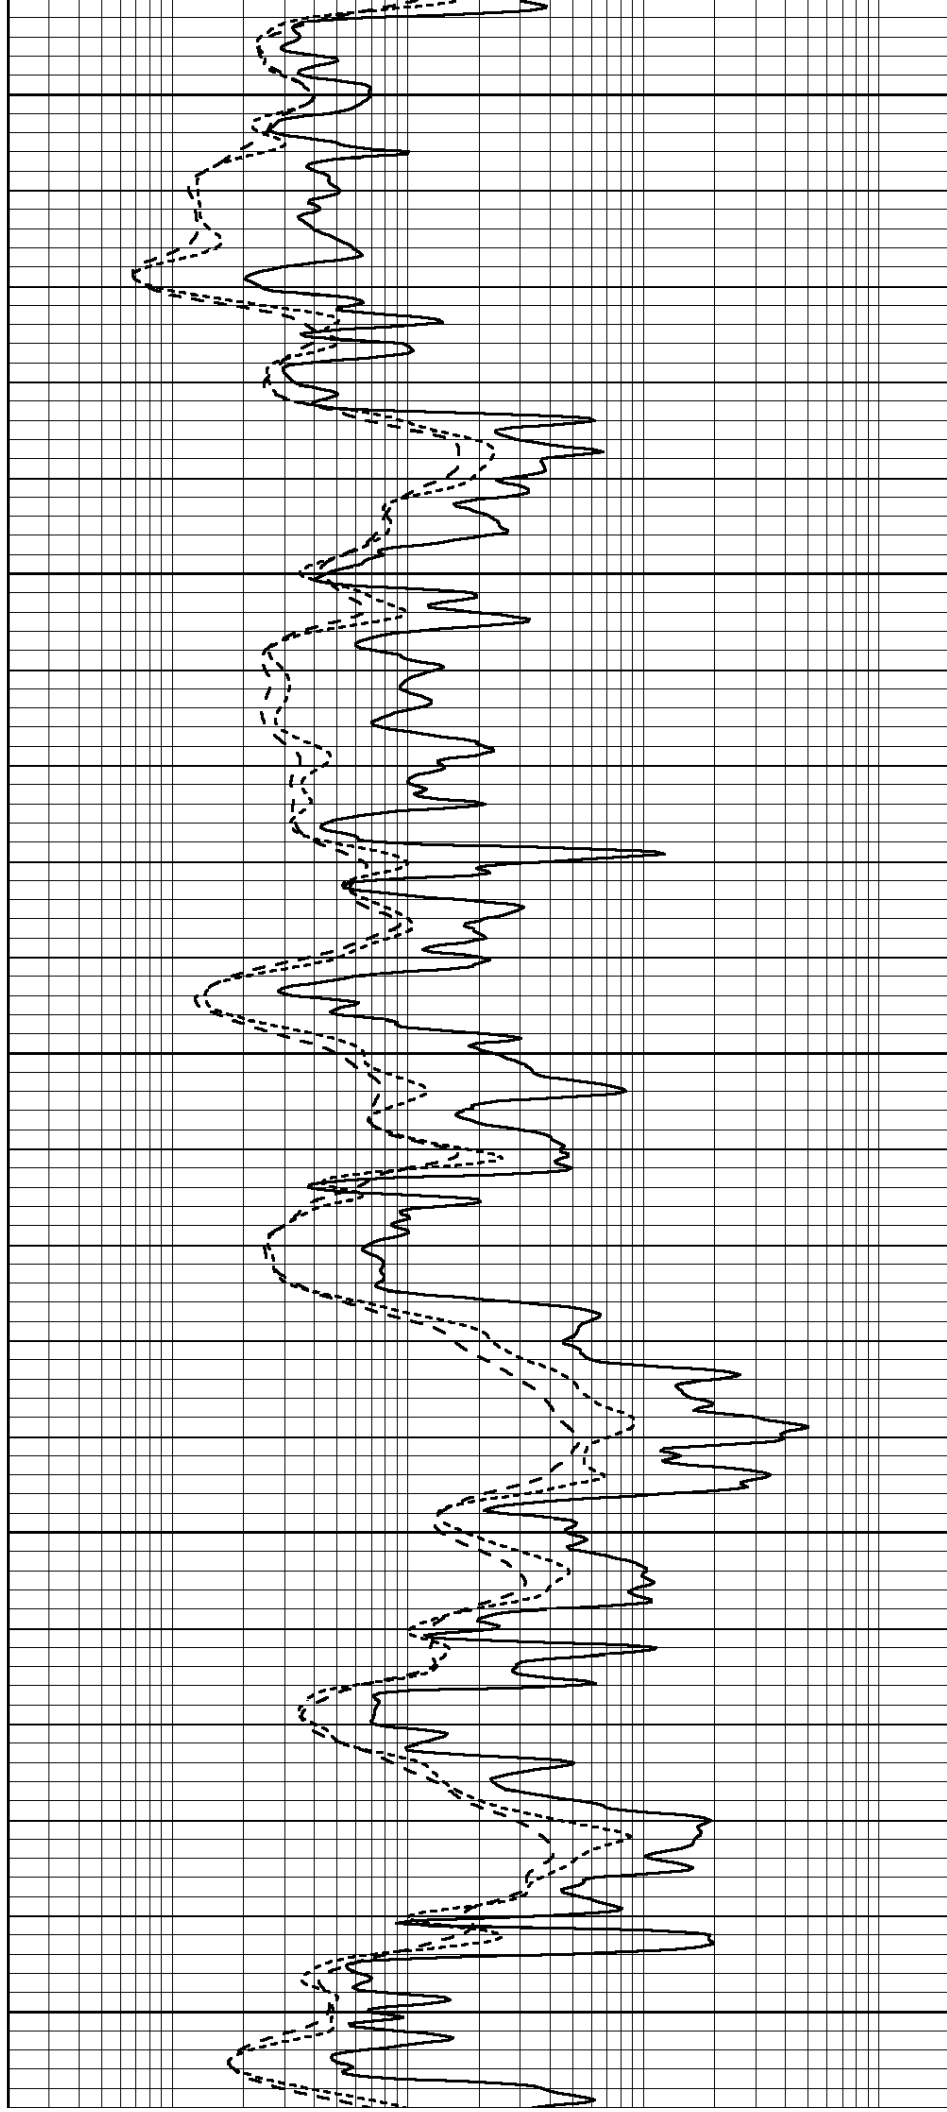

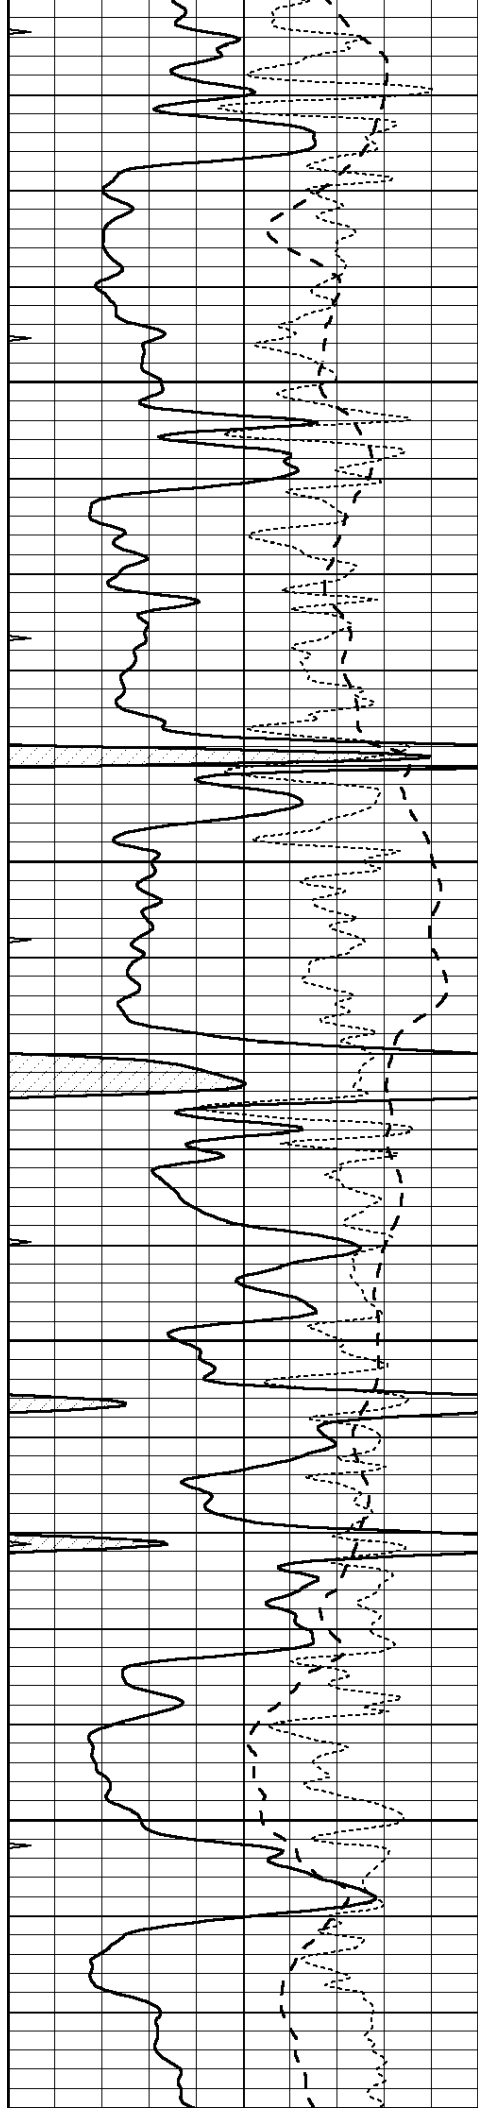



3950

4000

4050

4100

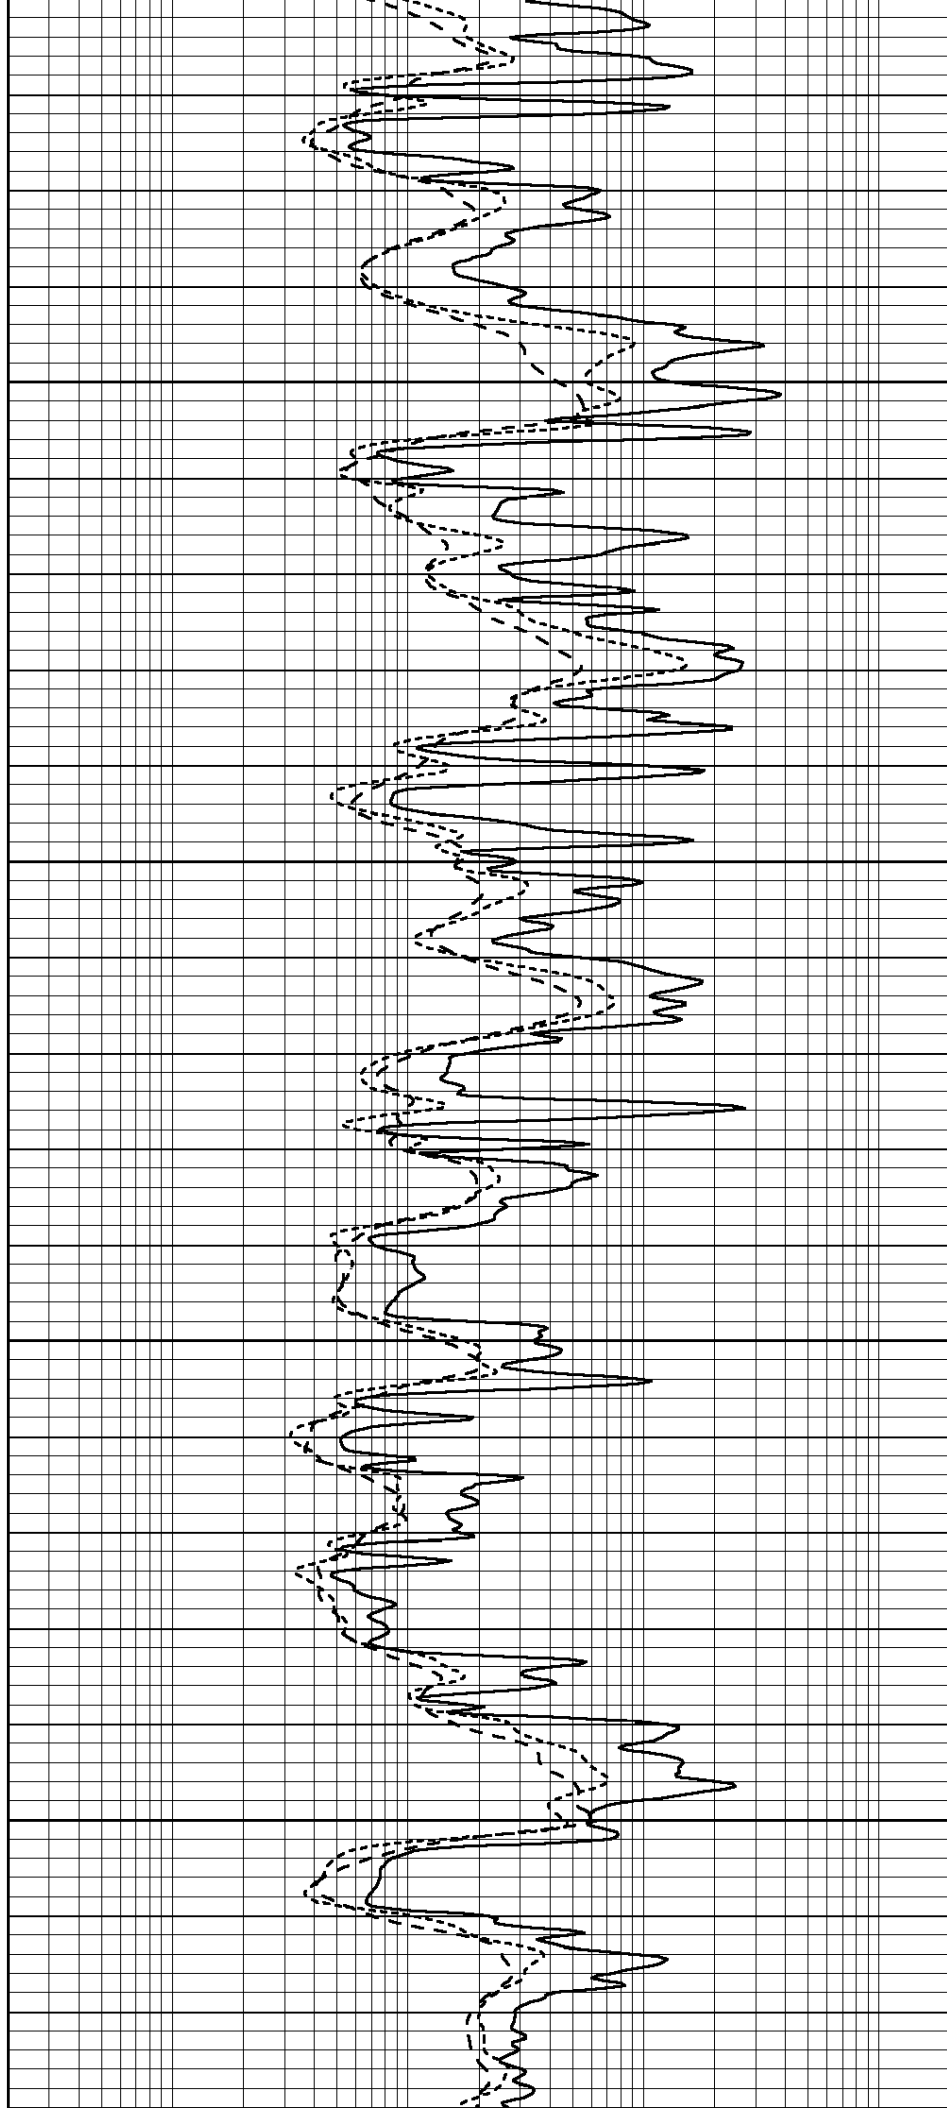

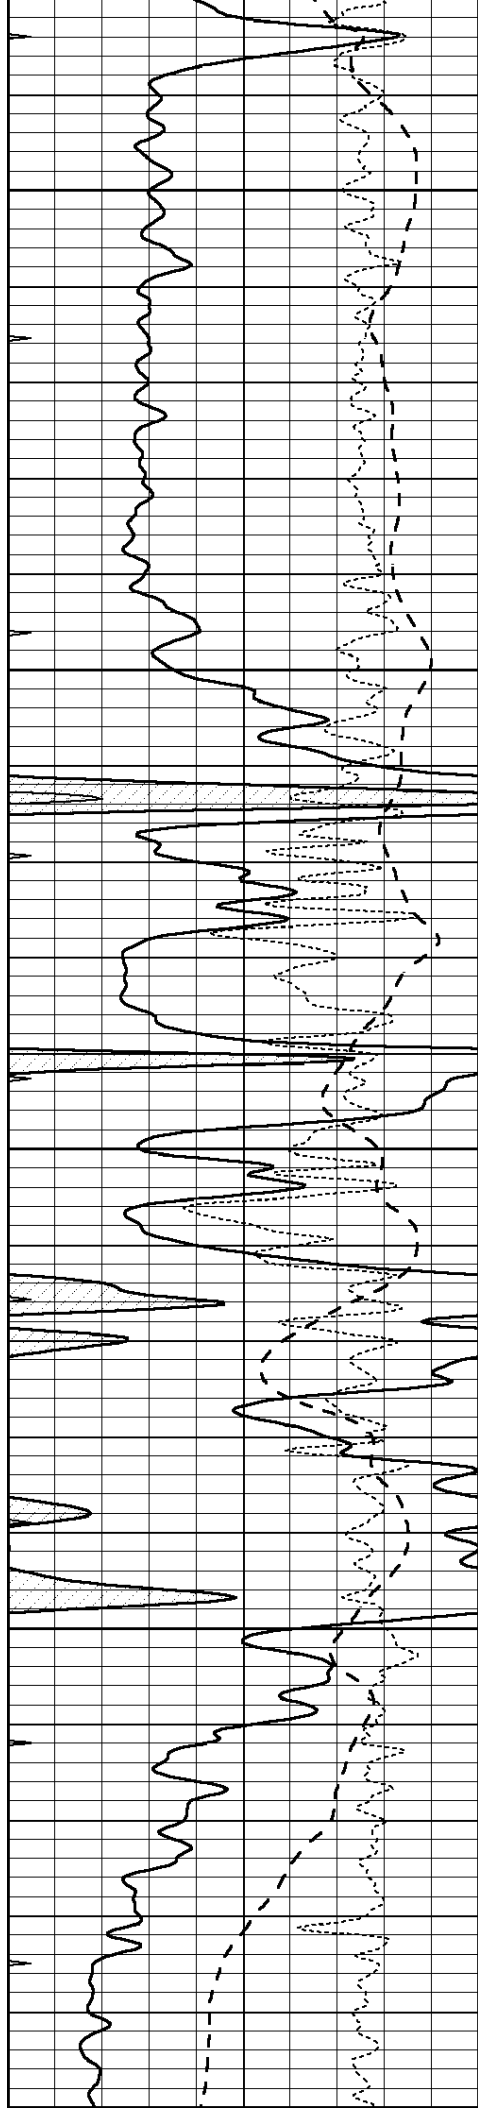


4150



4200

4250

4300





4350

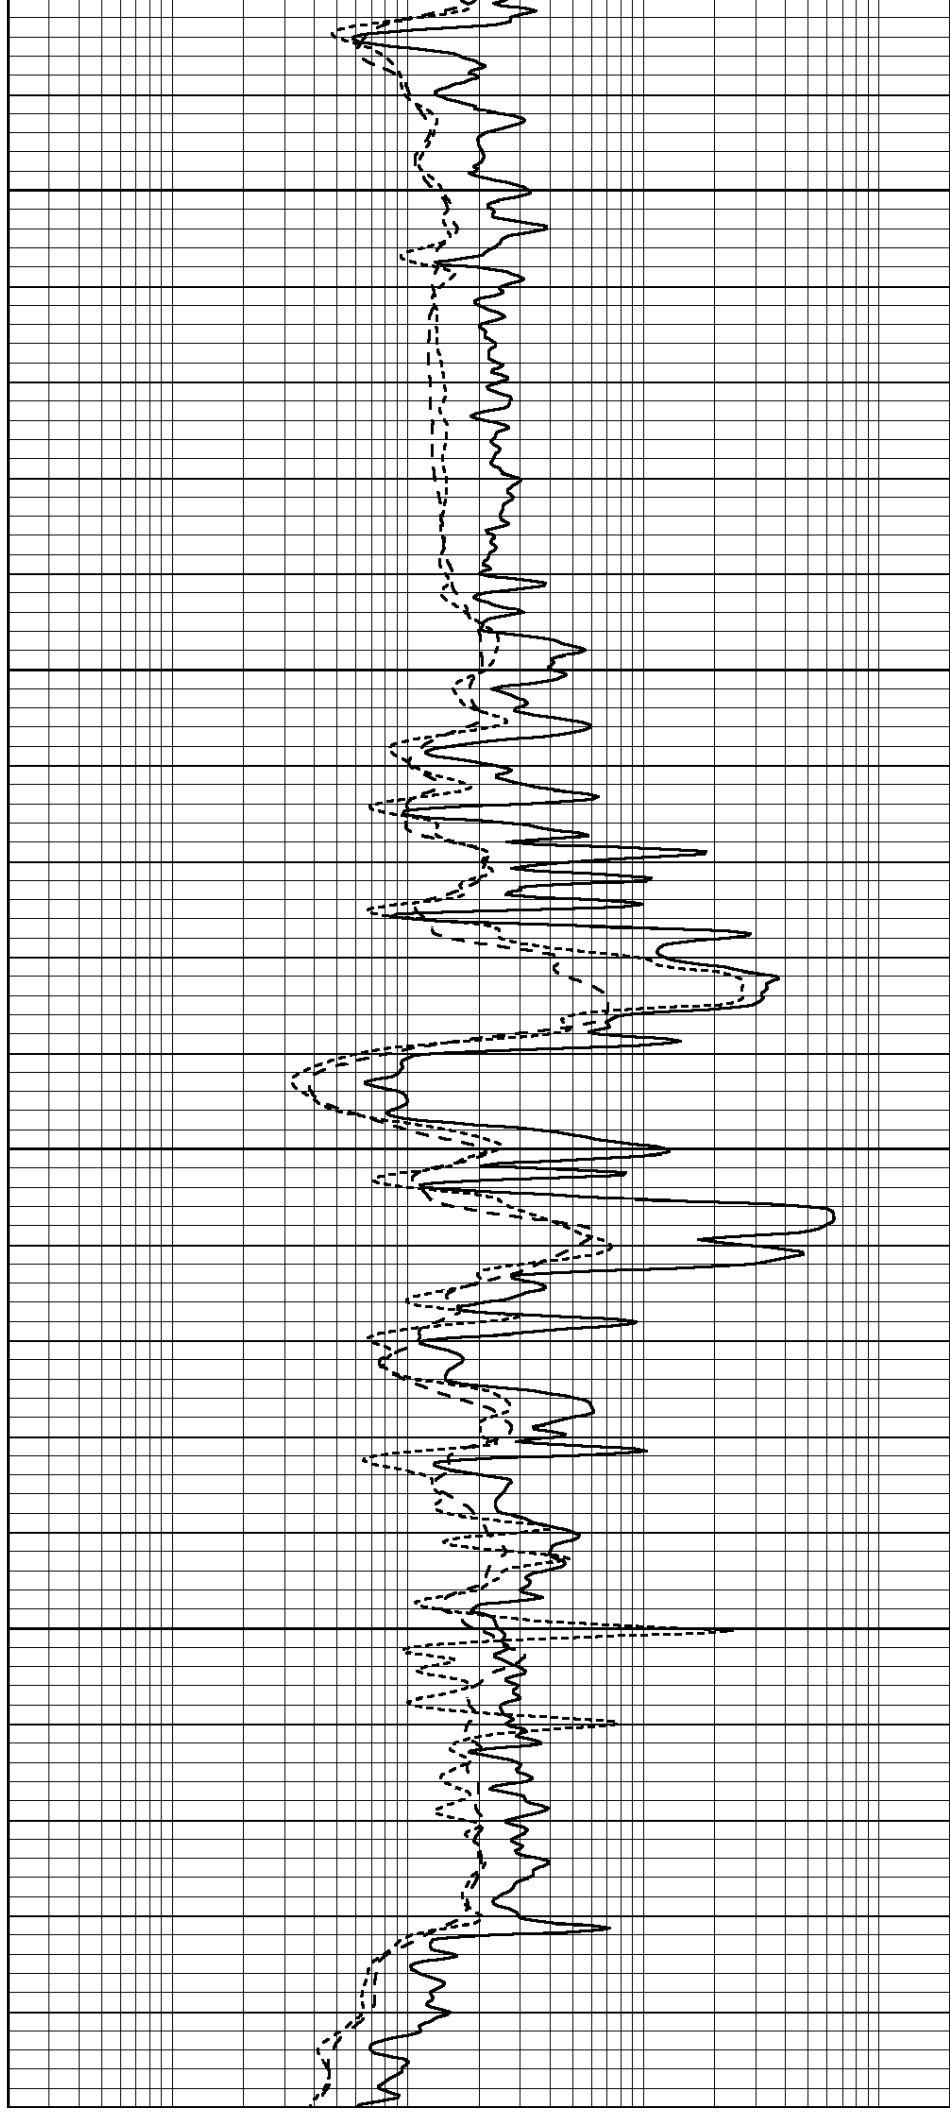


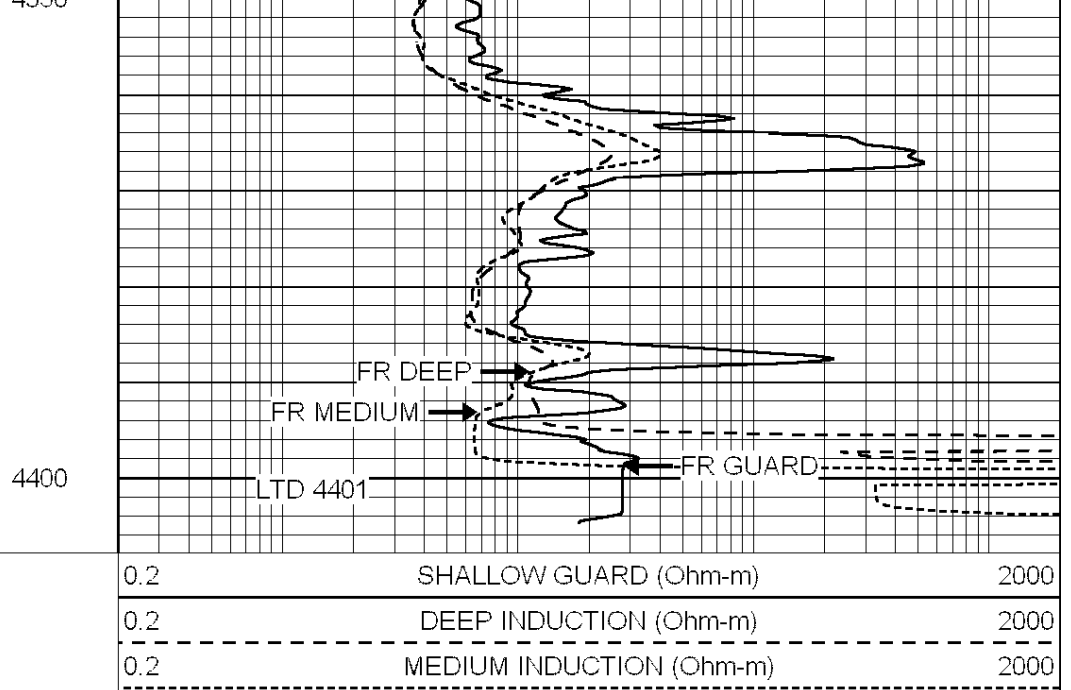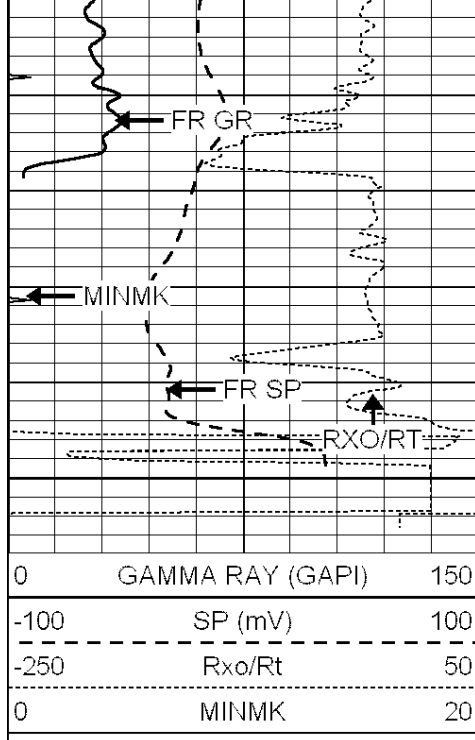

REPEAT SECTION

Database File: 25882pe.db
 Dataset Pathname: pass2.3
 Presentation Format: _dil
 Dataset Creation: Wed Sep 17 10:47:18 2014
 Charted by: Depth in Feet scaled 1:240

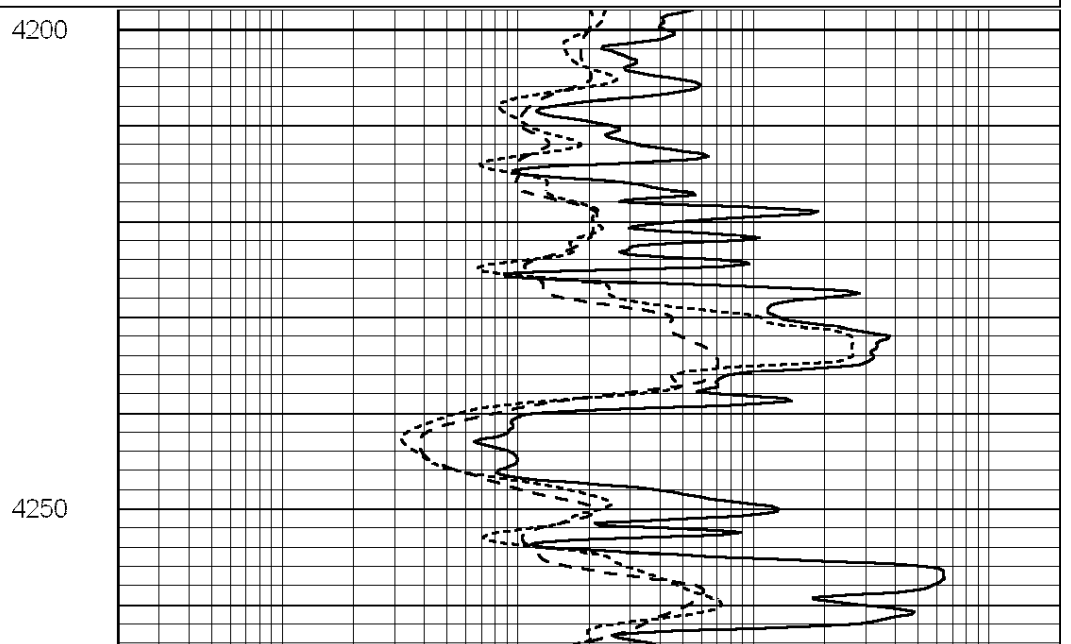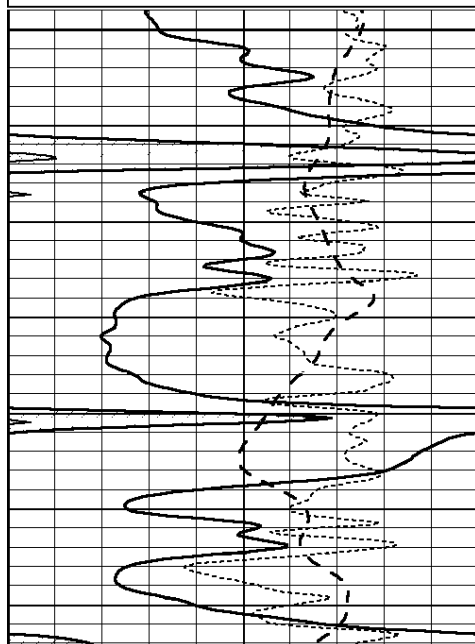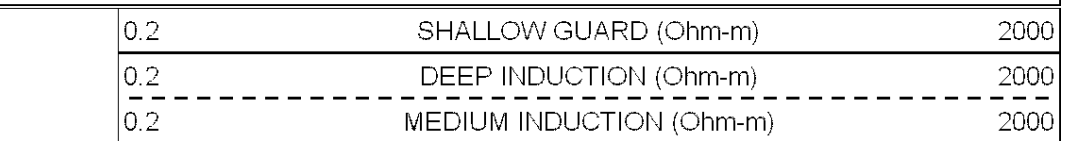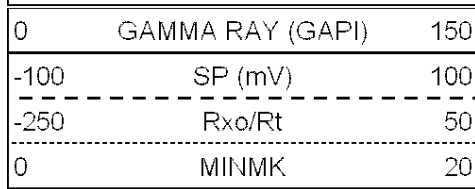

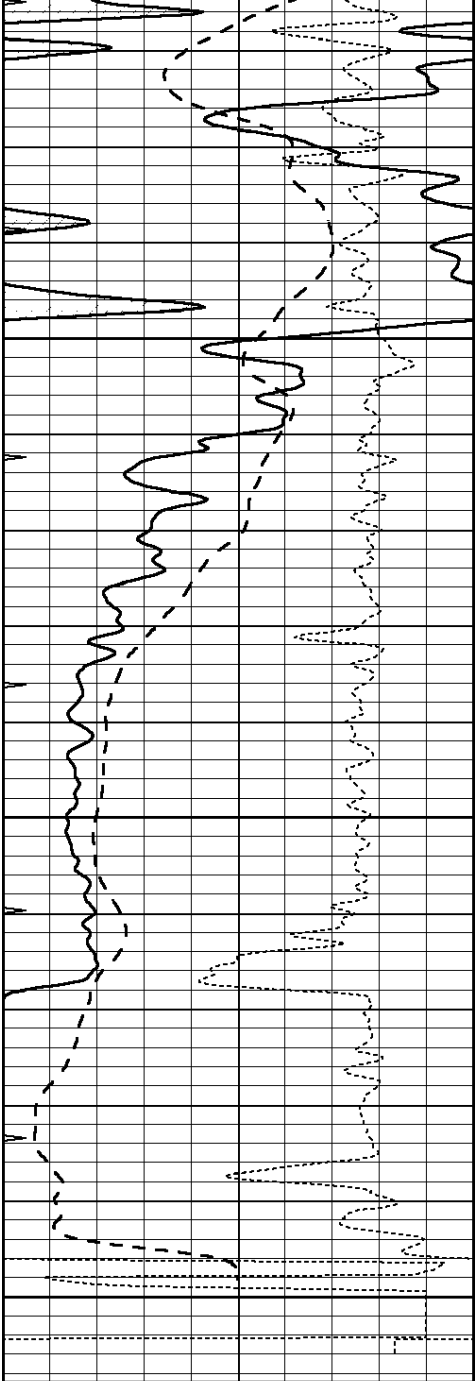


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4300

4350

4400

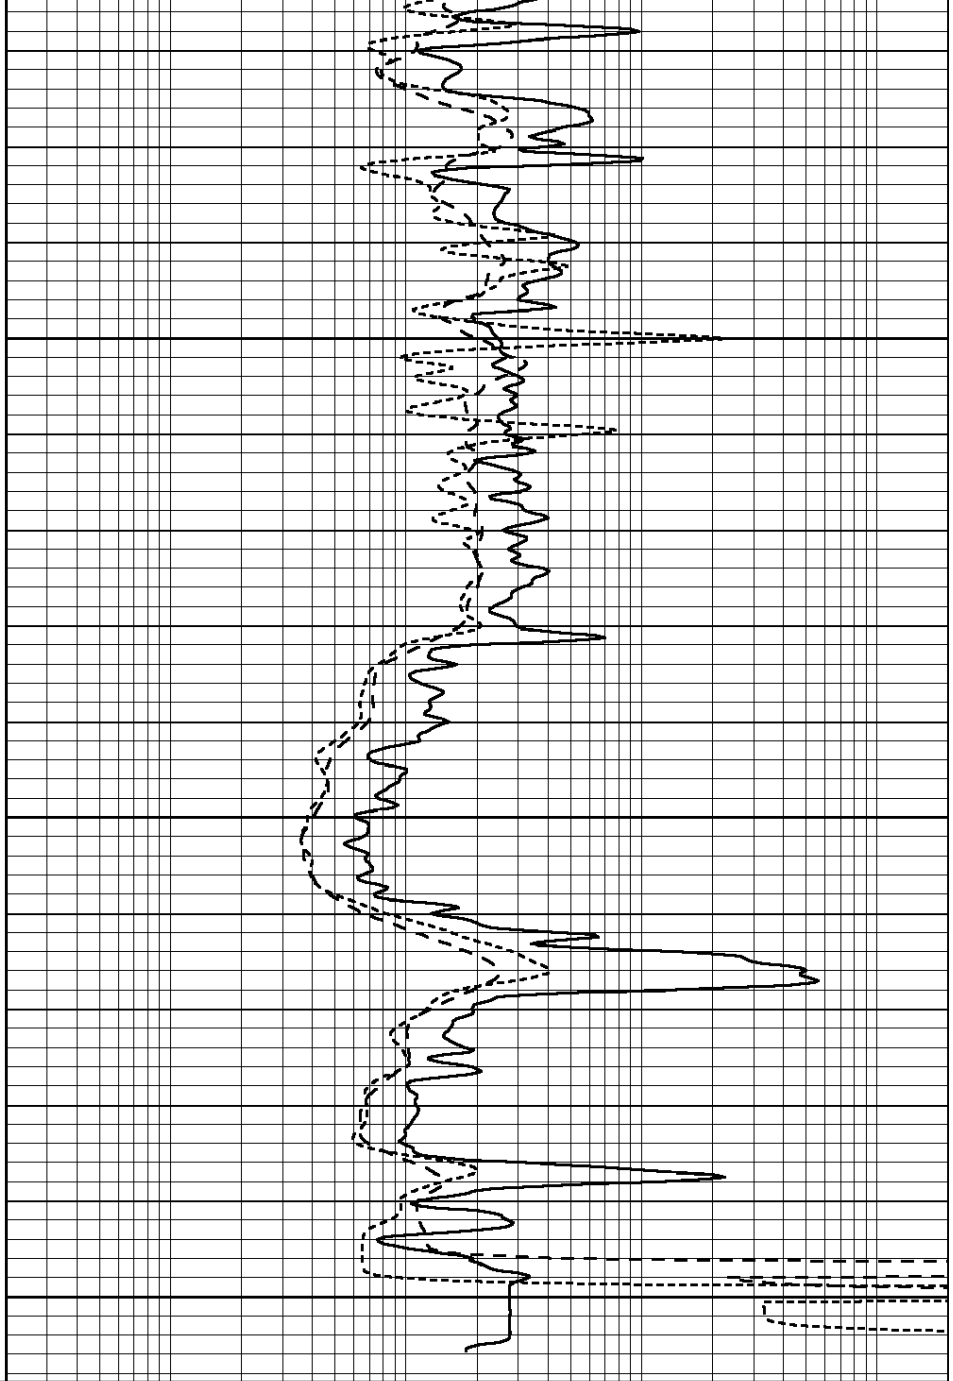

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 25882pe.db
Dataset Pathname: pass3.6
Dataset Creation: Wed Sep 17 10:34:38 2014

Dual Induction Calibration Report

Serial-Model:	PROBE9-DILG
Surface Cal Performed:	Tue Sep 16 21:06:10 2014
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008

Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	670.000	-20.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	670.000	-35.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings			References			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings			Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 003N			Model: PRB					

Master Calibration				Performed Tue Sep 08 14:14:44 2009				
	Background	Magnesium		Aluminum		Sandstone		
Window 1	2042.6	12312.8		4225.8		13758.4		cps
Window 2	1855.8	10134.7		3624.2		11113.1		cps
Window 3	1639.4	6760.2		2716.3		7260.3		cps
Window 4	466.4	469.2		466.1		476.5		cps
Long Space	0.0	8278.9		1768.4		9257.4		cps
Short Space	2.2	2377.3		1544.1		2574.2		cps
Rho		1.7100		2.5900		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio			: 0.549	
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept			: -18.8	

Before Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

After Survey Verification				Performed Wed Dec 31 18:00:00 1969				
---------------------------	--	--	--	------------------------------------	--	--	--	--

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Mon Jun 30 21:53:39 2014	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps