



Weatherford

**COMPACT PHOTO DENSITY
COMPENSATED NEUTRON
MICRORESISTIVITY LOG**


COMPANY			O'BRIEN RESOURCES, LLC.		
WELL			MSJ-PENNER 28 #3		
FIELD			WILDCAT		
PROVINCE/COUNTY			GOVE		
COUNTRY/STATE			U.S.A. / KANSAS		
LOCATION			1382' FNL & 2362' FWL		
SEC 28	TWP 14S	RGE 30W	Other Services		
Latitude		MAI/MFE			
Longitude					
API Number		15-063-22212			
Permanent Datum GL, Elevation 2798 feet					
Log Measured From KB					
Drilling Measured From KB @ 13 feet			Elevations:		
			KB		
			DF		
			GL		
			feet		
			2811.00		
			2809.00		
			2798.00		
Date	19-NOV-2014				
Run Number	ONE				
Service Order	7577-103540900				
Depth Driller	4650.00	feet			
Depth Logger	4650.00	feet			
First Reading	4631.00	feet			
Last Reading	3700.00	feet			
Casing Driller	286.00	feet			
Casing Logger	288.00	feet			
Bit Size	7.875	inches			
Hole Fluid Type	CHEMICAL				
Density / Viscosity	9.20 lb/USg	47.00 CP			
PH / Fluid Loss	9.50	9.20 ml/30Min			
Sample Source	MUD PIT				
Rm @ Measured Temp	1.73 @ 75.0	ohm-m			
Rmf @ Measured Temp	1.38 @ 75.0	ohm-m			
Rmc @ Measured Temp	2.08 @ 75.0	ohm-m			
Source Rmf / Rmc	CALC	CALC			
Rm @ BHT	1.17 @ 113.0	ohm-m			
Time Since Circulation	4 HOURS				
Max Recorded Temp	113.00	deg F			
Equipment / Base	13244	LIB			
Recorded By	JEFFREY RANDLE				
Witnessed By	KURT TALBOTT				
JOB #	LB14-360				


BOREHOLE RECORD					Last Edited: 19-NOV-2014 01:28
Bit Size inches		Depth From feet		Depth To feet	
7.875		286.00		4650.00	
CASING RECORD					
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft	
SURFACE	8.625	0.00	286.00	24.00	

REMARKS
- SOFTWARE ISSUE: WLS 14.03.5114.
- RUN ONE: MCG, MML, MDN, MPD, MFE, MAI RUN IN COMBINATION. - HARDWARE: DUAL BOWSPRING USED ON MDN. 0.5 INCH STANDOFF USED ON MFE. 0.5 INCH STANDOFF USED ON MAI.
- 2.71 G/CC LIMESTONE DENSITY MATRIX USED TO CALCULATE POROSITY.
- BOREHOLE RUGOSITY, TIGHT PULLS, AND WASHOUTS WILL AFFECT DATA QUALITY.
- ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.
- TOTAL HOLE VOLUME FROM TD TO SURFACE CASING: 1663 CU.FT.
- ANNULAR HOLE VOLUME WITH 5.5 INCH PRODUCTION CASING FROM TD TO 3700 FEET: 167 CU.FT.
- RIG: MAVERICK DRILLING #108

- OPERATOR: J. LaPOINT, S. LARES.

In interpreting, communicating or providing information and/or making recommendations, either written or oral, as to logs or test or other data, type or amount of material, or Work or other service to be furnished, or manner of performance, or in predicting results to be obtained, the Contractor will give the Company the benefit of the Contractor's best judgment based on its experience and will perform all such Work in a good and workmanlike manner. Any interpretation of test or other data, and any recommendation or reservoir description based upon such interpretations, are opinions based upon inferences from measurements and empirical relationships and assumptions, which inferences and assumptions are not infallible, and with respect to which professional engineers and analysts may differ. ACCORDINGLY ANY INTERPRETATION OR RECOMMENDATION RESULTING FROM THE SERVICES WILL BE AT THE SOLE RISK OF THE COMPANY, AND THE CONTRACTOR CANNOT AND DOES NOT WARRANT THE ACCURACY, CORRECTNESS OR COMPLETENESS OF ANY SUCH INTERPRETATION OR RECOMMENDATION, WHICH INTERPRETATIONS AND RECOMMENDATIONS SHOULD NOT, THEREFORE, UNDER ANY CIRCUMSTANCES BE RELIED UPON AS THE SOLE OR MAIN BASIS FOR ANY DRILLING, COMPLETION, WELL TREATMENT, PRODUCTION OR FINANCIAL DECISION, OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING ACTIVITY, DRILLING RIG OR ITS CREW OR ANY OTHER INDIVIDUAL. THE COMPANY HAS FULL RESPONSIBILITY FOR ALL DECISIONS CONCERNING THE SERVICES.

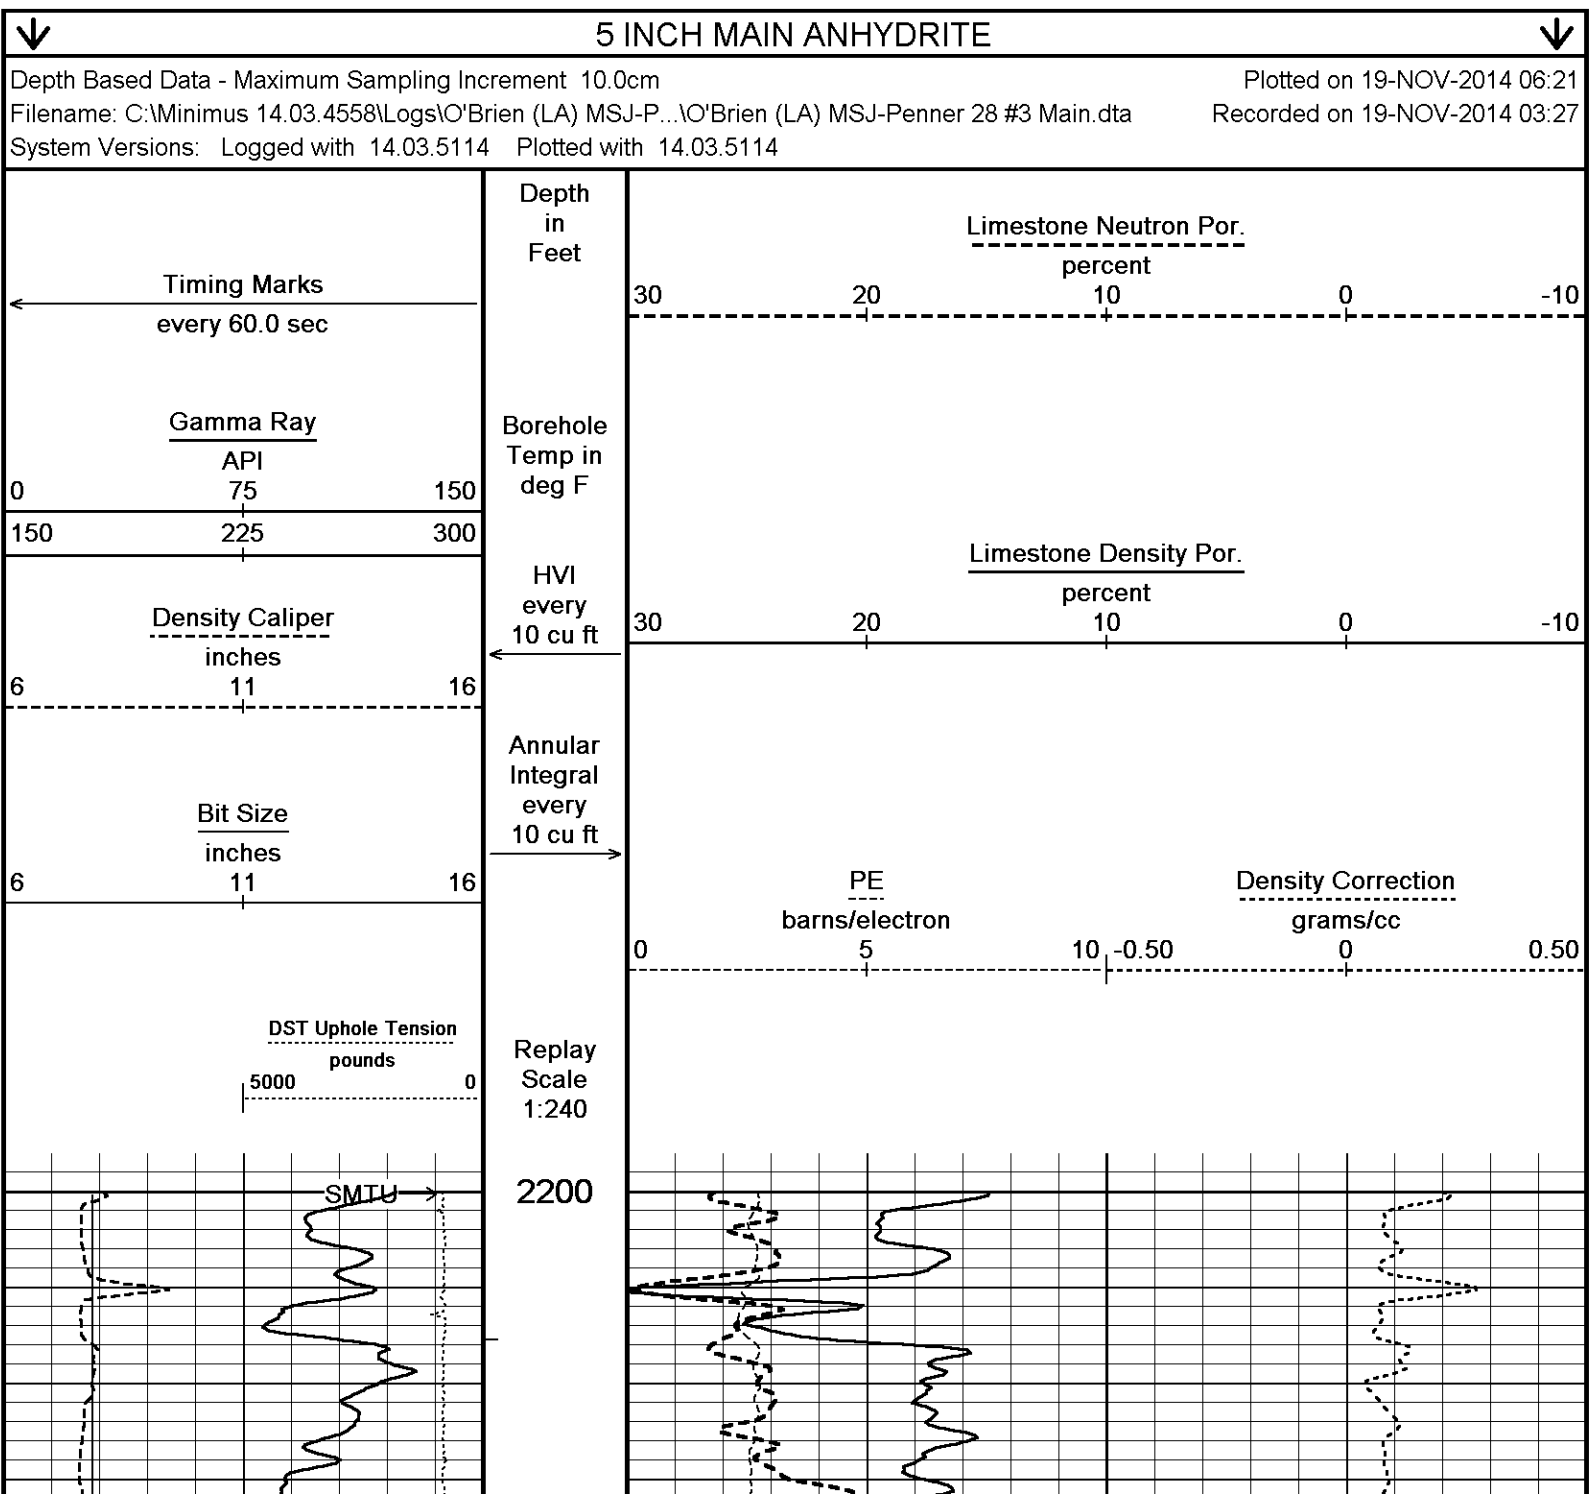

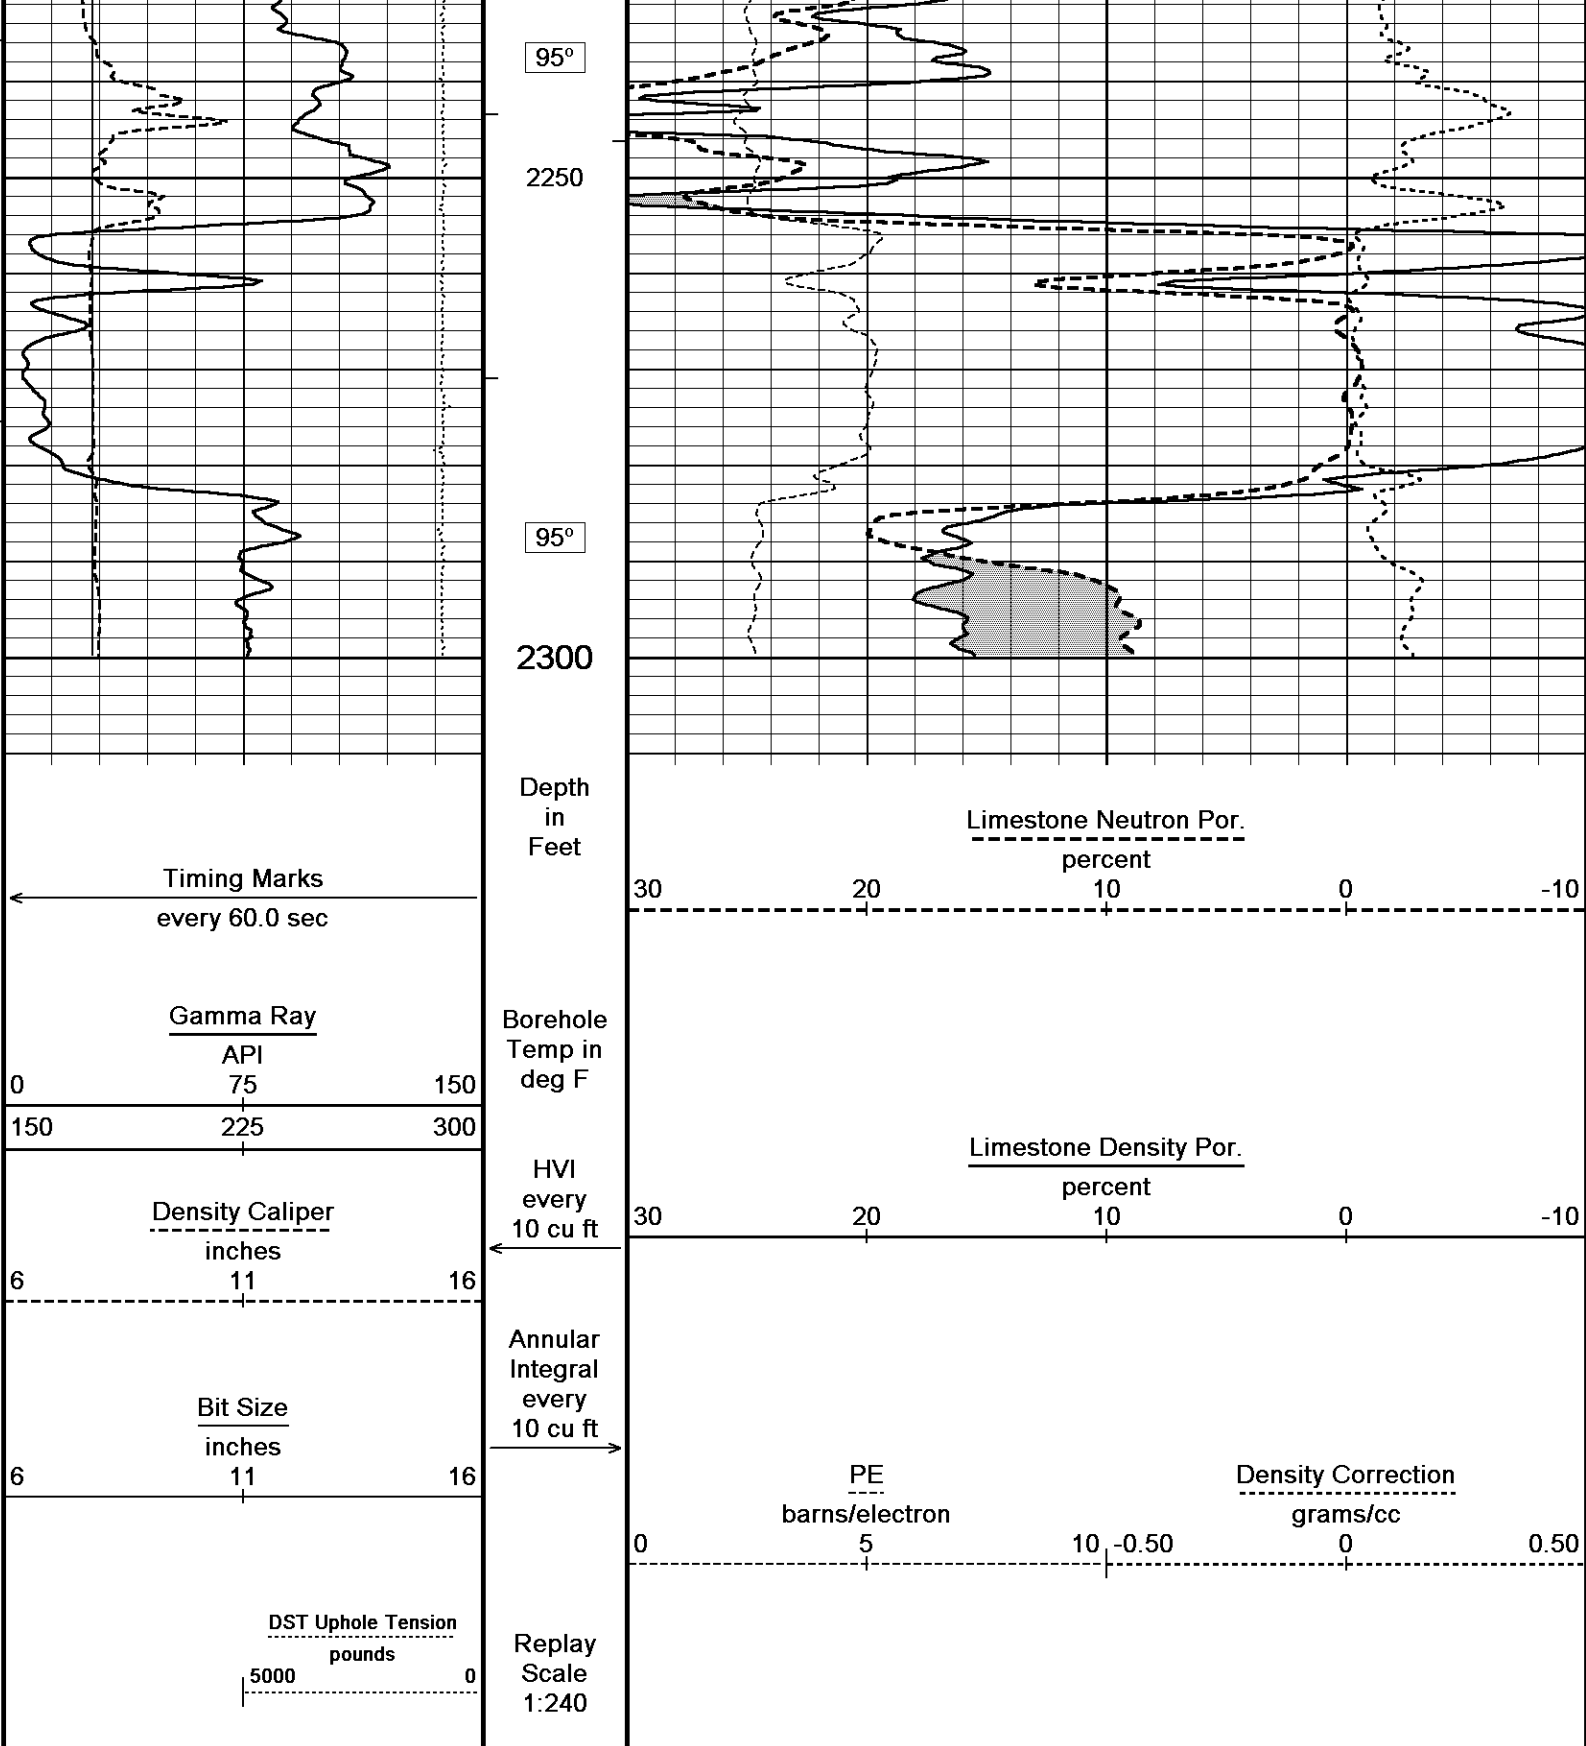


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 19-NOV-2014 06:21
Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-P...\O'Brien (LA) MSJ-Penner 28 #3 Main.dta Recorded on 19-NOV-2014 03:27
System Versions: Logged with 14.03.5114 Plotted with 14.03.5114

↑ 5 INCH MAIN ANHYDRITE ↑

↓ 5 INCH MAIN LIMESTONE ↓

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 19-NOV-2014 06:21
Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-P...\O'Brien (LA) MSJ-Penner 28 #3 Main.dta Recorded on 19-NOV-2014 03:27
System Versions: Logged with 14.03.5114 Plotted with 14.03.5114

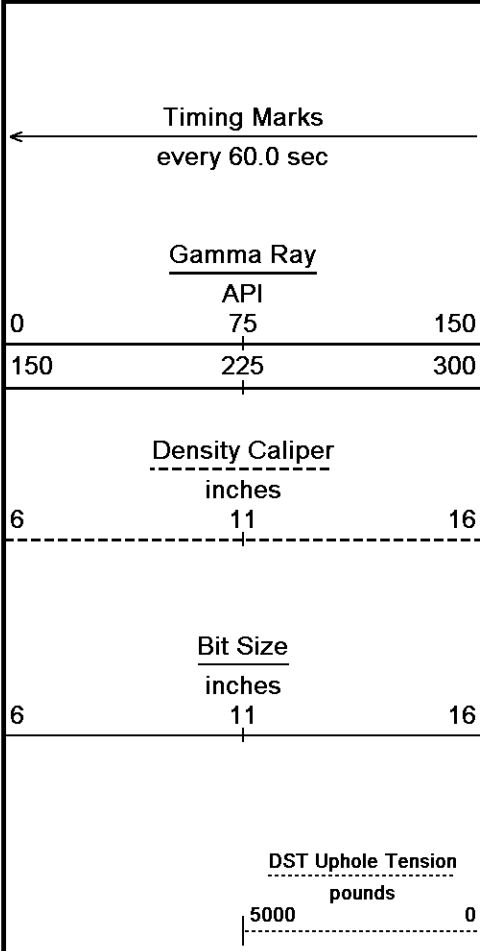



Depth
in
Feet

Borehole
Temp in
deg F

HVI
every
10 cu ft

Annular
Integral
every
10 cu ft

Replay
Scale
1:240

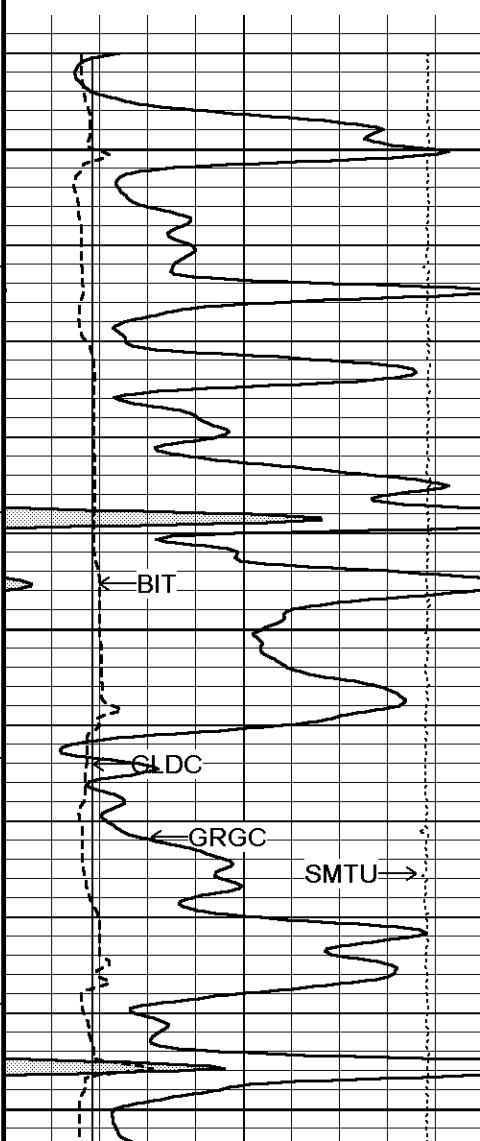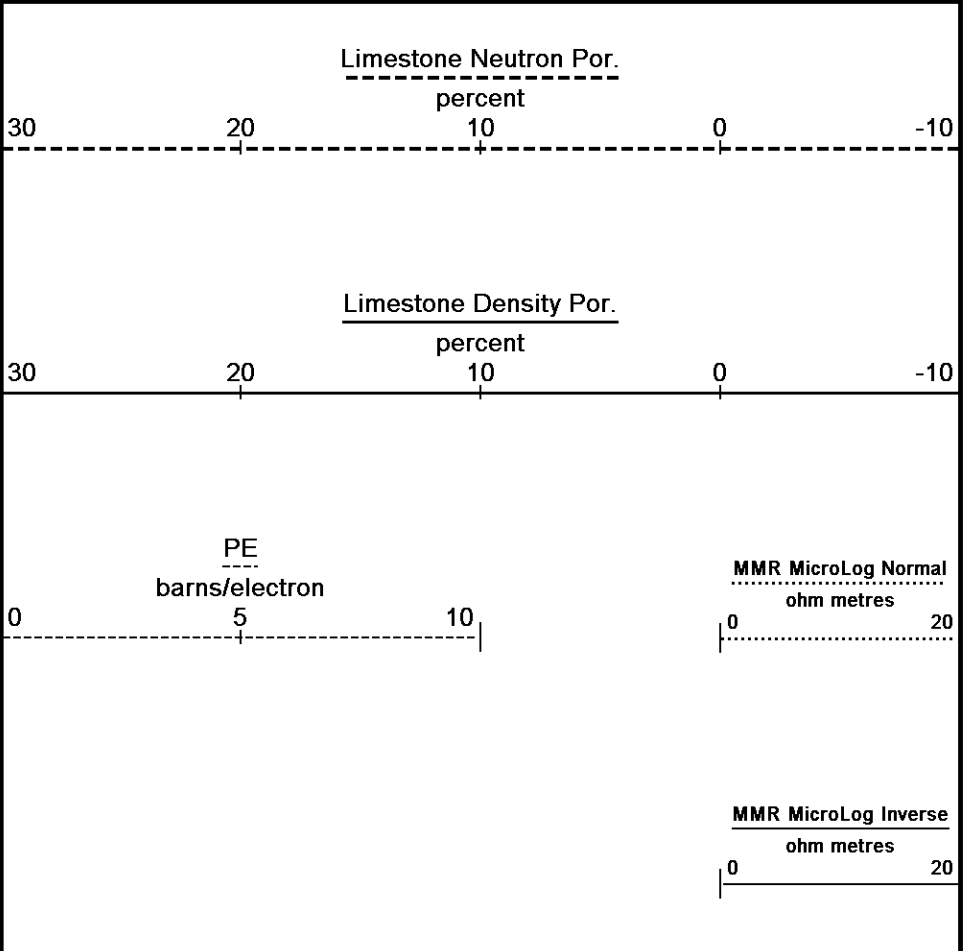

3688

3700


104°


3750


300

104°

3800

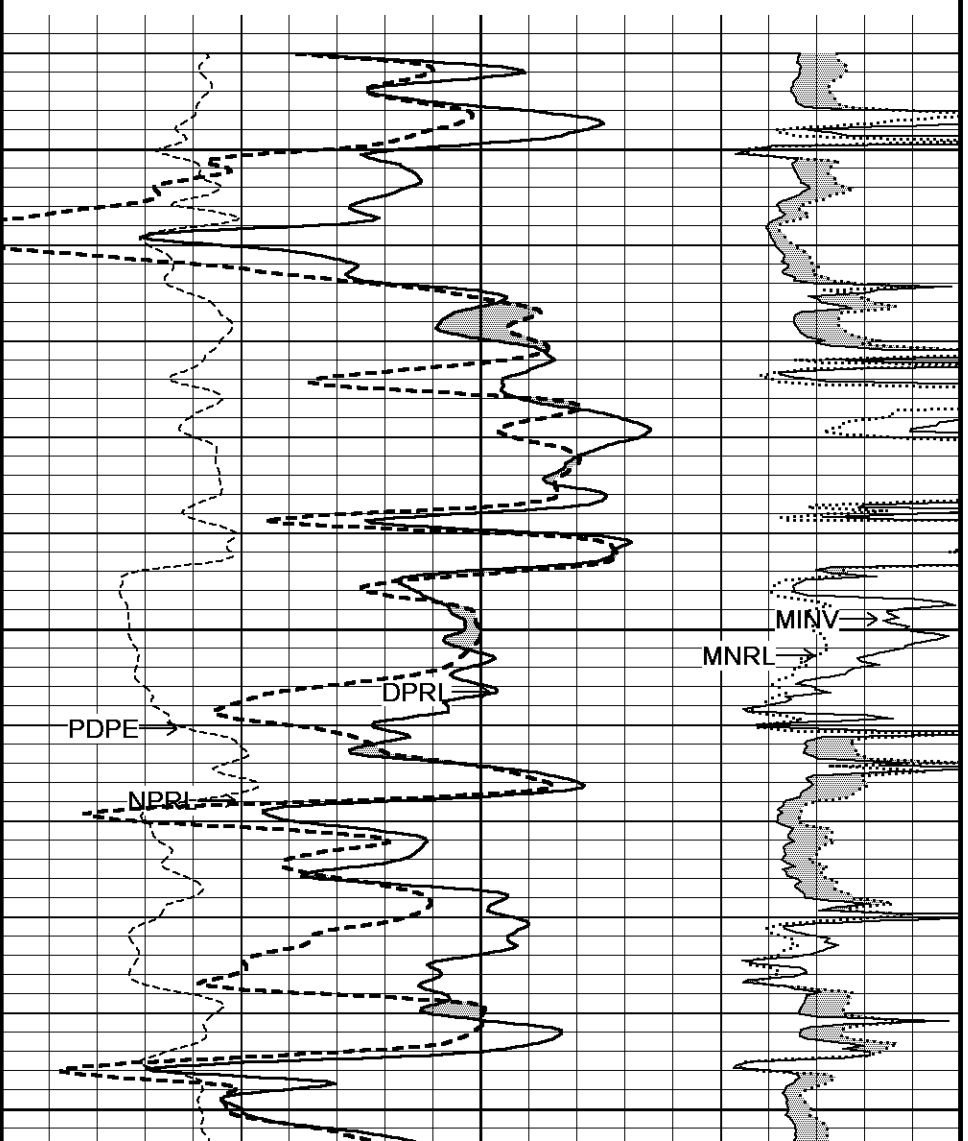

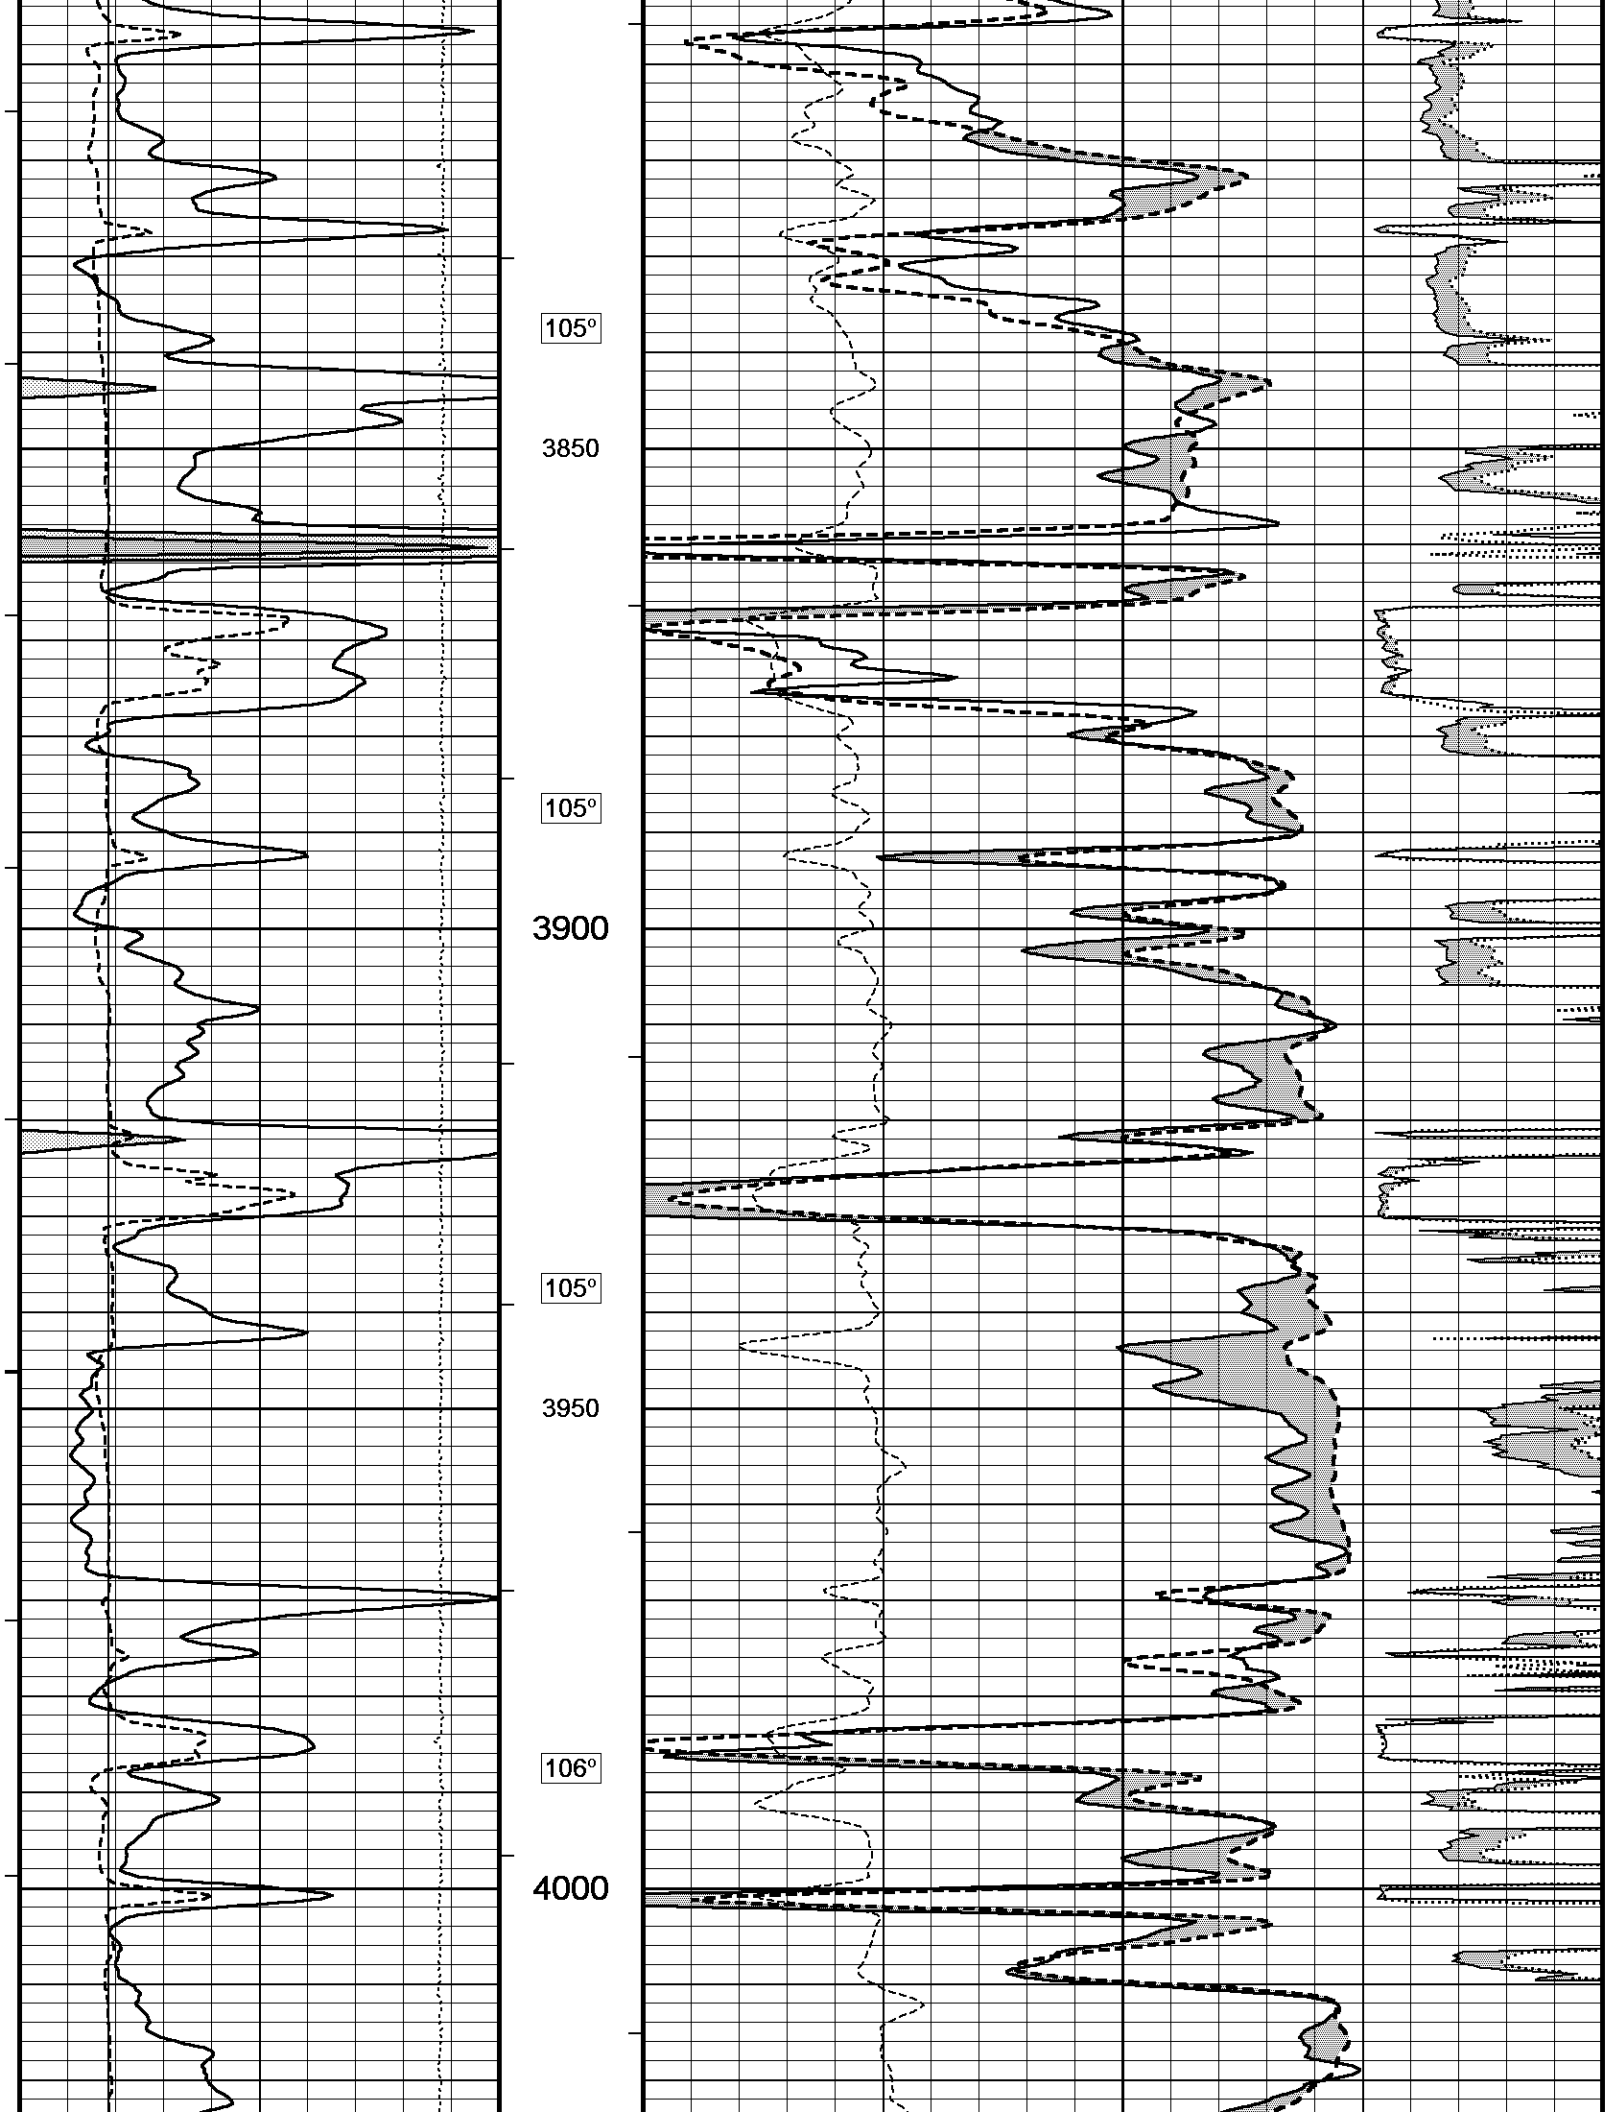

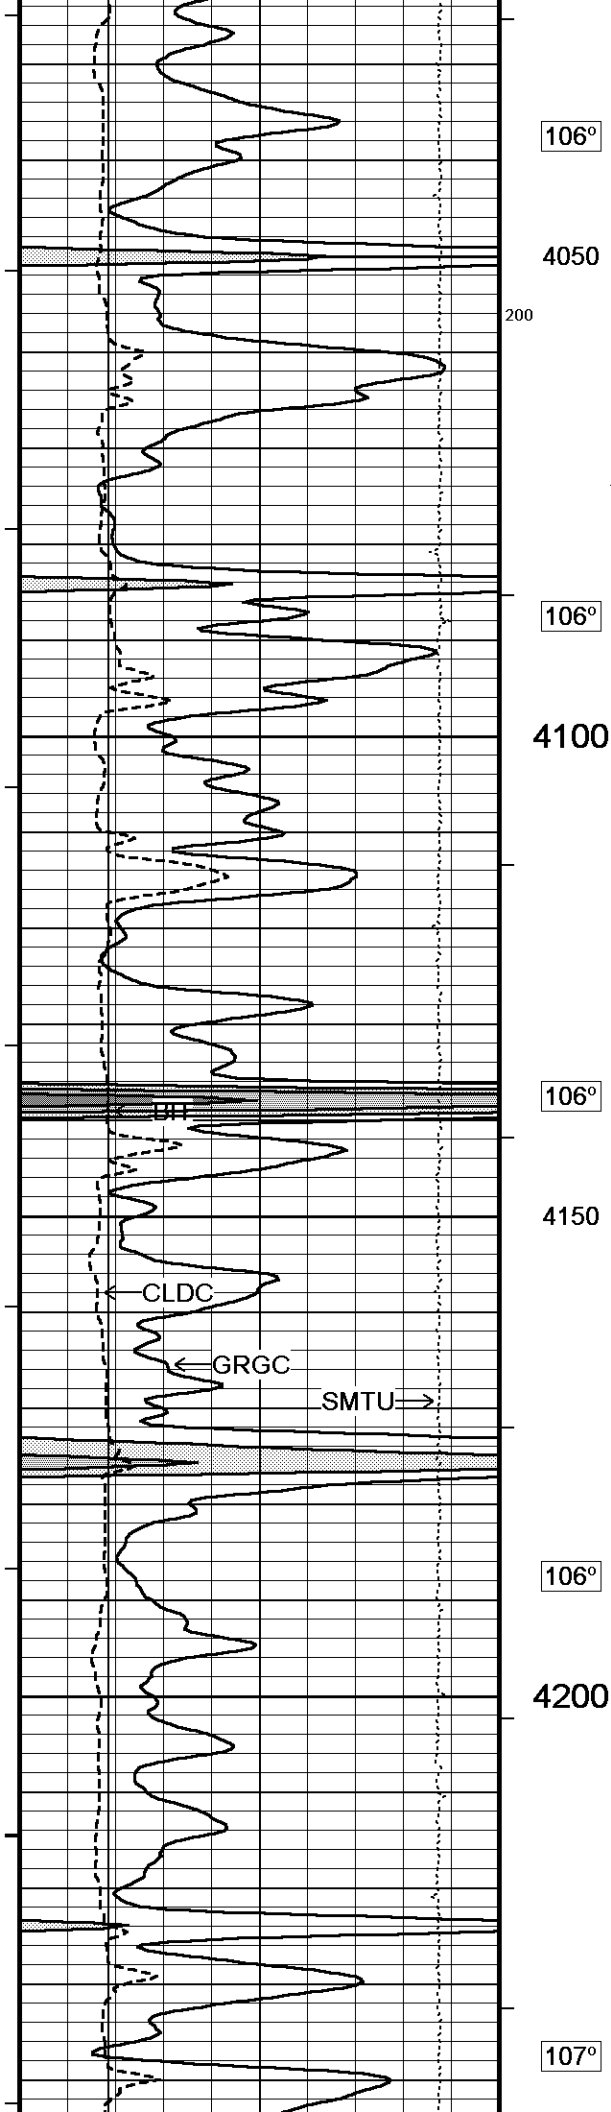

106°

4050

200

100

106°

4100


106°

4150

106°

4200

107°

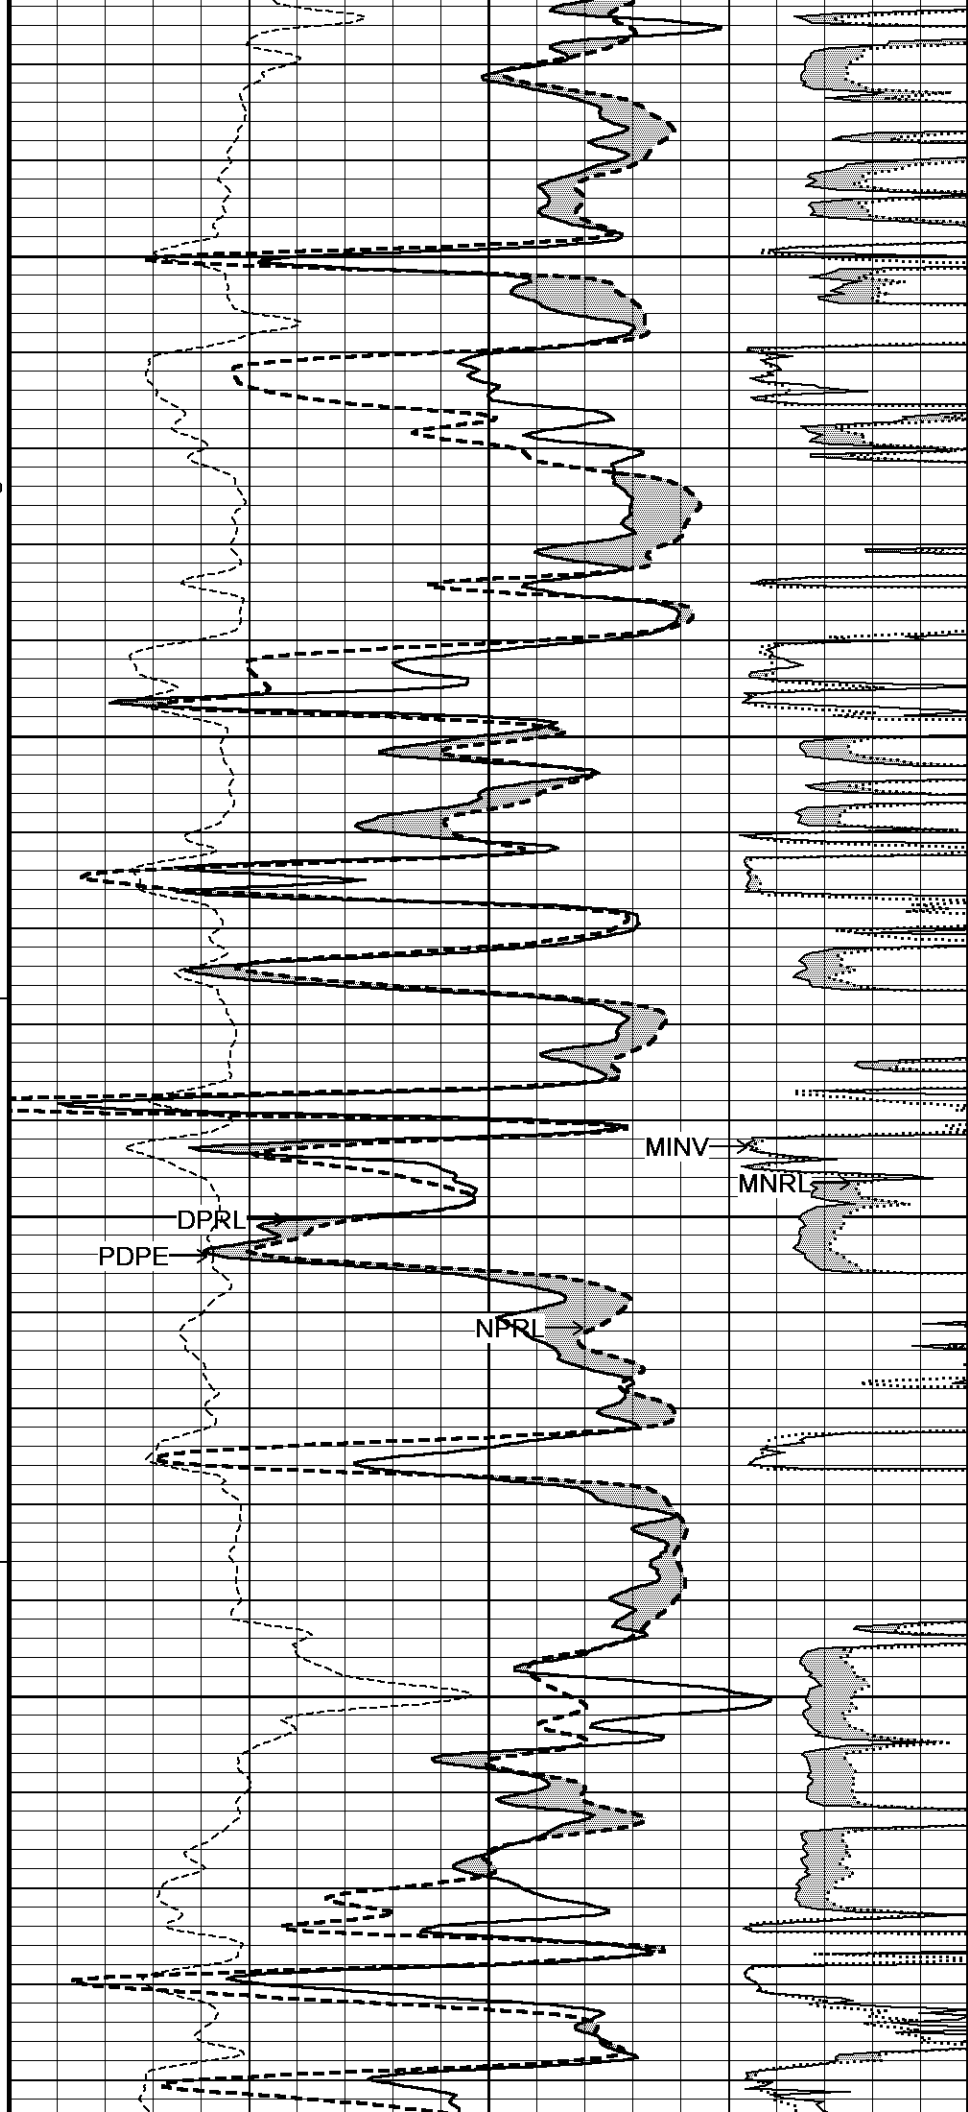


MINV

MNRI


DPRL



PDPE


NPRI

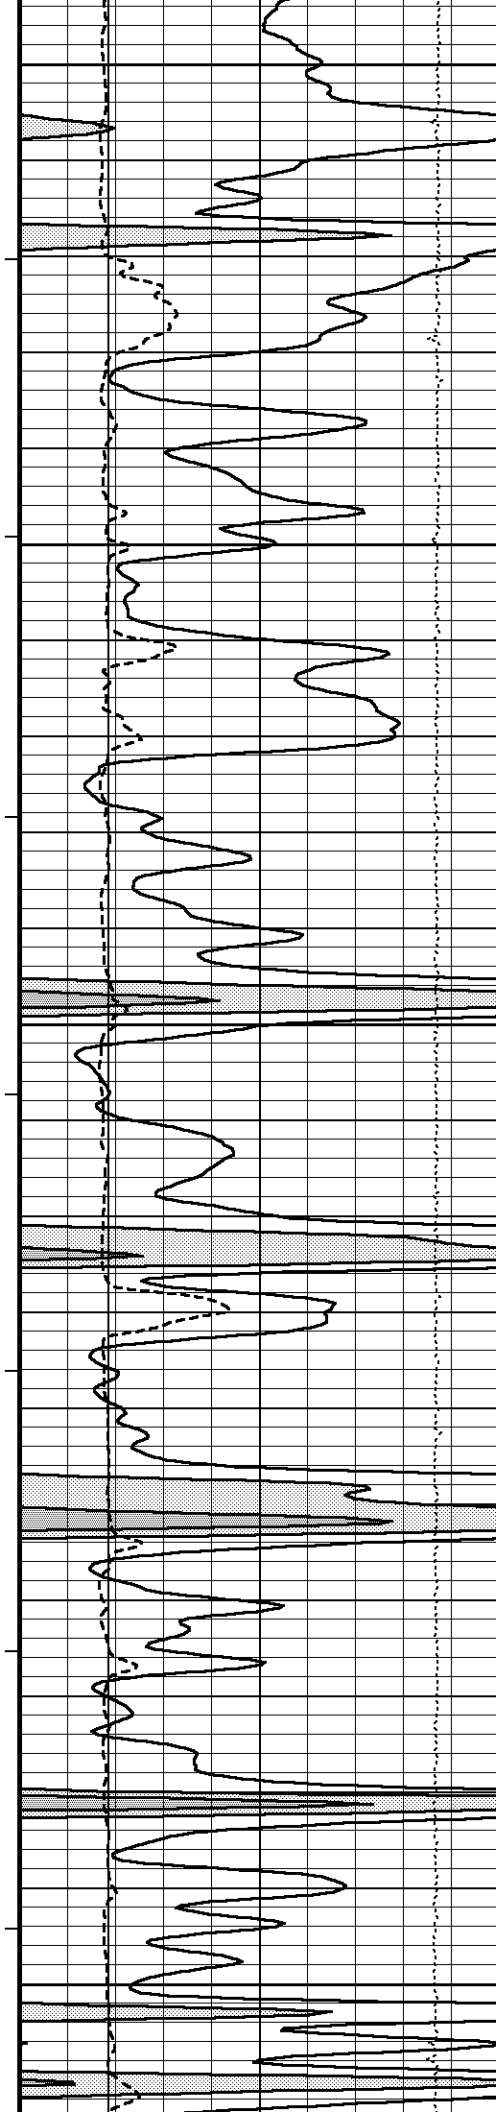

4250
107°
4300
108°
100
4350
110°
4400
111°
4450

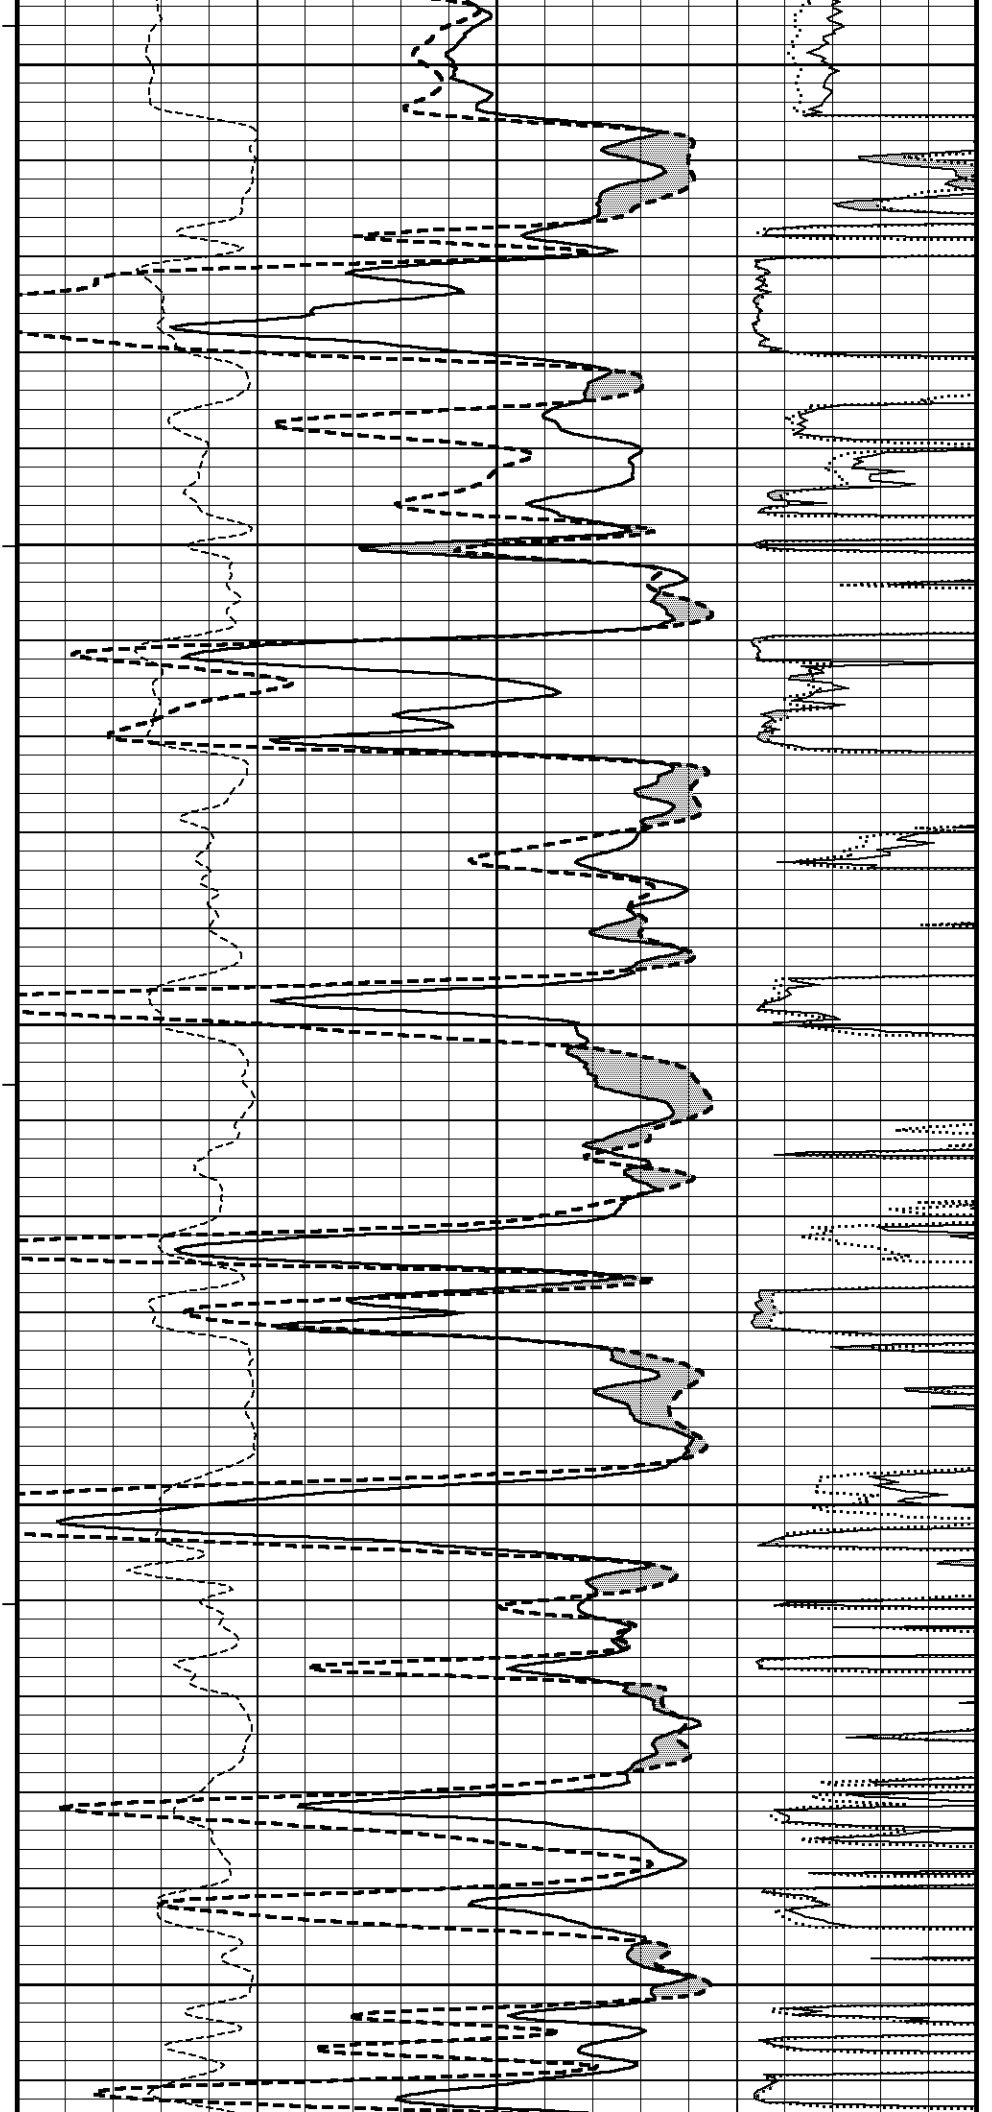

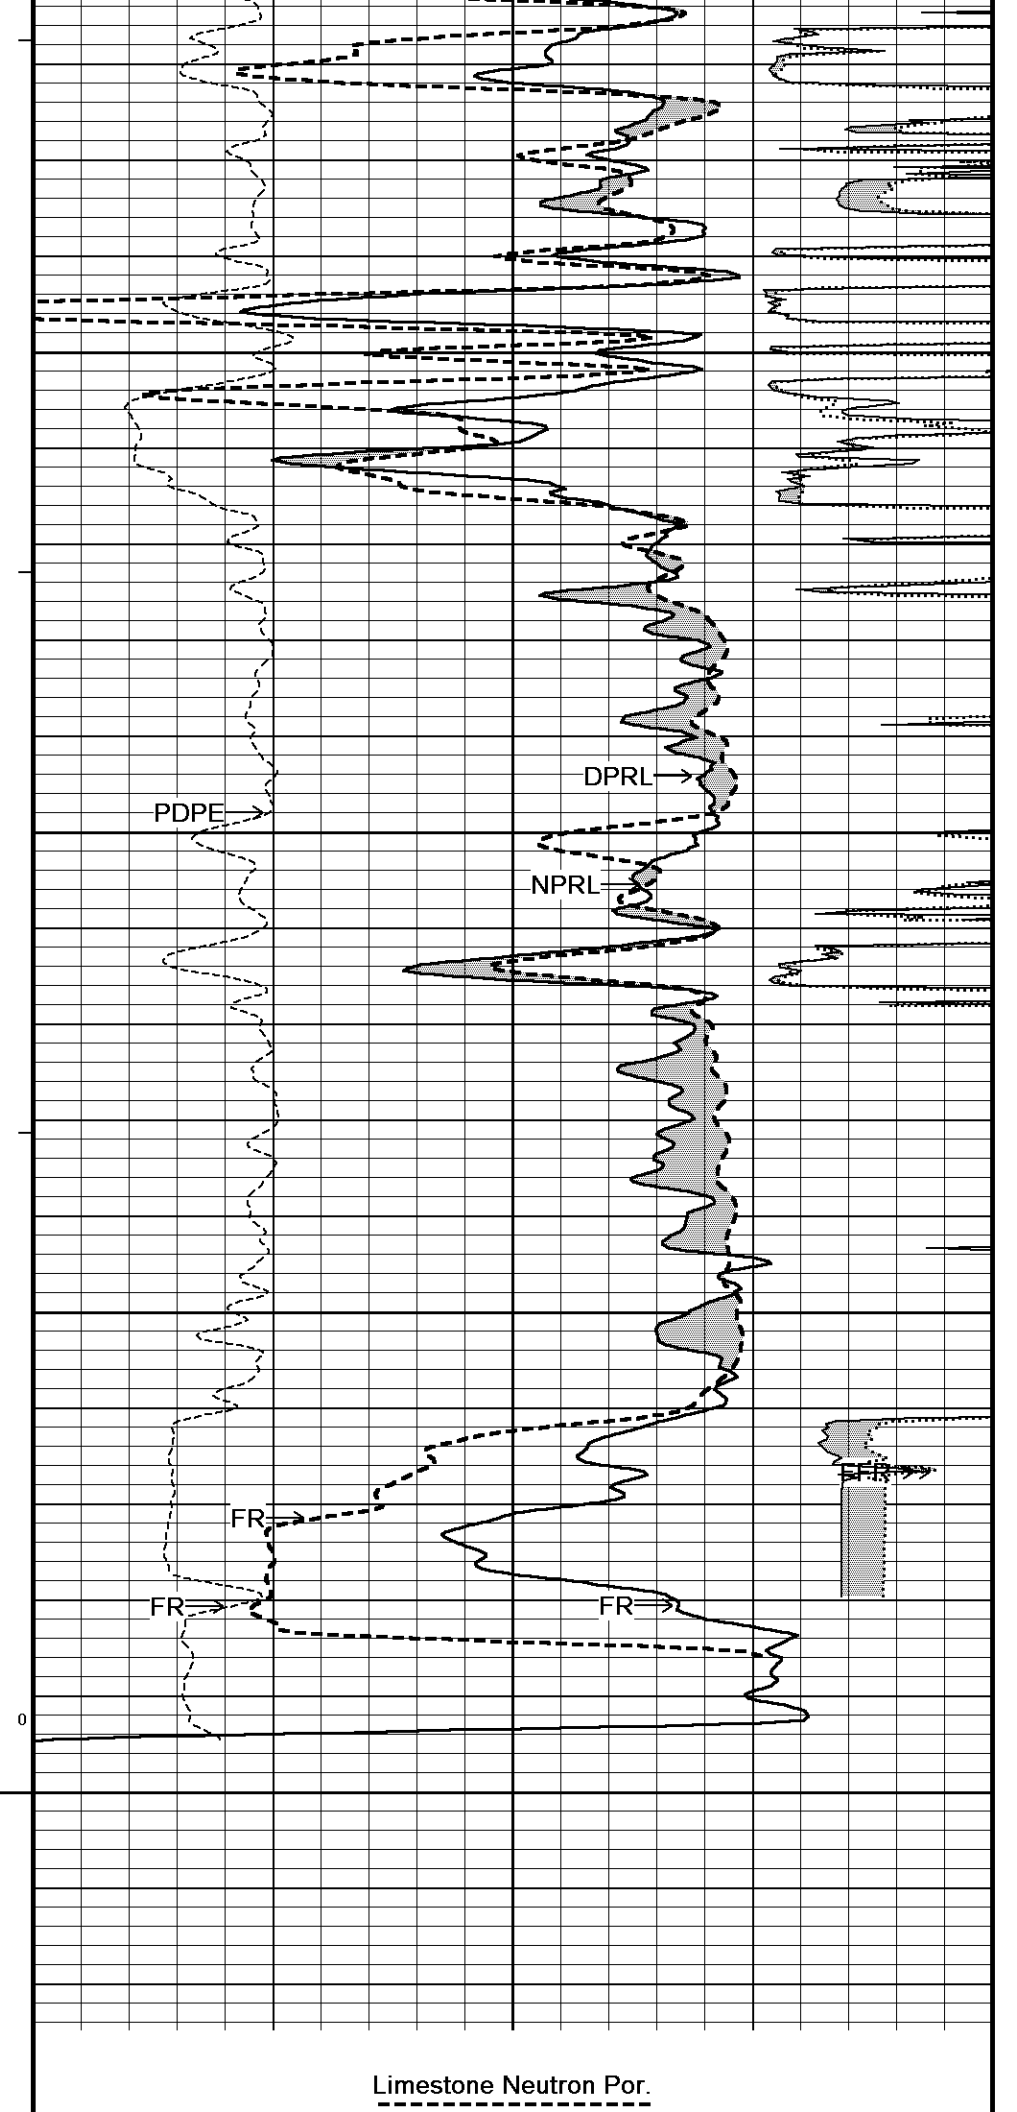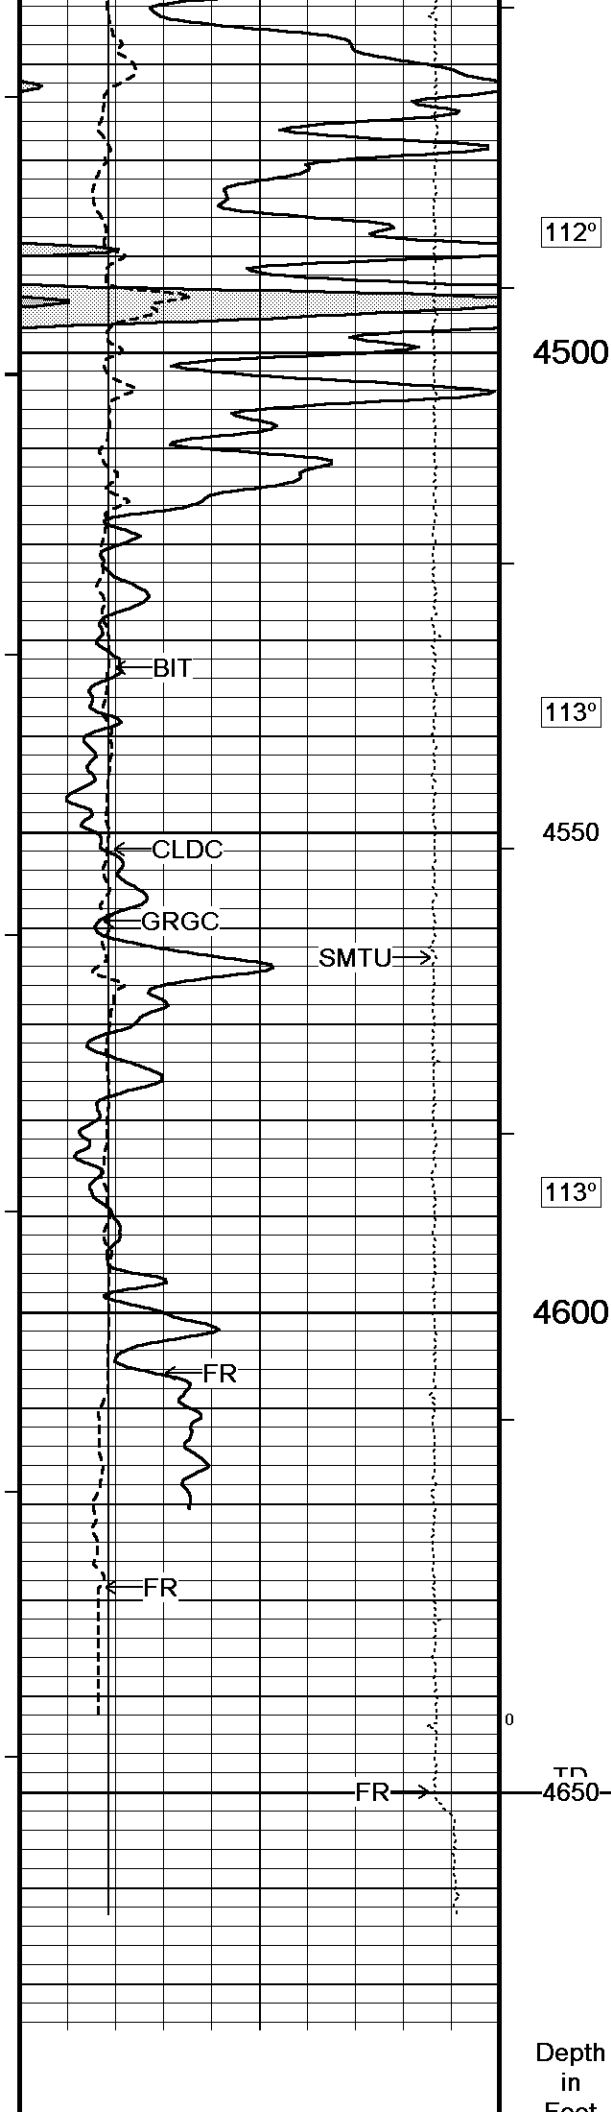

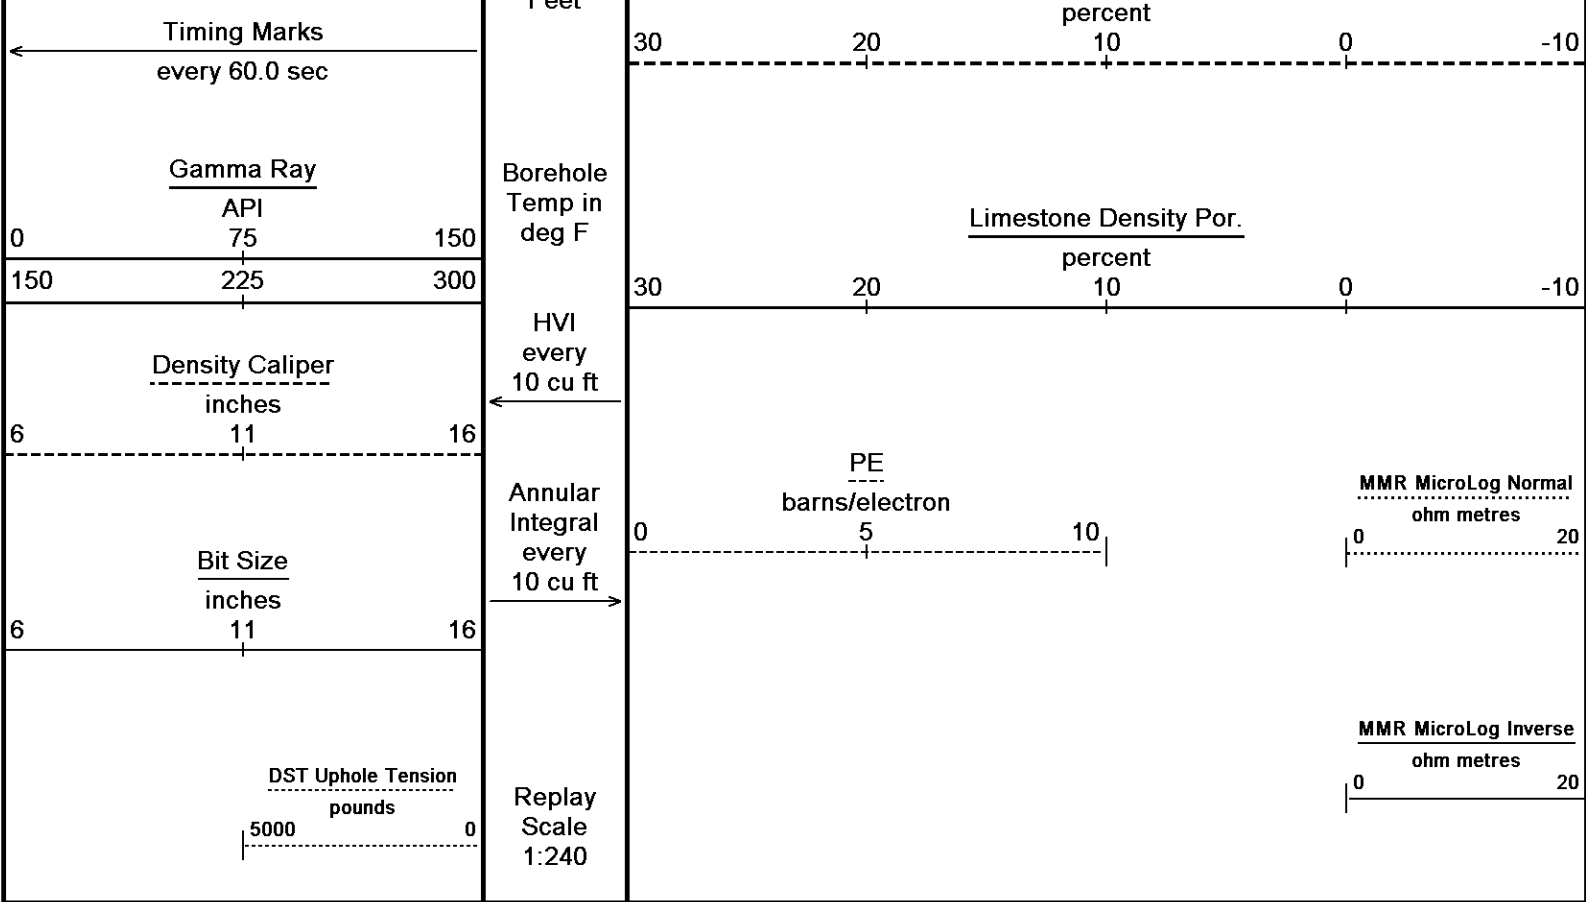

Depth Based Data - Maximum Sampling Increment 10.0cm

Plotted on 19-NOV-2014 06:21

Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-P...O'Brien (LA) MSJ-Penner 28 #3 Main.dta

Recorded on 19-NOV-2014 03:27

System Versions: Logged with 14.03.5114 Plotted with 14.03.5114

↑

5 INCH MAIN LIMESTONE

↑

↓

REPEAT SECTION

↓


Depth Based Data - Maximum Sampling Increment 10.0cm

Plotted on 19-NOV-2014 06:21

Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-...O'Brien (LA) MSJ-Penner 28 #3 Repeat.dta

Recorded on 19-NOV-2014 03:06

System Versions: Logged with 14.03.5114 Plotted with 14.03.5114

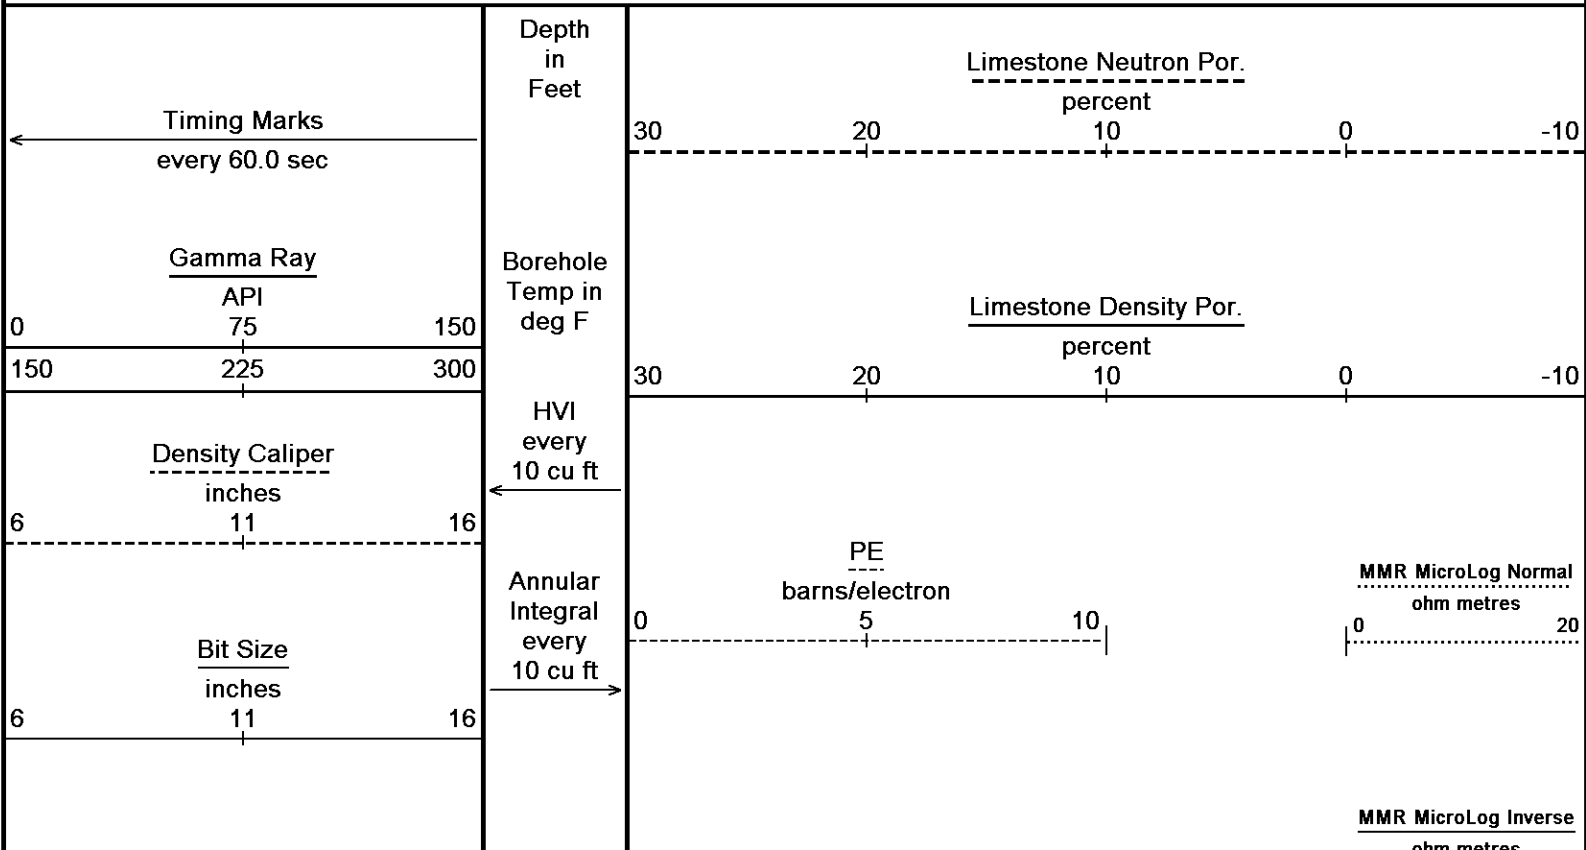

DST Uphole Tension

pounds

5000 0

Replay
Scale
1:240

0 20
m metres

4438

4450

111°

4500

112°

4550

112°

4600

BIT

CLDC

GRGC

SMTU

FR

FR

PDPE

DPRL


NPRL

FR

FR

FR

FFR

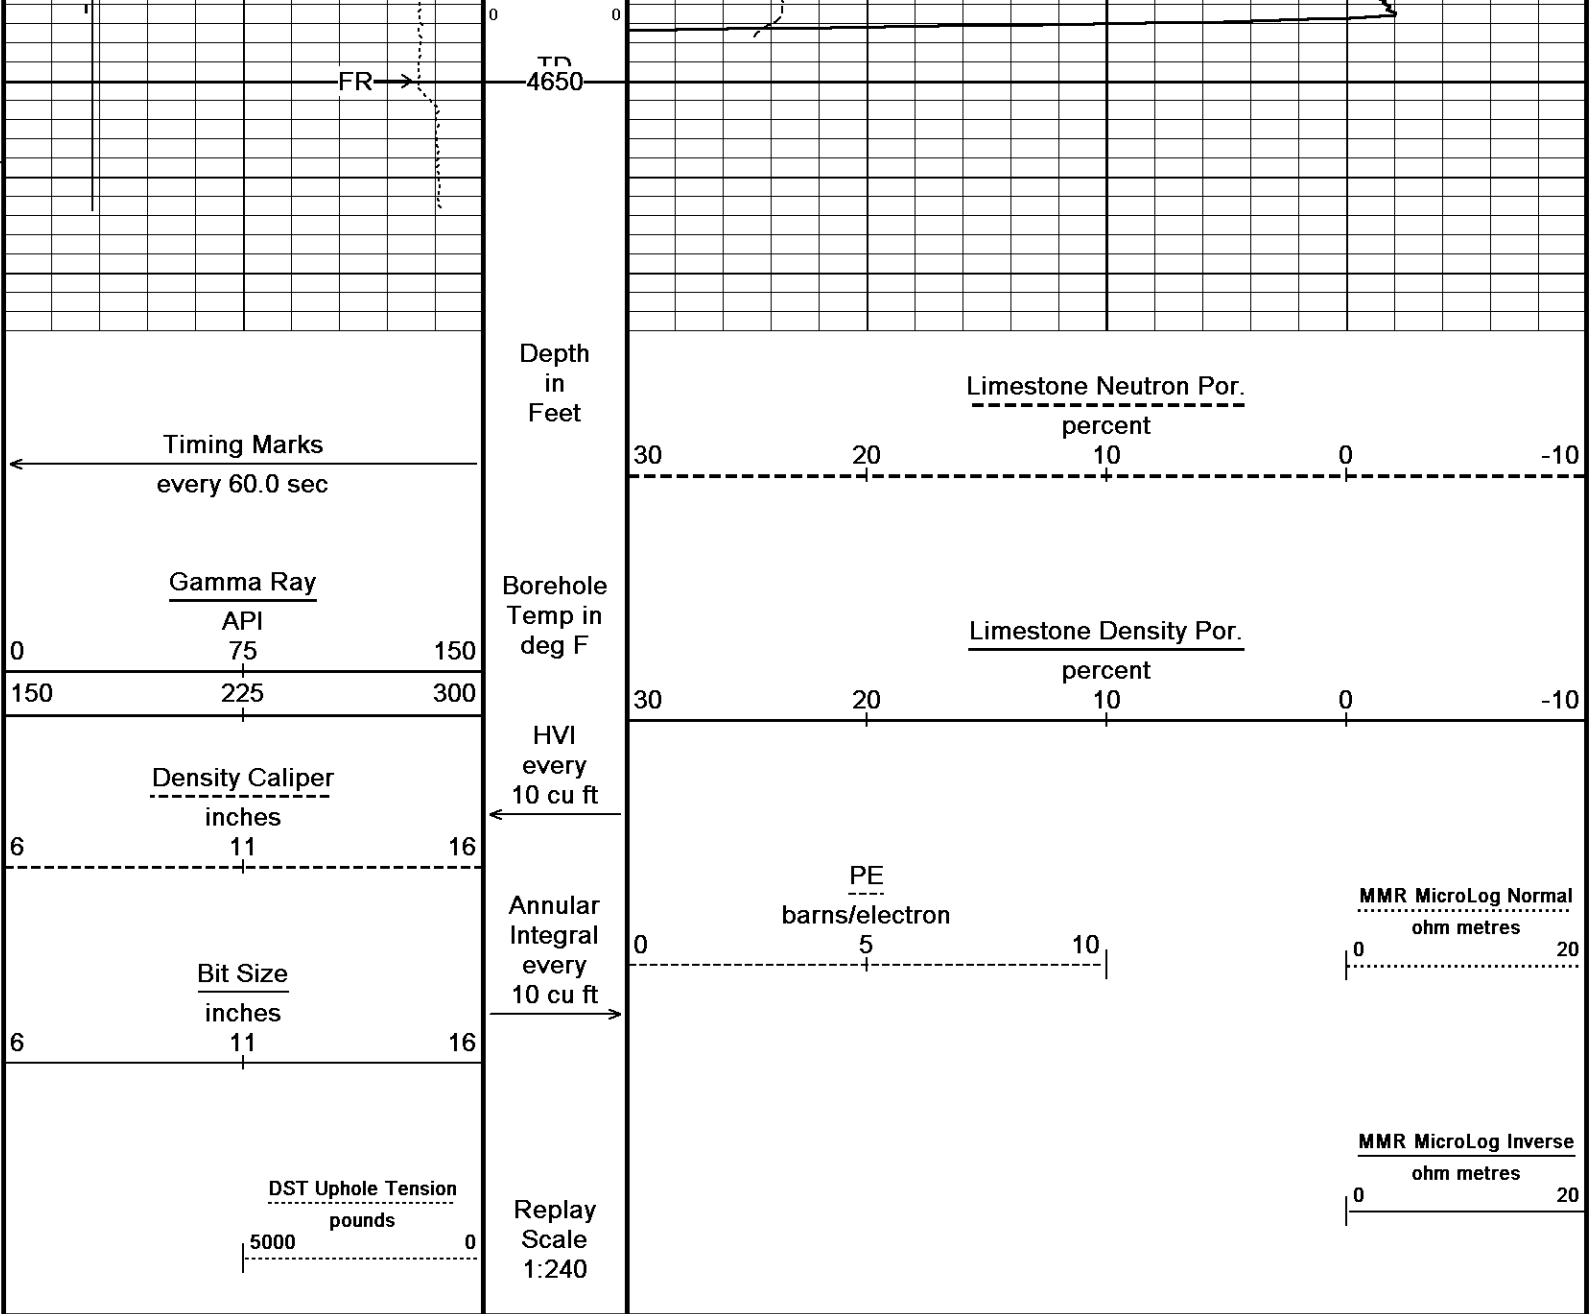





Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 19-NOV-2014 06:21
Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-...\O'Brien (LA) MSJ-Penner 28 #3 Repeat.dta Recorded on 19-NOV-2014 03:06
System Versions: Logged with 14.03.5114 Plotted with 14.03.5114



↑ REPEAT SECTION ↑


↓ 5 INCH MAIN BULK DENSITY ↓

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 19-NOV-2014 06:21
Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-P...\O'Brien (LA) MSJ-Penner 28 #3 Main.dta Recorded on 19-NOV-2014 03:27
System Versions: Logged with 14.03.5114 Plotted with 14.03.5114

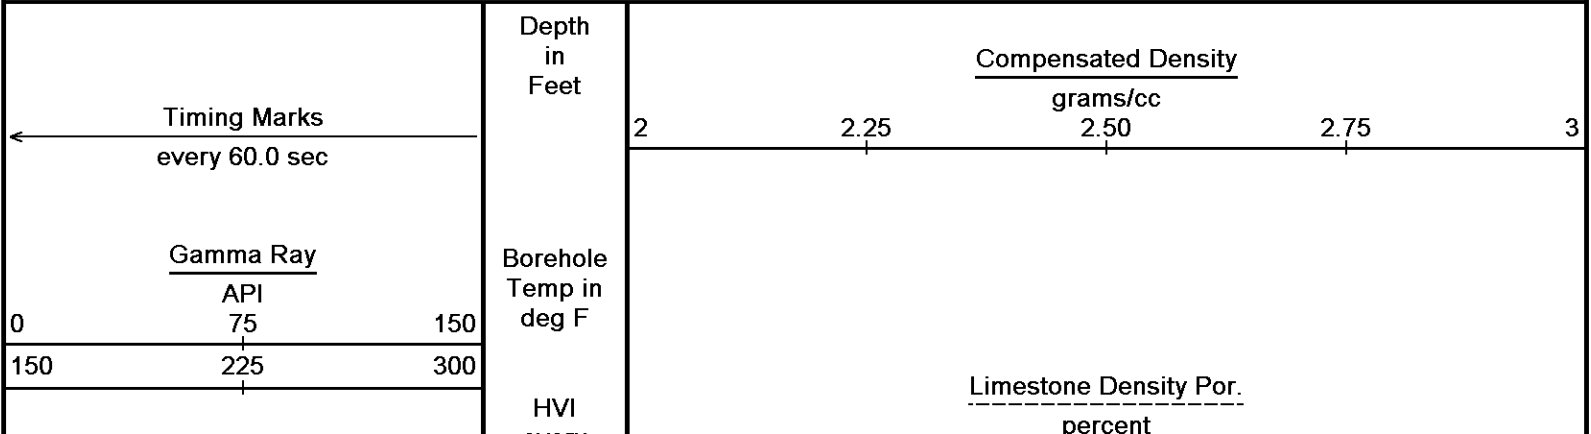


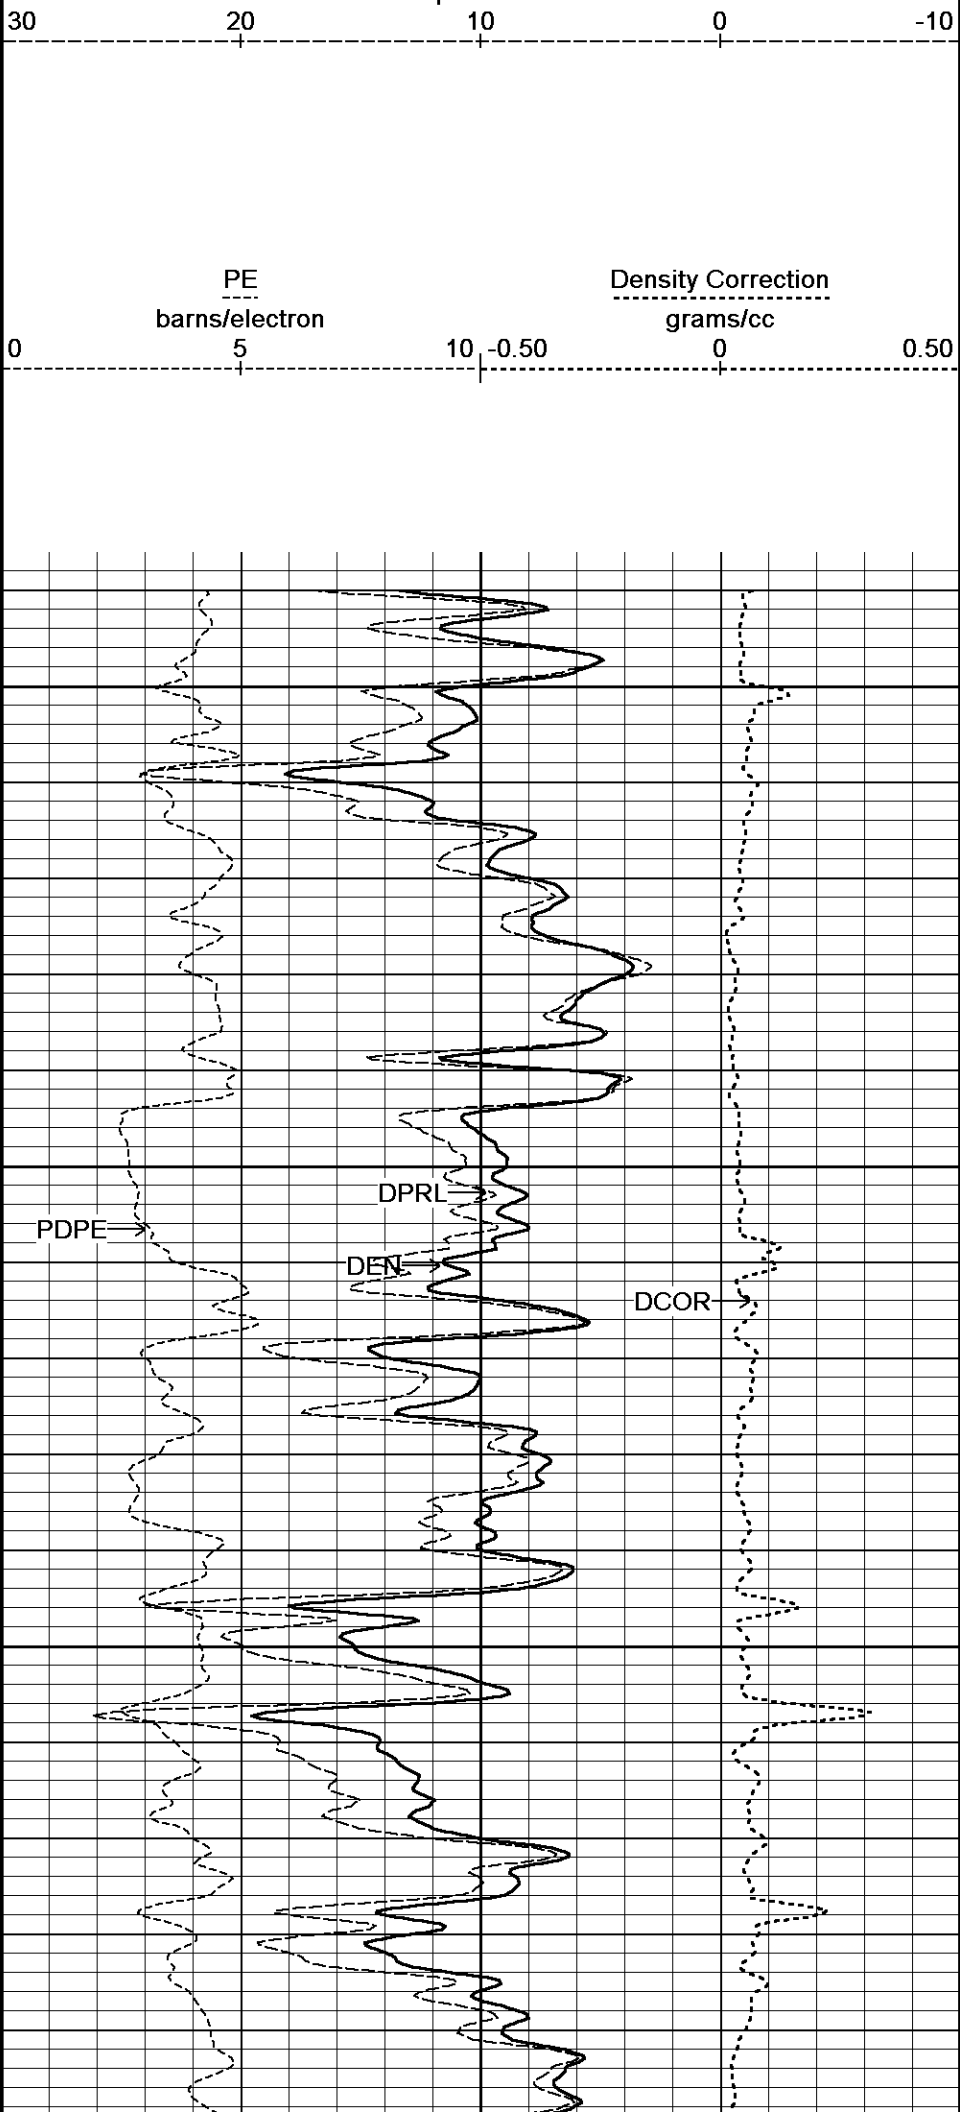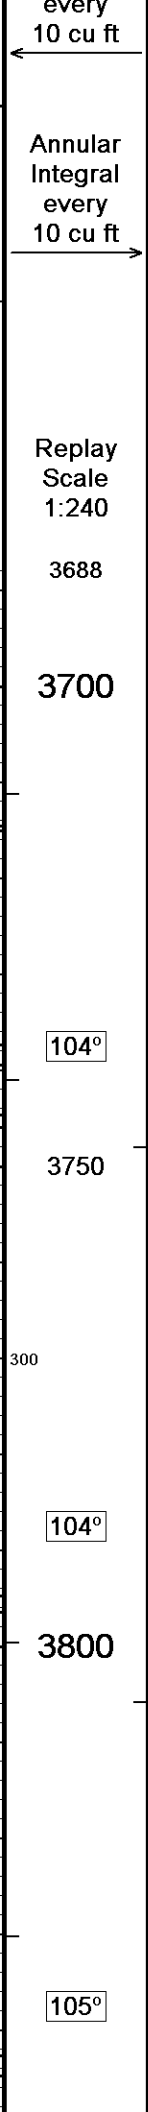
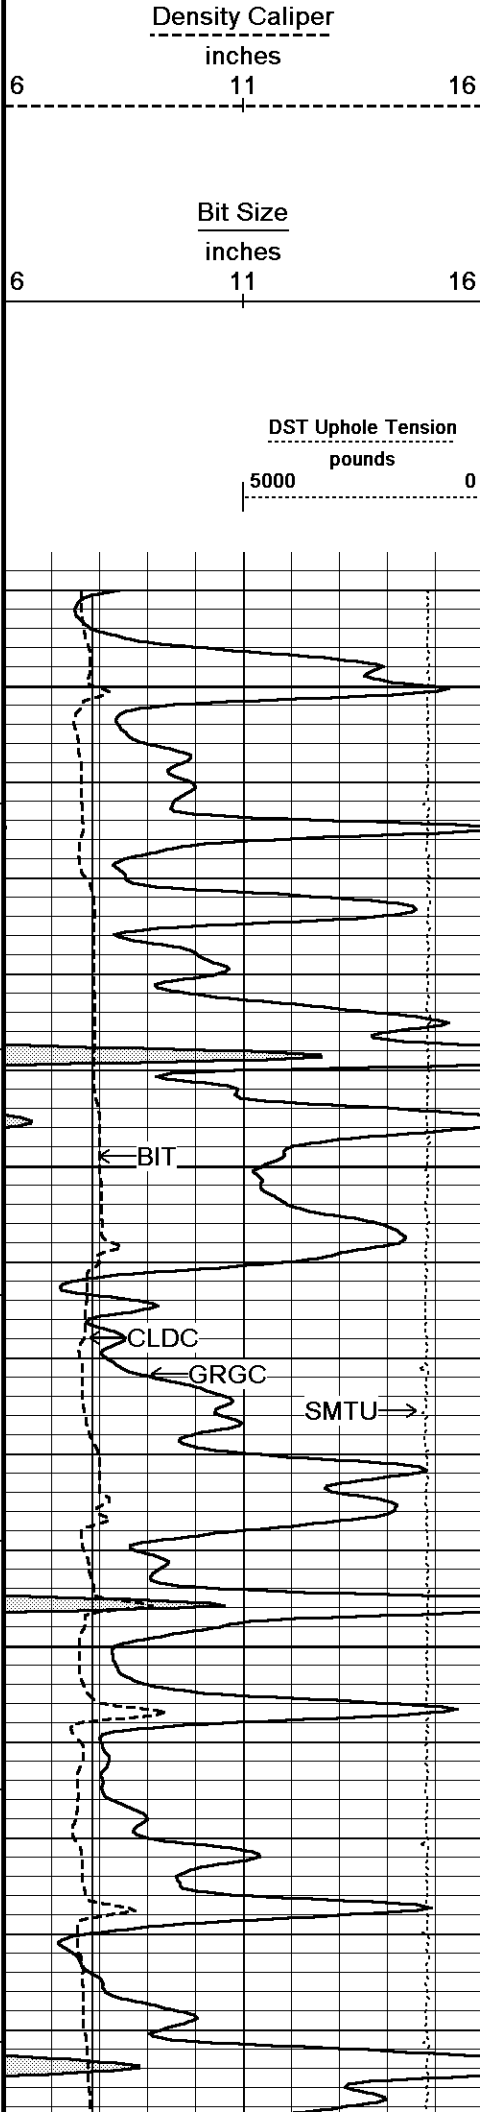


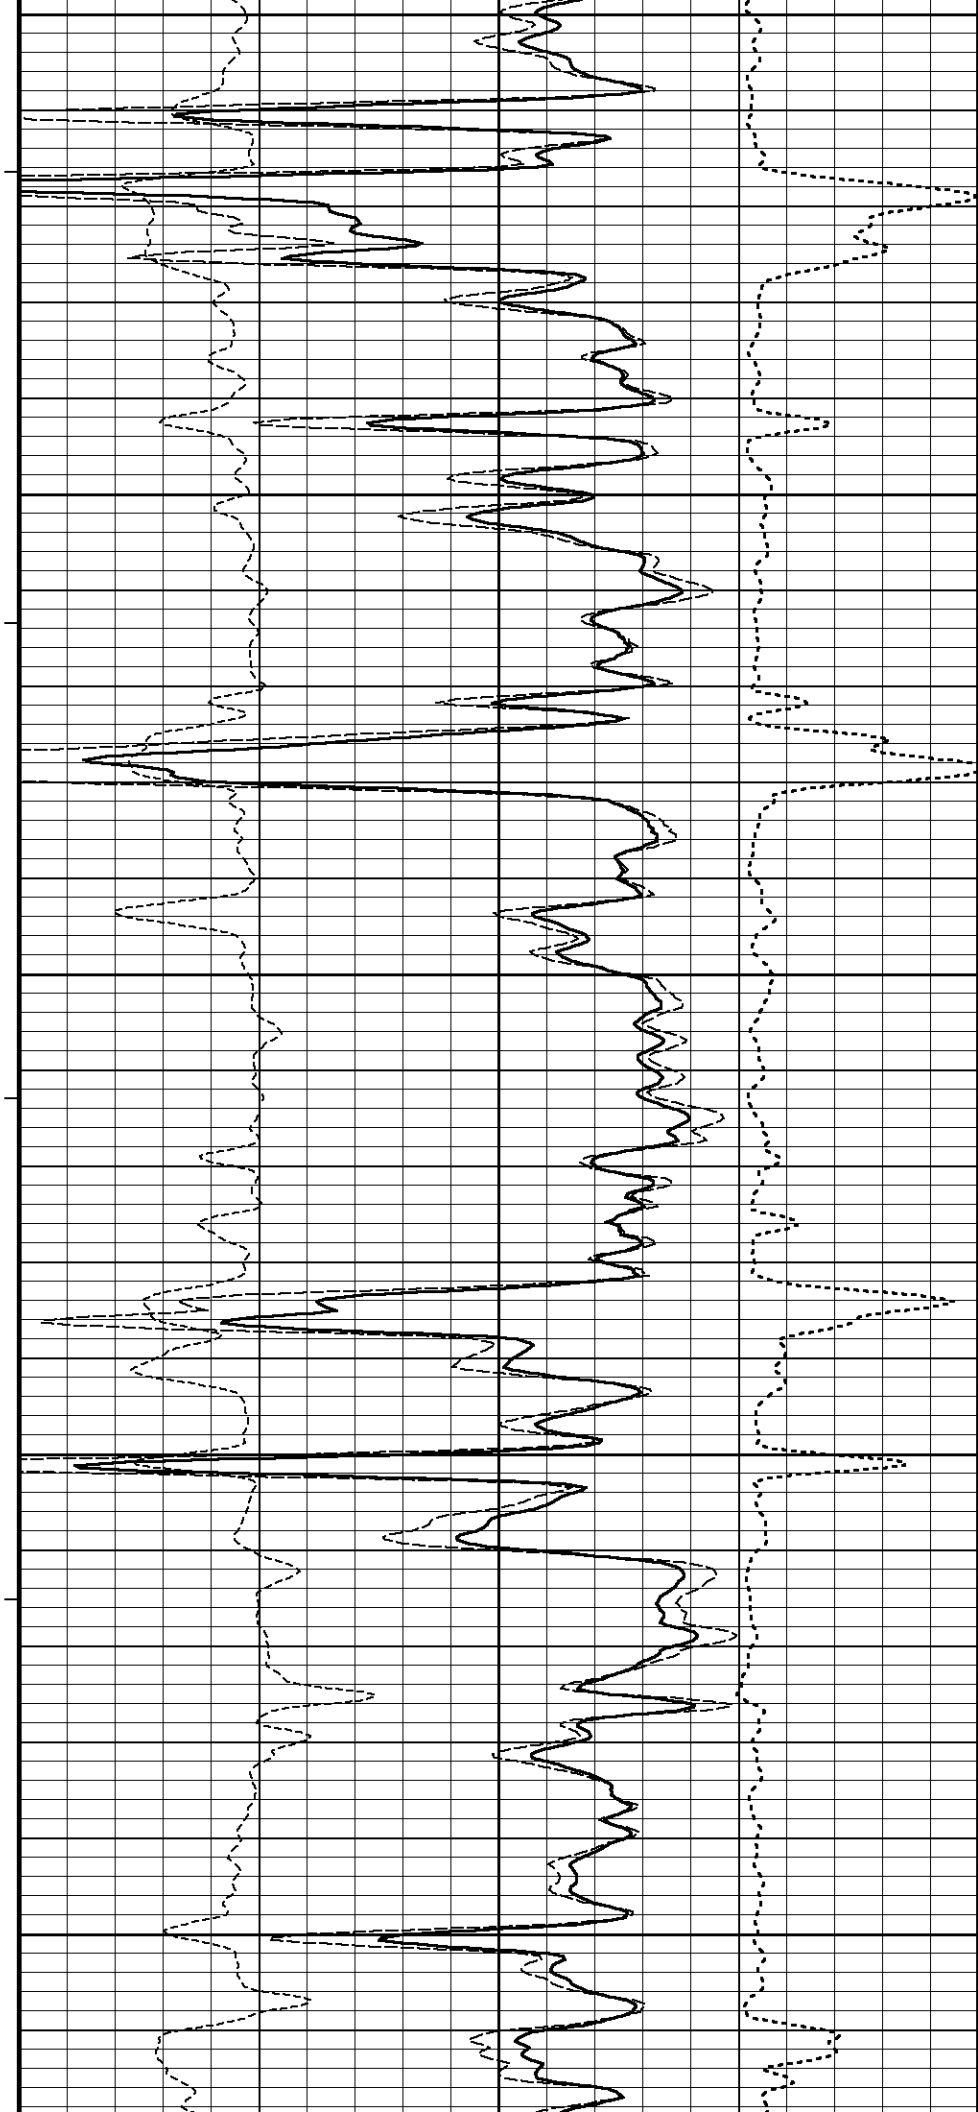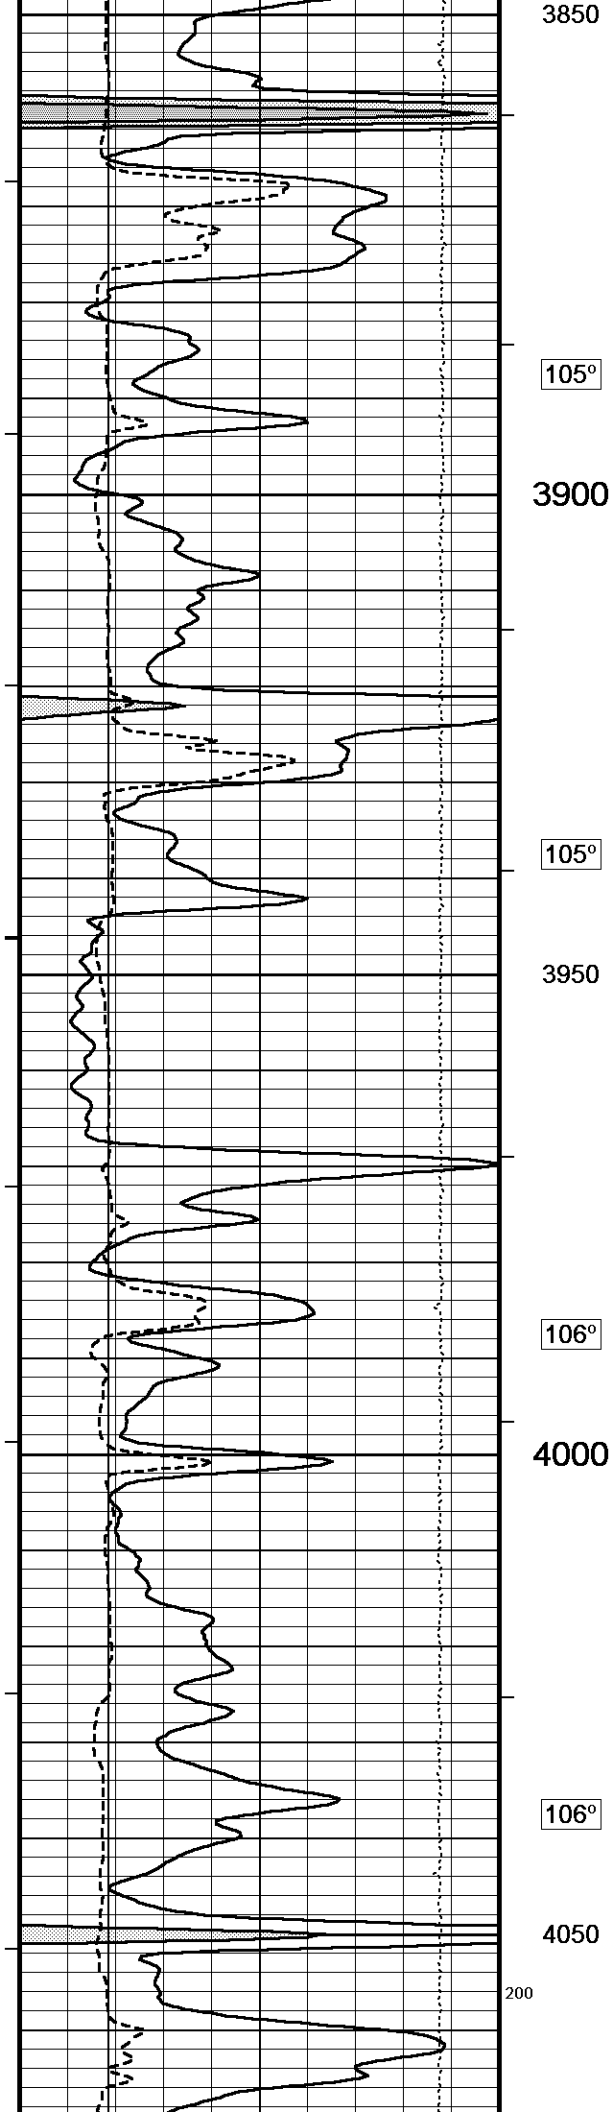


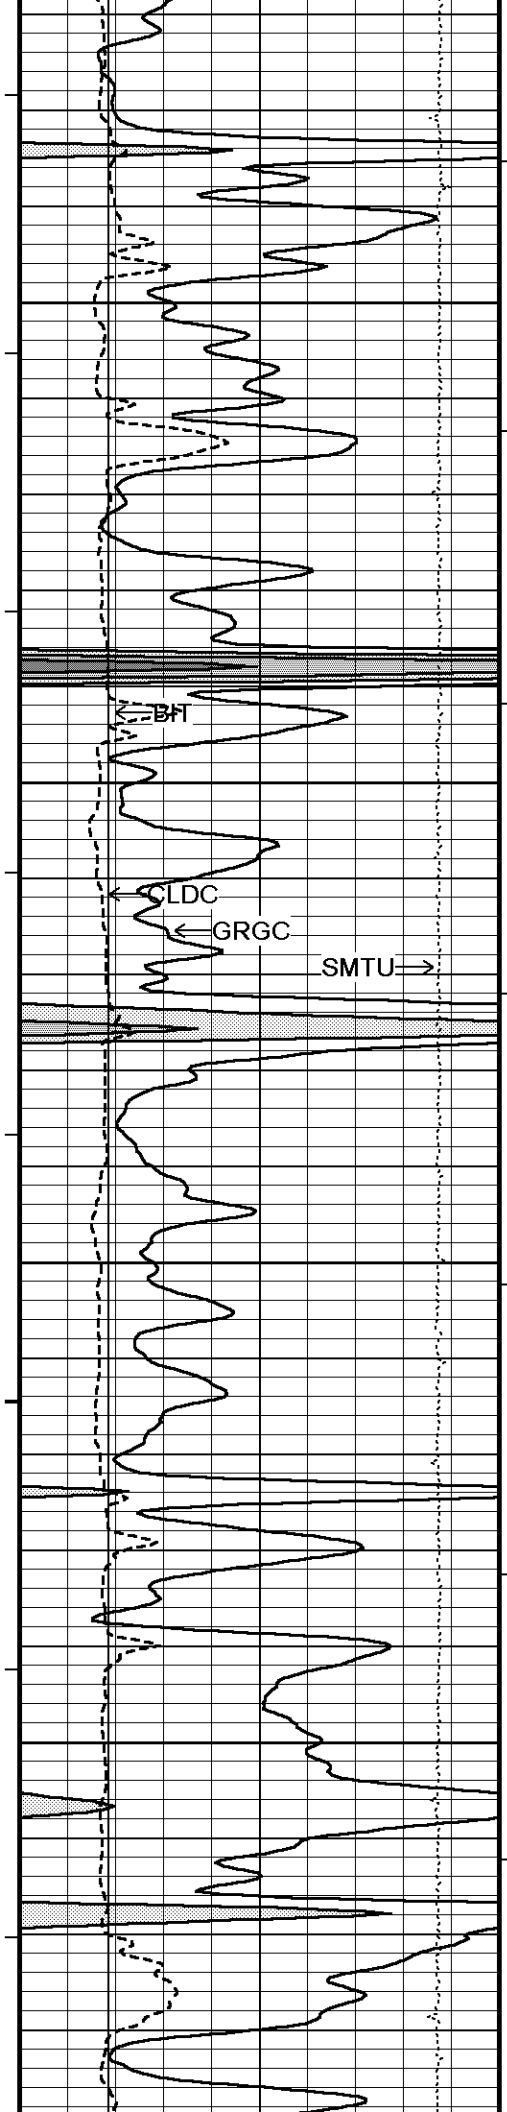

100
106°
4100
106°
4150
106°
4200
107°
4250
107°

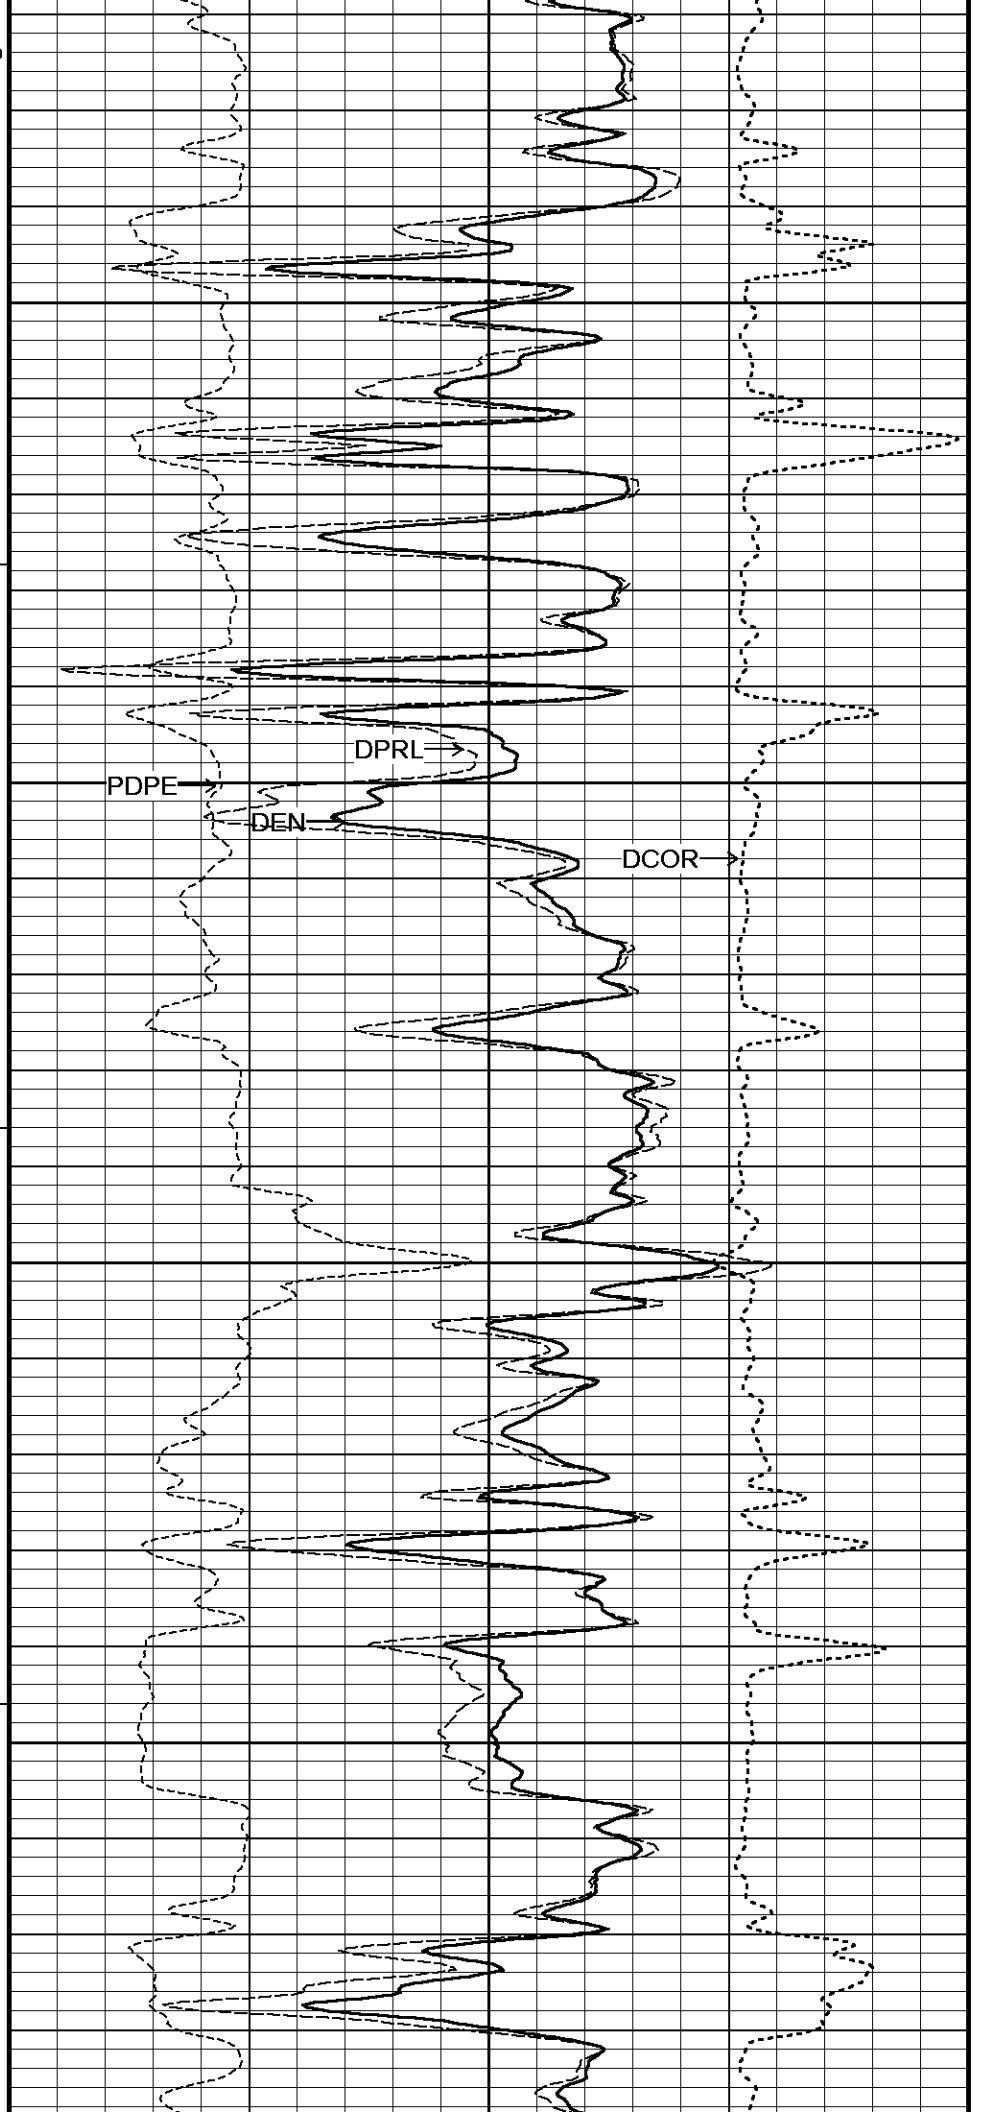

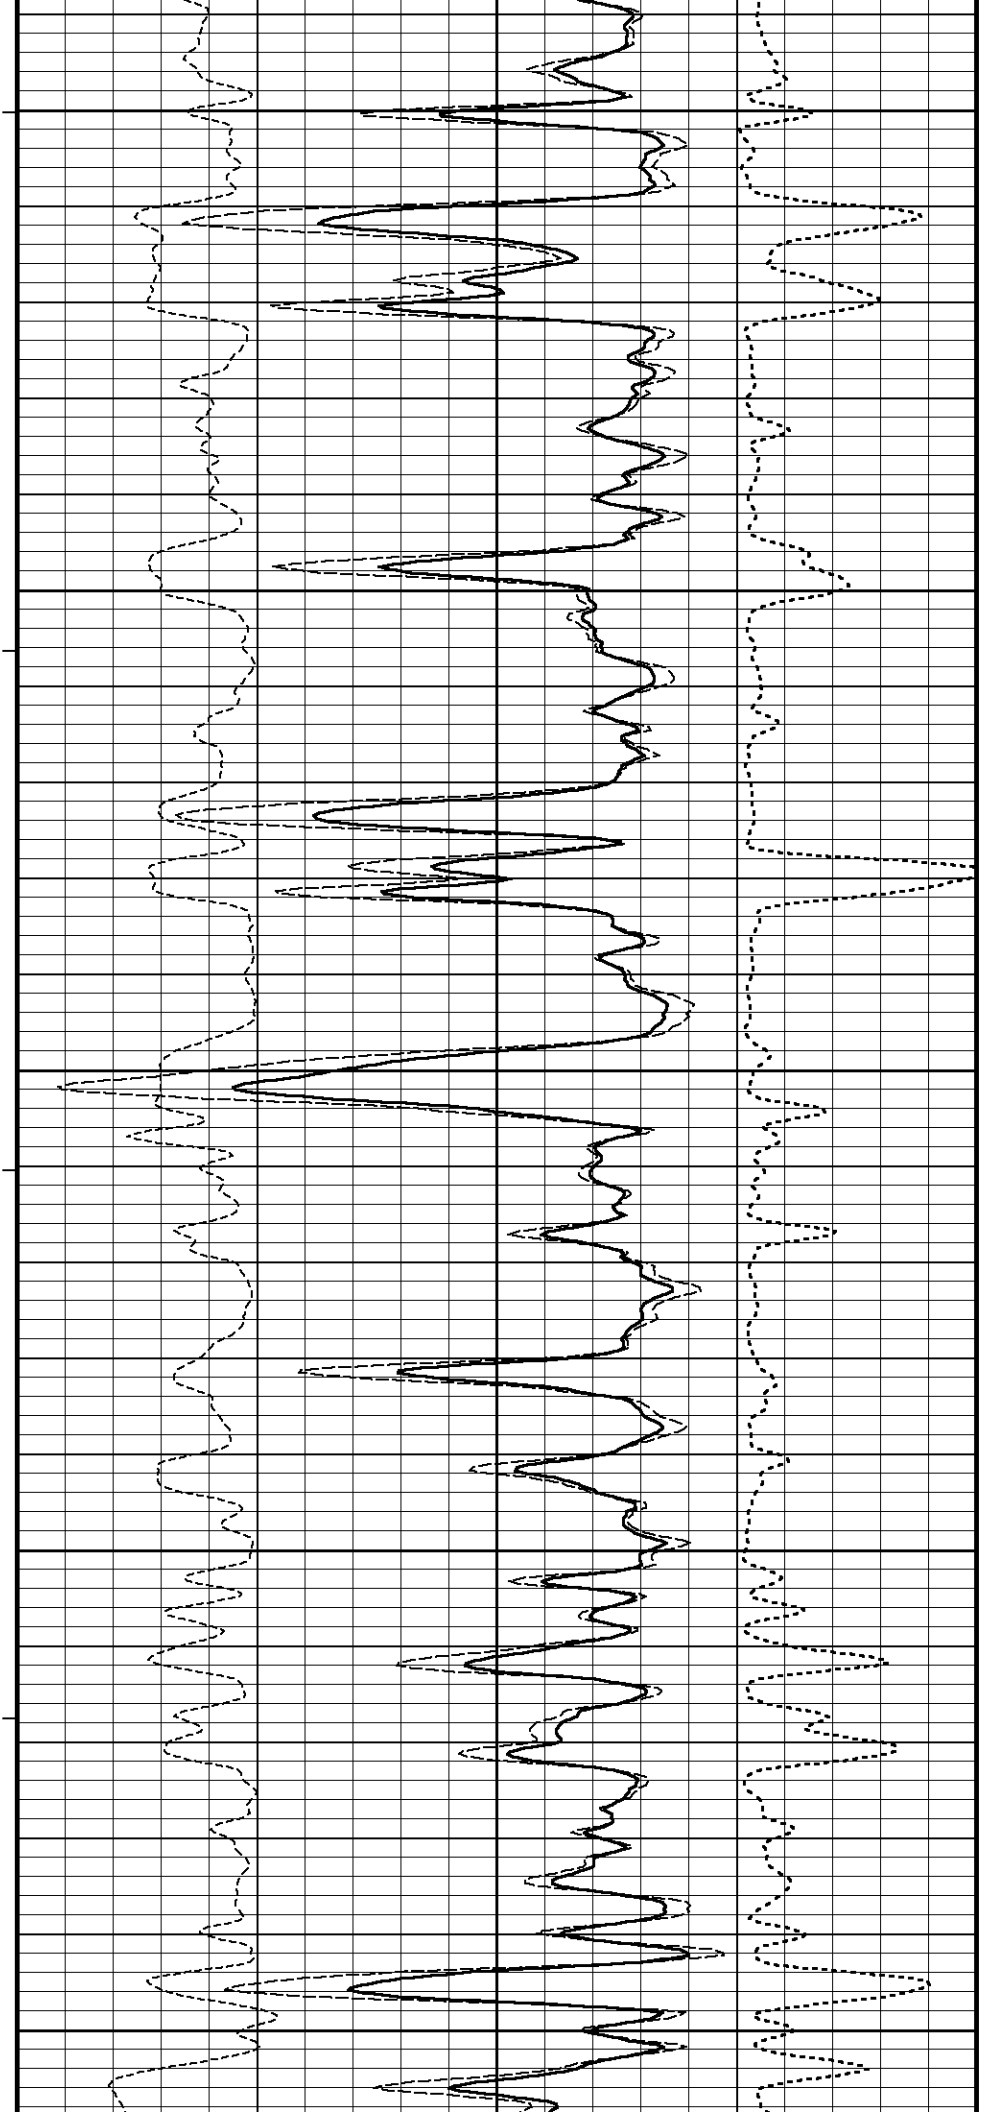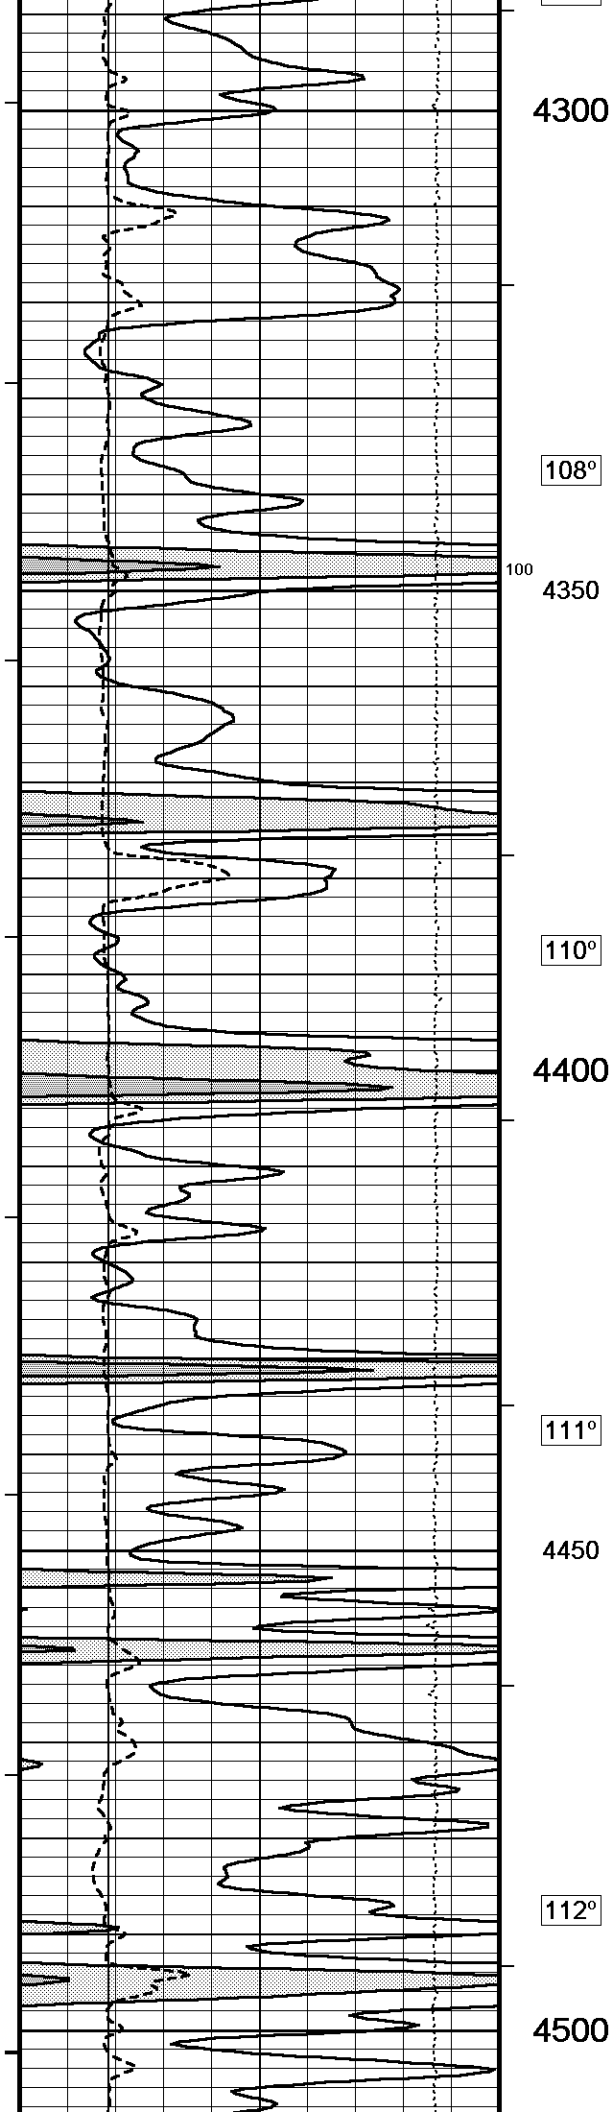

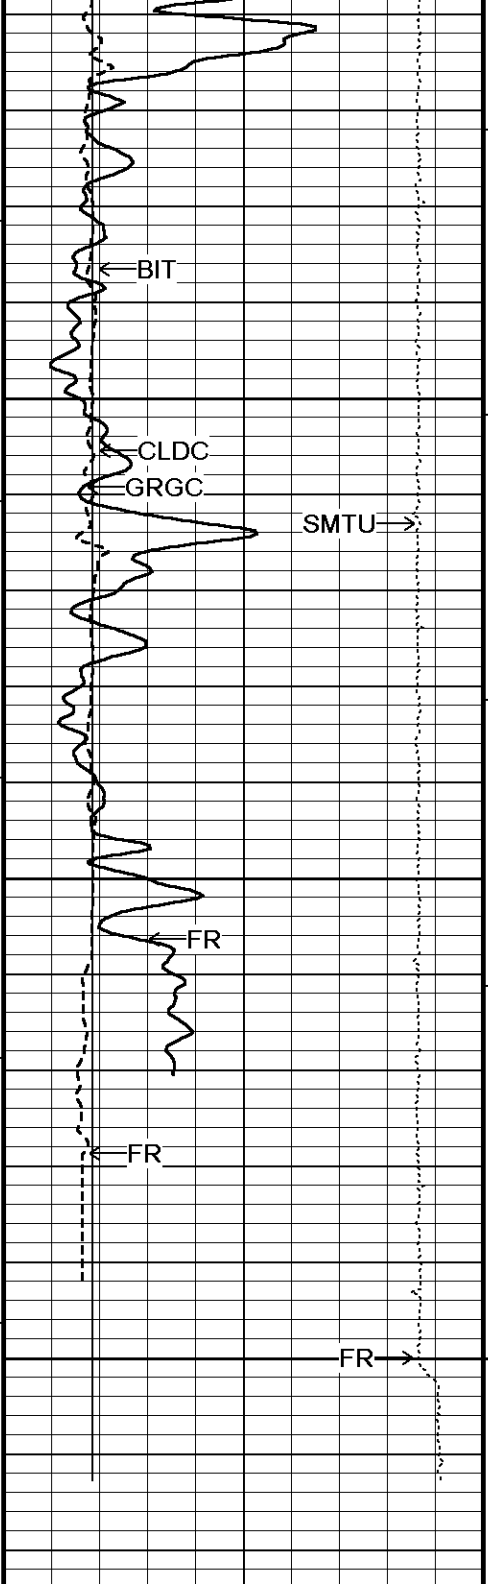

113°

4550


113°

4600

0

TD 4650

Depth in Feet

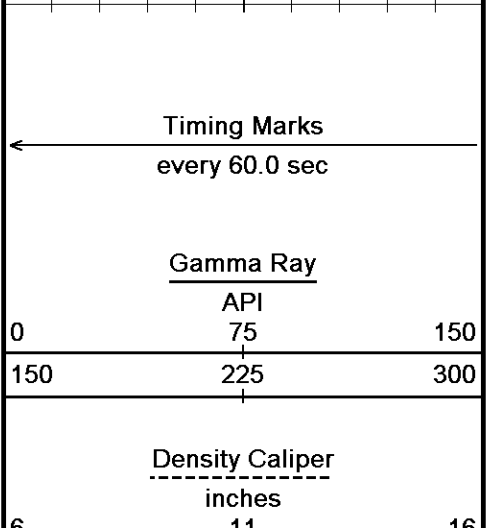



Timing Marks
every 60.0 sec

Gamma Ray
API

Borehole
Temp in
deg F


HVI
every
10 cu ft

Density Caliper
inches

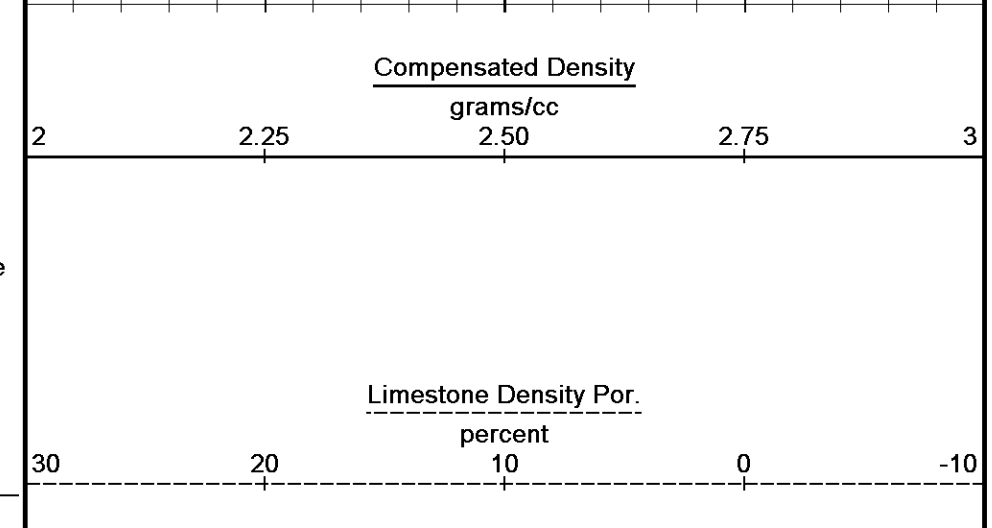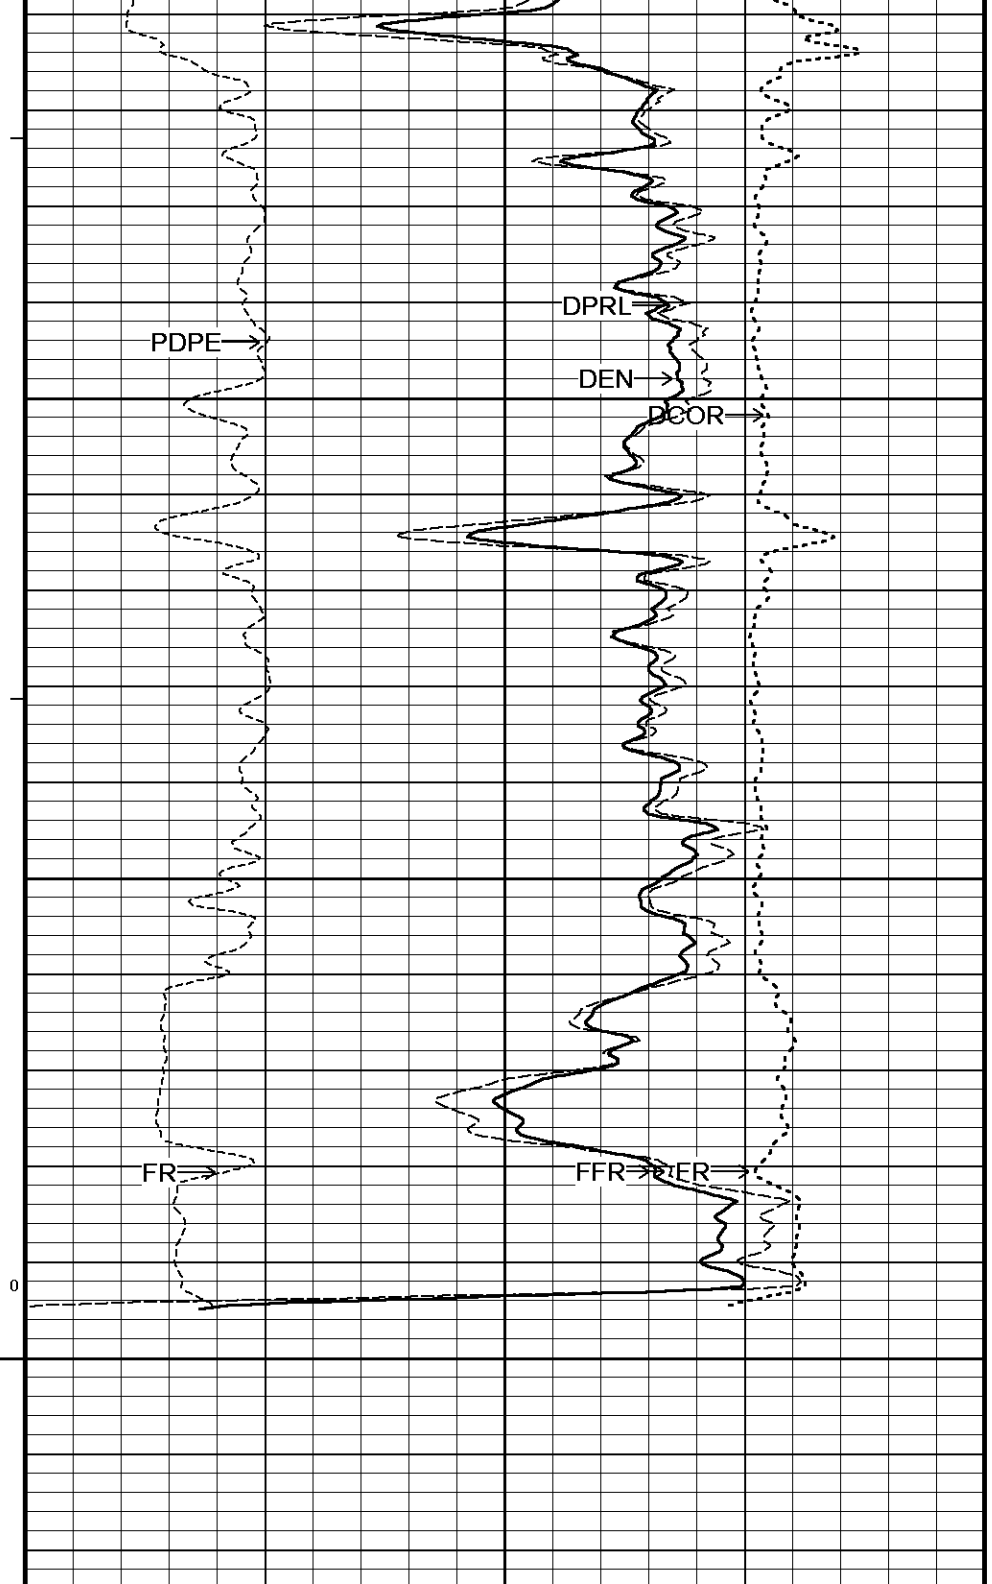

Compensated Density
grams/cc

Limestone Density Por.
percent

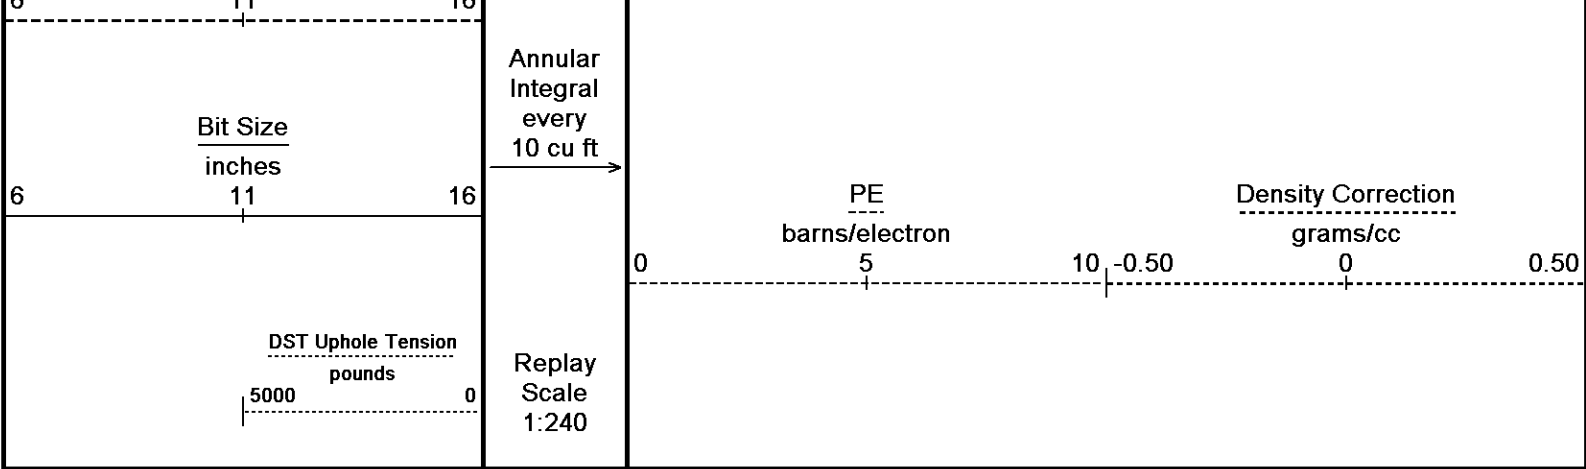

Depth Based Data - Maximum Sampling Increment 10.0cmPlotted on 19-NOV-2014 06:21

Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-P...\O'Brien (LA) MSJ-Penner 28 #3 Main.dtaRecorded on 19-NOV-2014 03:27

System Versions: Logged with 14.03.5114Plotted with 14.03.5114


↑5 INCH MAIN BULK DENSITY↑



↓REPEAT SECTION↓


Depth Based Data - Maximum Sampling Increment 10.0cmPlotted on 19-NOV-2014 06:21

Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-P...\O'Brien (LA) MSJ-Penner 28 #3 Repeat.dtaRecorded on 19-NOV-2014 03:06

System Versions: Logged with 14.03.5114Plotted with 14.03.5114

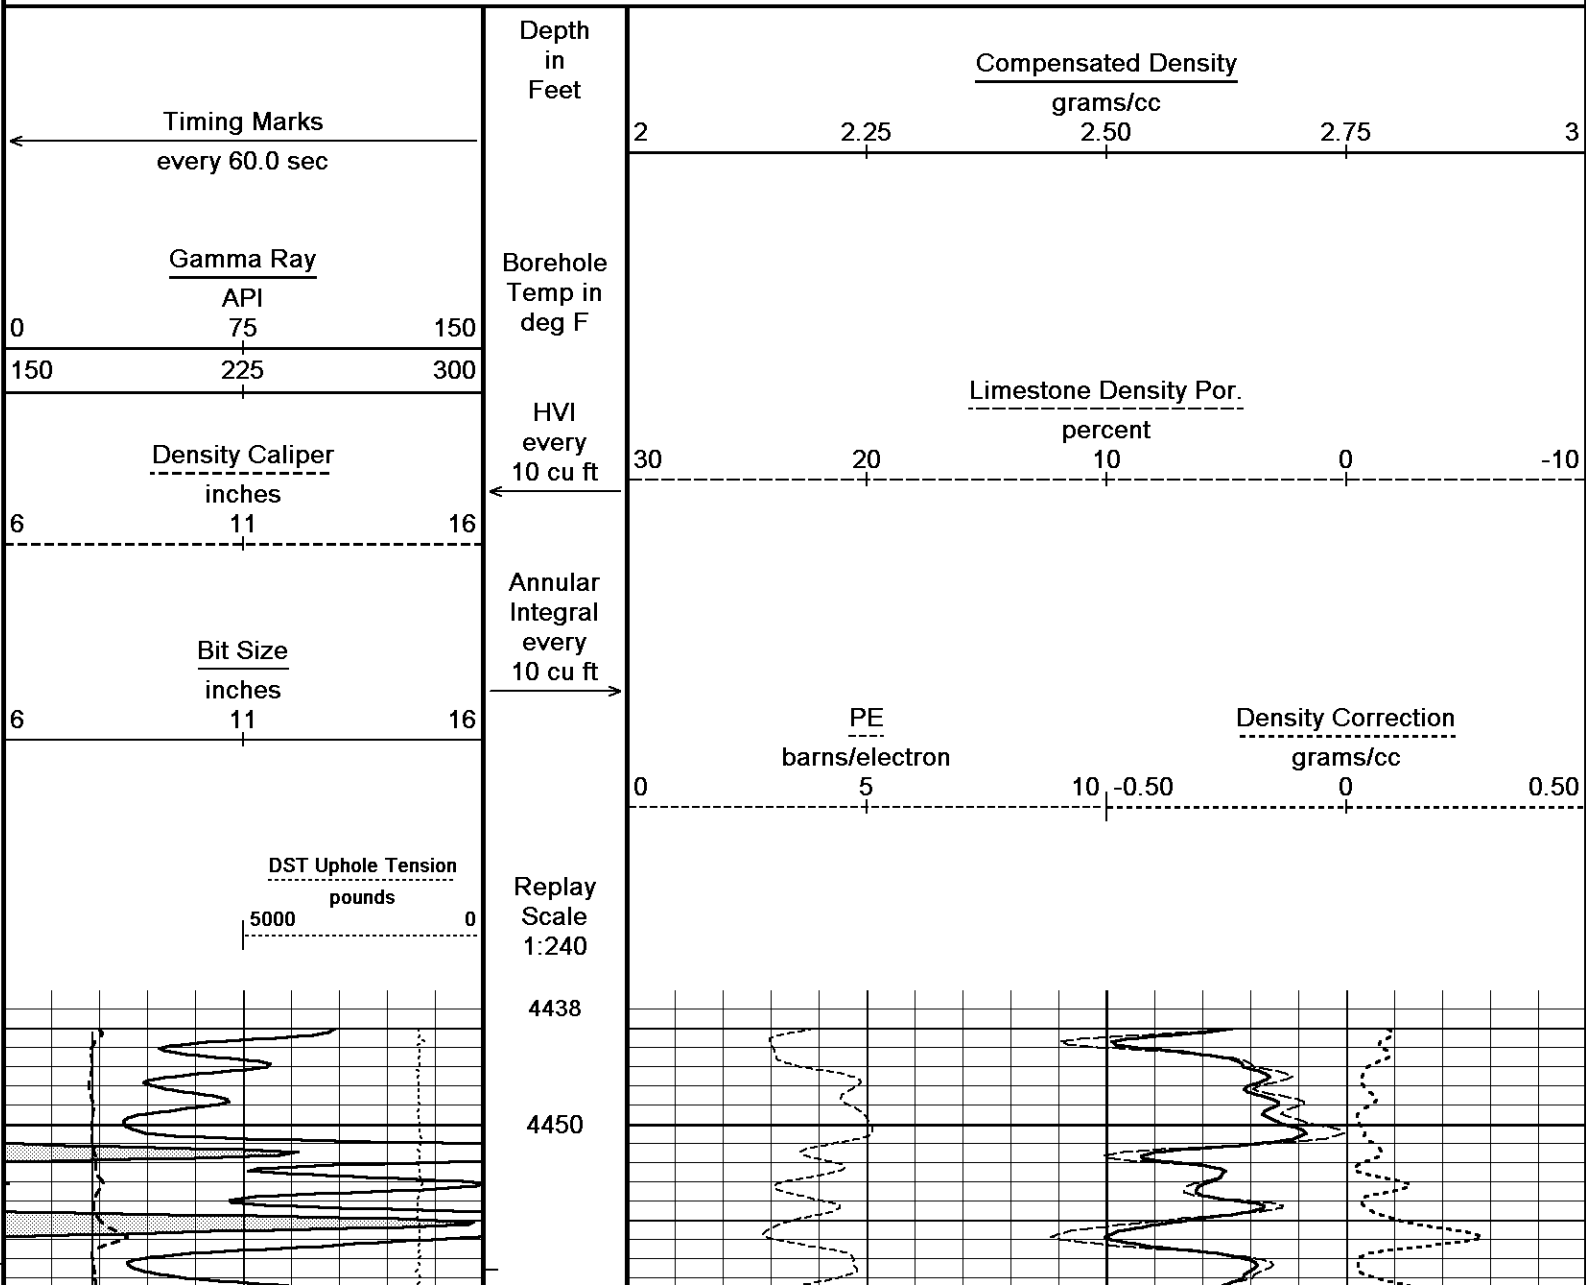

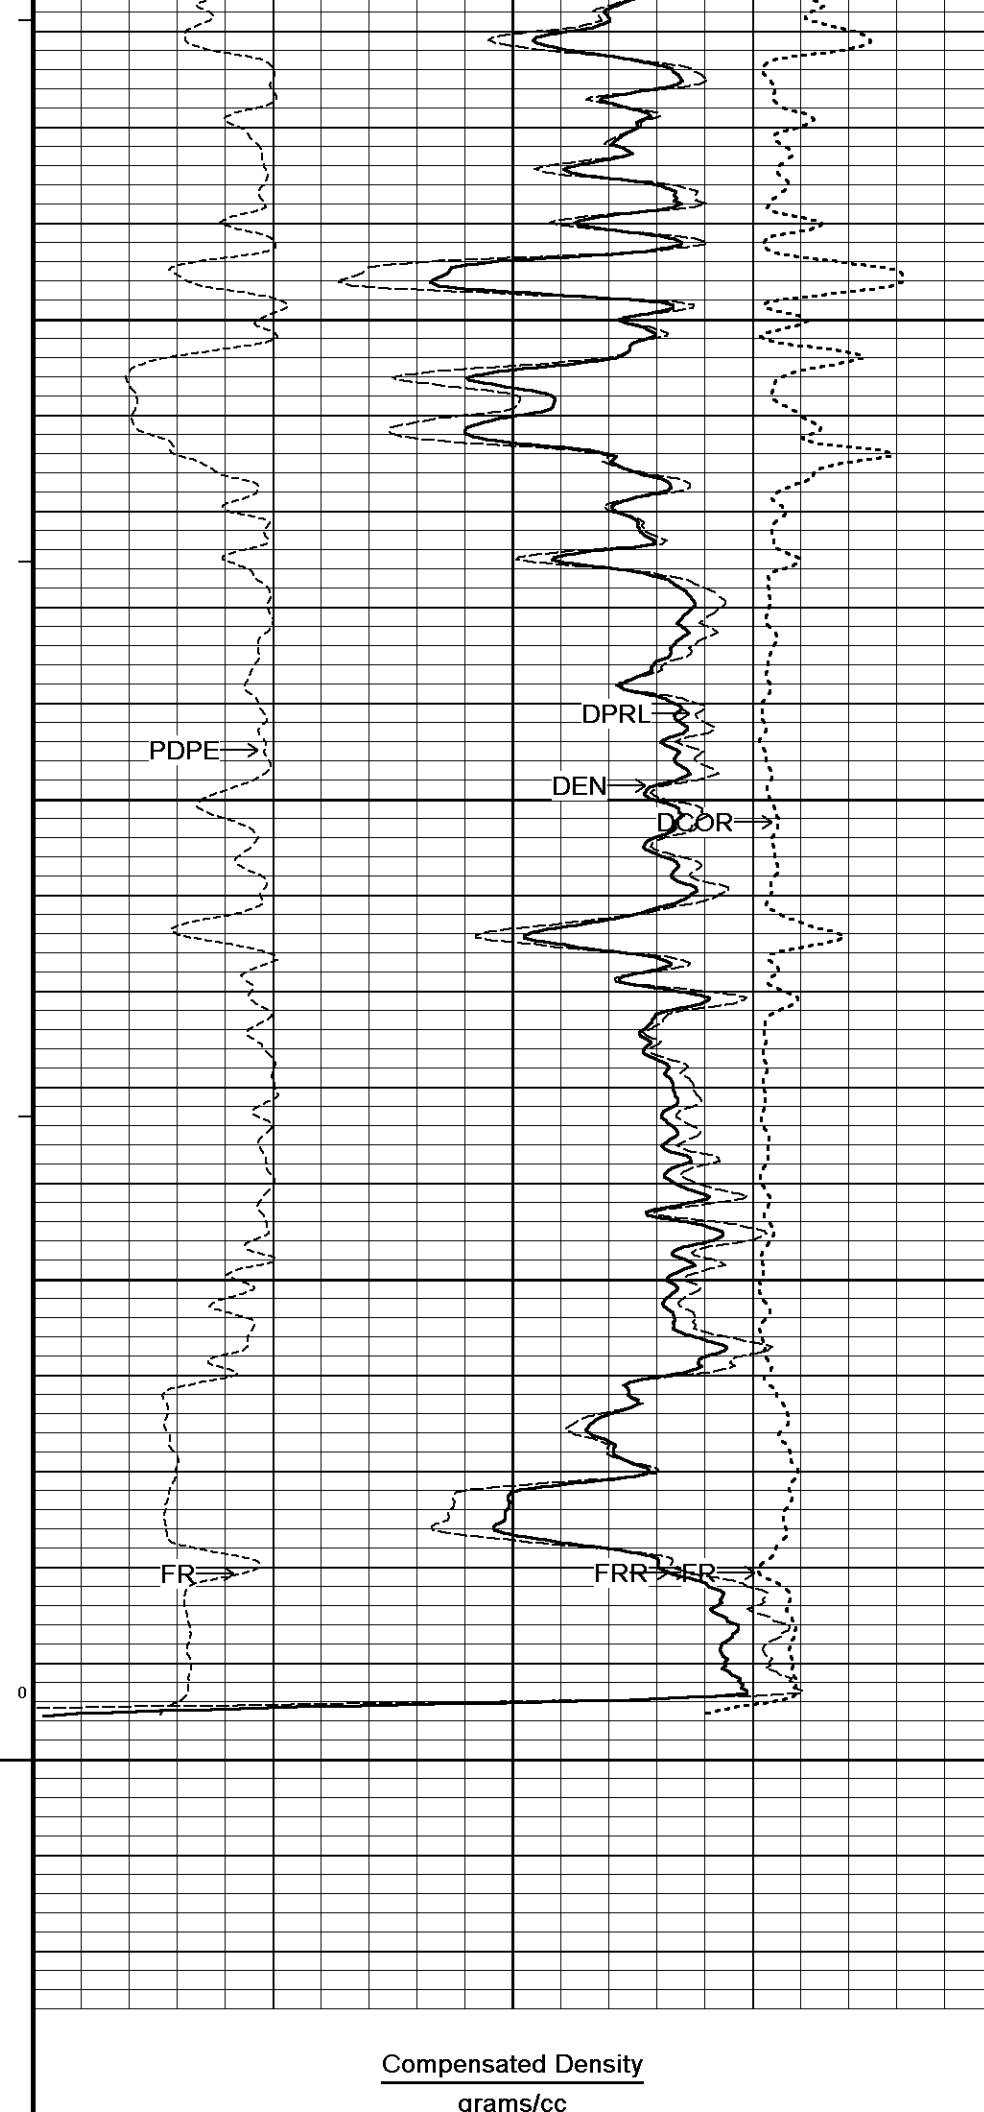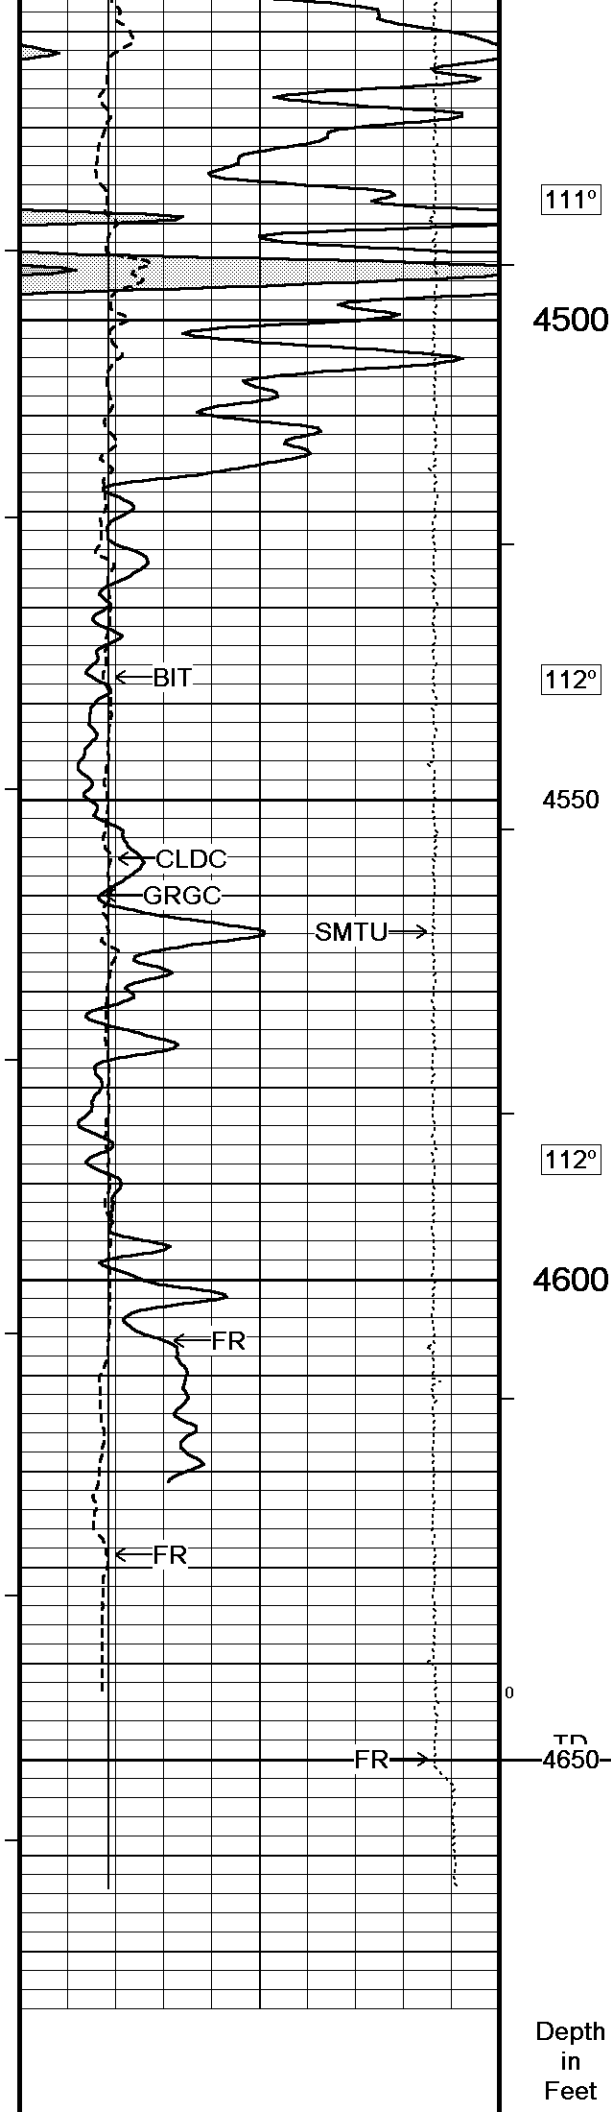

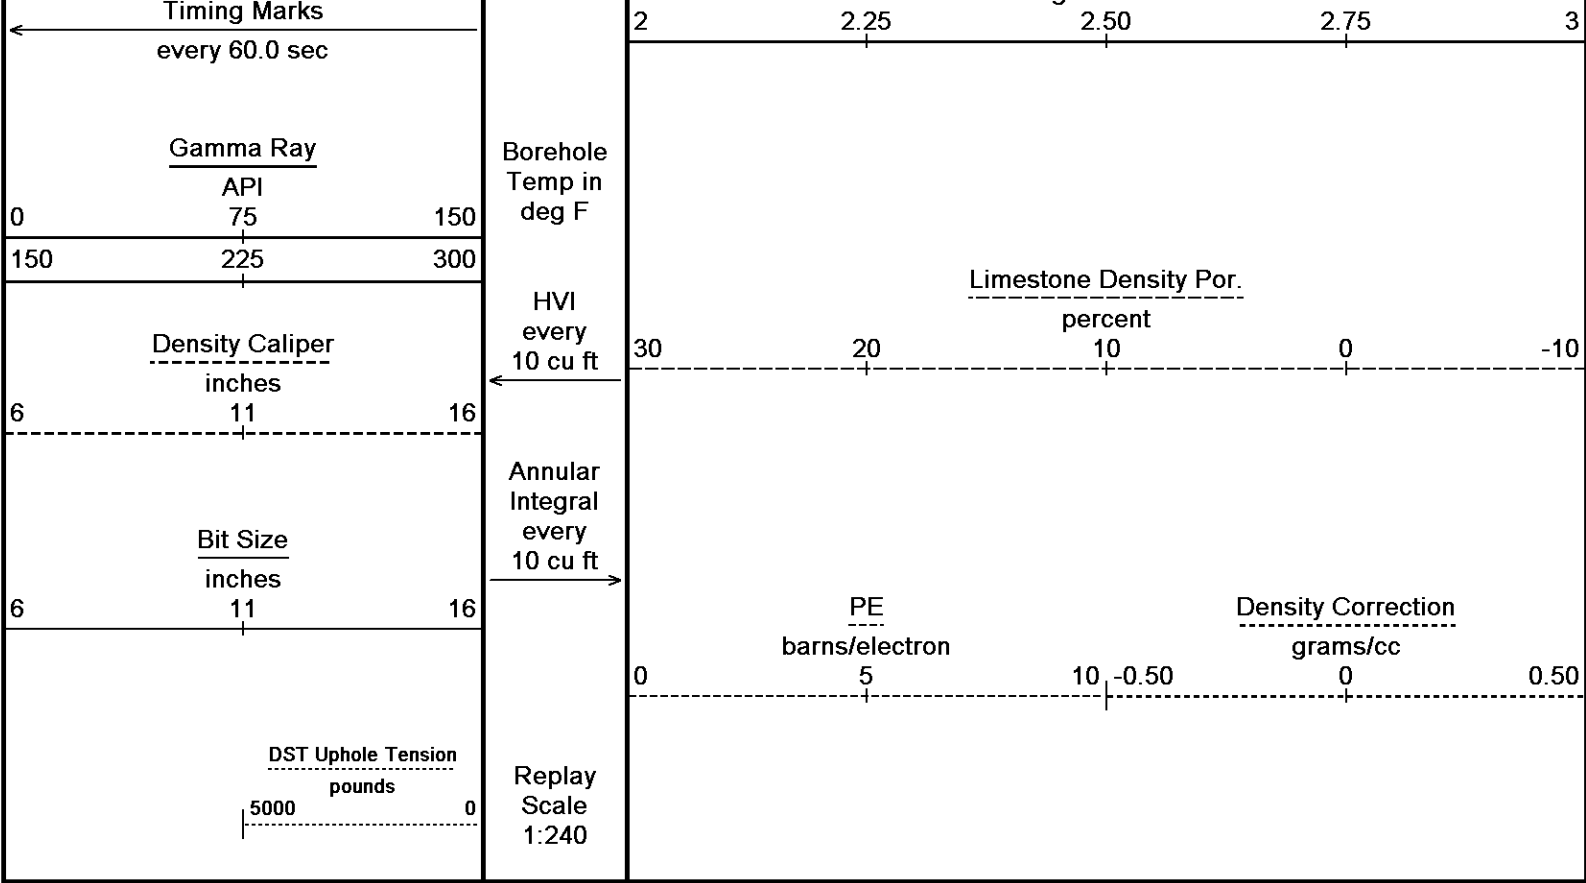

Depth Based Data - Maximum Sampling Increment 10.0cm
Filename: C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-...O'Brien (LA) MSJ-Penner 28 #3 Repeat.dta
System Versions: Logged with 14.03.5114 Plotted with 14.03.5114

Plotted on 19-NOV-2014 06:21
Recorded on 19-NOV-2014 03:06

↑ REPEAT SECTION ↑


BEFORE SURVEY CALIBRATION
C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-Penner 28 #3\O'Brien (LA) MSJ-Penner 28 #3 Repeat.dta

General Constants All 000			Last Edited on 19-NOV-2014,01:48	
General Parameters				
Mud Resistivity	1.730	ohm-metres		
Mud Resistivity Temperature	75.000	degrees F		
Water Level	0.000	feet		
Borehole Fluid Processing	Wet Hole			
Hole/Annular Volume and Differential Caliper Parameters				
HVOL Method	Single Caliper			
HVOL Caliper 1	Density Caliper			
HVOL Caliper 2	N/A			
Annular Volume Diameter	5.500	inches		
Caliper for Differential Caliper	None			
Rwa Parameters				
Porosity used	Crossplot Porosity			
Resistivity used	Array Ind. Four Res Rt			
RWA Constant A	0.610			
RWA Constant M	2.150			
SW/APOR Tool Source	0.000			

Down-hole Tension Calibration SMS 0			Field Calibration on 19-NOV-2014 02:09
Reading No	Measured	Calibrated (lbs)	
1	15332.97	0.00	
2	15825.43	407.90	

Gamma Calibration MCG-C 208			Field Calibration on 18-NOV-2014 15:49
	Measured	Calibrated (API)	
Background	67	48	

Background	67	48
Calibrator (Gross)	1084	773
Calibrator (Net)	1017	725

Gamma Calibration Tolerances MCG-C 208		
Ratio	1.402	 Counts/API


Gamma Constants MCG-C 208		Last Edited on 19-NOV-2014,01:47	
Gamma Calibrator Number	GRC038		
GRC-M Calibrator Jig in Use?	NO		
Inactive Background Jig in Use?	NO		
Mud Density	1.10	gm/cc	
Caliper Source for Processing	Density Caliper		
Tool Position	Eccentred		
Concentration of KCl		kppm	
K Mud Type	Chloride		
K Mud Concentration	0.00	%	

SP Calibration MCG-C 208		Field Calibration on 18-NOV-2014 15:38	
	Measured	Calibrated (mV)	
Reference 1	100.2	99.1	
Reference 2	-98.0	-99.3	

High Resolution Temperature Calibration MCG-C 208		Field Calibration on 23-SEP-2014,19:44	
	Measured	Calibrated(Deg F)	
Lower	10.00	10.00	
Upper	100.00	100.00	

High Resolution Temperature Constants MCG-C 208		Last Edited on 23-SEP-2014,19:44	
Pre-filter Length	11		

Caliper Calibration MMR-C.A 248			Base Calibration on 23-OCT-2014 09:52	
			Field Calibration on 18-NOV-2014 15:35	
Base Calibration				
Reading No		Measured	Calibrator Size (in)	
1		13737	5.96	
2		17108	7.98	
3		20397	9.85	
4		24360	11.92	
5		0	0.00	
6		N/A	N/A	
Field Calibration				
		Measured Caliper (in)	Actual Caliper (in)	
		8.04	7.97	

Caliper Calibration Tolerances MMR-C.A 248		
Short Arm Field Cal.	8.04	 in

Micro Normal and Micro Inverse Calibration MMR-C.A 248					Base Calibration on 23-OCT-2014 10:02	
					Field Check on 18-NOV-2014 15:36	
Base Calibration						
		Measured		Calibrated (ohm-m)		
Channel	Resistor 1	Resistor 2	Resistor 1	Resistor 2		
Micro Normal	10.2	49.9	5.1	25.6		
Micro Inverse	9.9	49.5	3.4	16.9		
Channel	Base Check (ohm-m)			Field Check (ohm-m)		
Micro Normal	93.5			93.5		
Micro Inverse	62.2			62.2		

Micro Normal & Micro Inverse Calibration Tolerance MMR-C.A 248											
Micro Normal Res. 1	10.2				ohm	Micro Normal Res. 2	49.9				ohm
Micro Inverse Res. 1	9.9				ohm	Micro Inverse Res. 2	49.5				ohm

Micro Normal Base Check	93.5		ohm-m
Micro Inverse Base Check	62.2		ohm-m
Micro Normal Field Check	93.5		ohm-m
Micro Inverse Field Check	62.2		ohm-m

Micro Normal and Micro Inverse Constants MMR-C.A 248

Last Edited on 19-SEP-2014,16:14

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	0.5110		
Micro Inverse K Factor	0.3380		
Standoff Offset	0.0000	inches	

Micro-Resistivity Caliper Constants MMR-C.A 248

Last Edited on

Sonde Configuration	Resistivity Mode
---------------------	------------------

Micro Laterolog Calibration MMR-C.A 248

Base Calibration on 31-DEC-1999 00:00

Field Check on 31-DEC-1999 00:00

Base Calibration				
	Measured	Calibrated (ohm-m)		
	Ref 1	Ref 2	Ref 1	Ref 2
	0.0	0.0	0.0	0.0
	Base Check (ohm-m)	Field Check (ohm-m)		
	0.0	0.0		

Micro Laterolog Constants MMR-C.A 248

Last Edited on 23-SEP-2014,18:59

Pad Type	6 in Solid Nylon B23059		
Micro Laterolog K Factor	0.0128		
Standoff Offset	0.0000	inches	

Mudcake Thickness Correction Constants

Mud Cake Source	Constant Value	
Mud Cake Thickness	0.4000	inches
Mud Cake Thickness Caliper	N/A	
Mud Cake Resistivity	0.1500	ohm-m
Mud Cake Resistivity Temp.	68.00	Deg F
Mud Cake Resistivity Source	Constant Value	
Temp. Source Rmc Correc.	N/A	

Neutron Calibration MDN-A.B 163

Base Calibration on 22-OCT-2014 17:32

Field Check on 18-NOV-2014 15:53

Base Calibration				
	Measured	Calibrated (cps)		
	Near	Far	Near	Far
	3042	93	3714	110
Ratio	32.627		33.764	
Field Calibrator at Base			Calibrated (cps)	
			1687	2482
Ratio			0.680	
Field Check			Calibrated (cps)	
			1672	2427
Ratio			0.689	

Neutron Calibration Tolerances MDN-A.B 163

Near Reading	3042		cps	Far Reading	93		cps
Ratio	32.627						
Base Check	0.680						
Field Check	0.689						

Neutron Constants MDN-A.B 163

Last Edited on 19-NOV-2014,01:46

Neutron Source Id	P58125B
-------------------	---------

Neutron Jig Number	5824NE	
Air Hole Processing	Legacy	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	None	
Formation Pressure	N/A	kpsi
Temperature Source	Constant Value	
Temperature	68.00	degrees F
Mud Salinity	0.00	kppm
Salinity Correction	Not Applied	
Formation Fluid Salinity Source	None	
Formation Fluid Salinity	N/A	kppm
Barite Mud Correction	Not Applied	

FE Calibration MFE-A.A 55

Base Calibration on 23-OCT-2014 09:18

Field Check on 18-NOV-2014 15:28

Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	950.6	126.8
Base Check		282.0
Field Check		281.8

FE Calibration Tolerances MFE-A.A 55

Reference 2	950.6	-3% 980.0 +3%	ohm
Base Check	282.0	-2% 277.0 +2%	ohm-m
Field Check	281.8	-2% 282.0 +2%	ohm-m

FE Constants MFE-A.A 55

Last Edited on 19-NOV-2014,01:46

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	0.5	inches

Induction Calibration MAI-A.A 5

Base Calibration on 22-OCT-2014,13:28

Field Check on 18-NOV-2014 15:27

Base Calibration

Test Loop Calibration Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	16.3	470.8	9.3	966.2
2	5.6	376.1	7.6	821.4
3	2.6	266.1	5.2	566.0
4	1.6	130.0	2.6	279.2
Array Temperature	71.1		Deg F	

Test Loop Calibration Verified

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1			14.7	3862.6
2			31.6	3591.0
3			29.7	2971.9
4			20.8	2126.6
Deep			18.4	1912.8
Medium			42.9	3861.7
Shallow			47.0	5372.5

Induction Calibration Tolerances MAI-A.A 5

Low Conductivity 1	16.3		mmho/m	High Conductivity 1	470.8		mmho/m
Low Conductivity 2	5.6		mmho/m	High Conductivity 2	376.1		mmho/m
Low Conductivity 3	2.6		mmho/m	High Conductivity 3	266.1		mmho/m
Low Conductivity 4	1.6		mmho/m	High Conductivity 4	130.0		mmho/m
Background Vx 1	0.0		mmho/m	Phase Check Loop 1	0.0		%
Background Vx 2	0.0		mmho/m	Phase Check Loop 2	0.0		%
Background Vx 3	0.0		mmho/m	Phase Check Loop 3	0.0		%
Background Vx 4	0.0		mmho/m	Phase Check Loop 4	0.0		%

Induction Constants MAI-A.A 5

Last Edited on 19-NOV-2014,01:46

Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		
Stand-off Type	Fins		
Stand-off	0.00	inches	
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00	degrees	
Stand-off Fin Width	0.0000	inches	
Borehole Corr. Rm Source	Temperature Corr		
Temp. for Rm Corr.	MCG External Temperature		
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000
Calibration Site Corrections			
Channel 1	0.00	mmhos/metre	
Channel 2	0.00	mmhos/metre	
Channel 3	0.00	mmhos/metre	
Channel 4	0.00	mmhos/metre	
Apparent Porosity and Water Saturation Constants			
Archie Constant (A)	1.00		
Cementation Exponent (M)	2.00		
Saturation Exponent (N)	2.00		
Saturation of Water for Apor	100.00	percent	
Resistivity of Water for Apor and Sw	0.05	ohm-m	
Resistivity of Mud Filtrate for Sw	0.00	ohm-m	
Source for Rt	0.00		
Source for Rxo	0.00		

High Resolution Temperature Calibration MAI-A.A 5

Field Calibration on 01-NOV-2014,01:00

	Measured	Calibrated(Deg F)
Lower	10.00	10.00
Upper	100.00	100.00

High Resolution Temperature Constants MAI-A.A 5

Last Edited on 01-NOV-2014,01:00

Pre-filter Length	11
-------------------	----

Photo Density Calibration MPD-D.A 481

Base Calibration on 22-OCT-2014 15:53

Field Check on 18-NOV-2014 15:33

Density Calibration				
Base Calibration				
	Measured	Calibrated (sdu)		
	Near	Far	Near	Far

Background	1210	1421		
Reference 1	55376	26233	59556	30836
Reference 2	22300	2596	24941	2541

Field Check at Base
1210.3 1420.8

Field Check
1209.8 1419.4



PE Calibration


Base Calibration	WS	Measured WH	Ratio	Calibrated Ratio
Background	227	1078		
Reference 1	23980	55175	0.439	0.371
Reference 2	6780	22159	0.311	0.272



Field Check at Base
226.9 1078.0



Field Check
229.4 1079.9

Photo Density Calibration Tolerances MPD-D.A 481

Near Density Ratio 2.57 
PE Calibration 0.120 

Far Density Ratio 21.11 

Near Den. Field Check 1209.8 
PE WS Field Check 229.4 

Far Den. Field Check 1419.4 
PE WH Field Check 1079.9 

Density Constants MPD-D.A 481

Last Edited on 19-NOV-2014,01:46

Density Source Id	P50557B	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.10	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix density (gm/cc)	Depth (m)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

Caliper Calibration MPD-D.A 481

Base Calibration on 22-OCT-2014 15:01
Field Calibration on 18-NOV-2014 15:29


Base Calibration	Measured	Calibrator Size (in)
Reading No		
1	17509	3.99
2	27597	5.98
3	37616	7.97
4	47437	9.86
5	58570	11.92
6	N/A	N/A

Field Calibration

Measured Caliper (in) Actual Caliper (in)

Measured Caliper (in)
7.96Actual Caliper (in)
7.97

Caliper Calibration Tolerances MPD-D.A 481

Short Arm Field Cal. 7.96  in

DOWNHOLE EQUIPMENT

C:\Minimus 14.03.4558\Logs\O'Brien (LA) MSJ-Penner 28 #3\O'Brien (LA) MSJ-Penner 28 #3 Repeat.dta

CBH-C, Cablehead, 11 pin

CBH-C 0 LG: 2.40 ft WT: 24.3 lb OD: 2.244 in

Compact Comms Gamma

MCG-C 208 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in

Compact Micro-Resistivity

MMR-C.A 248 LG: 8.59 ft WT: 81.6 lb OD: 4.882 in

Compact Neutron

MDN-A.B 163 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in

Compact Density/Caliper

MPD-D.A 481 LG: 9.59 ft WT: 90.4 lb OD: 2.449 in


Compact Focussed Electric

MFE-A.A 55 LG: 6.05 ft WT: 48.5 lb OD: 2.244 in

Compact Induction

MAI-A.A 5 LG: 10.81 ft WT: 48.5 lb OD: 2.244 in

Total Length: 51.18 ft Weight: 407.9 lb

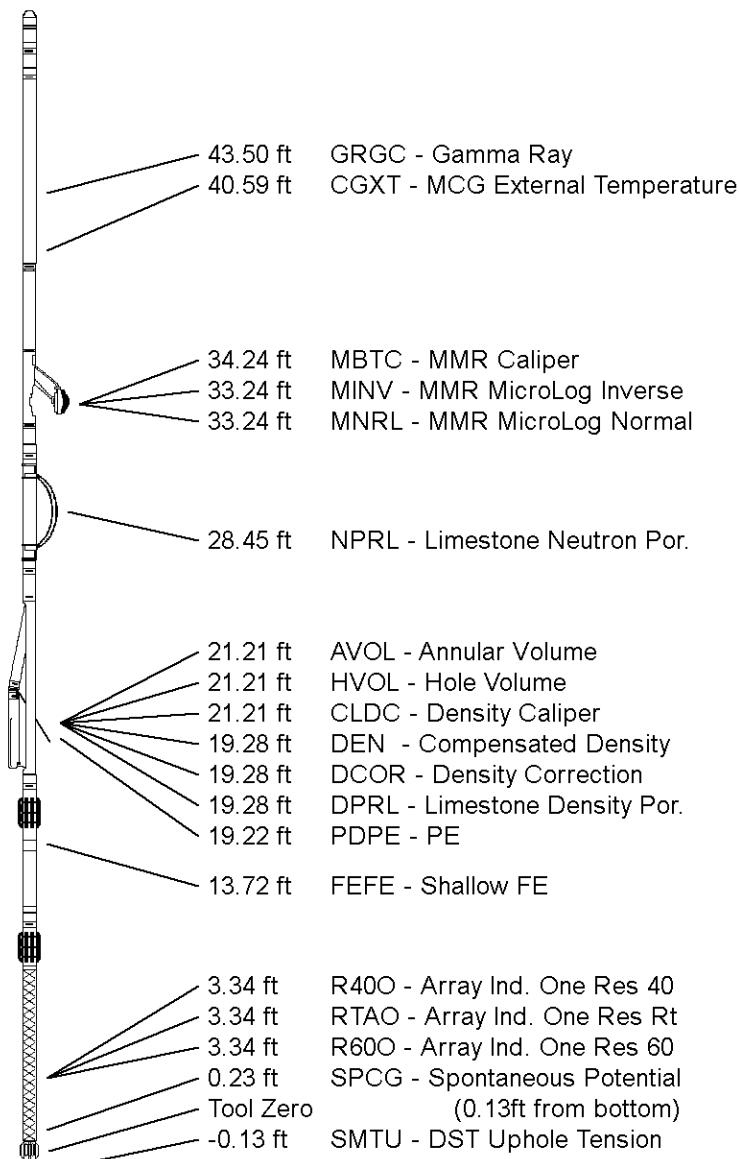

COMPANY

O'BRIEN RESOURCES, LLC.

WELL

MSJ-PENNER 28 #3

FIELD

WILDCAT

PROVINCE/COUNTY

GOVE

COUNTRY/STATE

U.S.A. / KANSAS

Elevation Kelly Bushing	2811.00	feet
Elevation Drill Floor	2809.00	feet
Elevation Ground Level	2798.00	feet

First Reading	4631.00	feet
Depth Driller	4650.00	feet
Depth Logger	4650.00	feet



COMPACT PHOTO DENSITY
COMPENSATED NEUTRON

Weatherford®

