PIONEER

Pioneer Energy Services

Microresistivity Log

Company	RJM Oil Company, Inc.
Well	Gregory #1
Field	
County	Barton State Kansas
Location	517' FSL & 1638' FWL
Sec: 24	Twp: 17S Rge: 12W
API No.	15-009-26,050-00-00

Permanent Datum	Ground Level
Log Measured From	Kelly Bushing
Drilling Measured From	Kelly Bushing
Elevation	1862
	7 Ft. Above Perm. Datum

Other Services	Elevation
CNL/CDL	K.B. 1869
DIL/BHCS	D.F.
	G.L. 1862

Date	11/12/2014		
Run Number	Two		
Depth Driller	3450		
Depth Logger	3450		
Bottom Logged Interval	3449		
Top Log Interval	2700		
Casing Driller	8.625 @ 389		
Casing Logger	386		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	6,000		
Density / Viscosity	9.2 | 54		
pH / Fluid Loss	9.5 | 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.55 @ 47		
Rmf @ Meas. Temp	.41 @ 47		
Rmc @ Meas. Temp	.74 @ 47		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.23 @ 111		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	111		
Equipment Number	10		
Location	Hays		
Recorded By	C. Desaire		
Witnessed By	Jim Musgrove		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Pioneer Energy Services
www.pioneeres.com
785 625 3858

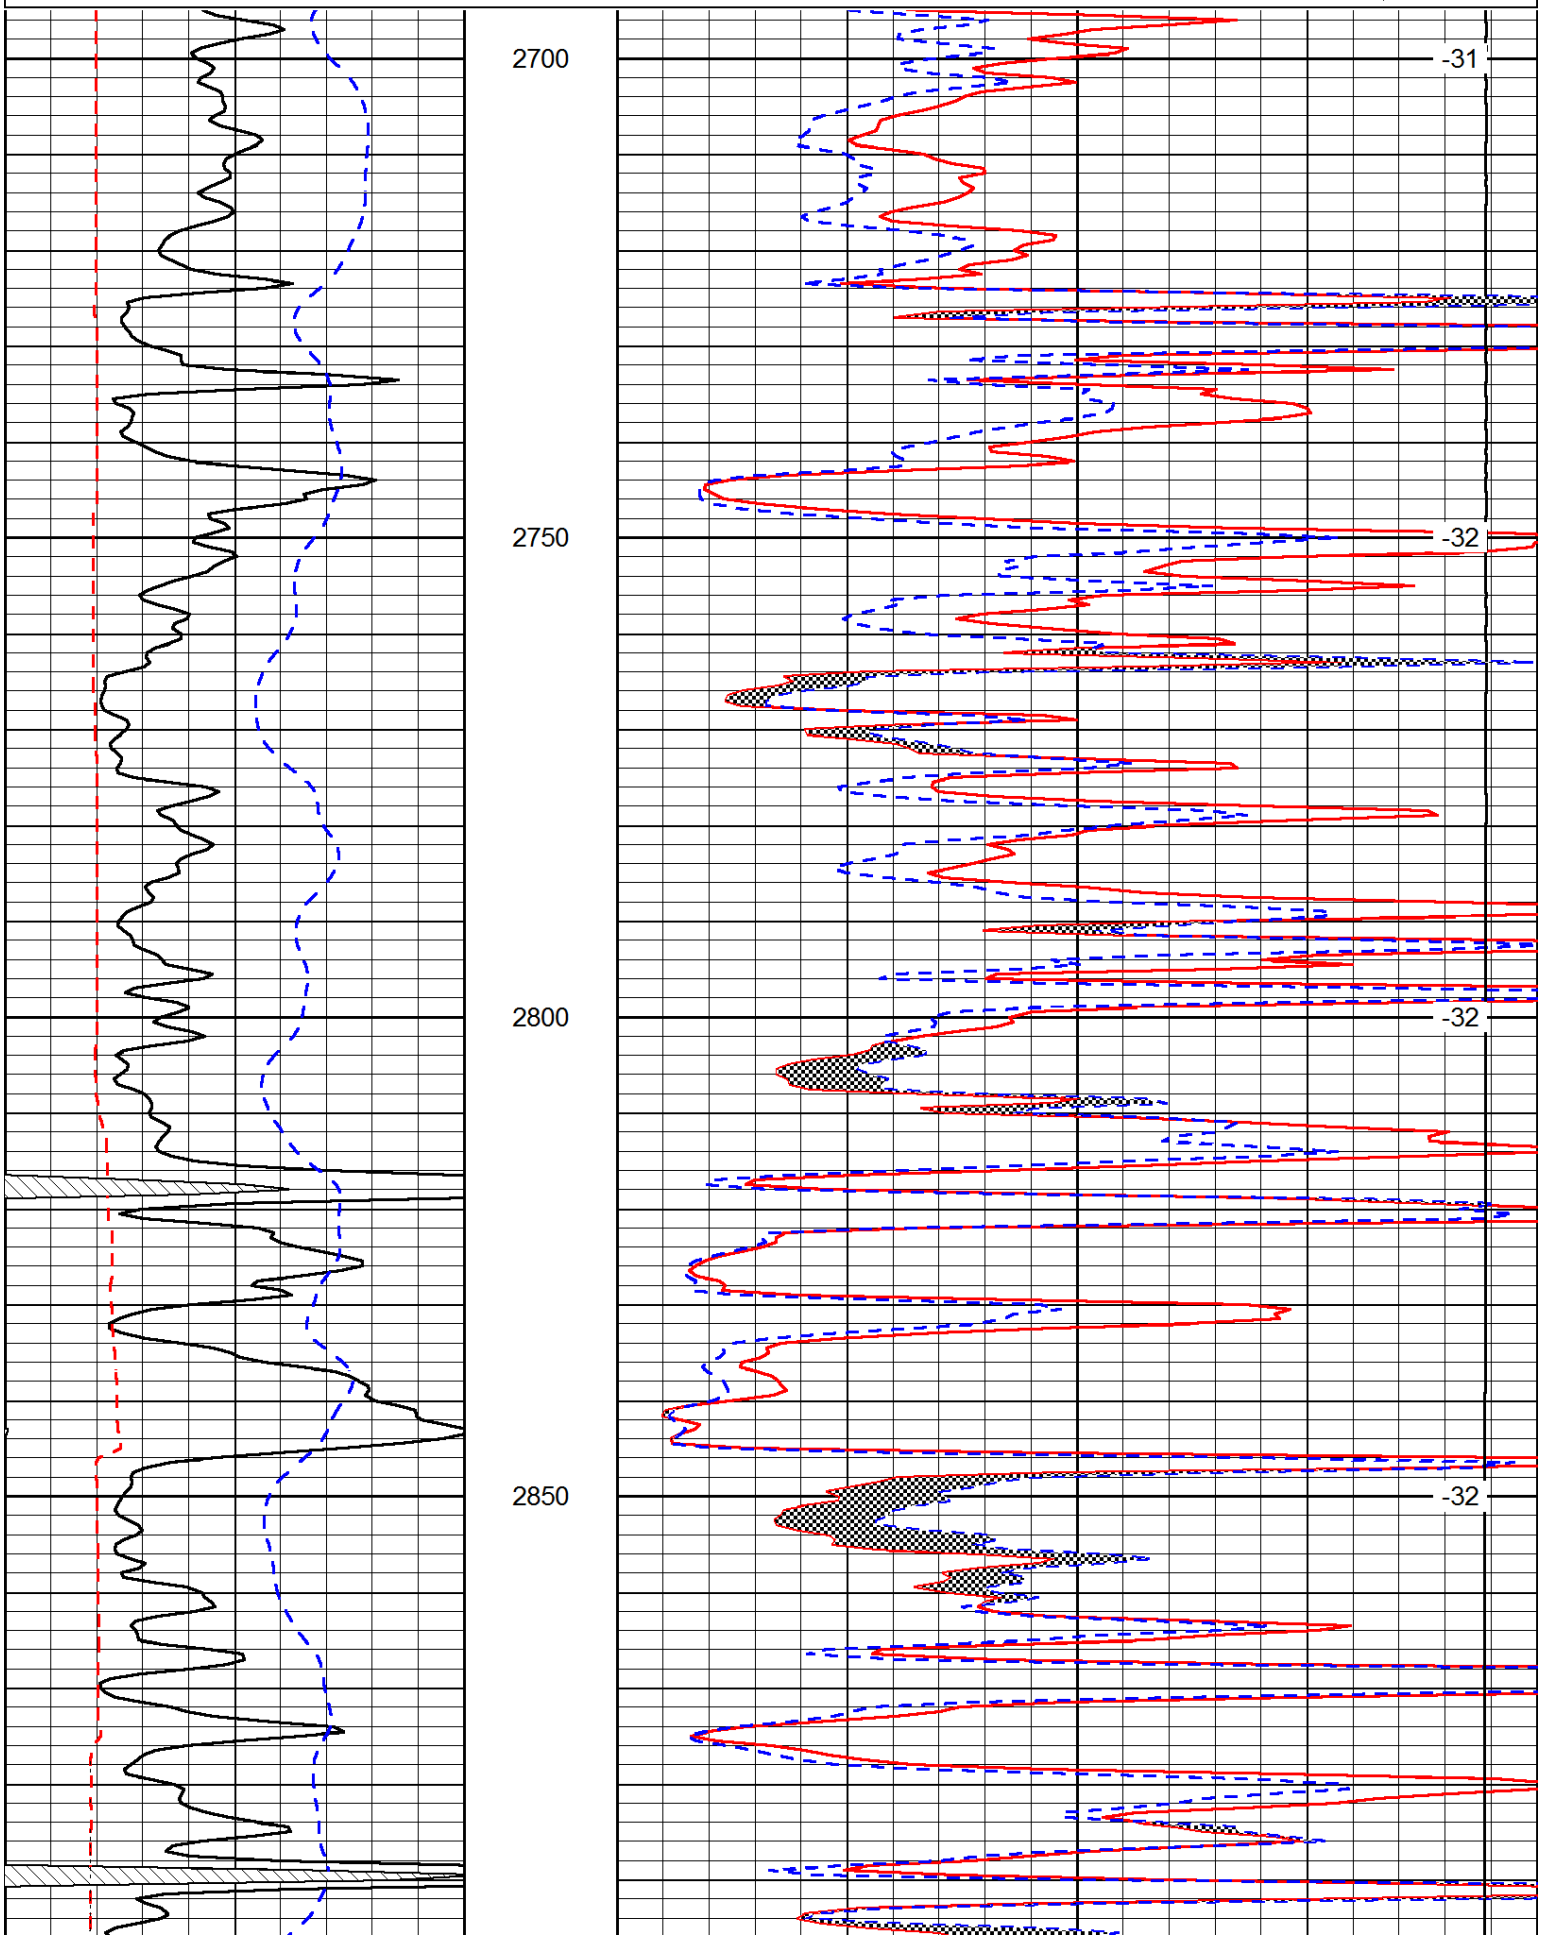
Odin KS, 1 S, 1/2 W, S Into

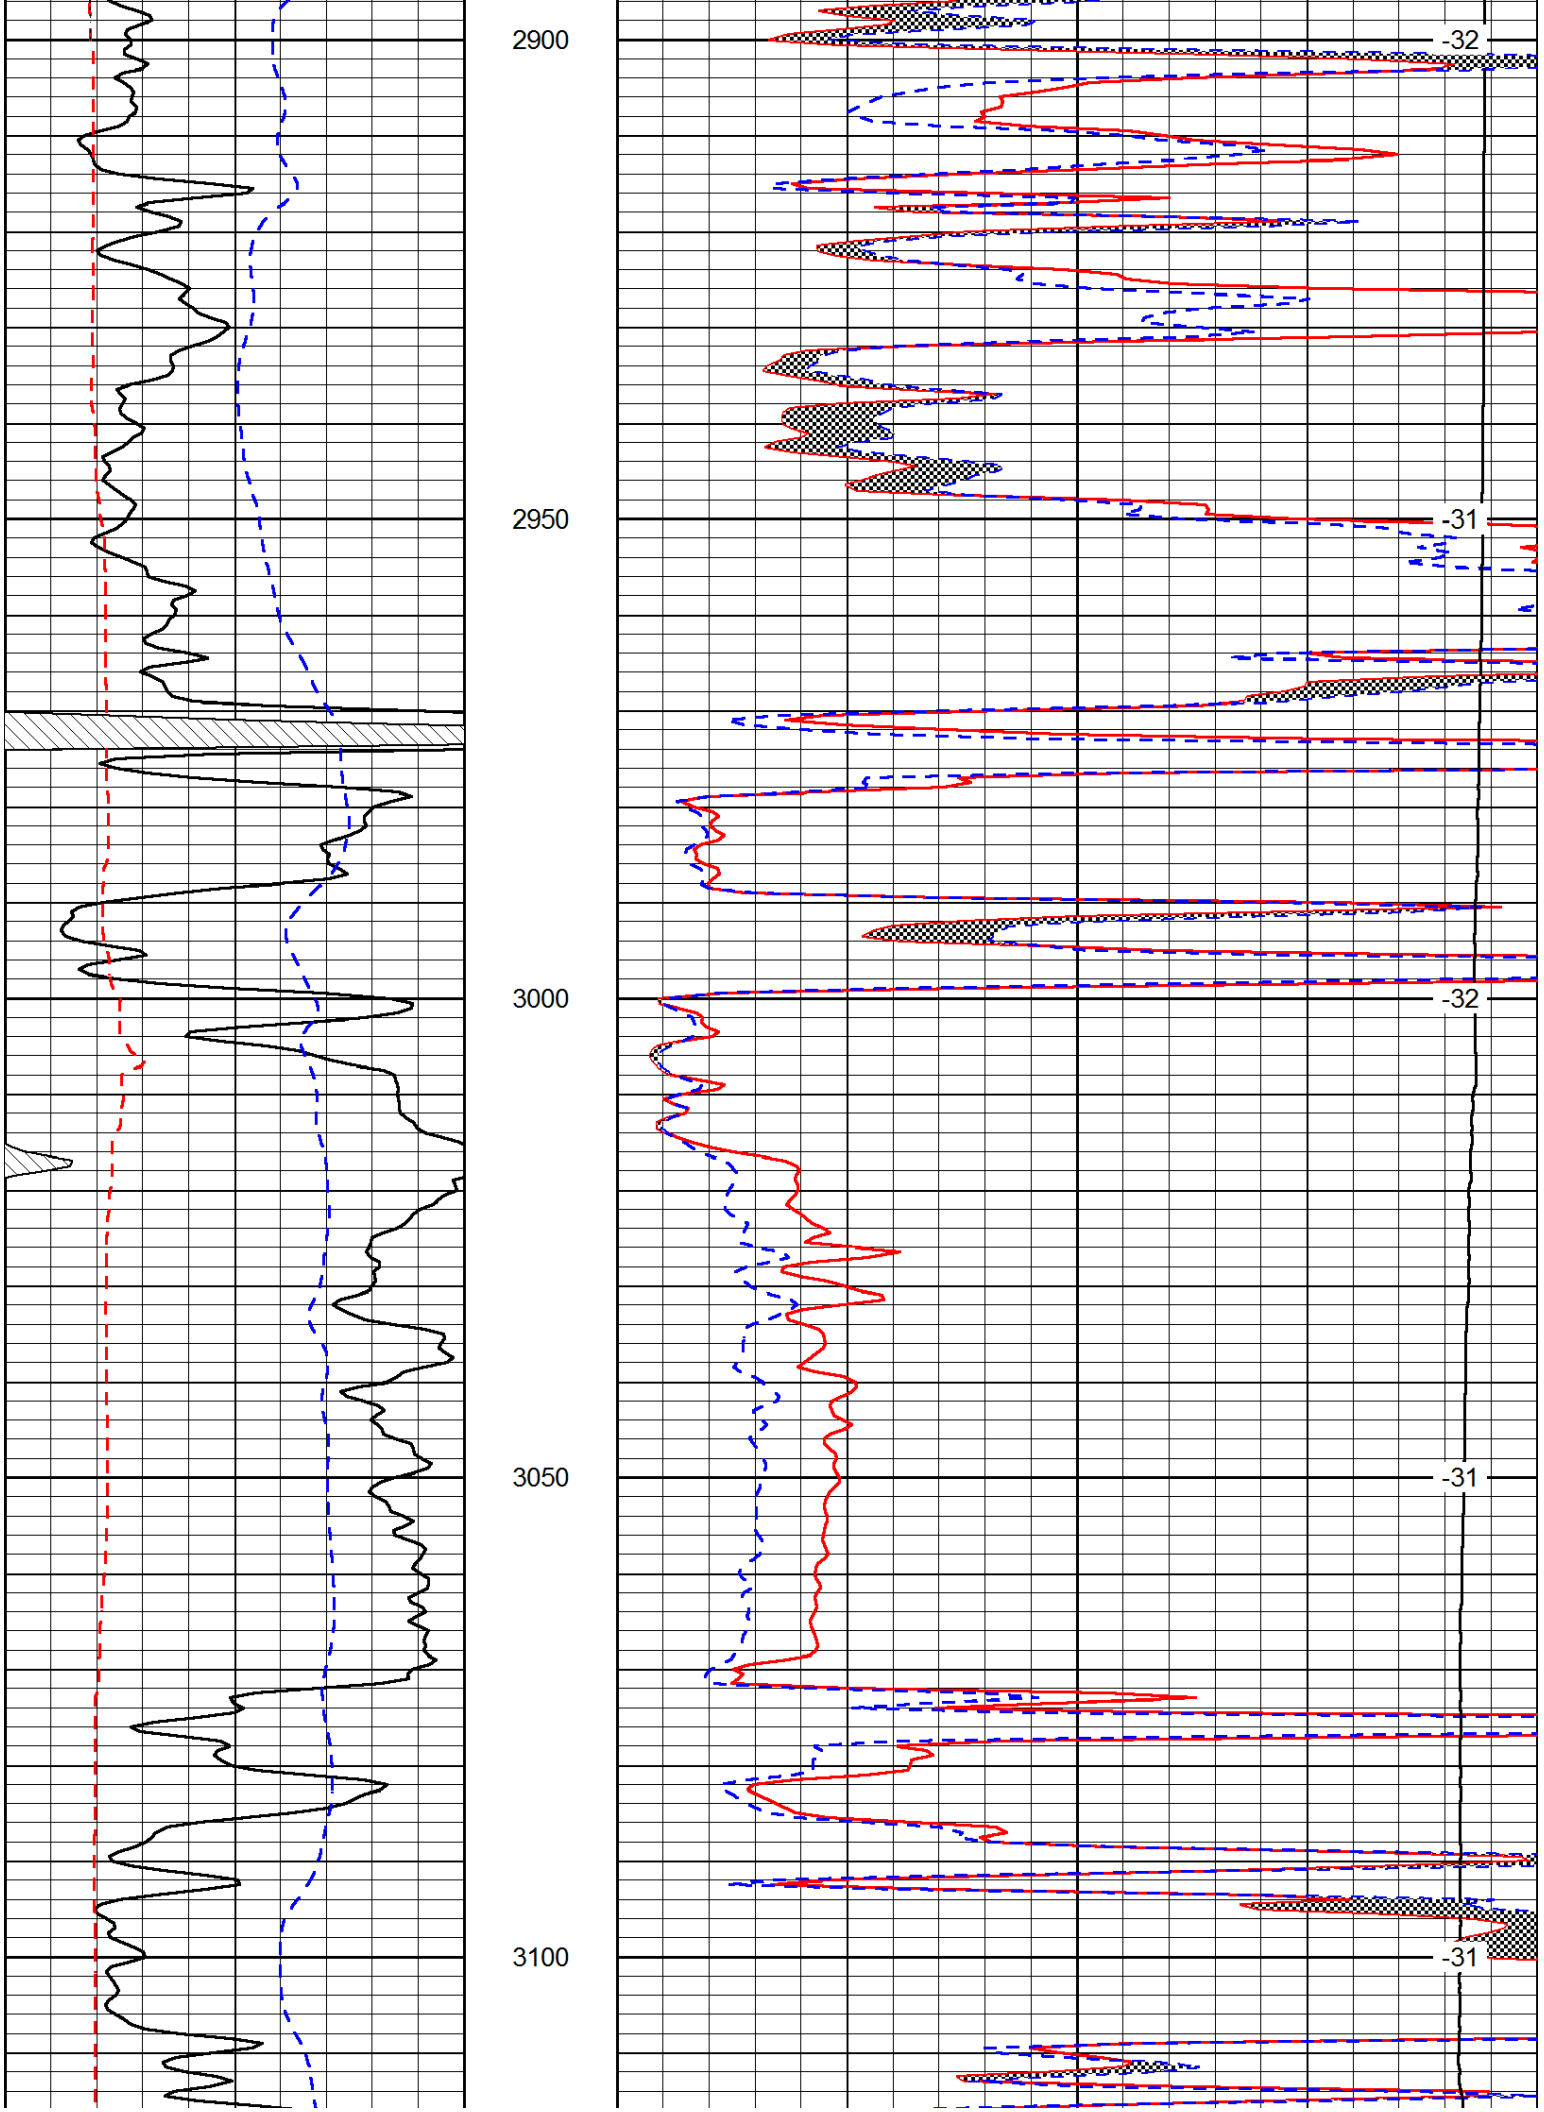
Database File:	c:\warrior\data\rjm_gregory #1\rjmhd.db
Dataset Pathname:	dil/rjmstk
Presentation Format:	micro
Dataset Creation:	Wed Nov 12 08:26:48 2014
Charted by:	Depth in Feet scaled 1:240

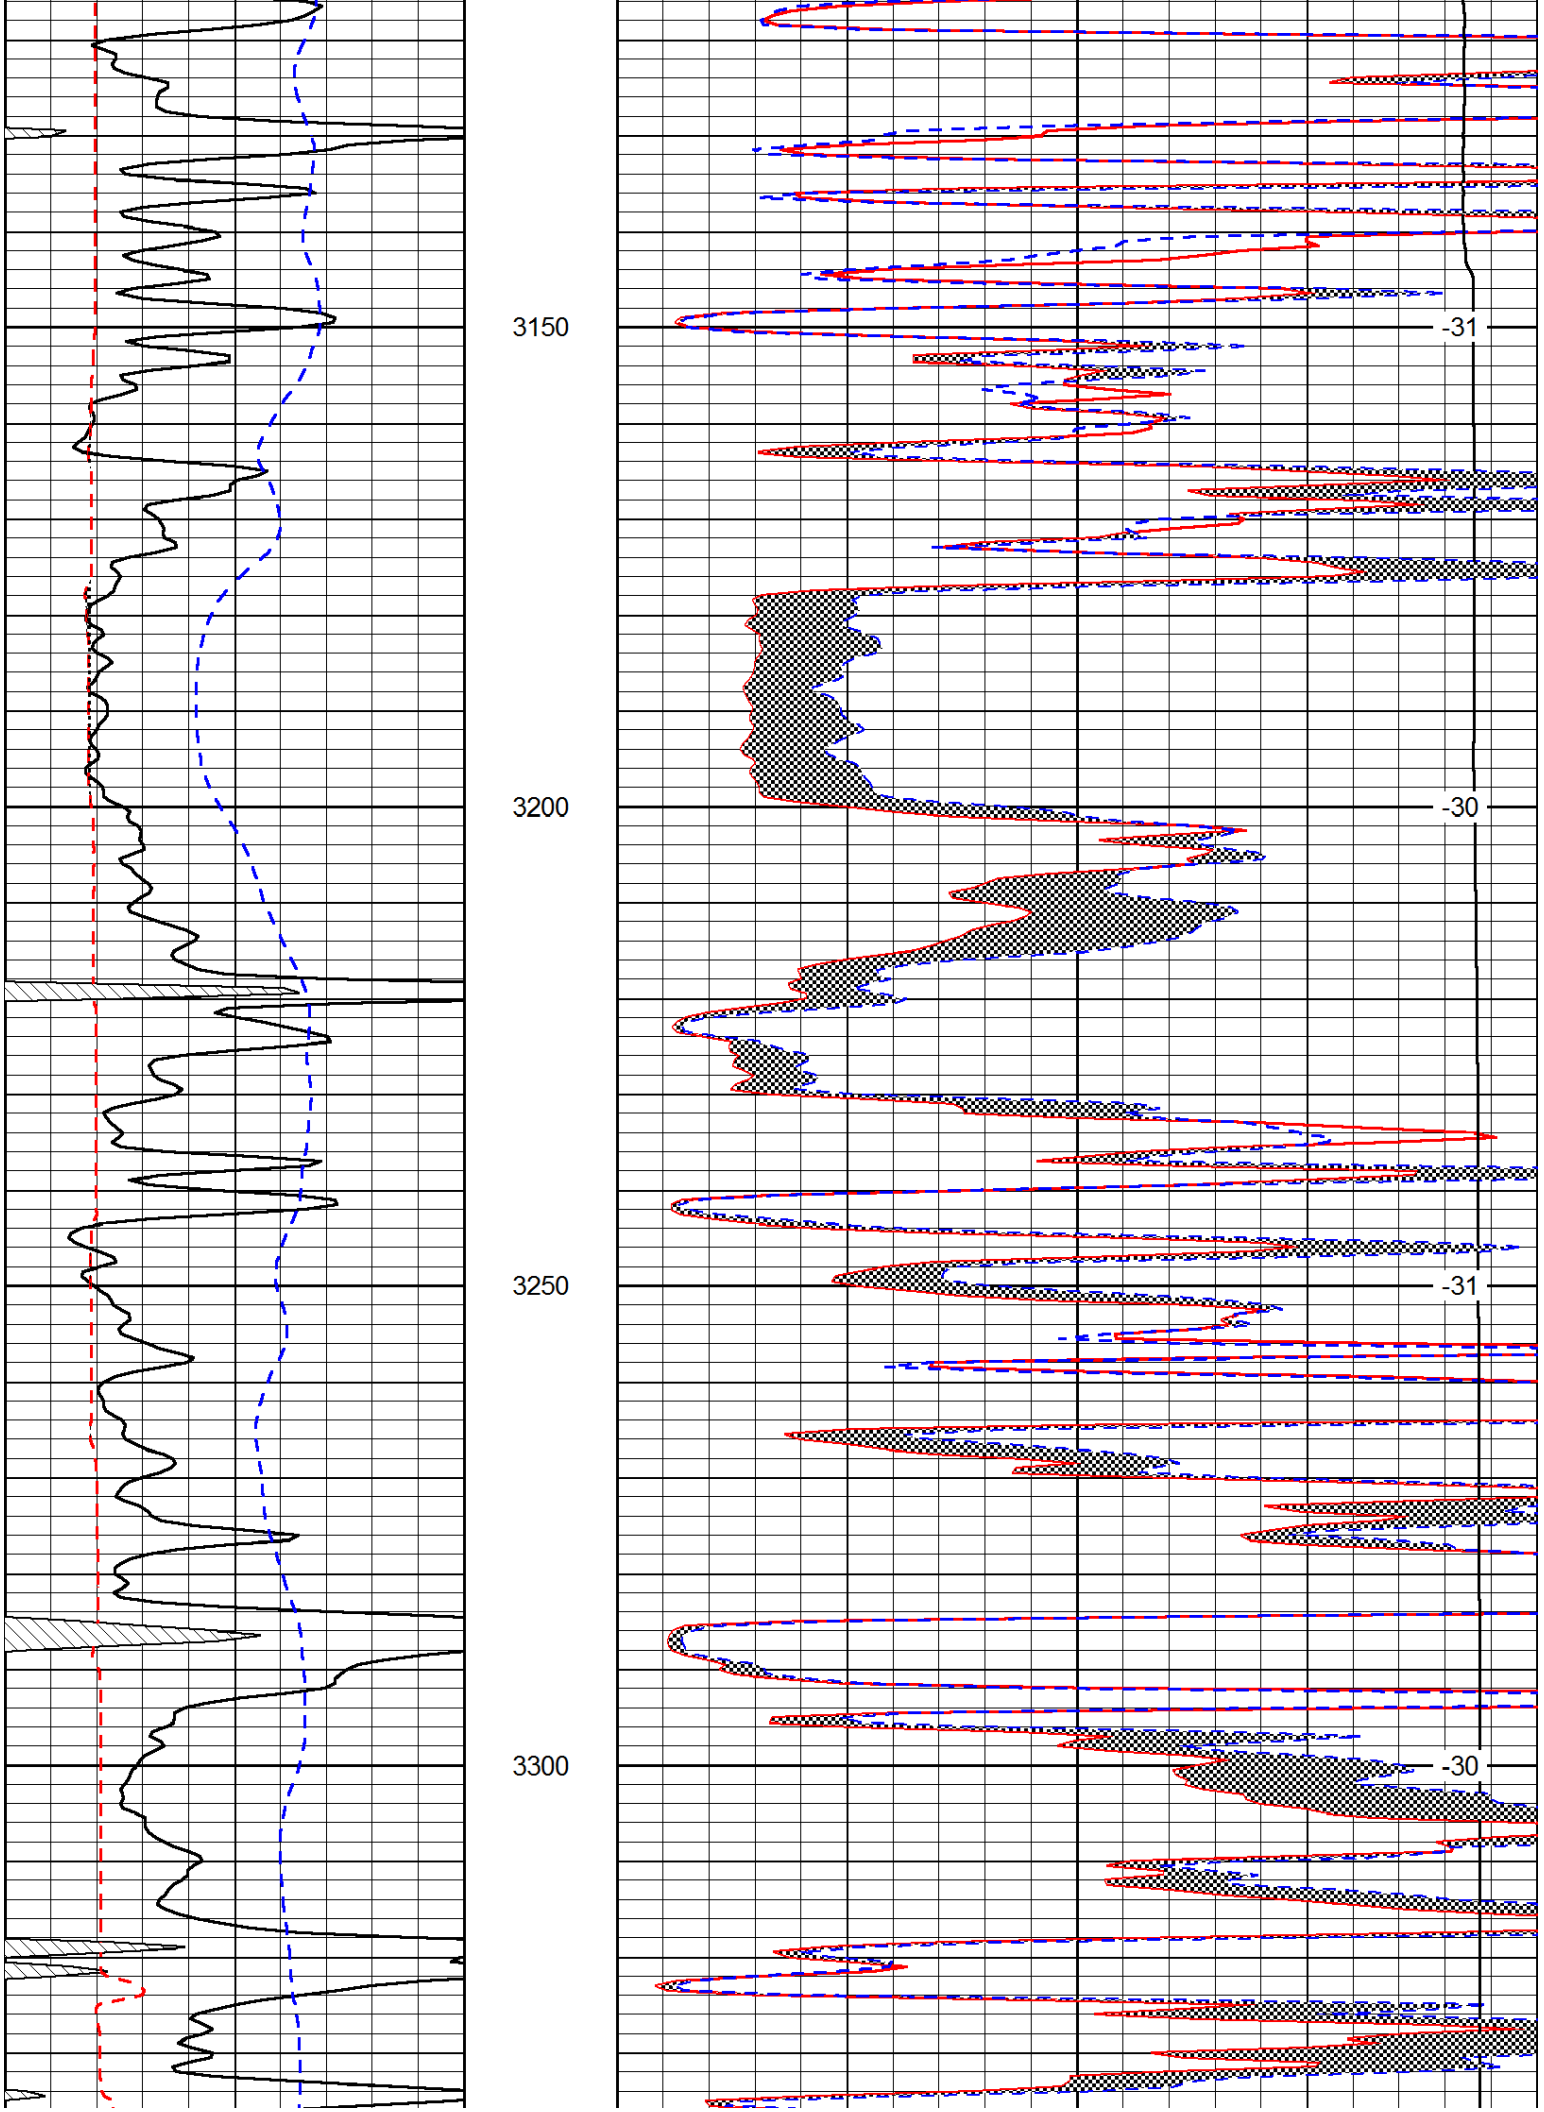
0	Gamma Ray	150
6	MCAL (GAPI)	16
-200	SP (mV)	0

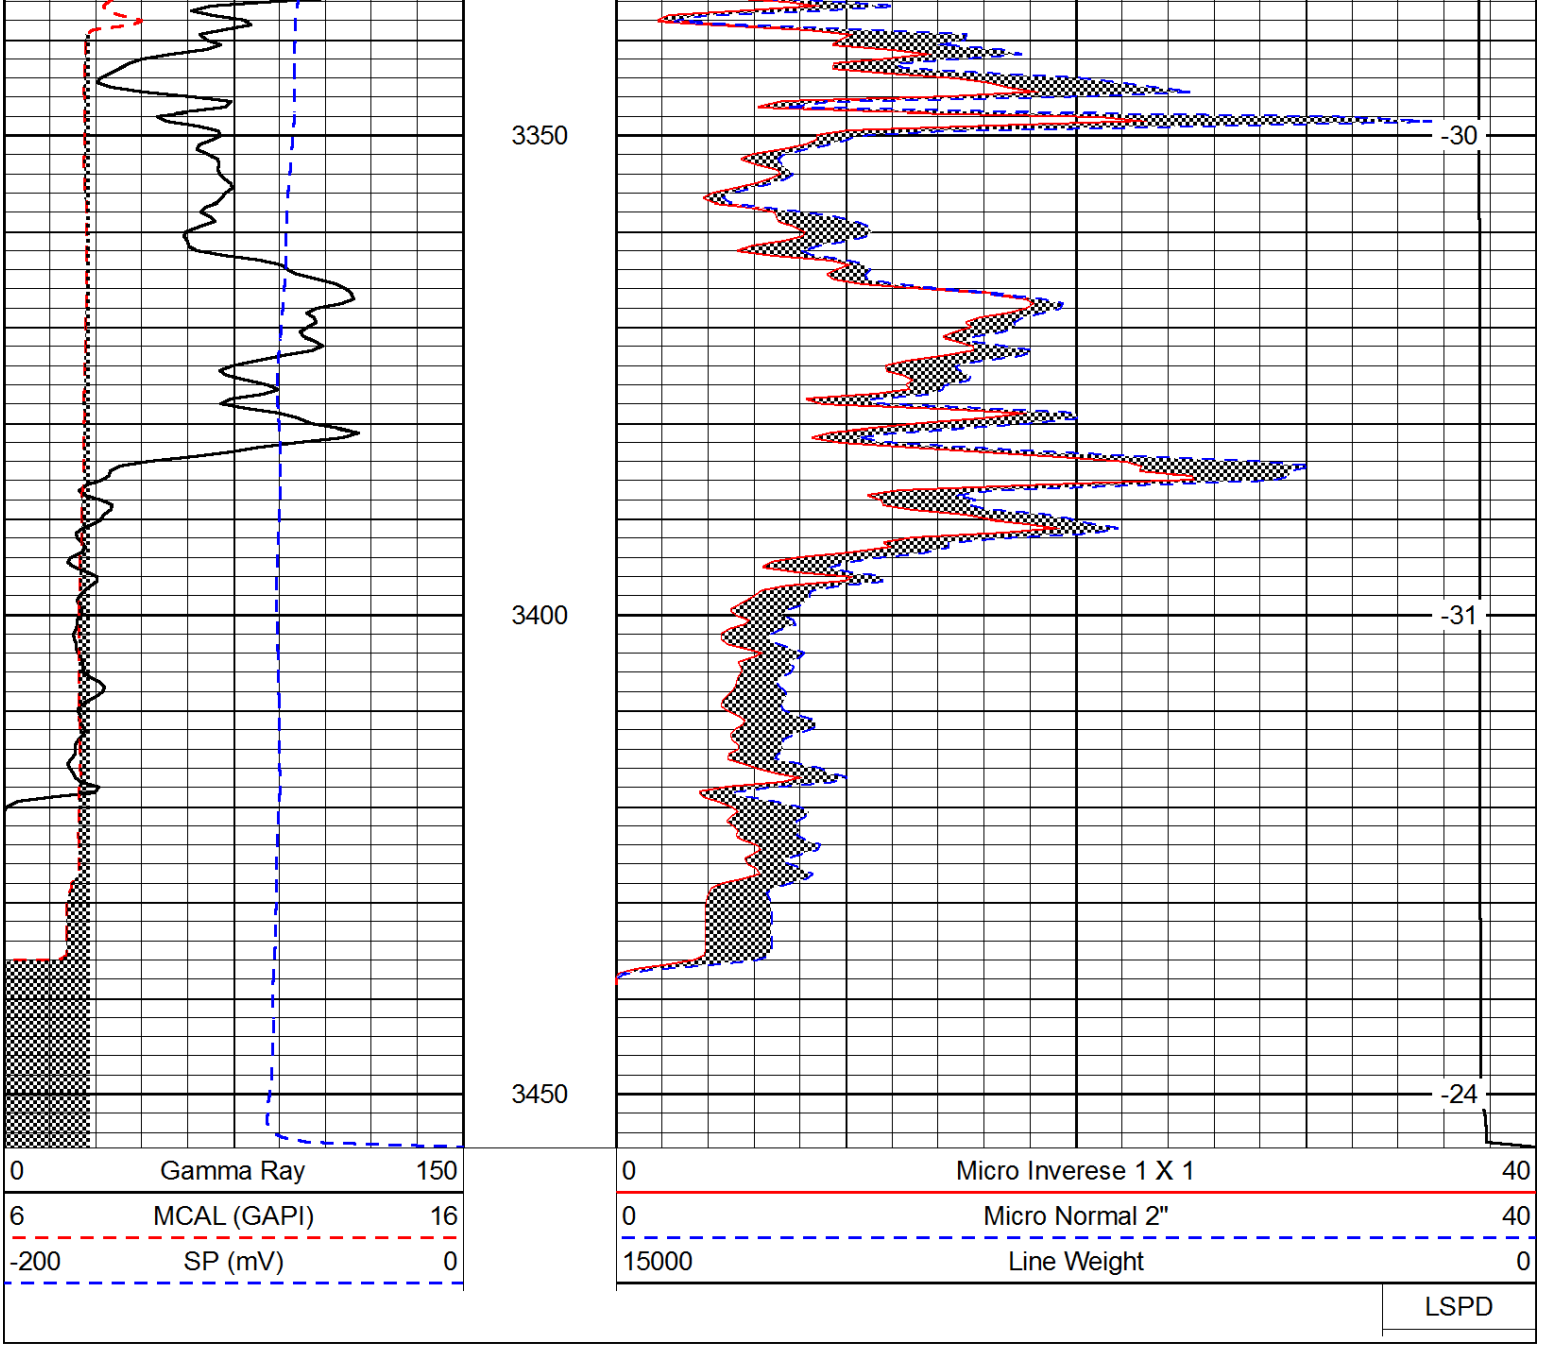
0	Micro Inverese 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD




2900
2950
3000
3050
3100
-32
-31
-32
-31
-31


3150
3200
3250
3300
-31
-30
-31
-30


3350
3400
3450
-30
-31
-24
0
Gamma Ray
150
6
MCAL (GAPI)
16
-200
SP (mV)
0
0
Micro Inverese 1 X 1
40
0
Micro Normal 2"
40
15000
Line Weight
0
LSPD