

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-20412-00-00
Spot: W2W2SW Sec/Twnshp/Rge: 6-21S-11W
983 feet from S Section Line, 4927 feet from E Section Line
Lease Name: SPARKS Well #: 4
County: STAFFORD Total Vertical Depth: 3462 feet

Operator License No.: 3208
Op Name: K & N PETROLEUM, INC.
Address: 513 W. 6TH ST
ELLINWOOD, KS 67526

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3456	0	WITH 50 SX CMT
SURF	8.625	265		

\$112⁵²

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/10/2006 9:00 AM
Plug Co. License No.: 6901 Plug Co. Name: D S & W WELL SERVICING, INC.
Proposal Rcvd. from: ED NIMICH Company: D S & W WELL SERVICING, INC. Phone: (620) 587-3361

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING METHOD.

RECEIVED
JAN 30 2006
KCC WICHITA

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/10/2006 10:10 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

COMPANY ATTEMPTED TO FISH TUBING STRING OUT OF HOLE. COULD NOT GET PAST 460'. GOT OUT OF 4 1/2". RAN TUBING TO 465'. PUMPED 225 SX CMT. CIRCULATED CMT UP 4 1/2" & 8 5/8" X 4 1/2" ANNULUS. TUBING WAS STUCK IN HOLE. PRESSURED 8 5/8" X 4 1/2" ANNULUS TO 600 PSI TRYING TO UNSTICK TUBING. BACKED OFF 1 JOINT OF TUBING. LEFT 15 JOINTS IN HOLE. 4 1/2" STAYING FULL OF CEMENT.


Perfs:

Top	Bot	Thru	Comments
3456	3462	OH	
3419	3422		

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: TBG

District: 01

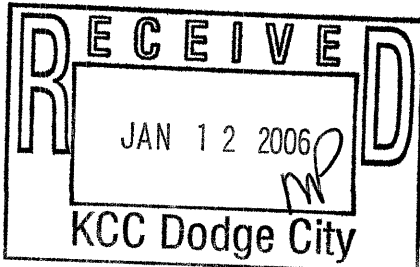

Signed

Richard W. Lacey

(TECHNICIAN)

INVOICED

DATE

1-30-06

INV. NO

2006061030

Form 