


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

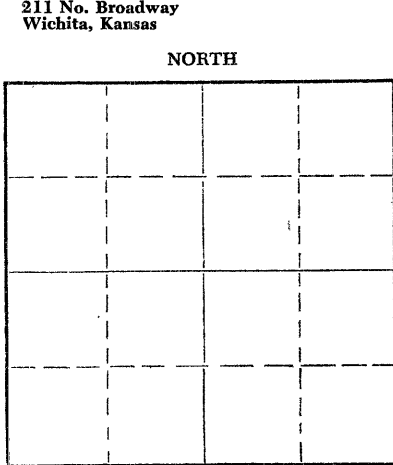

Locate well correctly on above Section Plat

Sheridan County. Sec. 30 Twp. 7 Rge. 29 (E) (W) X
Location as "NE/CNW/SW" or footage from lines NE NE SW
Lease Owner Empire Drilling Company
Lease Name Currey Well No. 1
Office Address 650 Fourth National Bank Building, Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed November 16, 1959 19
Application for plugging filed May 14, 1960 19
Application for plugging approved May 14, 1960 19
Plugging commenced May 14, 1960 19
Plugging completed May 23, 1960 19
Reason for abandonment of well or producing formation Went to water

If a producing well is abandoned, date of last production May 11, 1960
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes


Name of Conservation Agent who supervised plugging of this well A. D. Fabricius
Producing formation Lansing-Kansas City Depth to top 4205 Bottom 4205 Total Depth of Well 4205 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	285	8 5/8"	273'	-0-
	Lime	3970	4205	5 1/2"	4202'	1711.70'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 4205 feet to surface feet for each plug set.
Hole had been plugged back to 3992. Top perforation 3971. Hole filled with sand to 3960. 5 sacks cement placed in bottom of hole with dump bailer. Pipe shot off at 1715', and pulled. Hole mudded up to 270'. 5' rock bridge installed between 270' and 265' and 25 sacks cement poured in hole. Hole filled with mud to 40'. 10' rock bridge installed and hole capped with 10 sacks cement to bottom of cellar.



(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnes and Sons Pipe Pulling Company
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Irwin Kornfeld (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Irwin Kornfeld
650-4th Nat'l. Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of June, 19 60

My commission expires October 21, 1962

Lucille H. Harr
Lucille H. Harr Notary Public.



Handwritten notes in top right corner.

COMPANY: Empire Drilling Company
CONTRACTOR: Empire Drilling Company
FARM: Currey # 1
LOCATION: NE NE SW of Section 30-7E-29N, Sheridan County, Kansas
COMMENCED: November 6, 1959
COMPLETED: November 16, 1959
ELEVATION: 2877 KB
POTENTIAL:

Table with 4 columns: Depth (0 to 4205), Unit (ft), and Lithology (Sand-Shale, Shale-Shells, Anhydrite, etc.).

SET: 273° 8 5/8" casing with 125 sacks cement.

RAN: 4202° 5 1/2" casing with 75 sx cement & 25 sx latex

ELECTRIC LOG TOPS:

Table with 3 columns: Log Name (Heebner, Toronto, Lansing, Schlumberger TD), Depth (3935, 3960, 3972, 4201), and Offset (-1058, -1083, -1095).

CERTIFICATION

I, Dan J. Kornfeld, do hereby certify that the above and foregoing is a true and correct copy of the log on the Currey # 1, NE NE SW of Section 30-7E-29N, Sheridan County, Kansas, as reflected by the files of Empire Drilling Company.

Signature of Dan J. Kornfeld

SUBSCRIBED AND SWORN to before me, a Notary Public within and for Sedgwick County, Kansas, this 25th day of November, 1959.

Signature of Lucille H. Harr, Notary Public

My Commission expires October 21, 1962.

RECEIVED STATE CORPORATION COMMISSION

JUN 15 1960

CONSERVATION DIVISION Wichita, Kansas

Handwritten date 6/15/60