


STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-065-01694-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

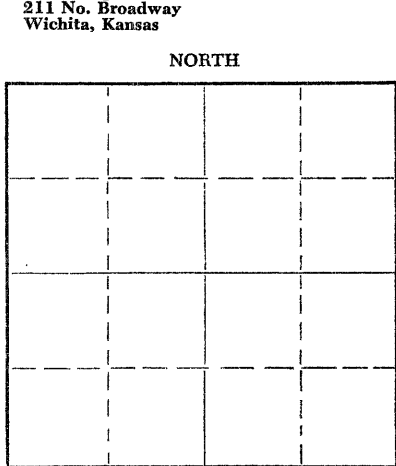

Locate well correctly on above Section Plat

Graham County, Sec. 17 Twp. 7S Rge. 25 ~~xx~~ (W)  
Location as "NE/CNW/SW" or footage from lines A/C SW/4 SW/4 SE/4  
Lease Owner Barnett Oil Company  
Lease Name Goodrow Well No. 1  
Office Address 411 First National Bank Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed July 11, 19 57  
Application for plugging filed July 12, 19 57  
Application for plugging approved July 16, 19 57  
Plugging commenced July 11, 19 57  
Plugging completed 12:00 P.M. July 11, 19 57  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3856 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	270'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Circulated heavy mud on bottom; filled hole to 260'; set bottom plug at 260' with 1/2 sack of hulls on top; mixed and dumped 20 sacks of cement; filled with mud to 40'; set top plug at 40' with 1/2 sack of hulls on top; mixed and dumped 10 sacks of cement to bottom of cellar.

Plugged rat hole with 1 sack of hulls and 2 sacks of cement.

(Well Log attached)

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnett Drilling, Inc.  
Address 409 First National Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
F. H. Rousey, Office Manager for ~~(employee of owner) or (contractor)~~ operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. H. Rousey  
411 First Nat'l Bank Bldg., Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of July, 19 57

My commission expires February 27, 1960.

Mildred F. Willis  
Notary Public.

PLUGGING  
FILE SEC. 17 T. 7 R. 25W  
BOOK PAGE 27 LINE 16

RECEIVED  
STATE CORPORATION COMMISSION  
7-18-57  
JUL 18 1957  
CONSERVATION DIVISION  
Wichita, Kansas

15-065-01694-00-00

BARNETT OIL COMPANY  
WELL LOG  
GOODROW WELL NO. 1  
A/C SW/4 SW/4 SE/4 SECTION 17-7S-25W  
GRAHAM COUNTY, KANSAS

Date Started: 7-3-57  
Date Plugged: 7-11-57

<u>From</u>	<u>To</u>	<u>Formation</u>
0	40	Clay
40	50	Sand
50	80	Shale and shells
80	90	Sand
90	140	Shale
140	185	Sand
185	270	Shale
270	1000	Shale and shells
1000	1200	Sand
1200	1255	Shale and shells
1255	1370	Shale and sand
1370	1480	Sand
1480	1745	Shale and shells
1745	2170	Shale
2170	2205	Anhydrite
2205	2220	Shale
2220	2485	Shale and lime
2485	3010	Lime and shale
3010	3856	Lime (D. & A.)

Set 270' of 8 5/8", 24# s.s. casing with  
175 sacks of cement.

**RECEIVED**  
STATE CORPORATION COMMISSION

JUL 18 1957 7-18-57

CONSERVATION DIVISION  
Wichita, Kansas

**PLUGGING**  
FILE SEC. 17 T. 7 R. 25 W  
BOOK PAGE 27 LINE 16