



Microresistivity Log

Pioneer Energy Services

API No.

15-051-26754-00-00

Company Trans Pacific Oil Corporation

Well Sunley Unit A #1-28

Field Kraus

County

Ellis

State

Kansas

Location

1250' FNL & 2800' FEL

Sec: 28

Twp: 14S

Rge: 19W

Permanent Datum Ground Level Elevation 2176
Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Elevation

K.B. 2181
D.F. 2176
G.L. 2176

Date

11/24/2014

Run Number

Two

Depth Driller

3789

Depth Logger

3787

Bottom Logged Interval

3786

Top Log Interval

3100

Casing Driller

8.625 @ 233

Casing Logger

234

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

3000

Density / Viscosity

9.2 54

pH / Fluid Loss

10.5 7.4

Source of Sample

Flowline

Rm @ Meas. Temp

0.80 @ 55

Rmf @ Meas. Temp

0.60 @ 55

Rmc @ Meas. Temp

1.08 @ 55

Source of Rmf / Rmc

Charts

Rm @ BHT

0.39 @ 114

Operating Rig Time

4 Hours

Max Rec. Temp. F

114

Equipment Number

91

Location

Hays

Recorded By

D. Schmidt

Witnessed By

Brad Rine

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Pioneer Energy Services
www.pioneerres.com
785 625 3858
Hays,
South on 240th to Mt. Pleasant Rd,
5 West to Yocemento Rd, 1 South, 1/2 West,
South into

Database File: c:\warrior\data\trans pacific_sunley unit a #1-28\transpac_sunley unit_a_1-28hd.db
Dataset Pathname: dil/tpstack
Presentation Format: micro
Dataset Creation: Mon Nov 24 22:27:00 2014
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
-200	SP (mV)	0

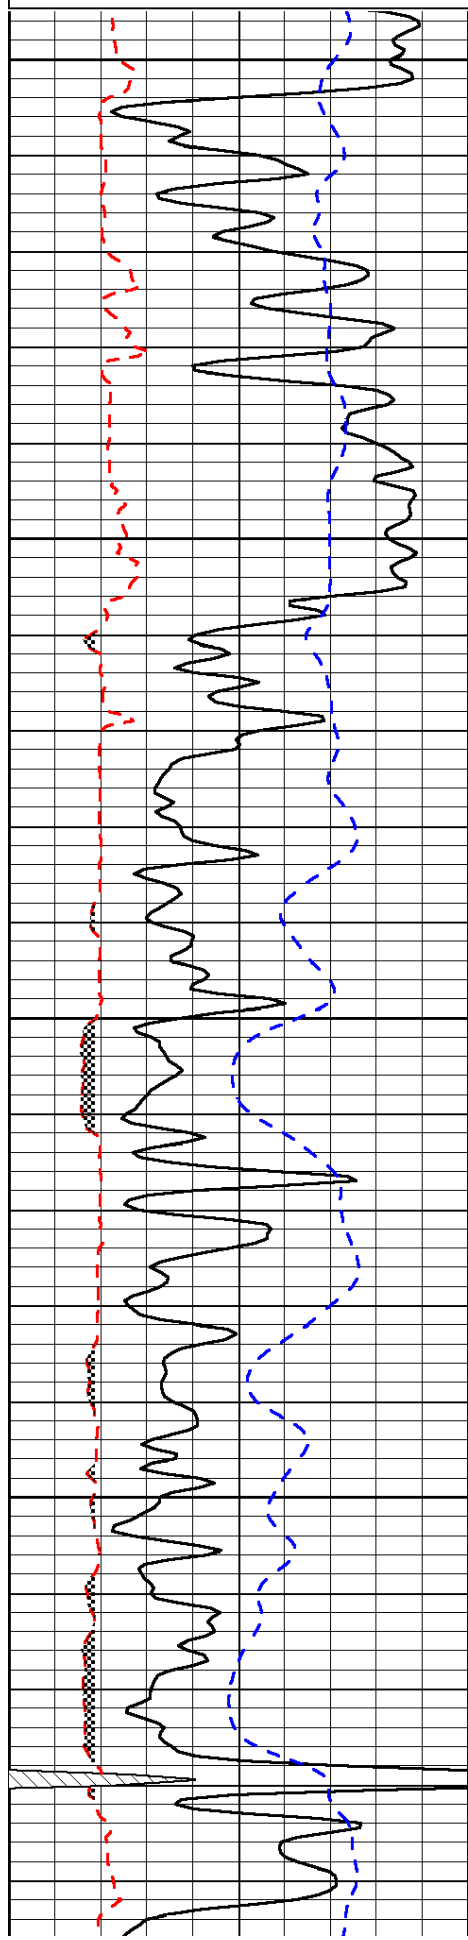

3100


3150

3200

3250

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

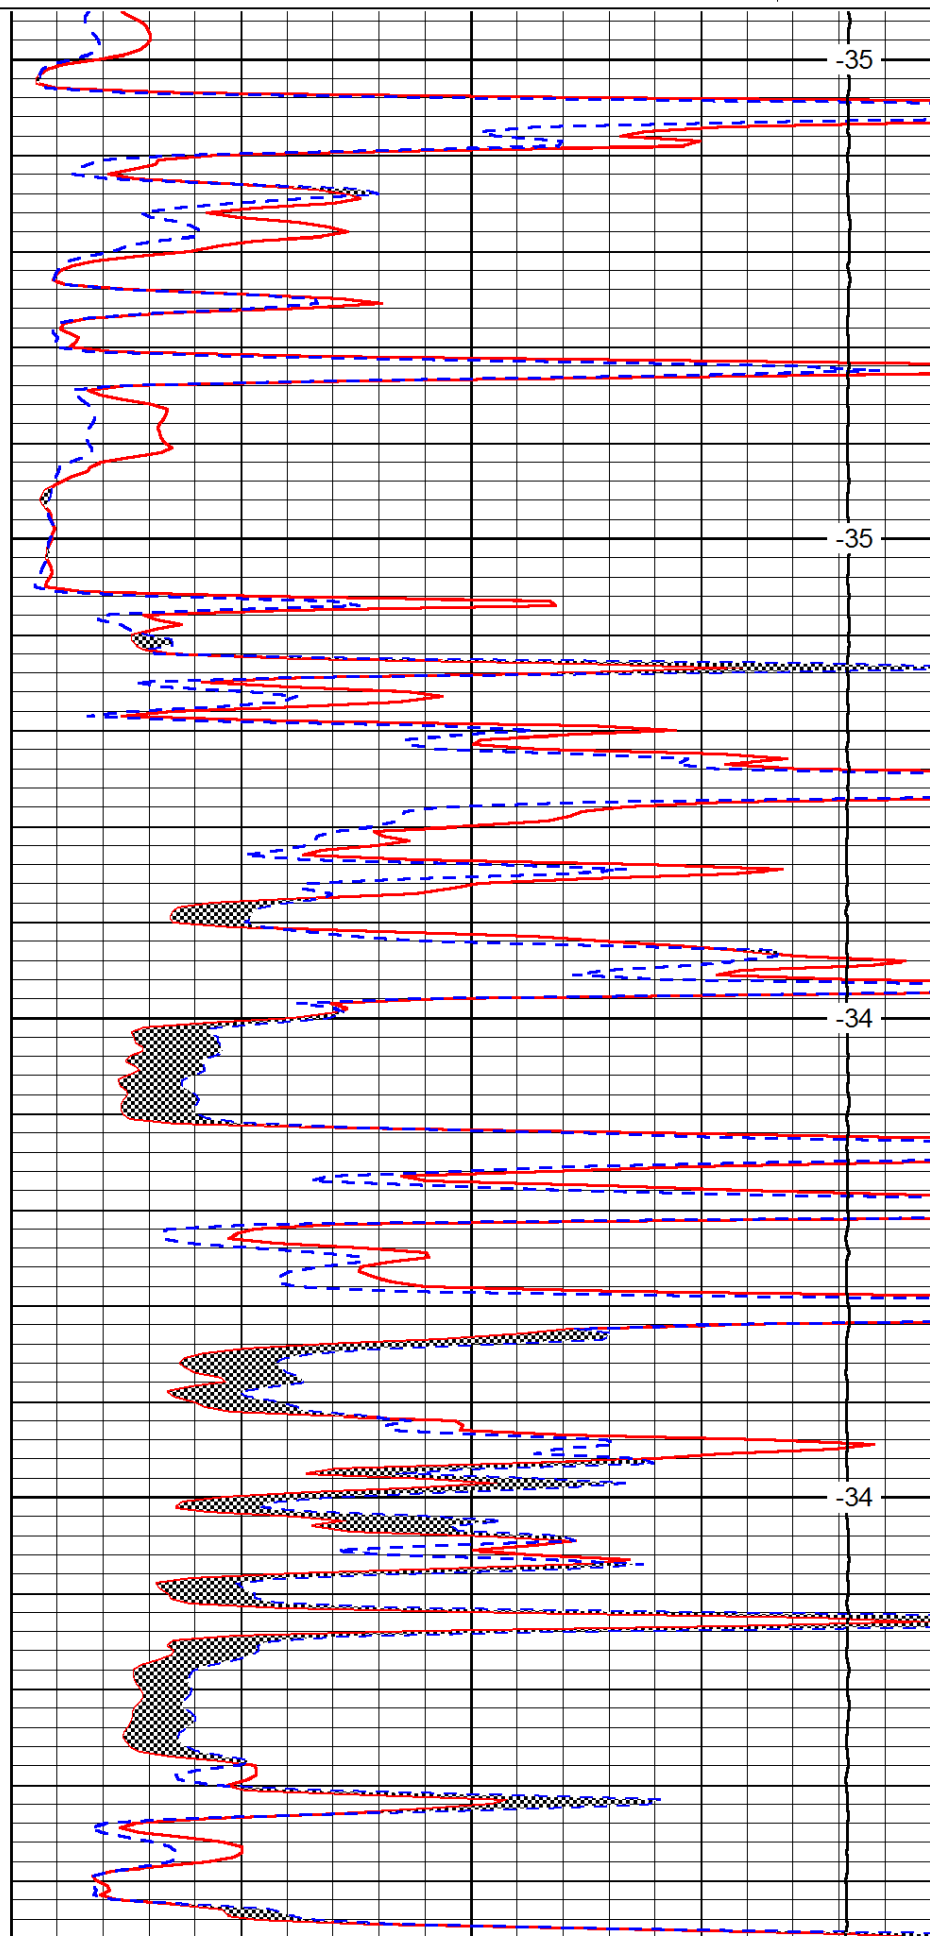


-35

-35

-34

-34

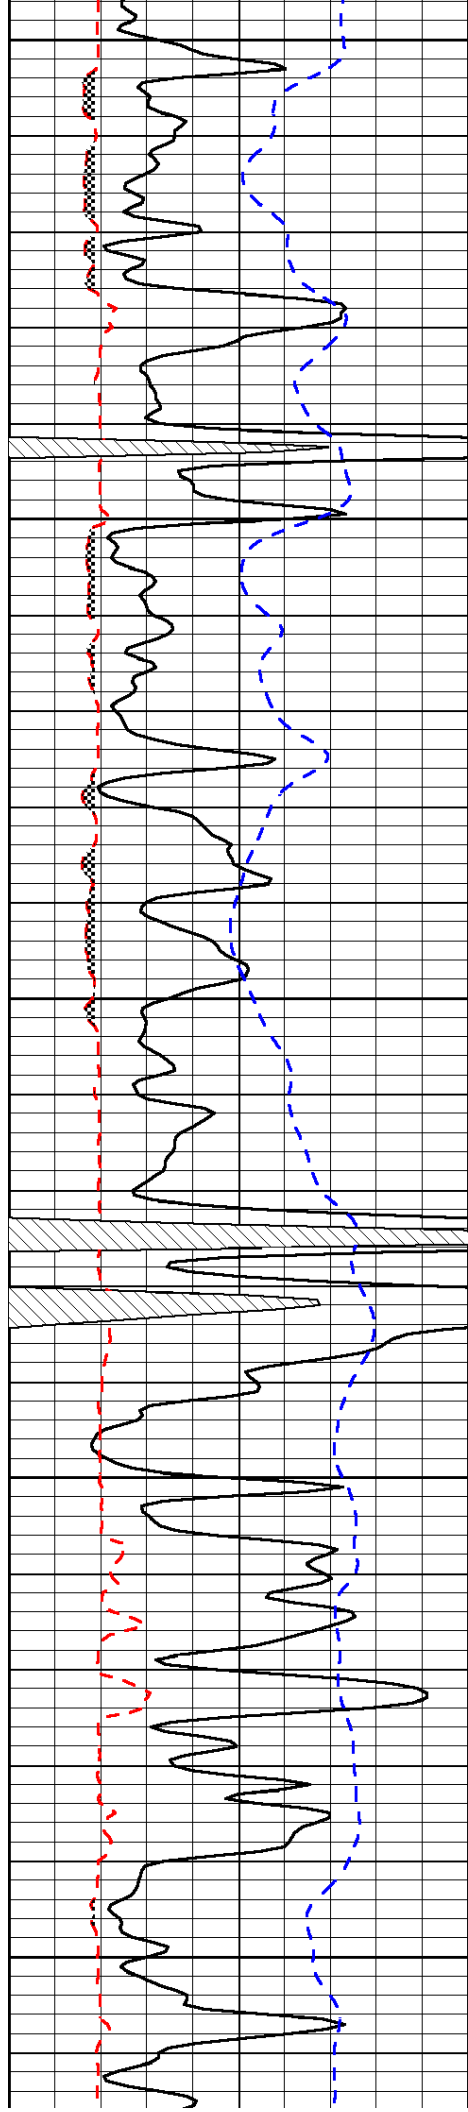


3300

3350

3400

3450

3500

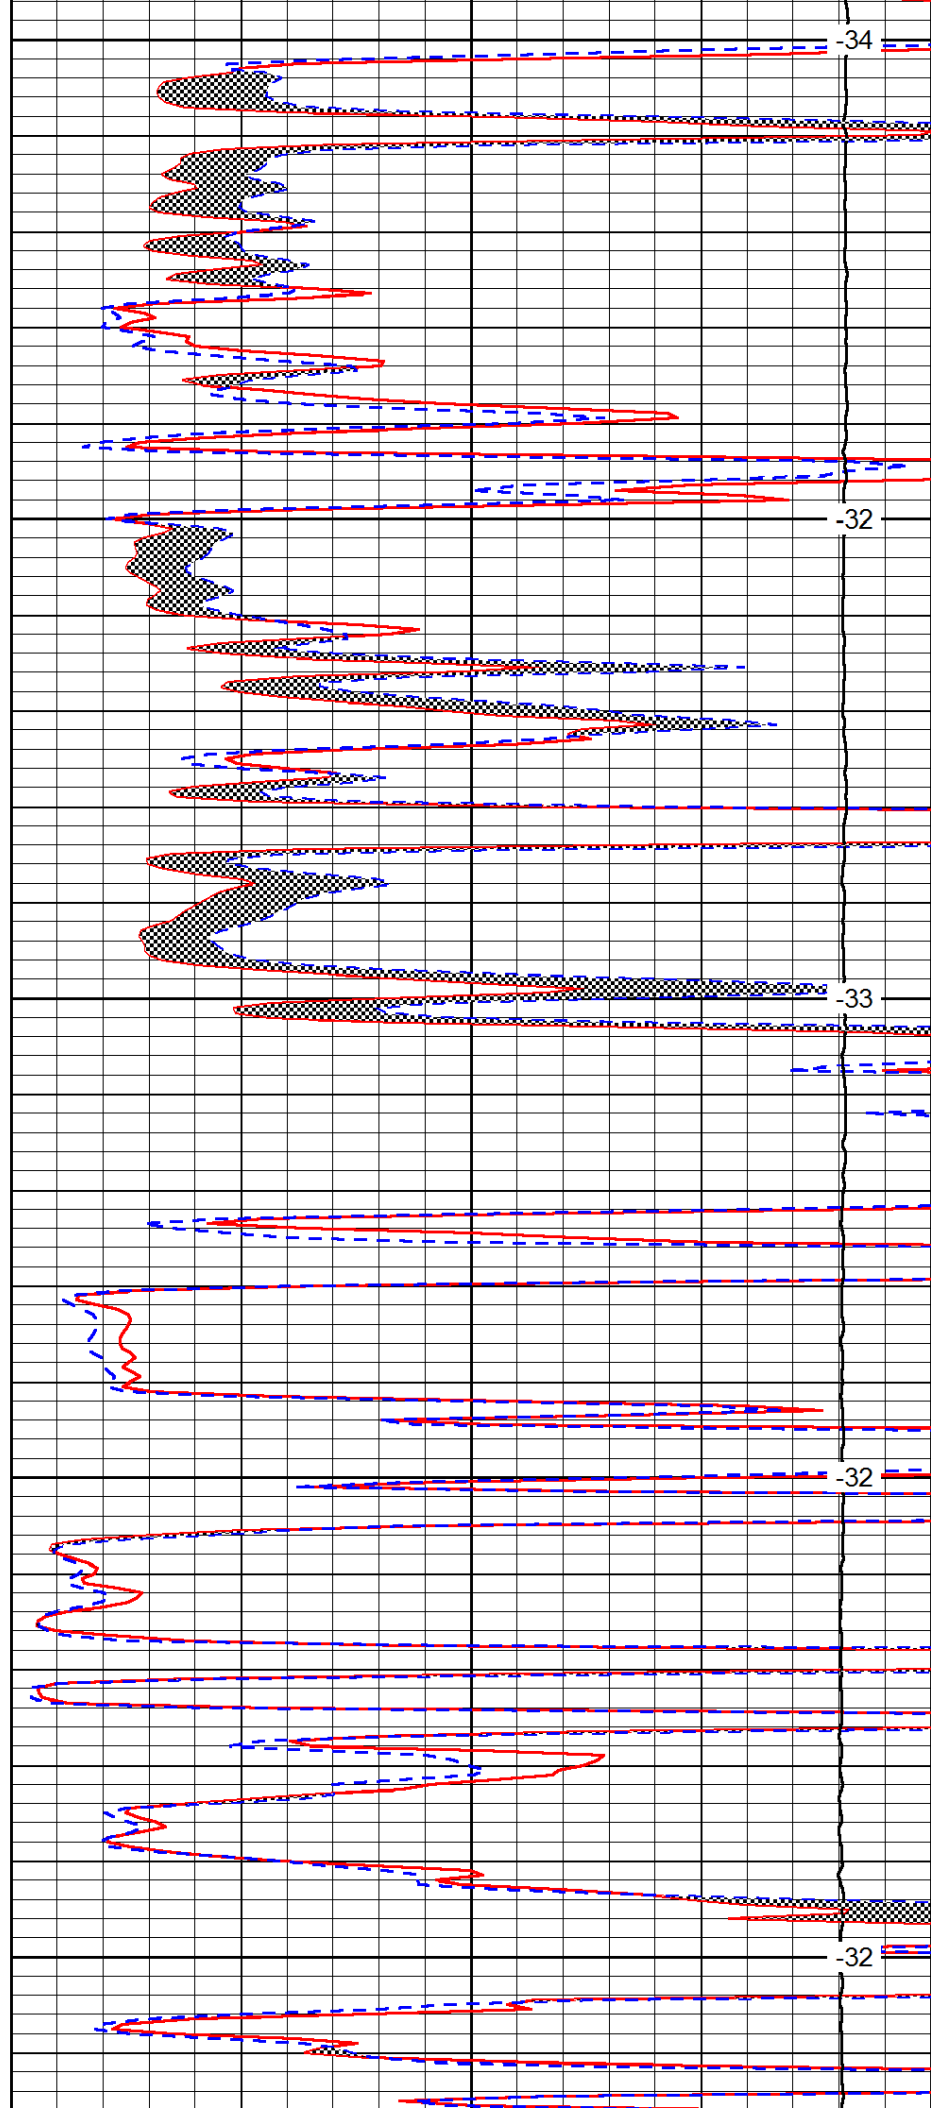


-34

-32

-33

-32

-32

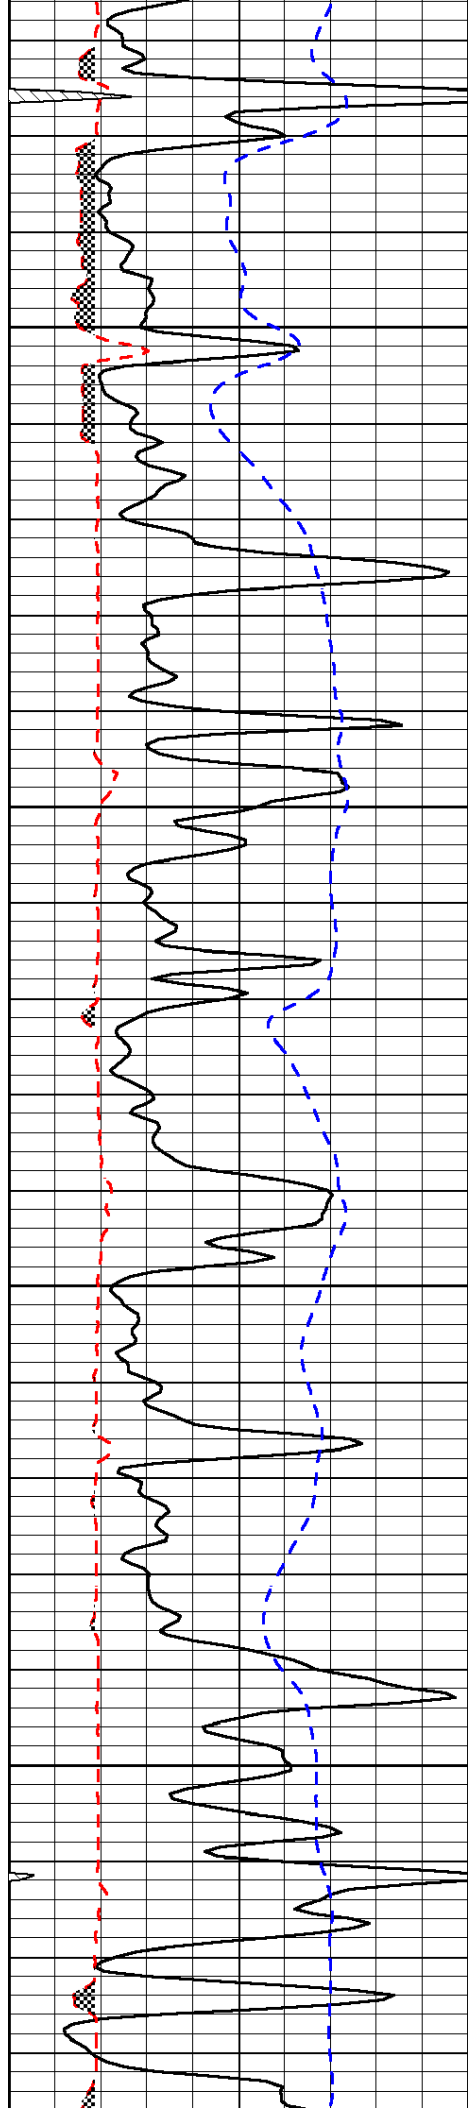


3550

3600

3650

3700

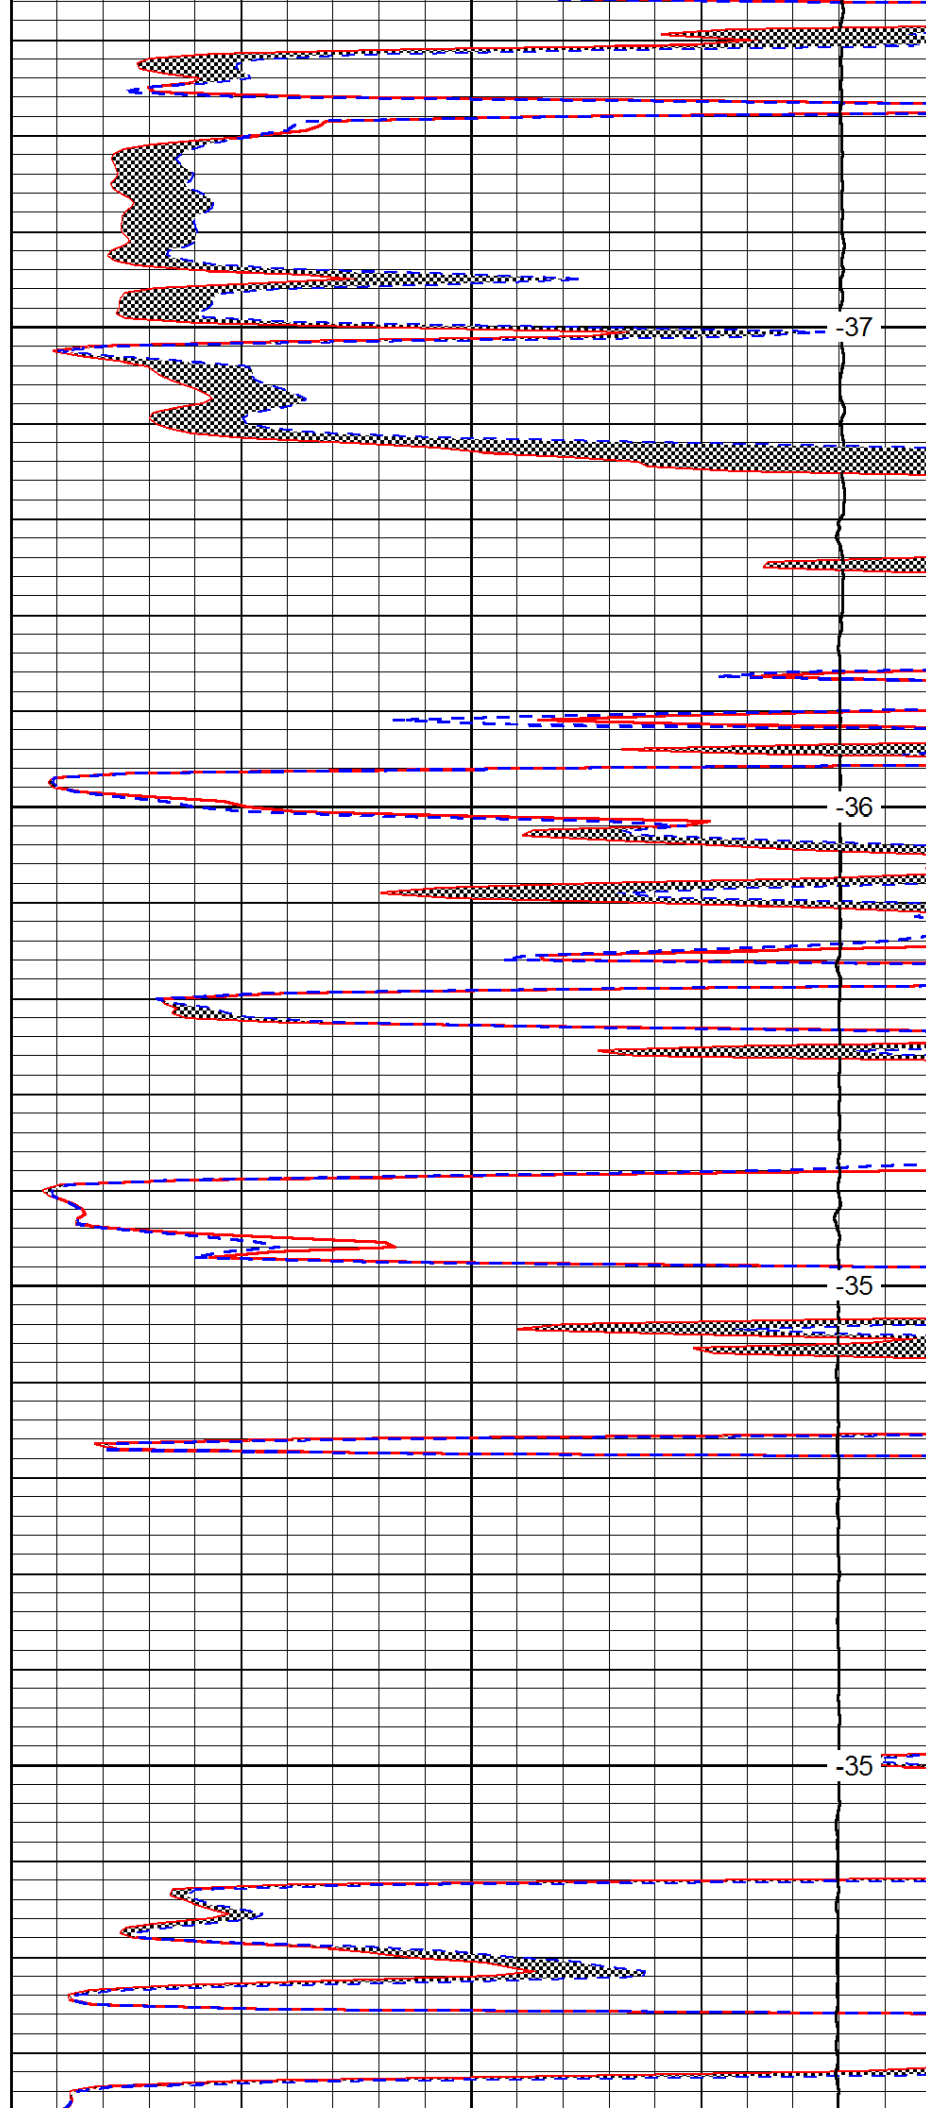


-37

-36


-35

-35

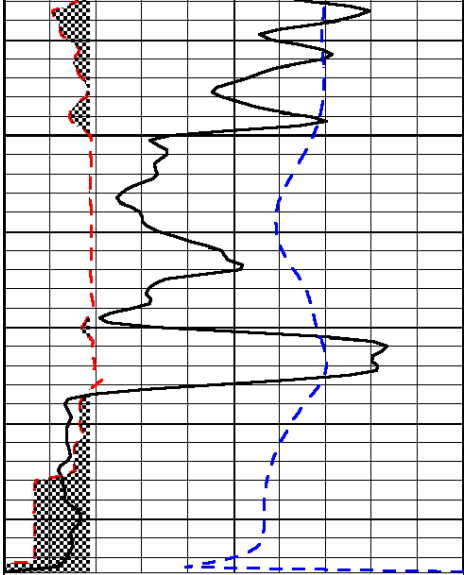

0	Gamma Ray	150
6	MCAL (GAPI)	16
-200	SP (mV)	0

3750

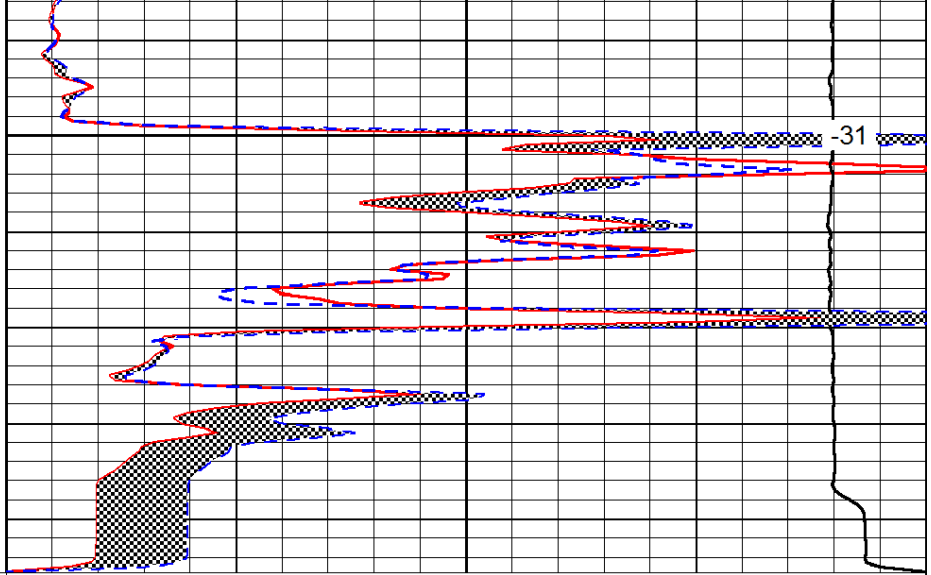

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD