


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Thomas County. Sec. 16 Twp. 75 Rge. 32 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
1650 FNL - 2310 FWL
Lease Owner Cities Service Company
Lease Name Knudson "A" Well No. 1
Office Address 209 E. William, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Oil

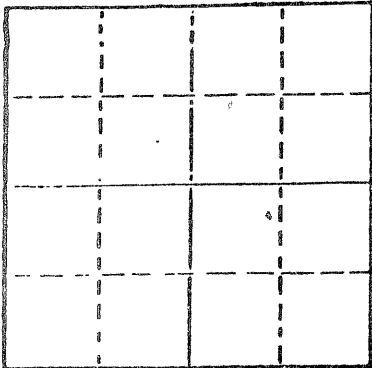

Locate well correctly on above
Section Plat

Date Well completed 6-23 1977
Application for plugging filed 8-10 1978
Application for plugging approved 8-14 1978
Plugging commenced 10-16 1978
Plugging completed 10-19 1978

Reason for abandonment of well or producing formation
not economical to produce
If a producing well is abandoned, date of last production
6-30 1978

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Bathazar
Producing formation L-KC Depth to top 4241 Bottom 4250 Total Depth of Well 4870FT.
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	362 ft.	-0-
				5 1/2"	4403 ft	1394 ft.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Plug and abandon. Plugged bottom 4358 to 4233 ft. with 125 feet sand and 4 sacks
cement. Shot casing at 2300 ft. and 2000 ft. Shot 5 1/2" casing at 1500 ft and 1400 ft.
Pulled 34 joints 5 1/2" OD casing (one joint bad where shot). Pumped into surface casing -
3 sacks hulls, 70 sacks 50/50 Pozmix + 6% gel, 23 sacks gel, 60 sacks 50/50 Pozmix
+ 6% gel. Plugged and abandoned completed at 1:00 PM 10-19-78

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Poe Well Service, Oberlin, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
(employee of owner) or (~~owner~~ or ~~operator~~)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

Glenn E. Meier
STATE NOTARY PUBLIC
Sedgwick County, Kansas

(Signature) *E. W. Peterman*
209 E. William, Wichita, Kansas E. W. Peterman
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of October, 19 78

Glenn E. Meier
Glenn E. Meier Notary Public.

My commission expires 6-3-81

RECEIVED
STATE CORPORATION COMMISSION

OCT 30 1978
OCT 30, 1978
CONSERVATION DIVISION
Wichita, Kansas