

Company TAOS RESOURCES OPERATING CO. Well WEBBER 34-1 Field WMU County COWLEY State KANSAS		Company TAOS RESOURCES OPERATING CO. Well WEBBER 34-1 Field WMU County COWLEY State KANSAS	
Location: 1650' FNL & 1960' FWL, C N/2 / NE / NW SEC 34 TWP 32S RGE 5E Permanent Datum Ground Level Elevation 1285' Log Measured From Kelly Bushing 10' Drilling Measured From Kelly Bushing		API # : 15-035-24621 Other Services Perf Elevation K.B. 1295.00 FT D.F. 1293.00 FT G.L. 1285.00 FT	
Date	12/17/14		
Run Number	One		
Depth Driller	3645.00 FT		
Depth Logger	3646.00 FT		
Bottom Logged Interval	3580'		
Top Log Interval	1150'		
Casing Driller	N/A		
Casing Logger	5.5"		
Bit Size	7.875 Inches		
Type Fluid in Hole	Water		
Density / Viscosity	N/A		
pH / Fluid Loss	N/A		
Source of Sample	N/A		
Rm @ Meas. Temp	N/A		
Rmf @ Meas. Temp	N/A		
Rmc @ Meas. Temp	N/A		
Source of Rmf / Rmc	N/A		
Rm @ BHT	N/A		
Time Circulation Stopped	N/A		
Time Logger on Bottom	14:30		
Maximum Recorded Temperature	N/A		
Equipment Number	801		
Location	Ponca City, OK		
Recorded By	J.D. WHITT		
Witnessed By	Mr. Dorothy		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Log Correlated to Weatherford Compesated Sonic Log
 dated 12-9-14
 Depth Corrected
 Used 3 Centralizers in tool string


Short Joint @ 2778-2798


Thank You For Using Consolidated Oil Well Services
 Ponca City, OK





Main Pass - 0 - PSI

-5	CCL	2	0	AMP (mV)	100	-5	AMPS1	150	200	VDL	1200	1	Cement Map	8
	GR (GAPI)		0	AMPx10 (mV)	10	-5	AMPS2	150						
0	(GAPI)	200				-5	AMPS3	150						
	Line Tension (lb)					-5	AMPS4	150						
0	(lb)	4000				-5	AMPS5	150						
	Travel Time (usec)					-5	AMPS6	150						
400	(usec)	200				-5	AMPS7	150						
						-5	AMPS8	150						

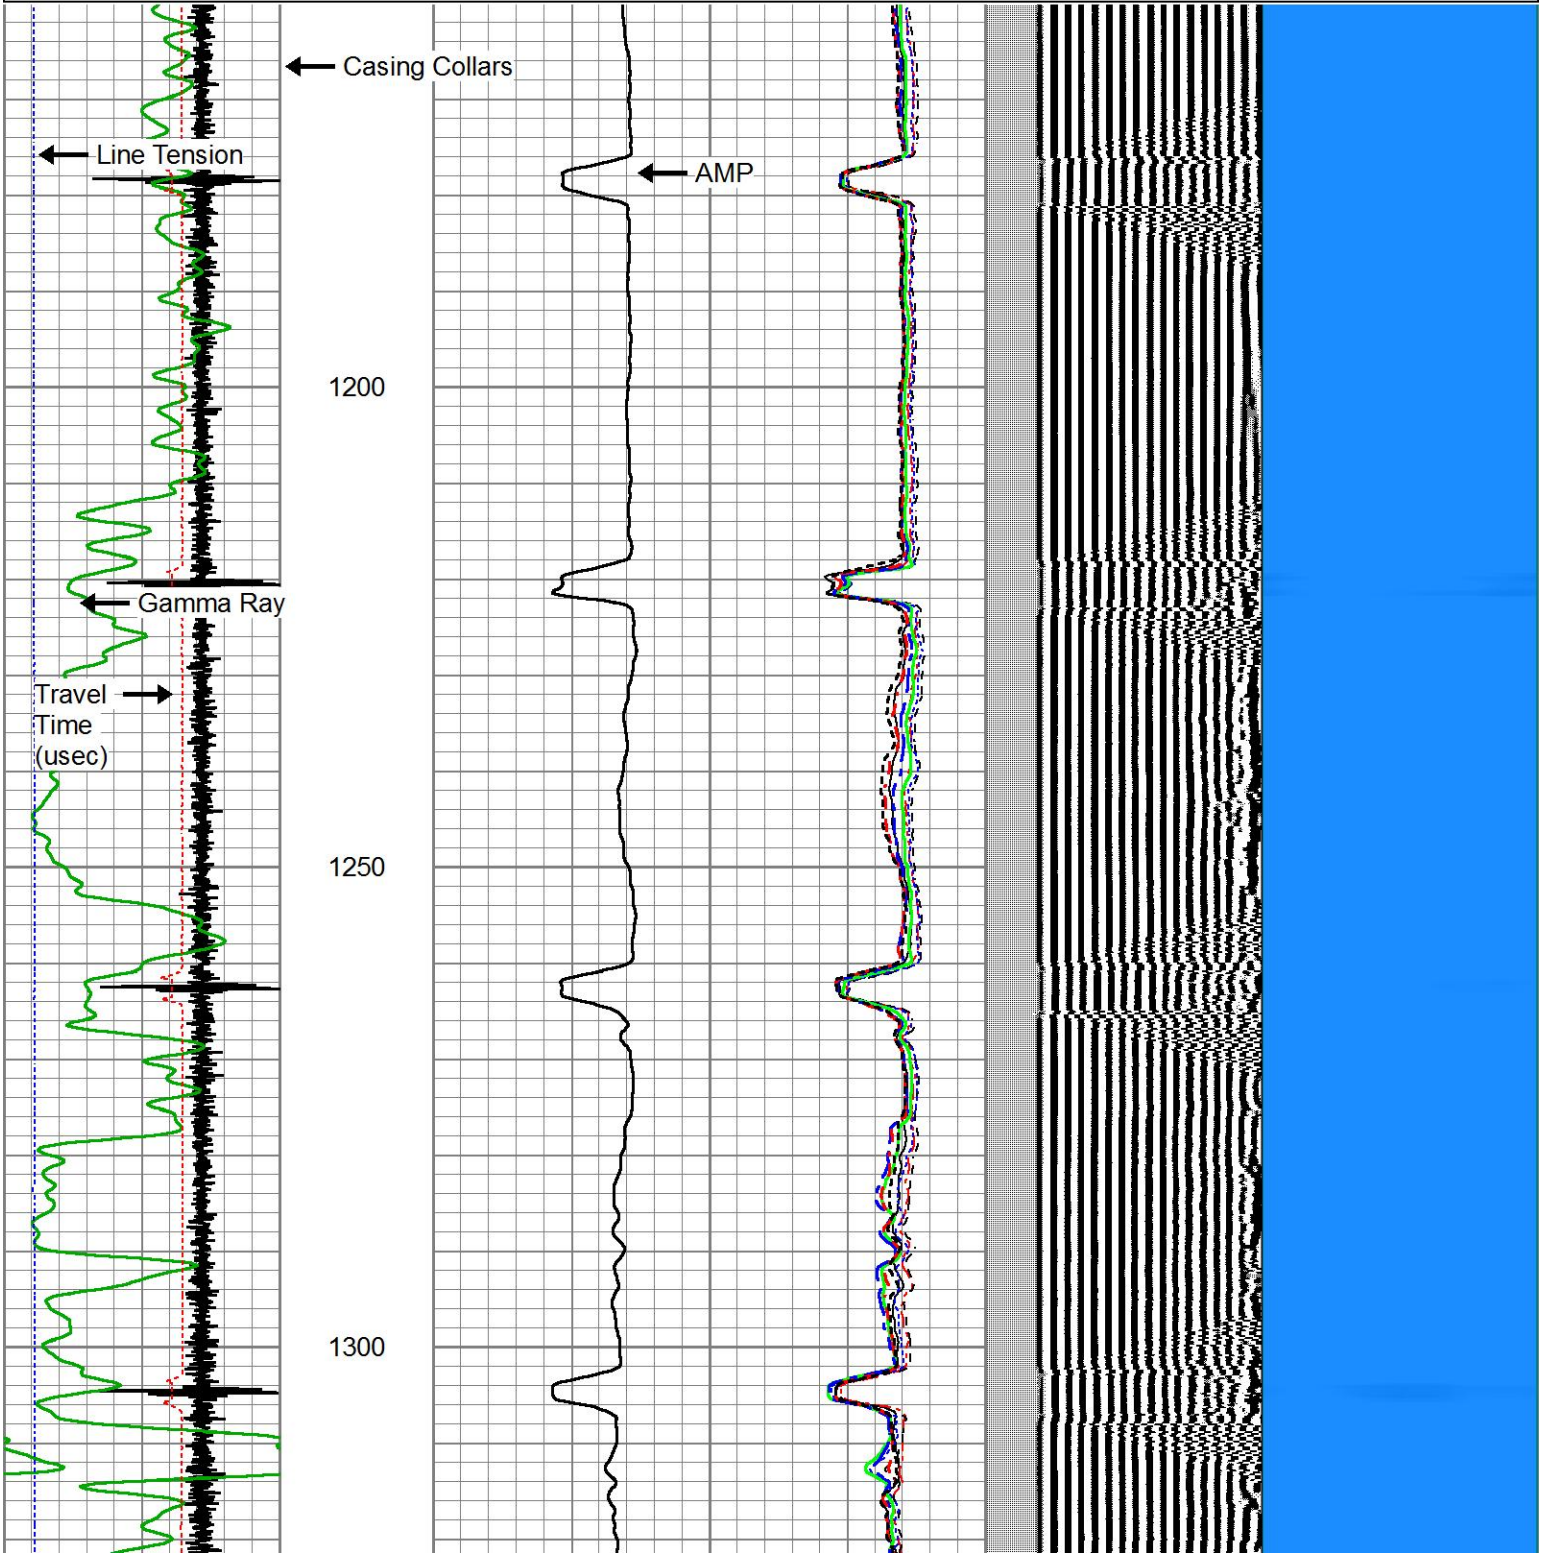

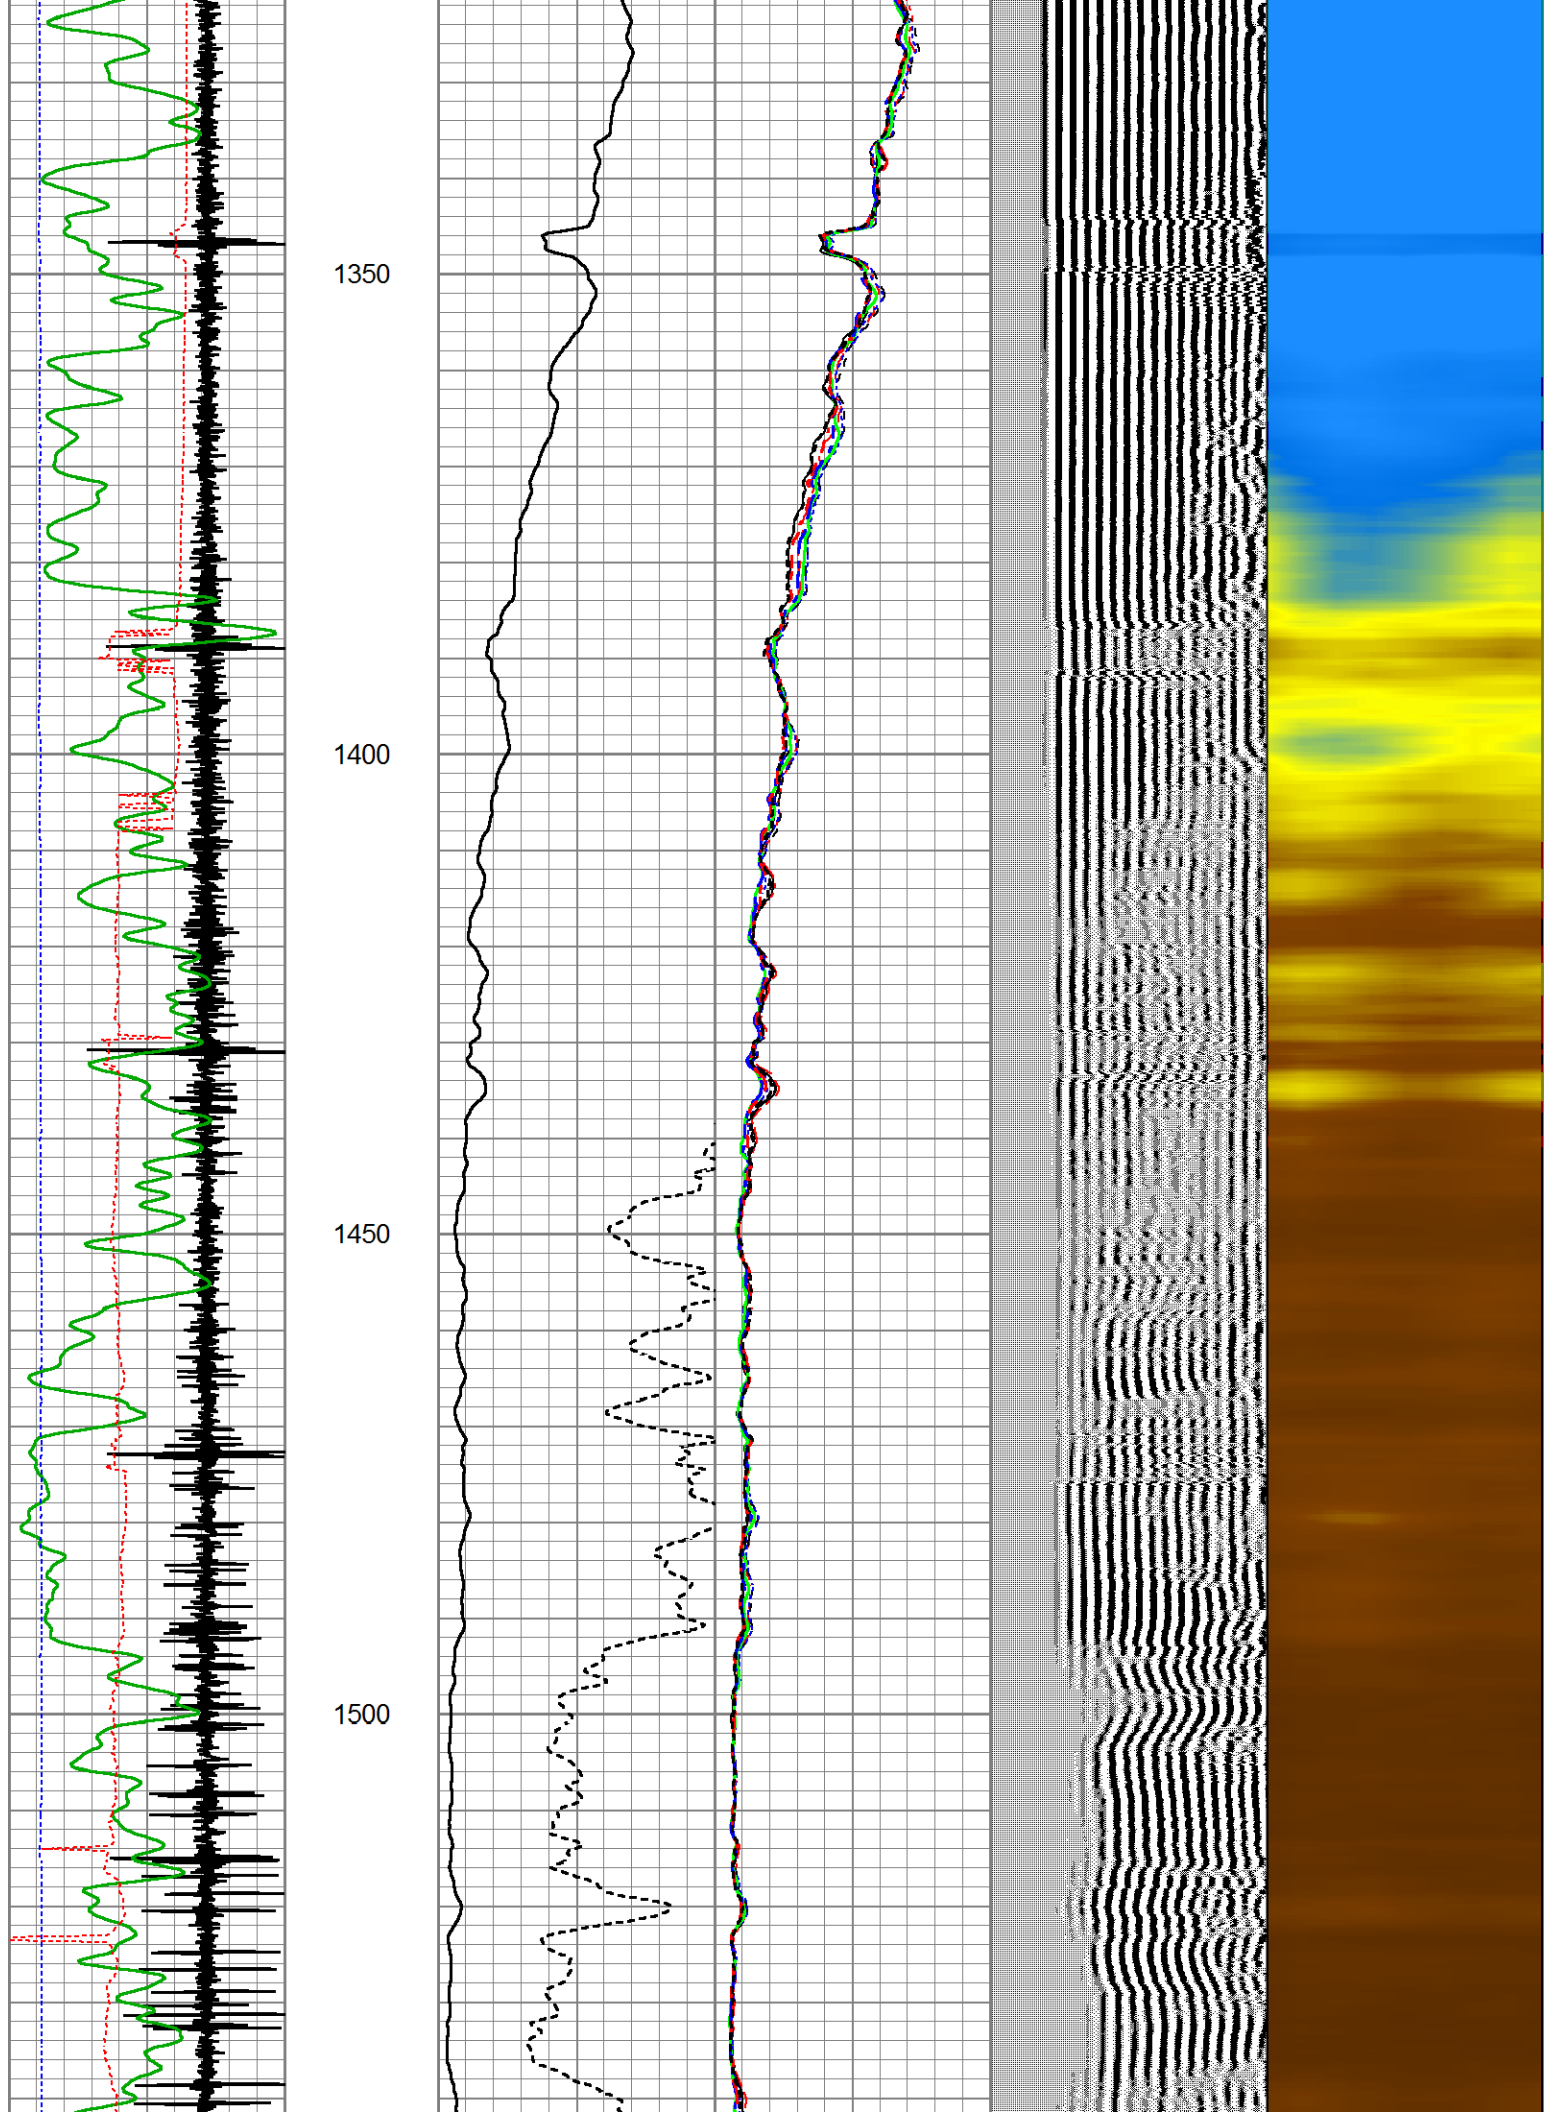

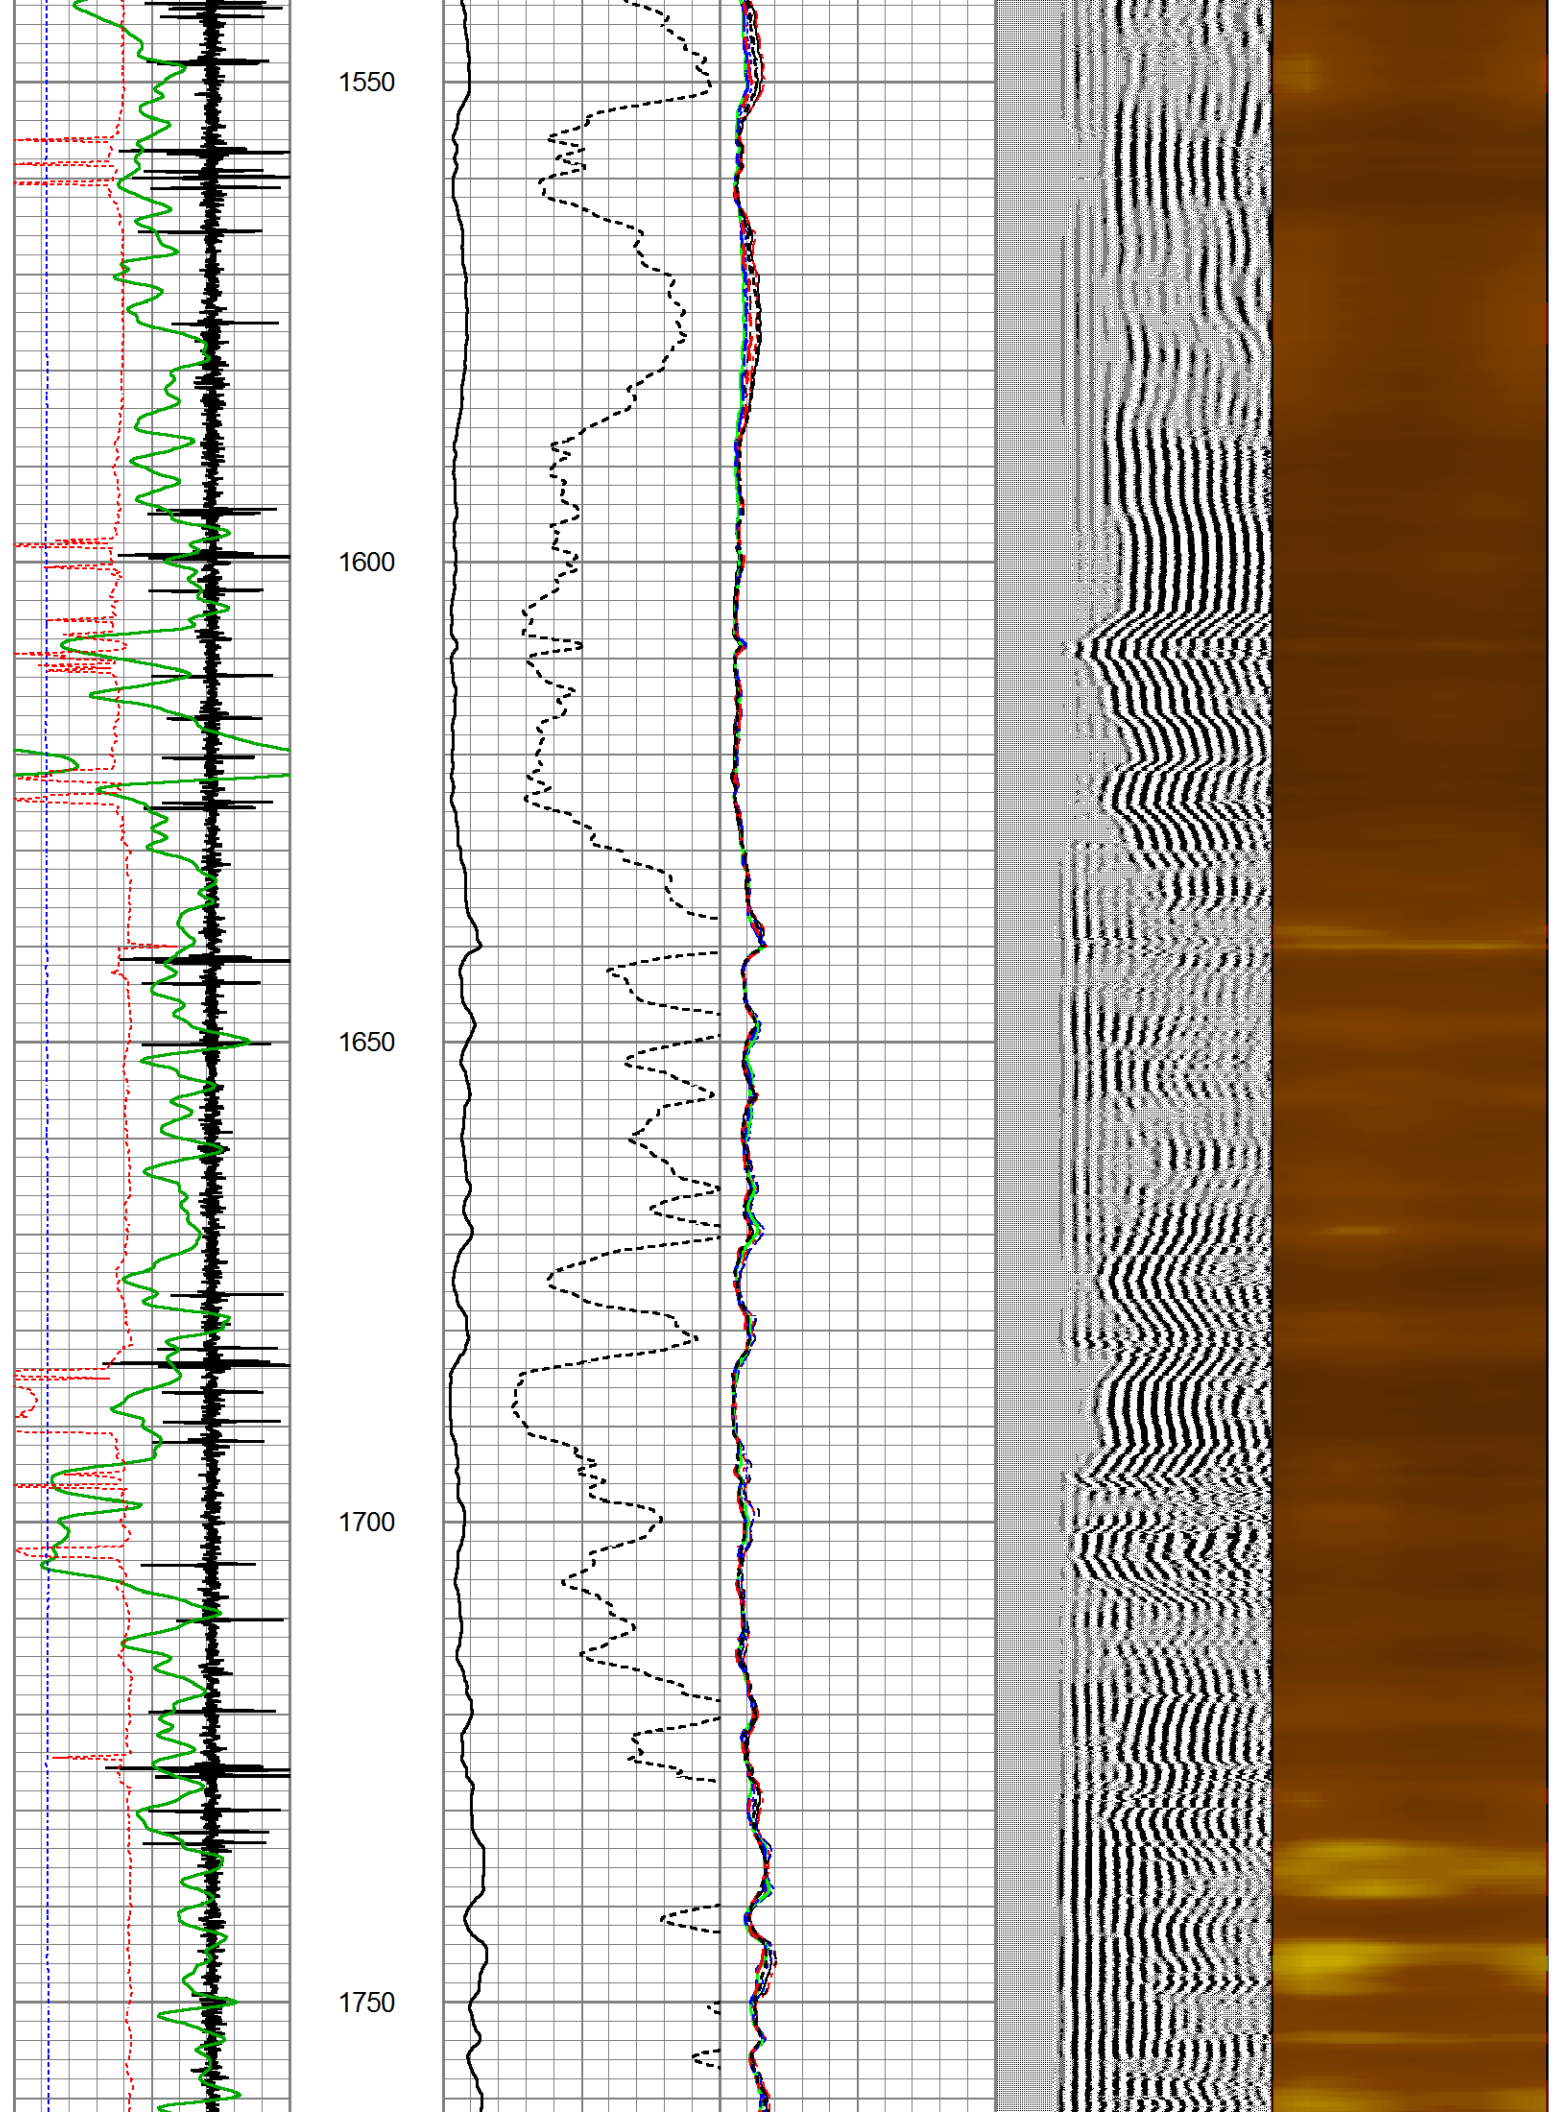


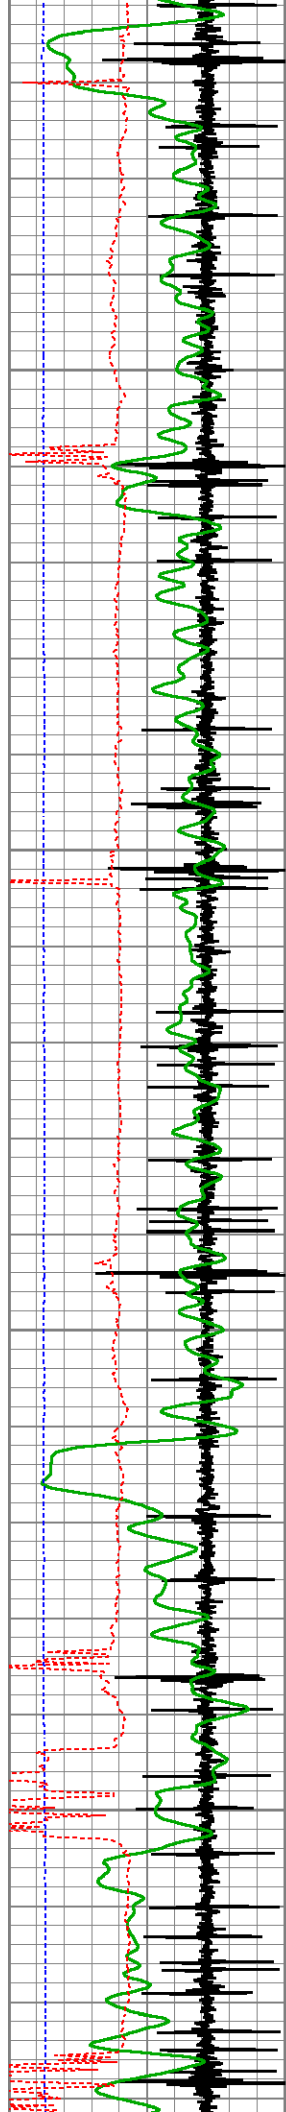



1800

1850

1900

1950

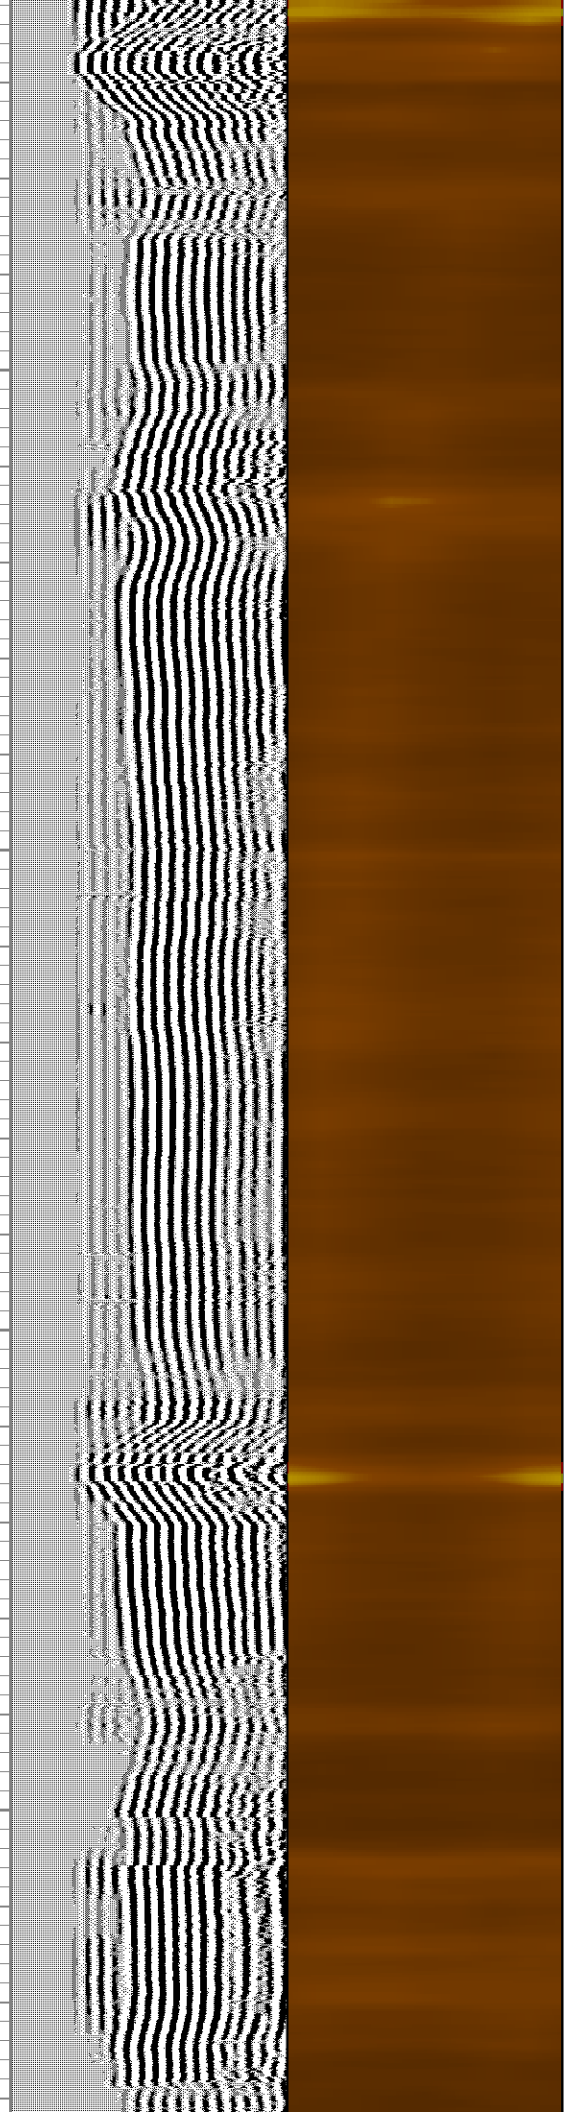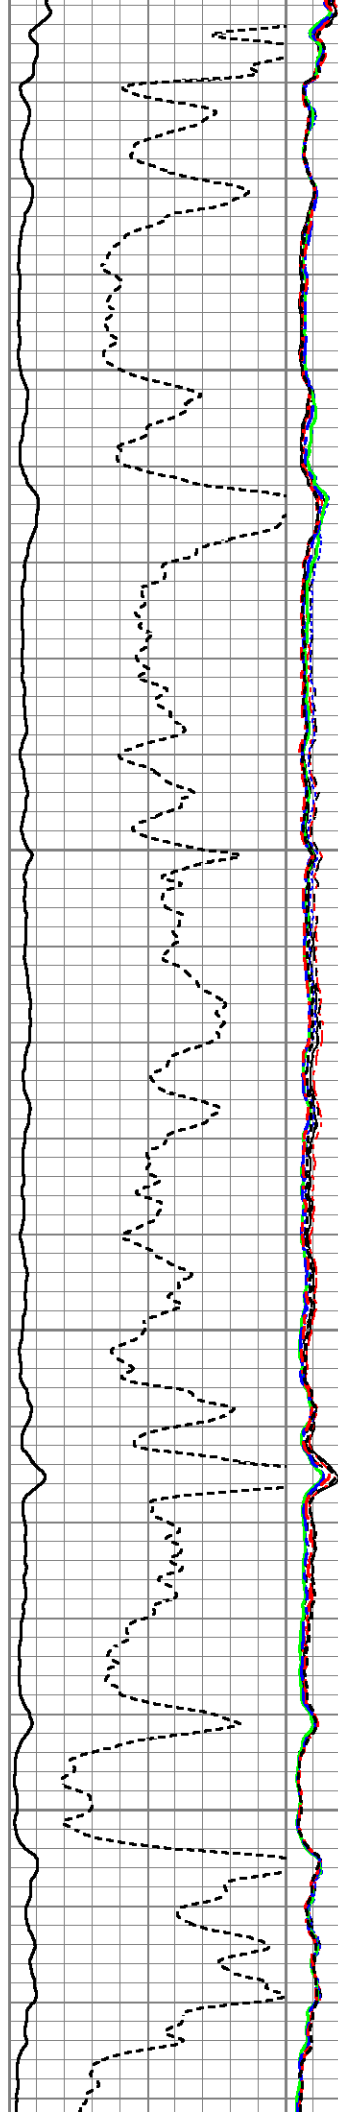

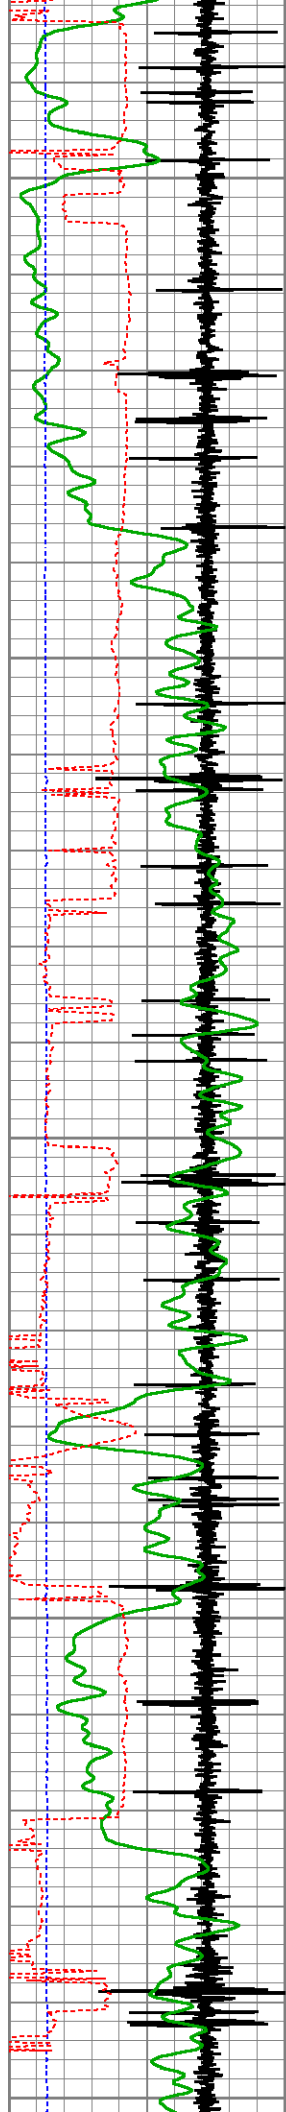



2000


2050


2100


2150

2200

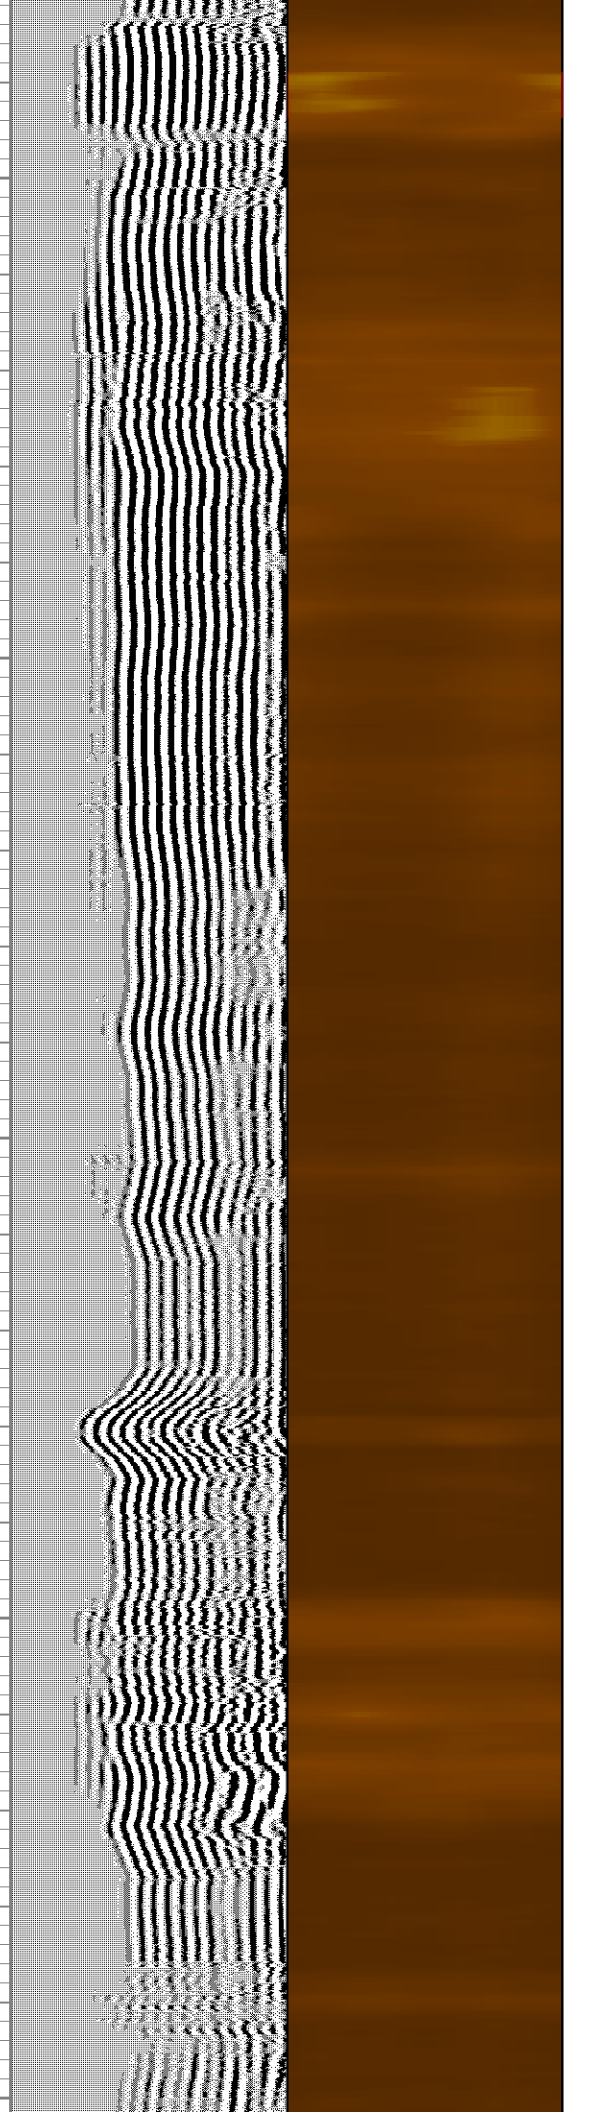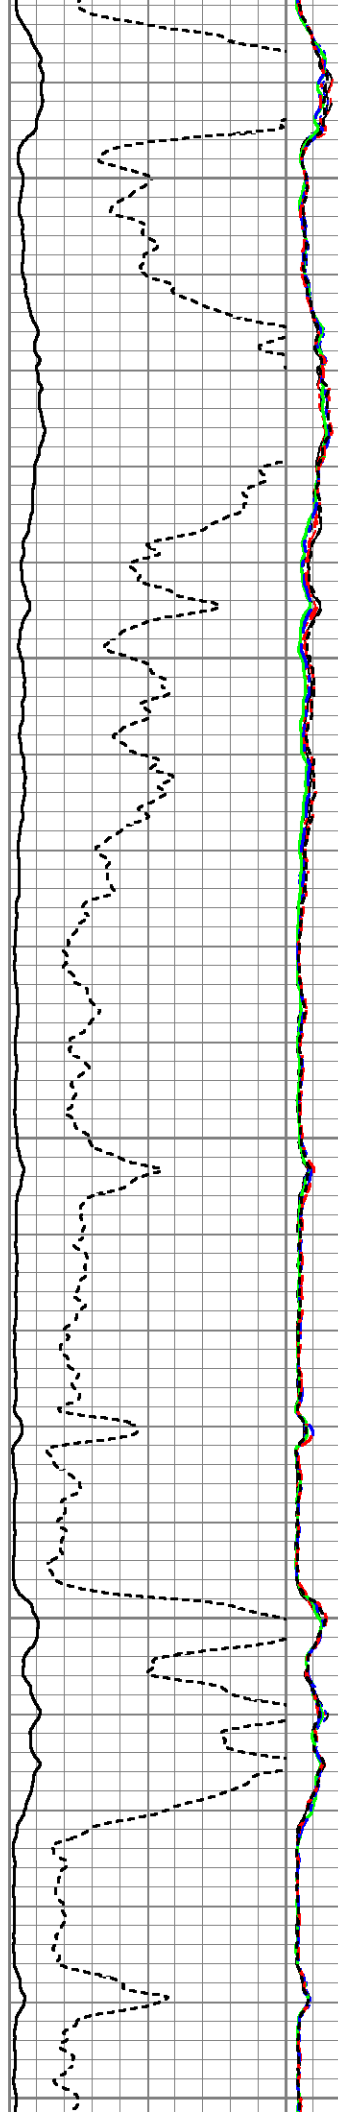

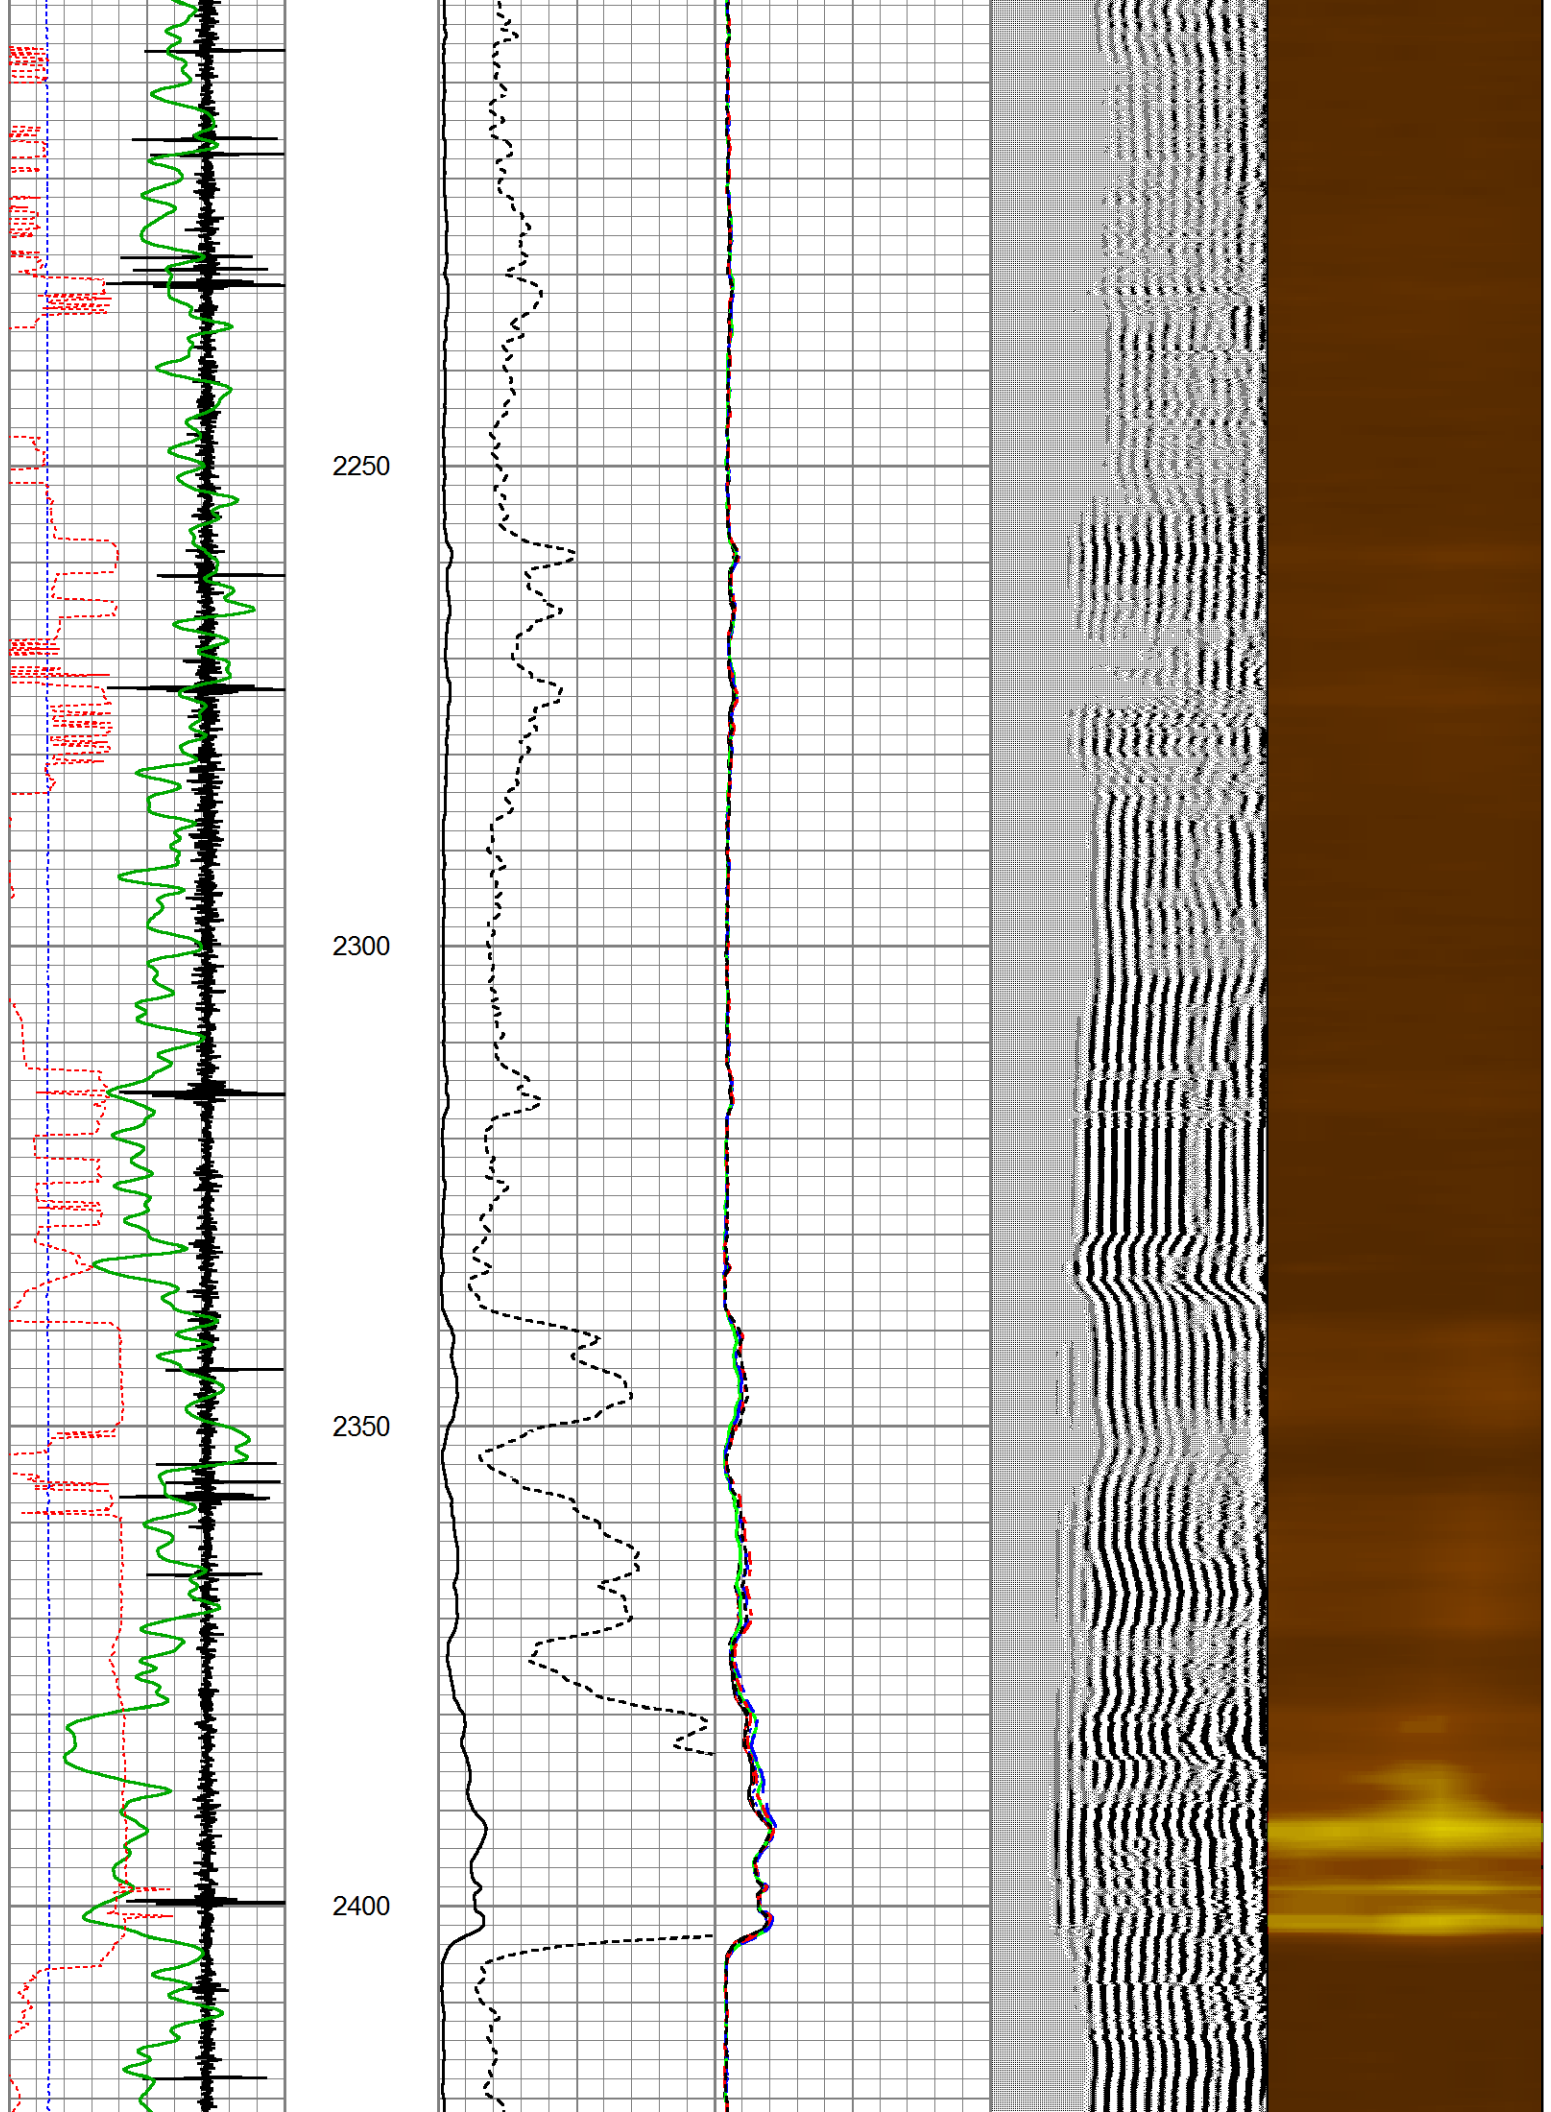

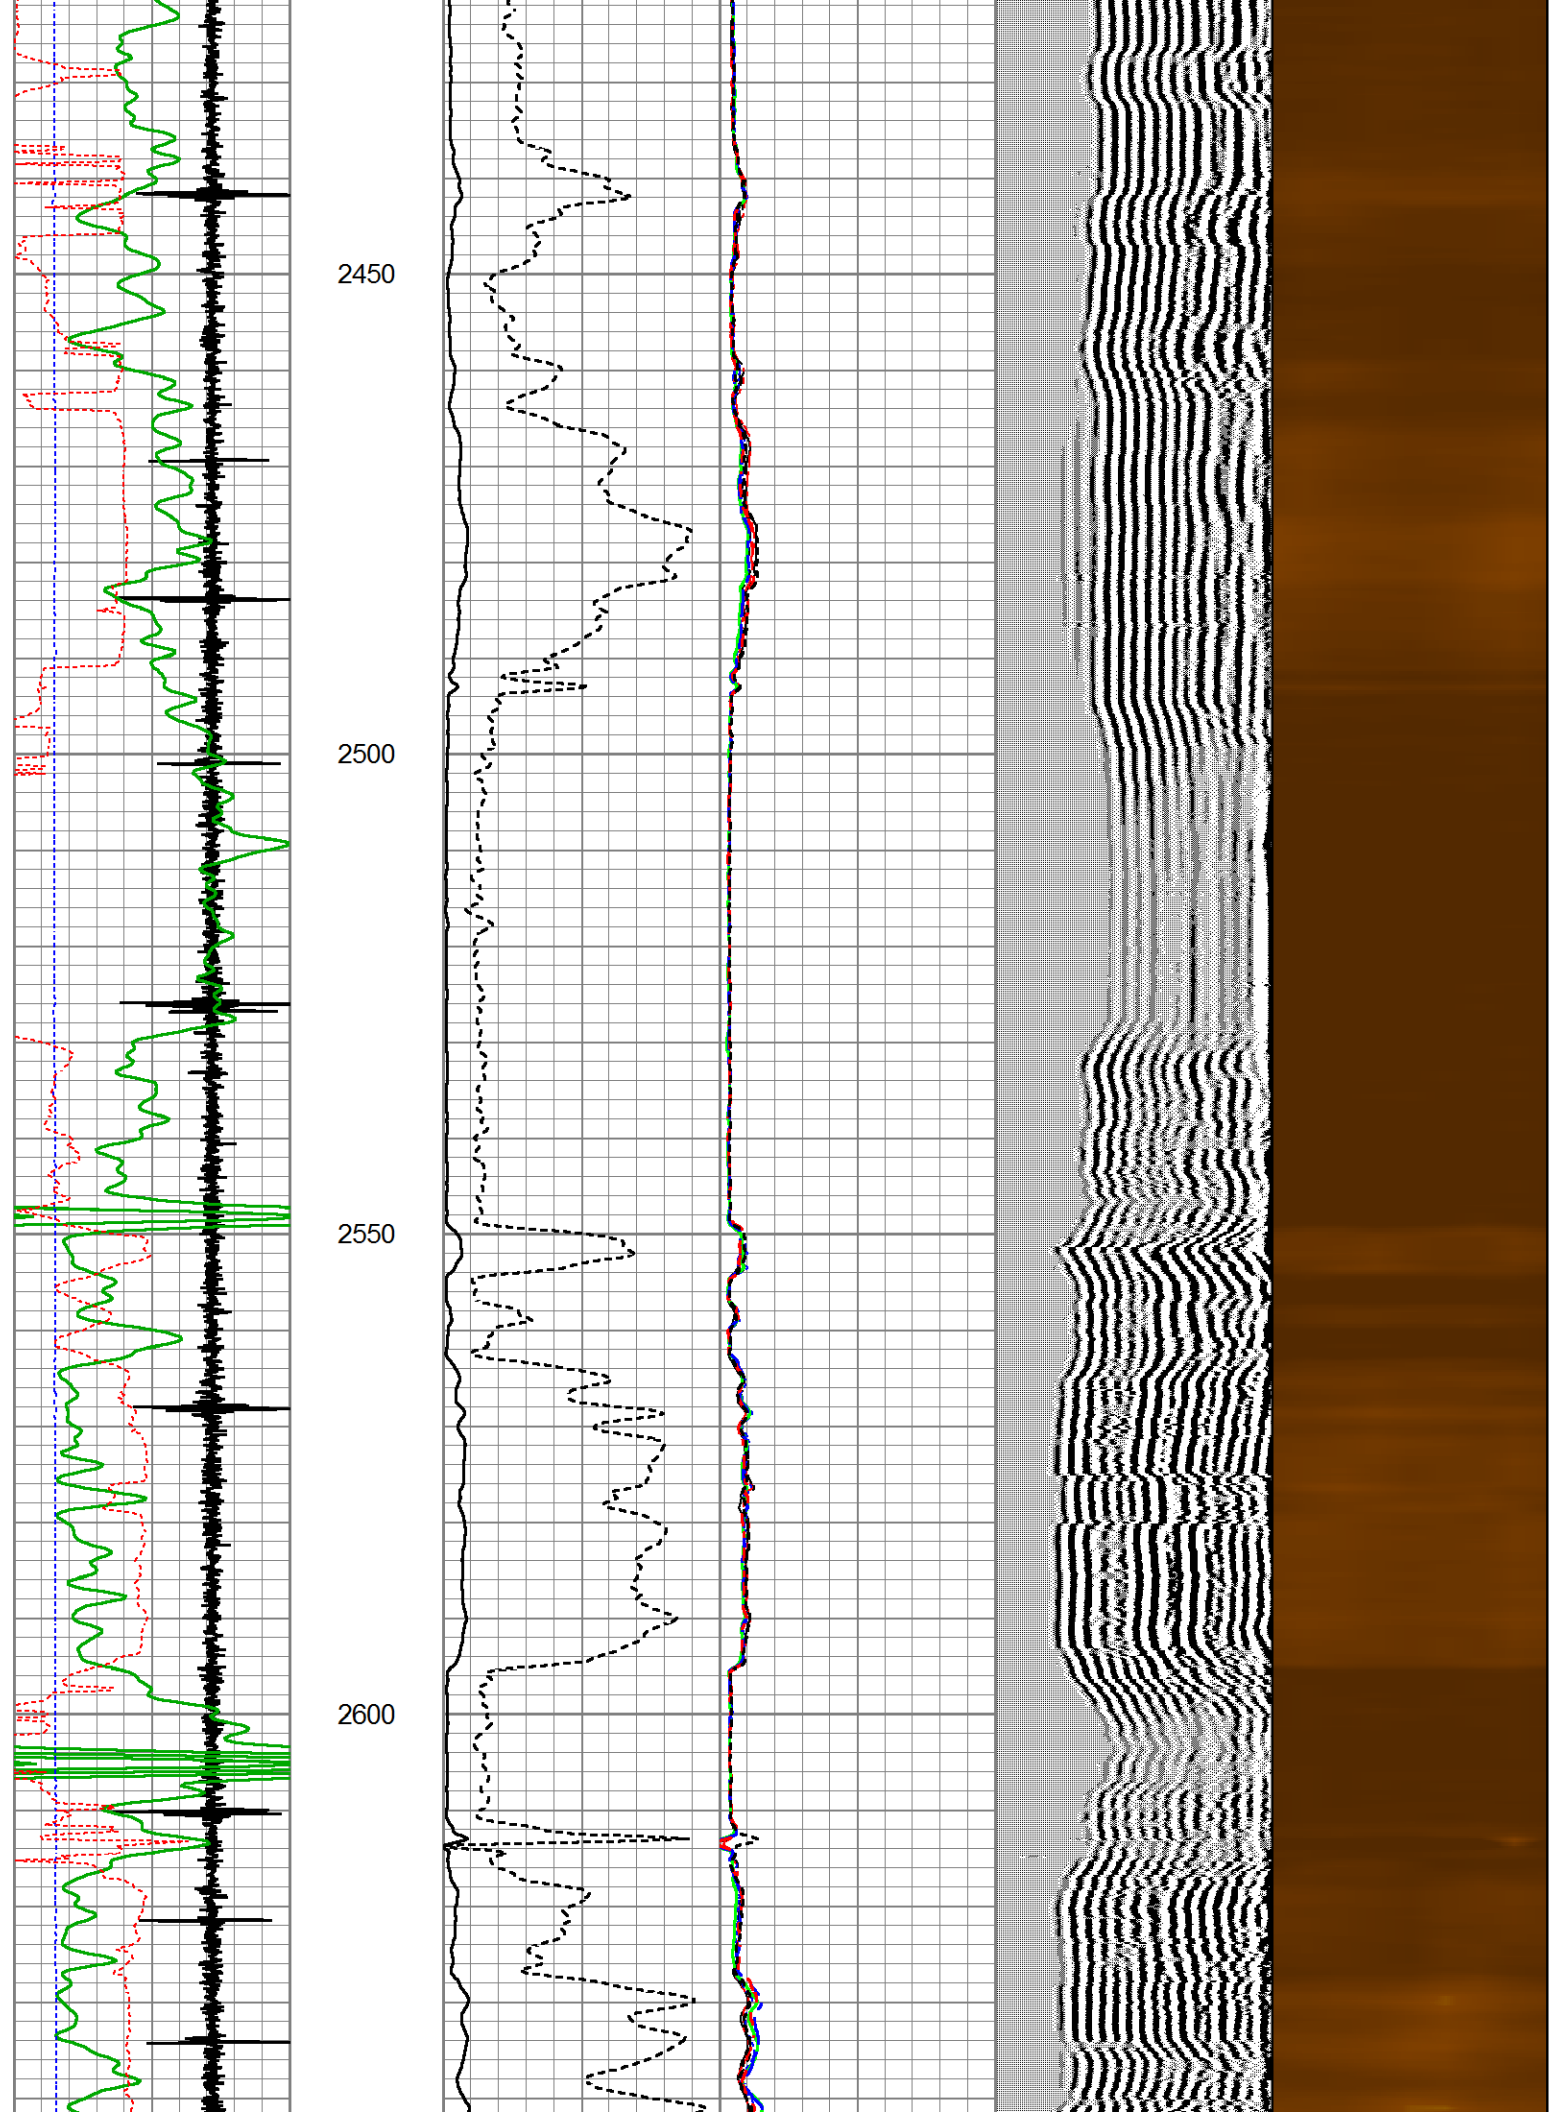

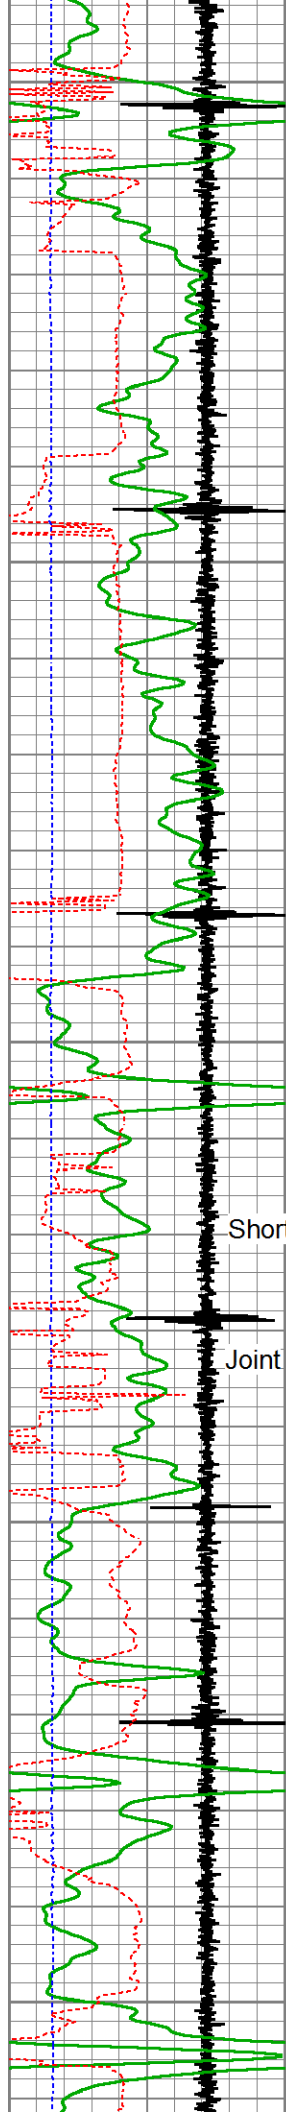

2650

2700



2750


Short


Joint


2800

2850

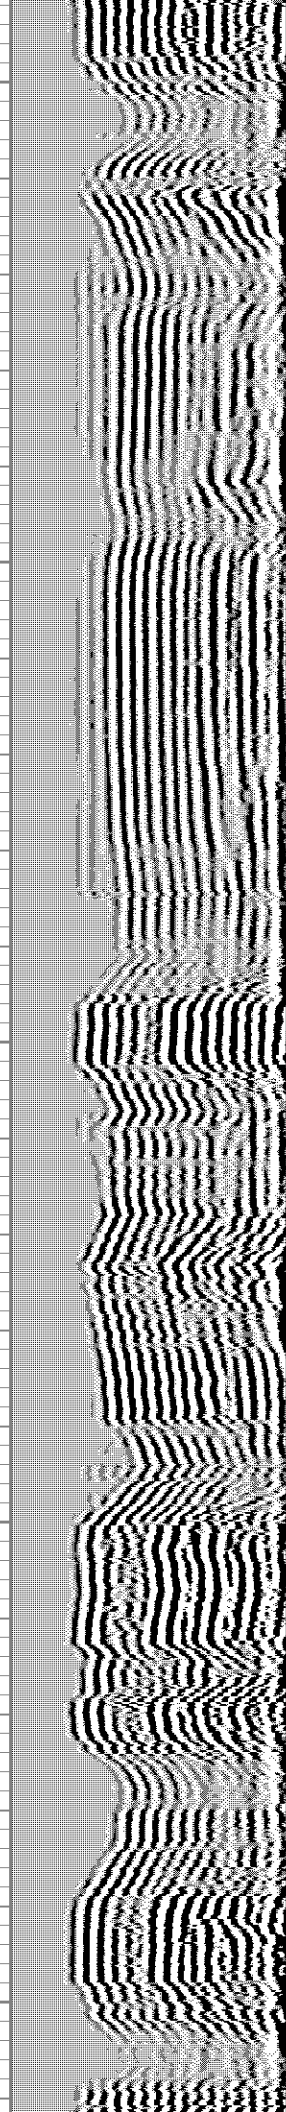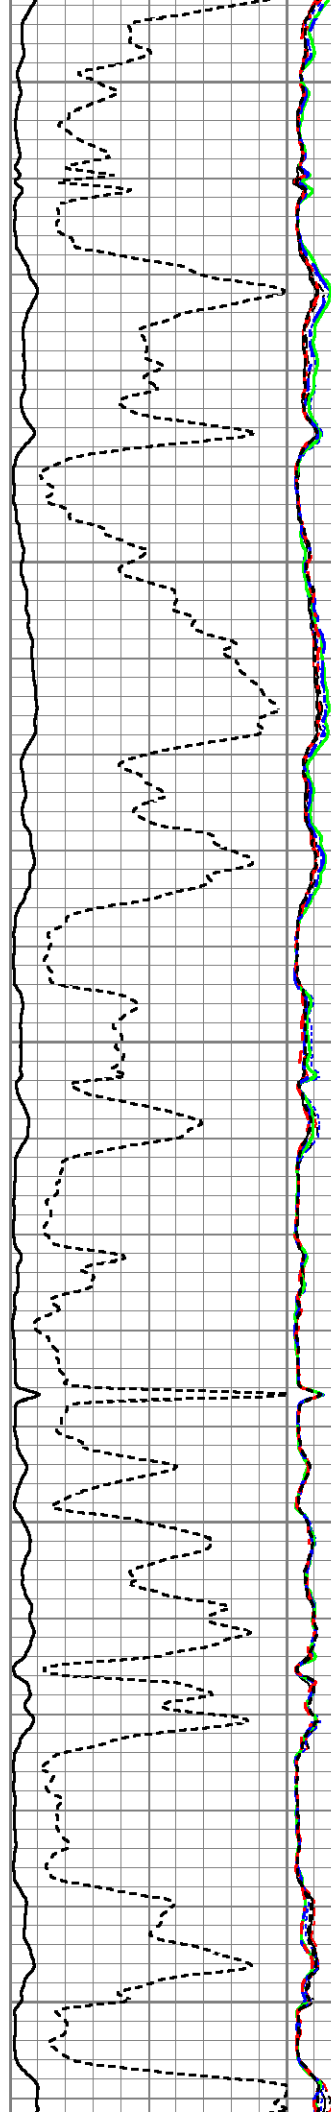

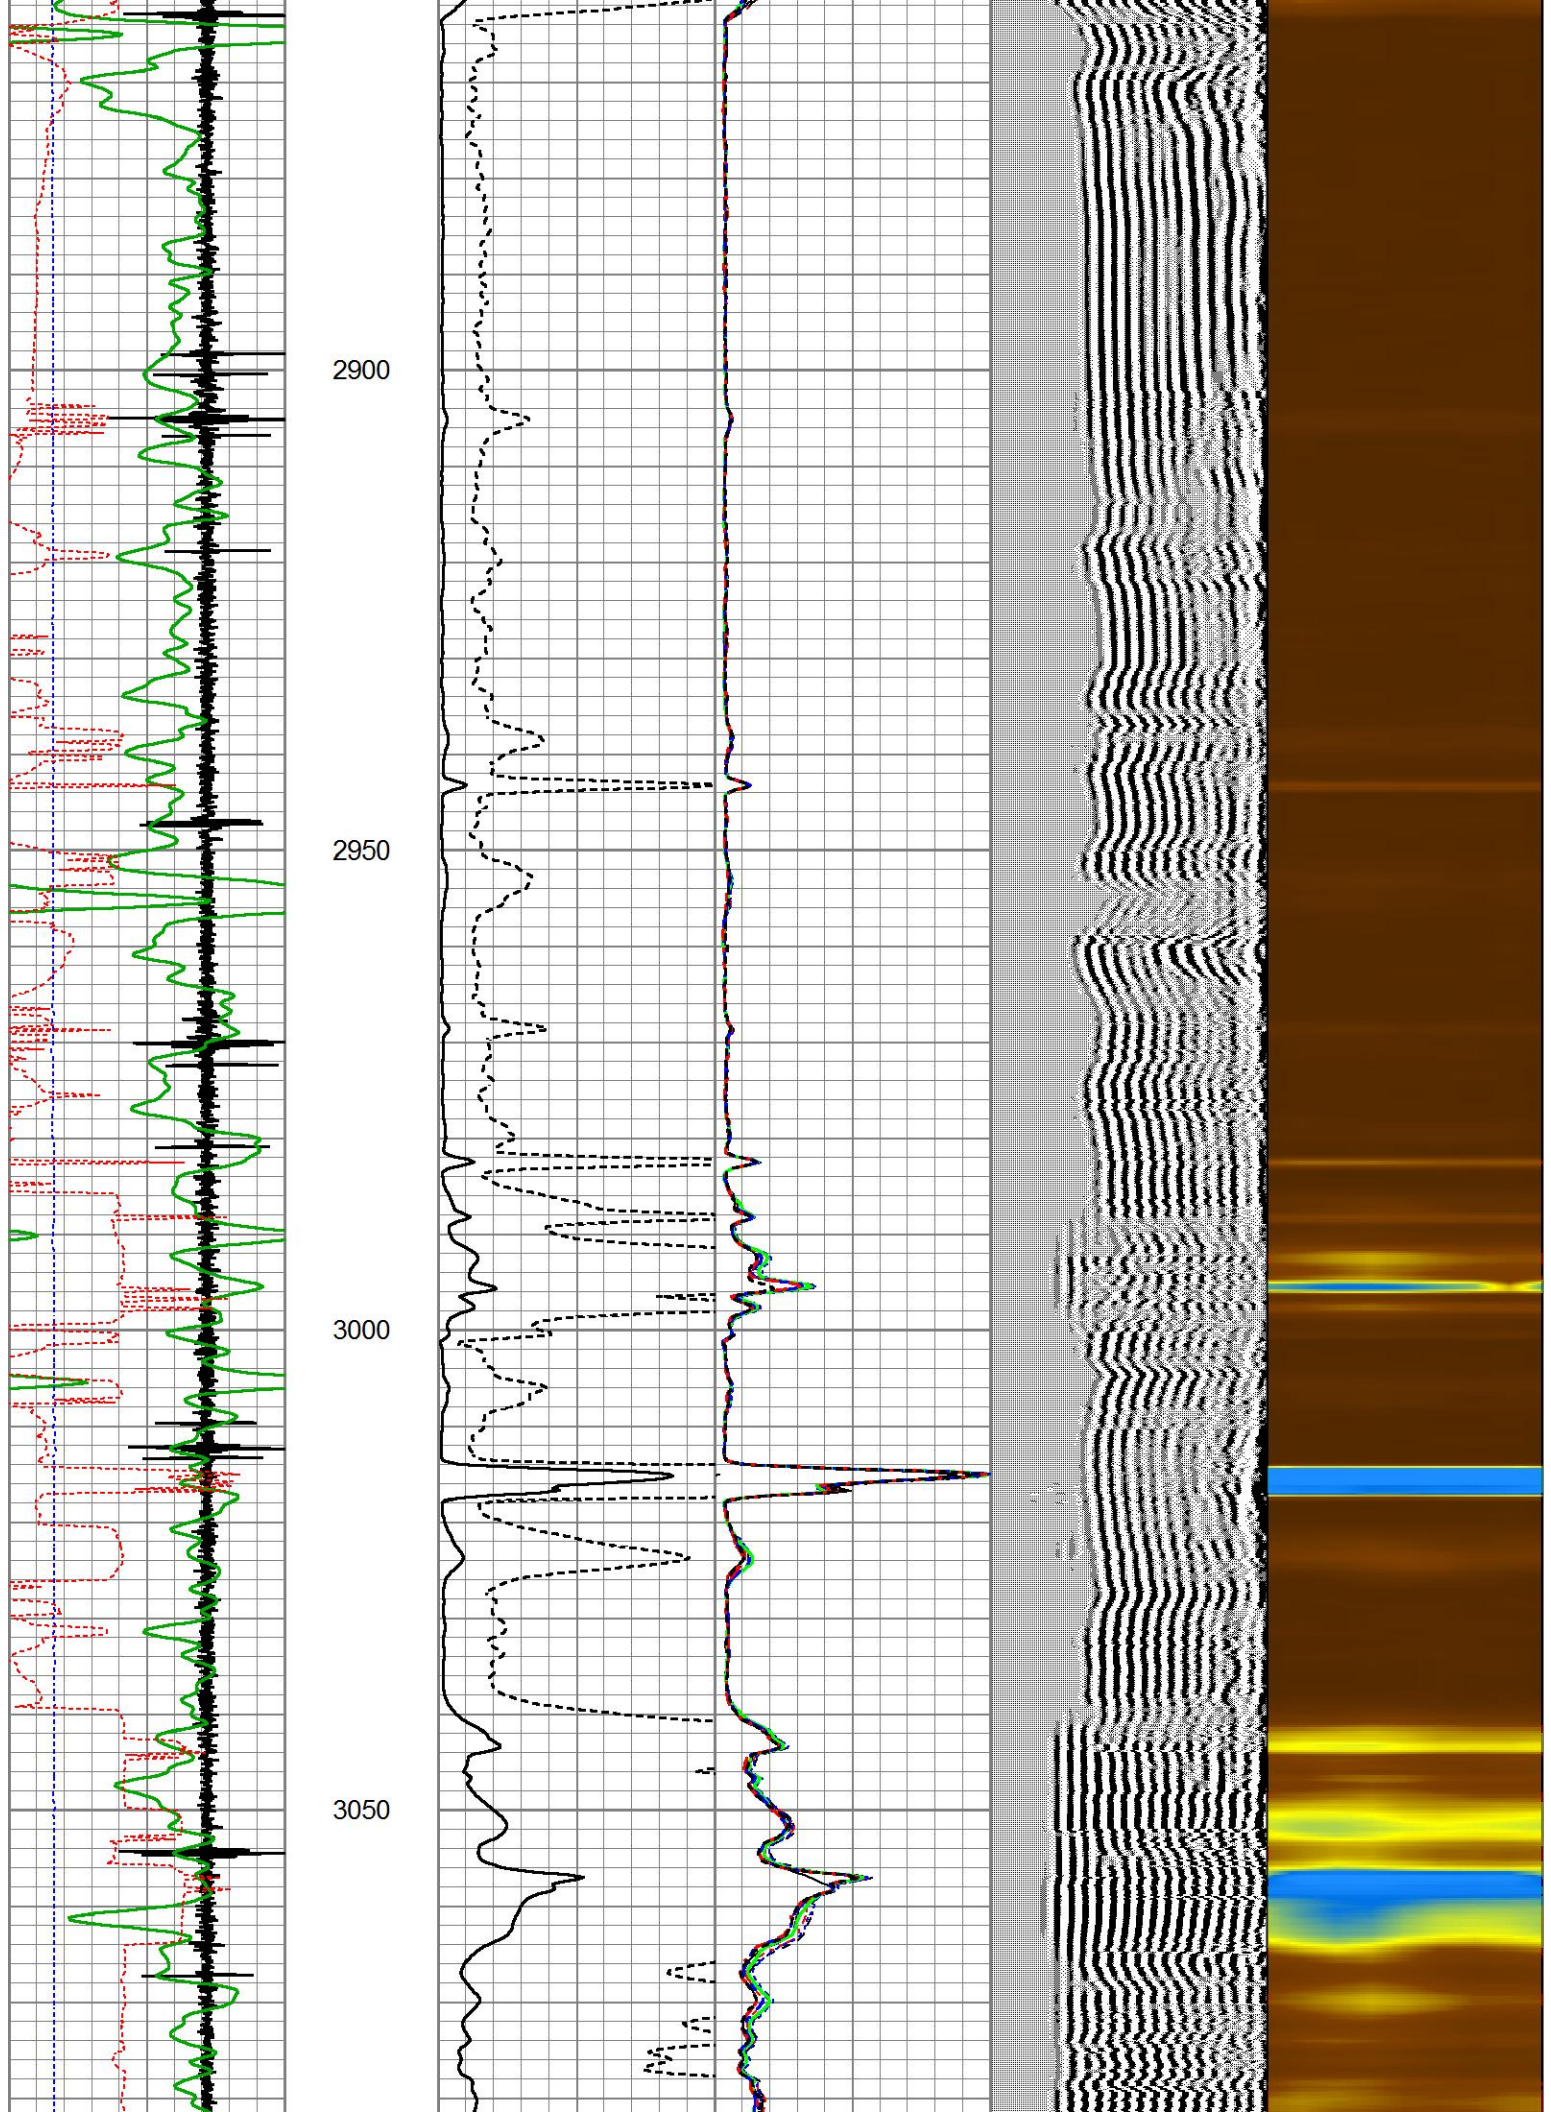

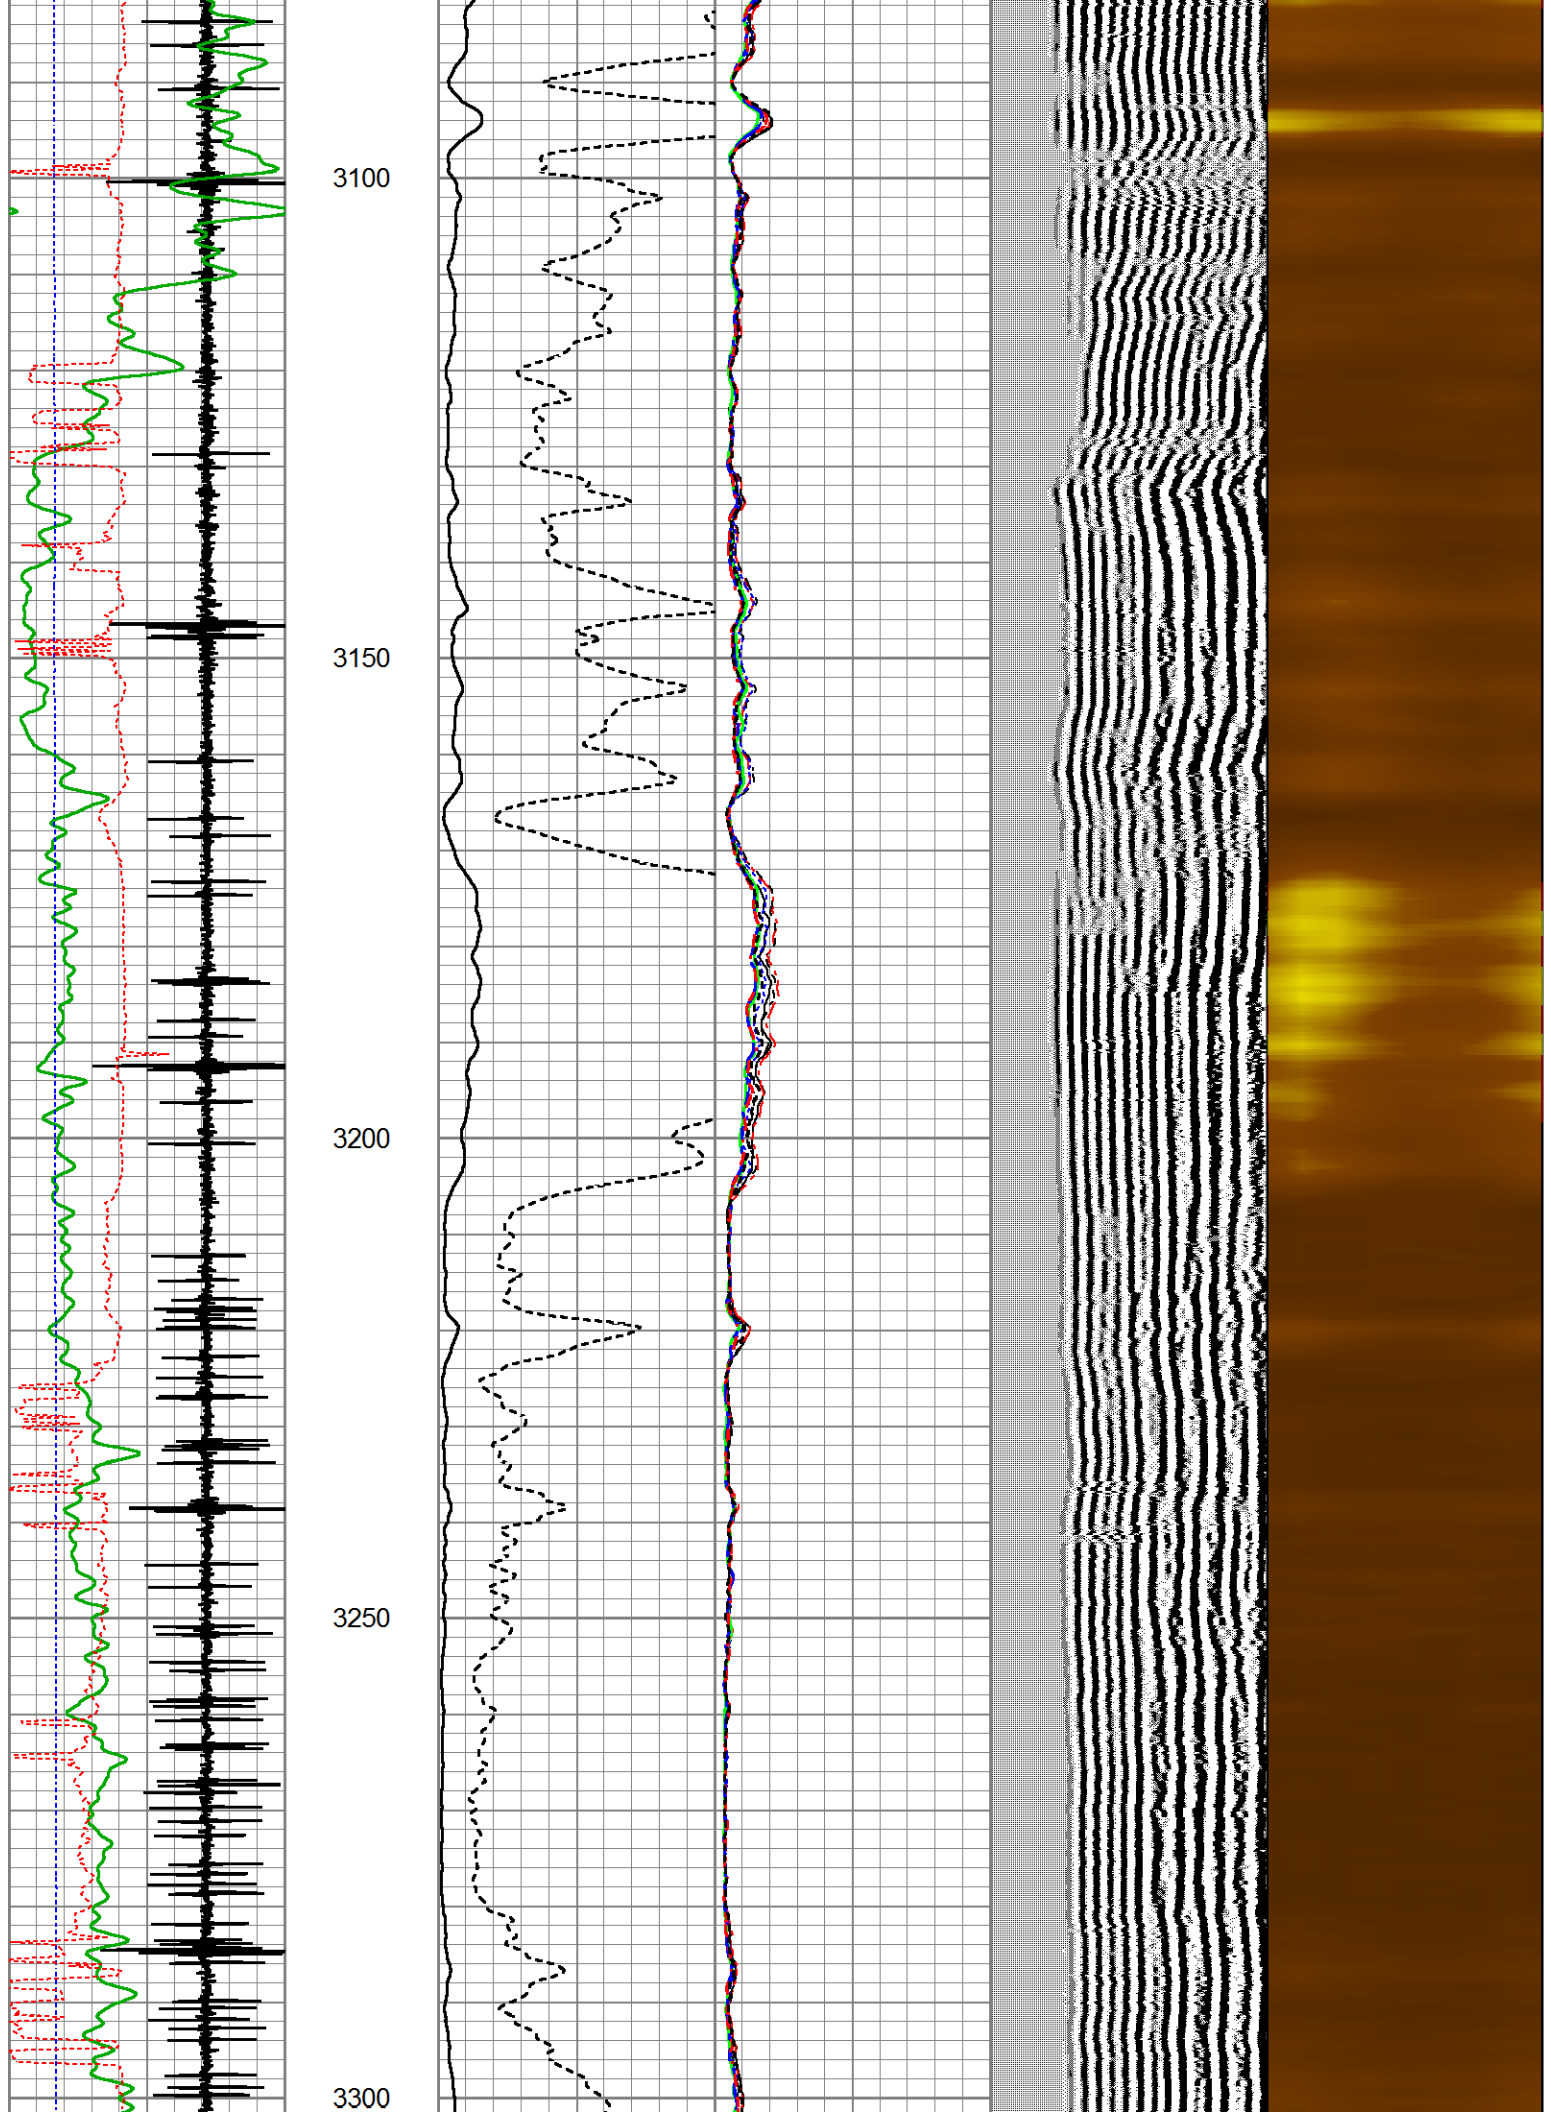


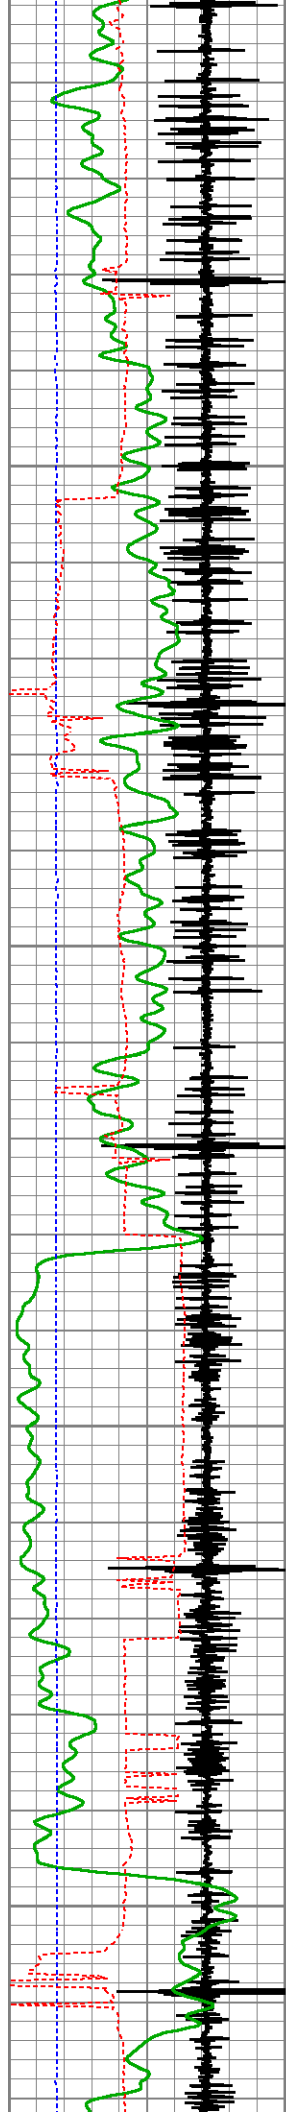



3350

3400

3450

3500

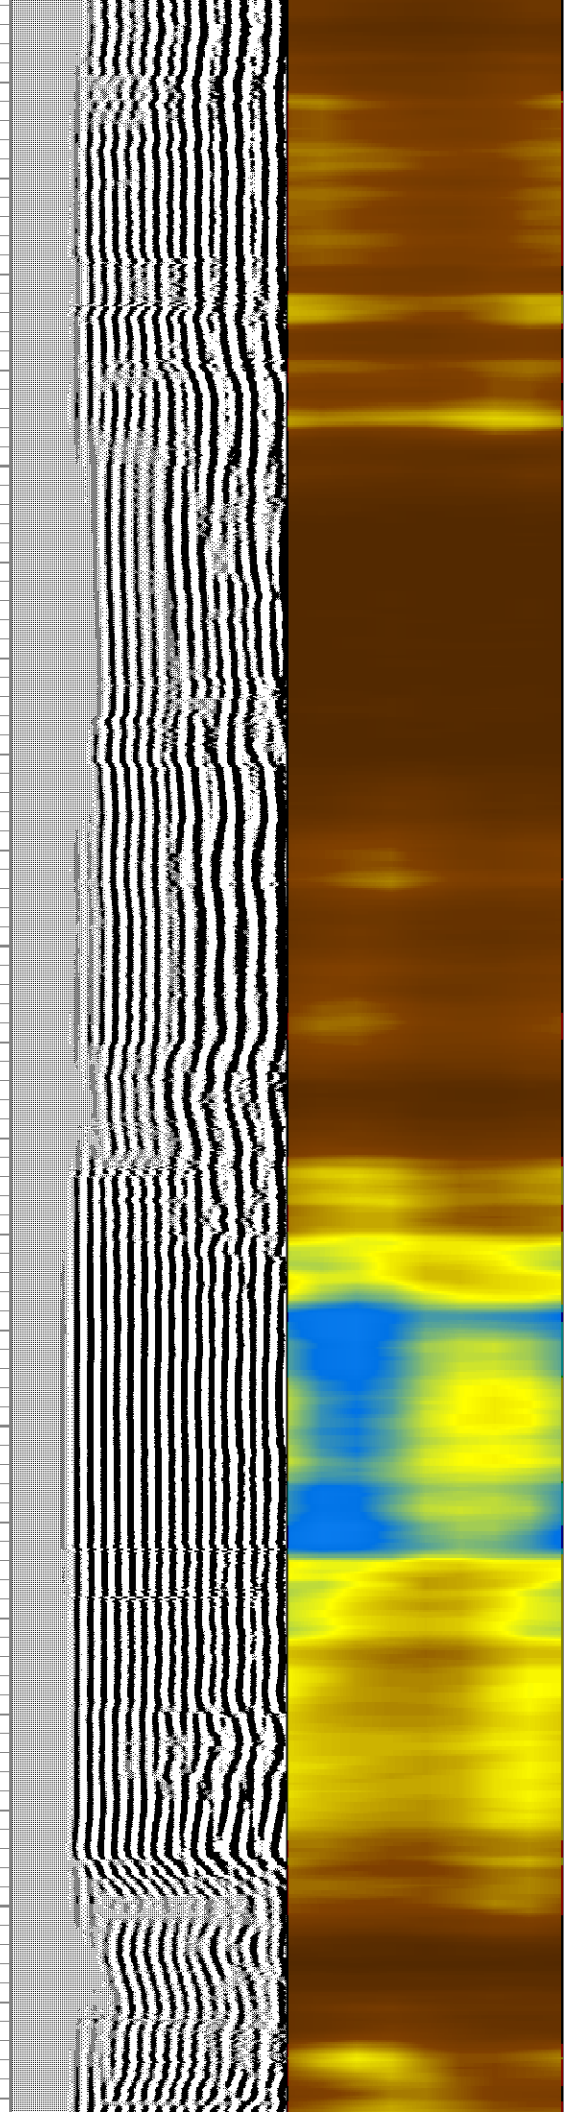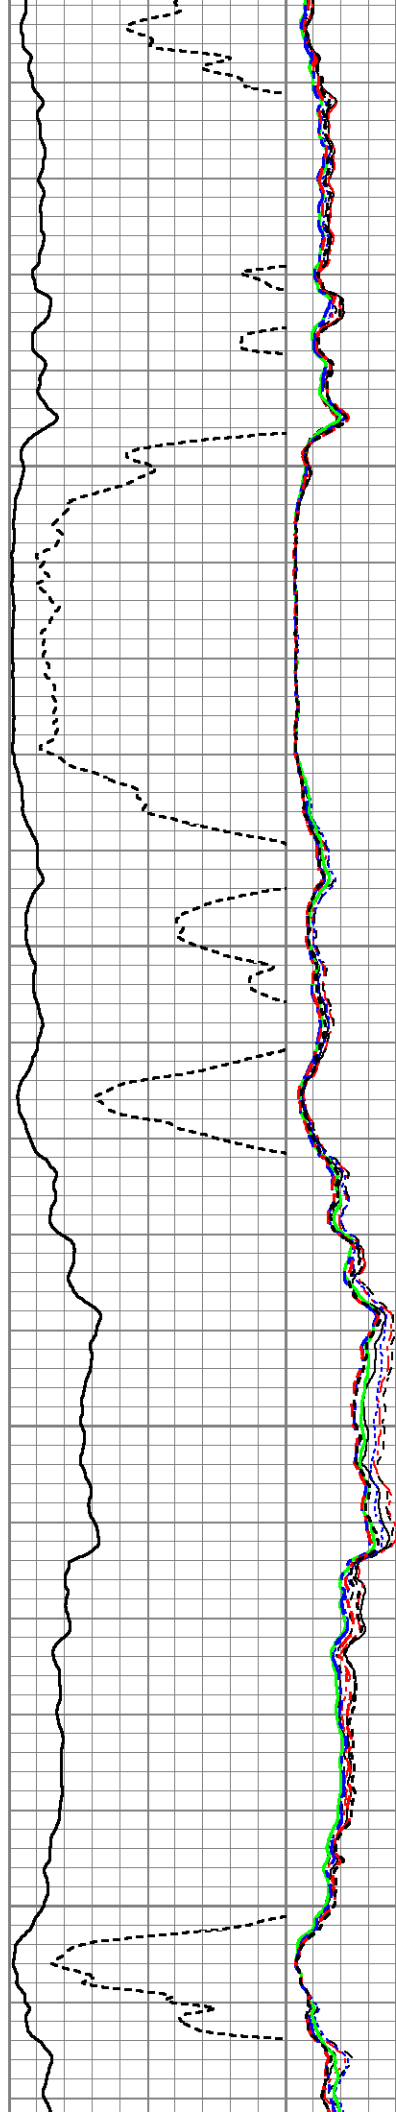

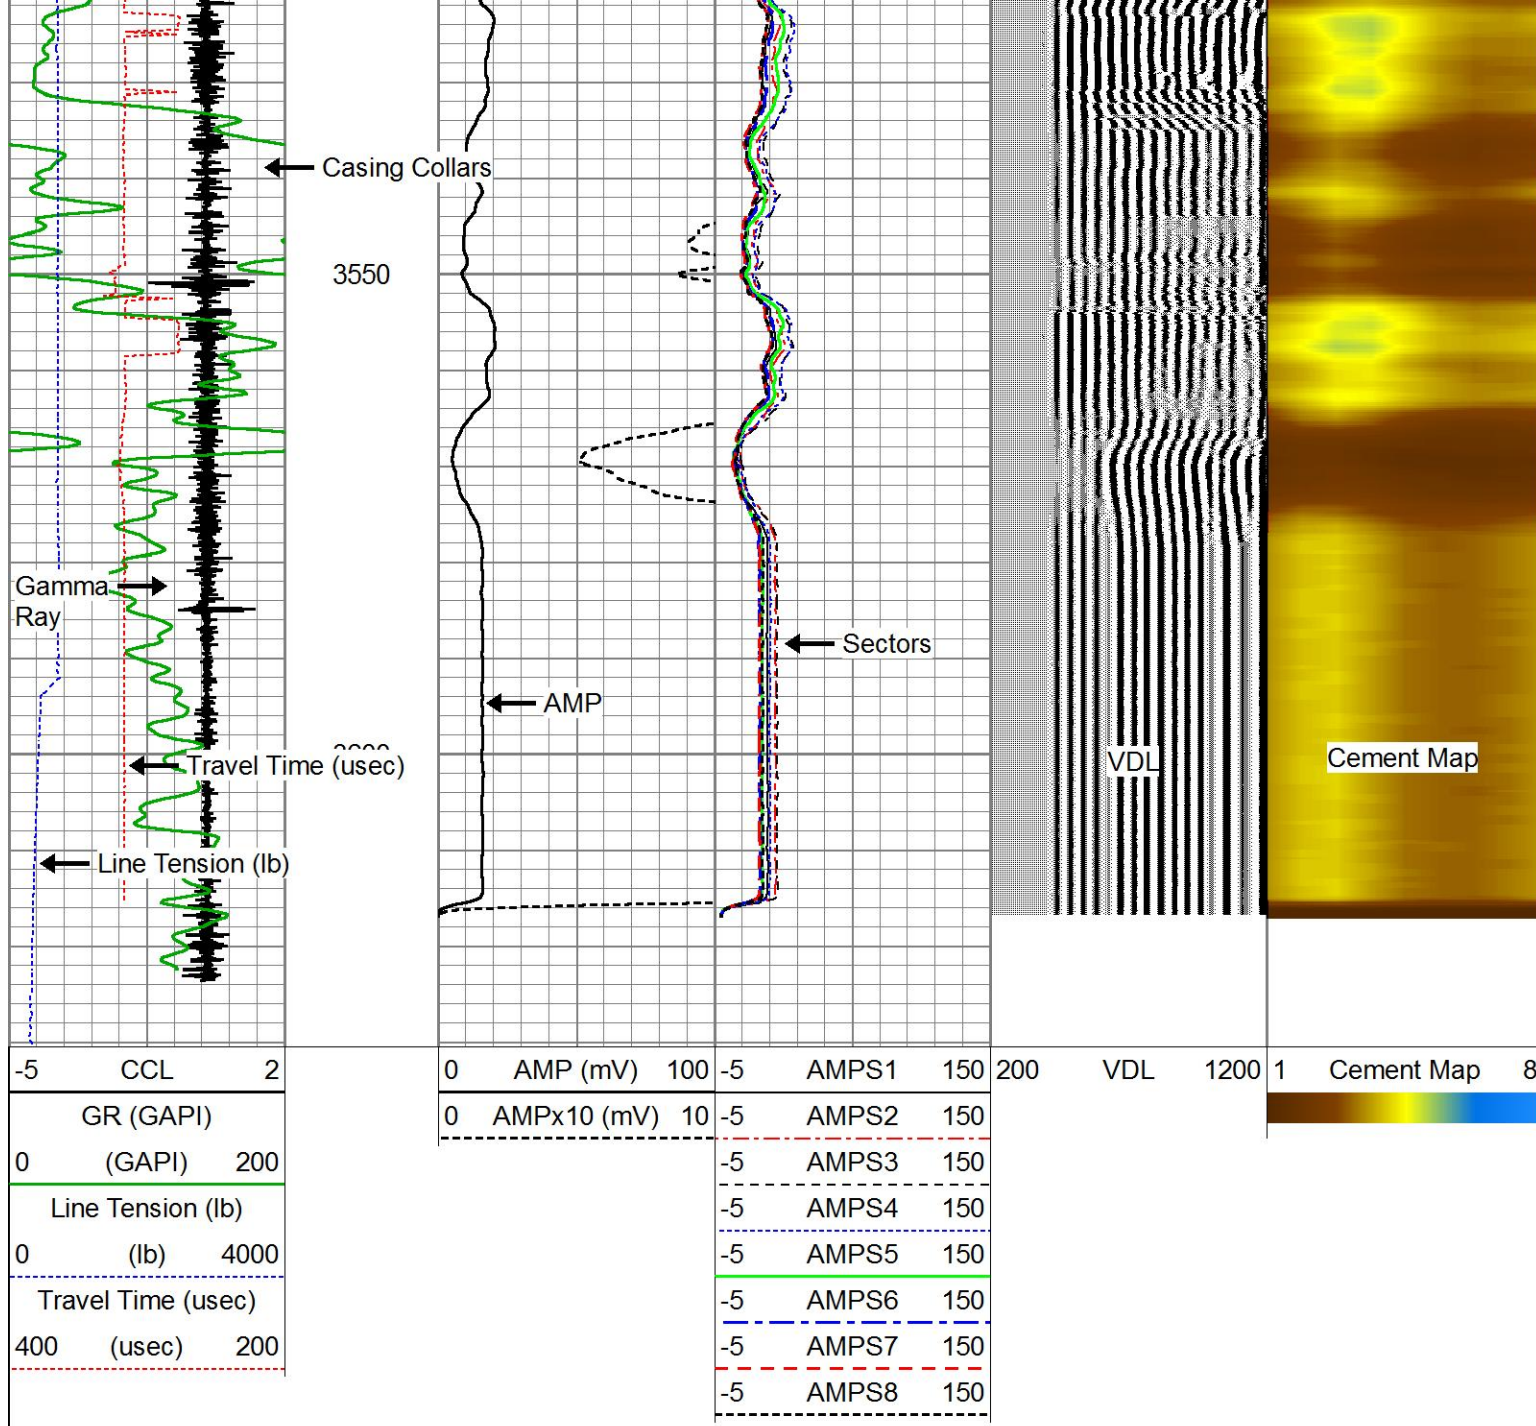

Calibration Report

Database File webber 34-1 12-17-14.db
 Dataset Pathname pass1
 Dataset Creation Wed Dec 17 15:19:16 2014

Gamma Ray Calibration Report

Serial Number: G003
 Tool Model: Probe275dig
 Performed: (Not Performed)

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 1.0000 GAPI/cps

Segmented Cement Bond Log Calibration Report

Serial Number: R002
Tool Model: Probe
Calibration Casing Diameter: 5.500 in
Calibration Depth: 1311.143 ft

Master Calibration, performed Wed Dec 17 15:01:52 2014:


	Raw (v)		Calibrated (mv)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
3'	0.007	0.436	1.000	71.921	165.175	-0.139
CAL	0.815	0.817				
5'	0.012	0.446	1.000	71.921	163.616	-0.989
SUM						
S1	0.009	0.456	0.000	100.000	223.672	-2.048
S2	0.005	0.431	0.000	100.000	234.694	-1.114
S3	0.004	0.413	0.000	100.000	244.537	-1.075
S4	0.004	0.417	0.000	100.000	242.510	-1.036
S5	0.005	0.432	0.000	100.000	233.817	-1.102
S6	0.004	0.447	0.000	100.000	225.619	-0.939
S7	0.004	0.460	0.000	100.000	219.607	-0.930
S8	0.004	0.469	0.000	100.000	215.058	-0.966

Internal Reference Calibration, performed (Not Performed):

	Raw (v)		Calibrated (v)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
CAL	0.000	0.000	0.815	0.817	1.000	0.000

Air Zero Calibration, performed Wed Dec 17 14:36:05 2014:

	Raw (v)		Calibrated (v)		Results	
	Zero		Zero		Offset	
3'	0.000		0.000		0.000	
5'	0.000		0.000		0.000	
SUM						
S1	0.000		0.000		0.000	
S2	0.000		0.000		0.000	
S3	0.000		0.000		0.000	
S4	0.000		0.000		0.000	
S5	0.000		0.000		0.000	
S6	0.000		0.000		0.000	
S7	0.000		0.000		0.000	
S8	0.000		0.000		0.000	

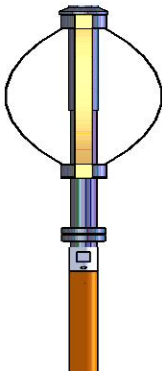Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
			CENT-Probe (CEN002) Probe 2 3/4 Centralizer	2.88	2.75	20.00

WVFS8	14.80		RBT-Probe (R002)	8.92	2.75	100.00
WVFS7	14.80					
WVFS6	14.80					
WVFS5	14.80					
WVFS4	14.80					
WVFS3	14.80					
WVFS2	14.80					
WVFS1	14.80					
WVF3FT	14.80					
WVF5FT	13.80					
WVFCAL	10.55					
			CENT-Probe (CEN001) Probe 2 3/4 Centralizer	2.88	2.75	20.00
CCL	6.79					
GR	5.46		GR-Probe275dig (G003)	4.80	2.75	55.00
			CENT-Probe (CEN004) Probe 2 3/4 Centralizer	2.88	2.75	20.00

Dataset: webber 34-1 12-17-14.db: field/well/run1/pass1

Total length: 22.34 ft

Total weight: 215.00 lb

O.D.: 2.75 in