



1750


1800

1850

1900

1950

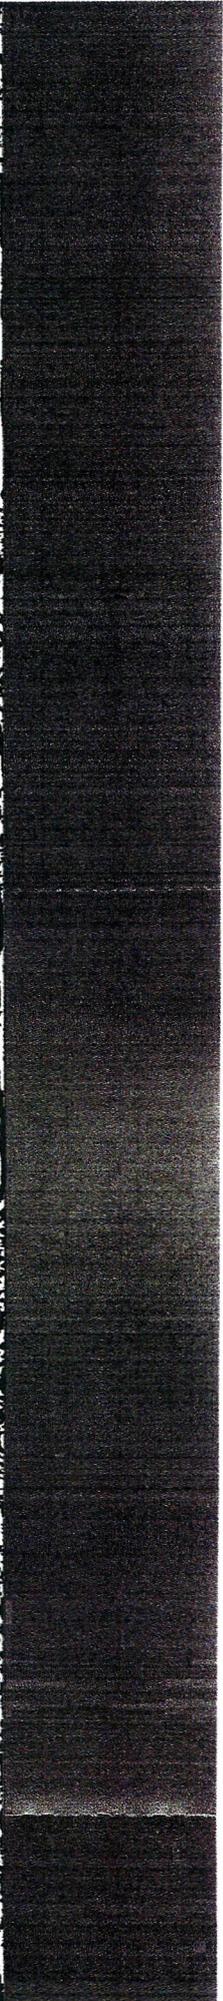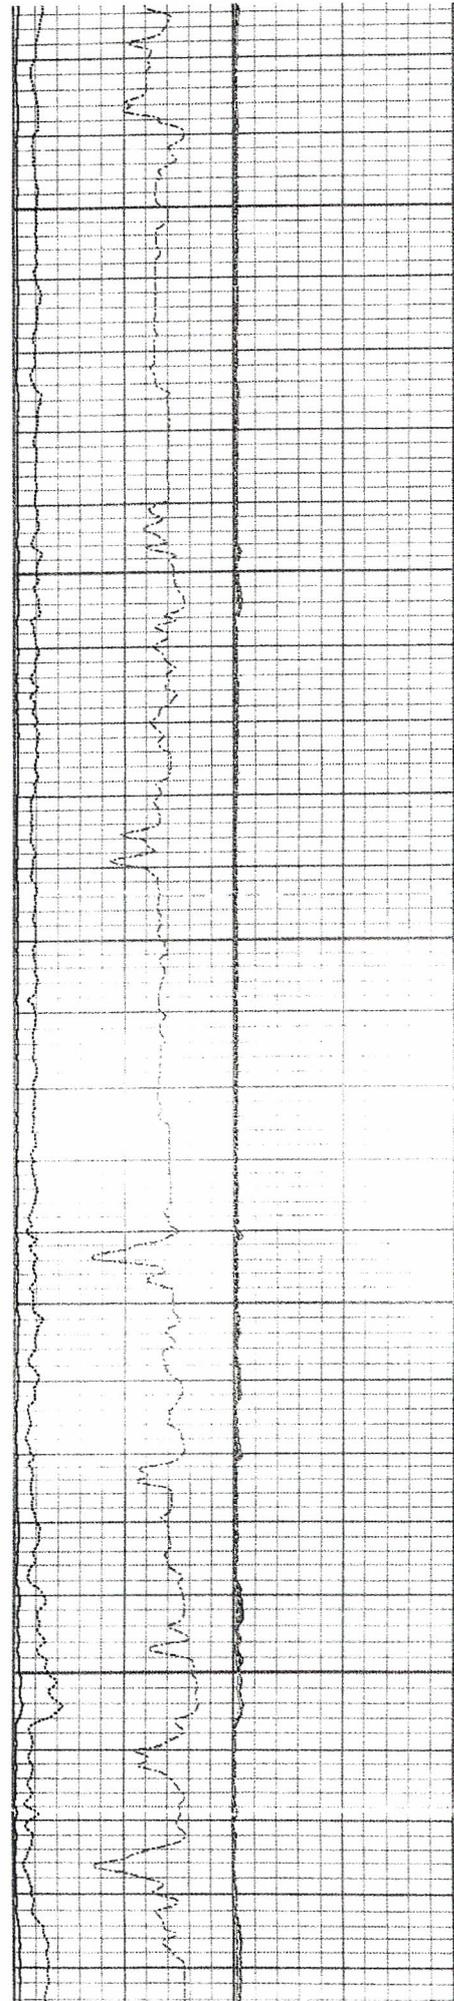

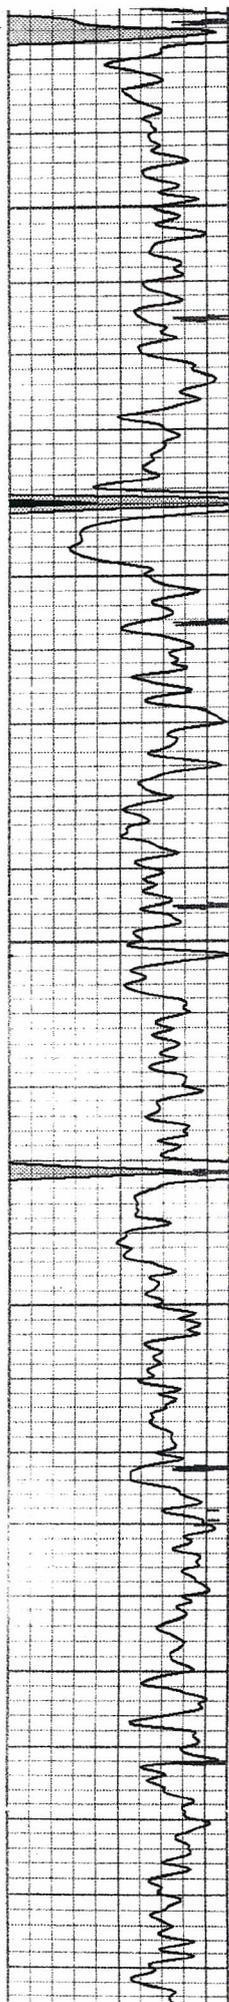



2000


2050

2100

2150

2200

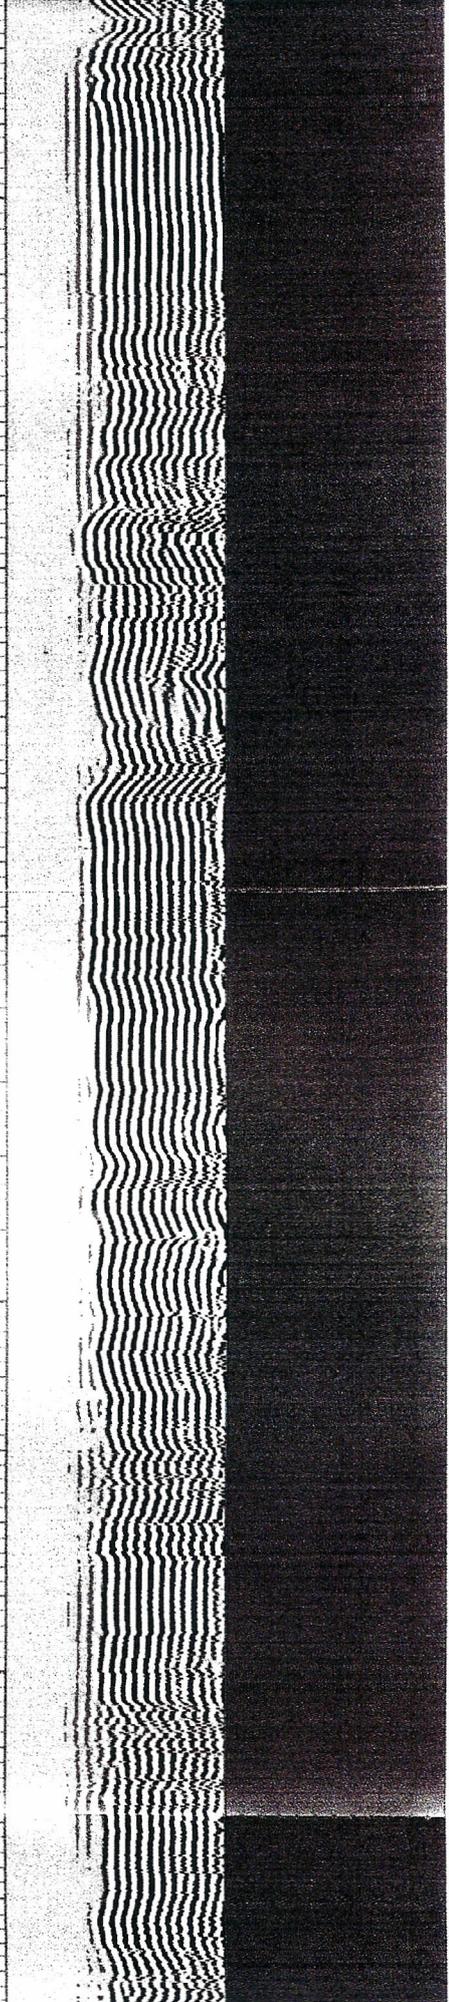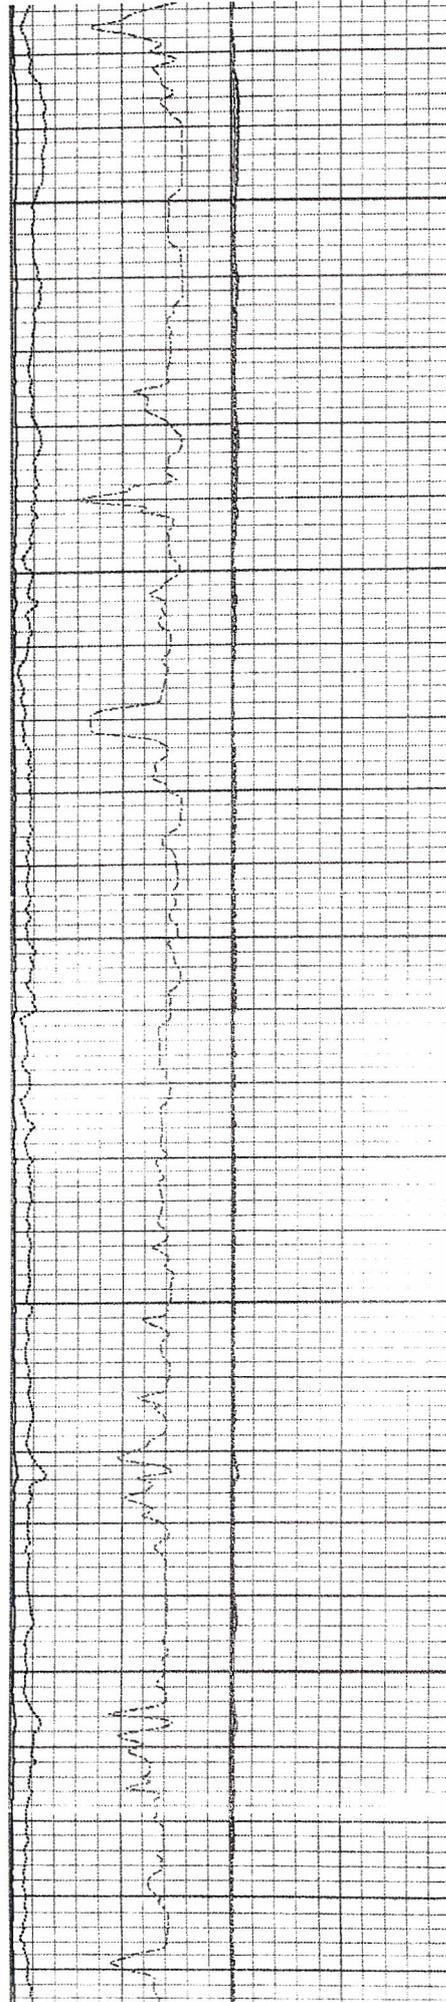

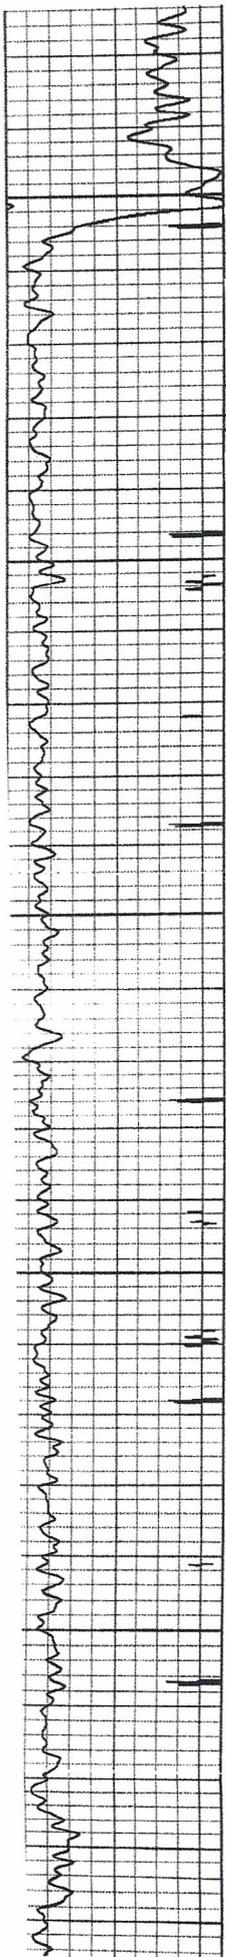



2250


2300

2350

2400

2450

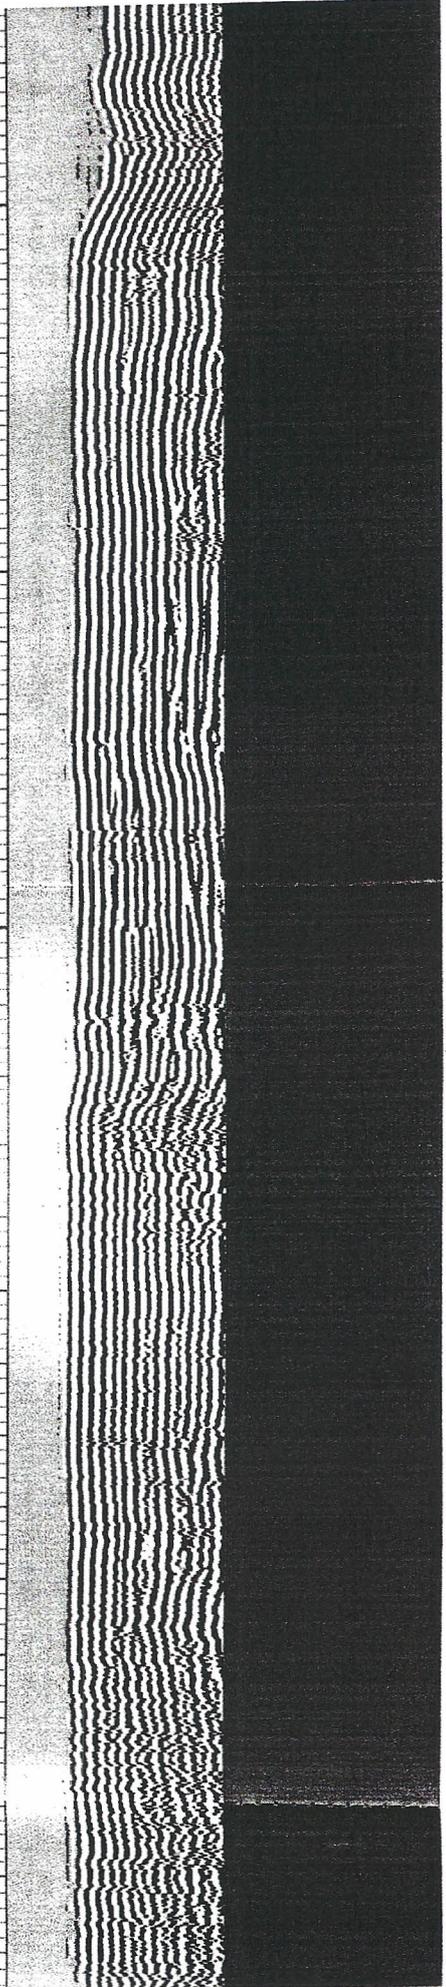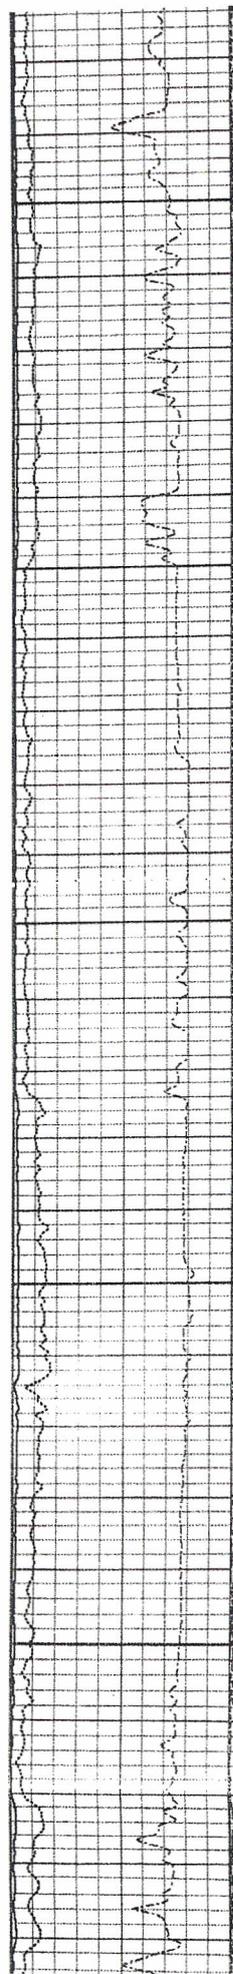

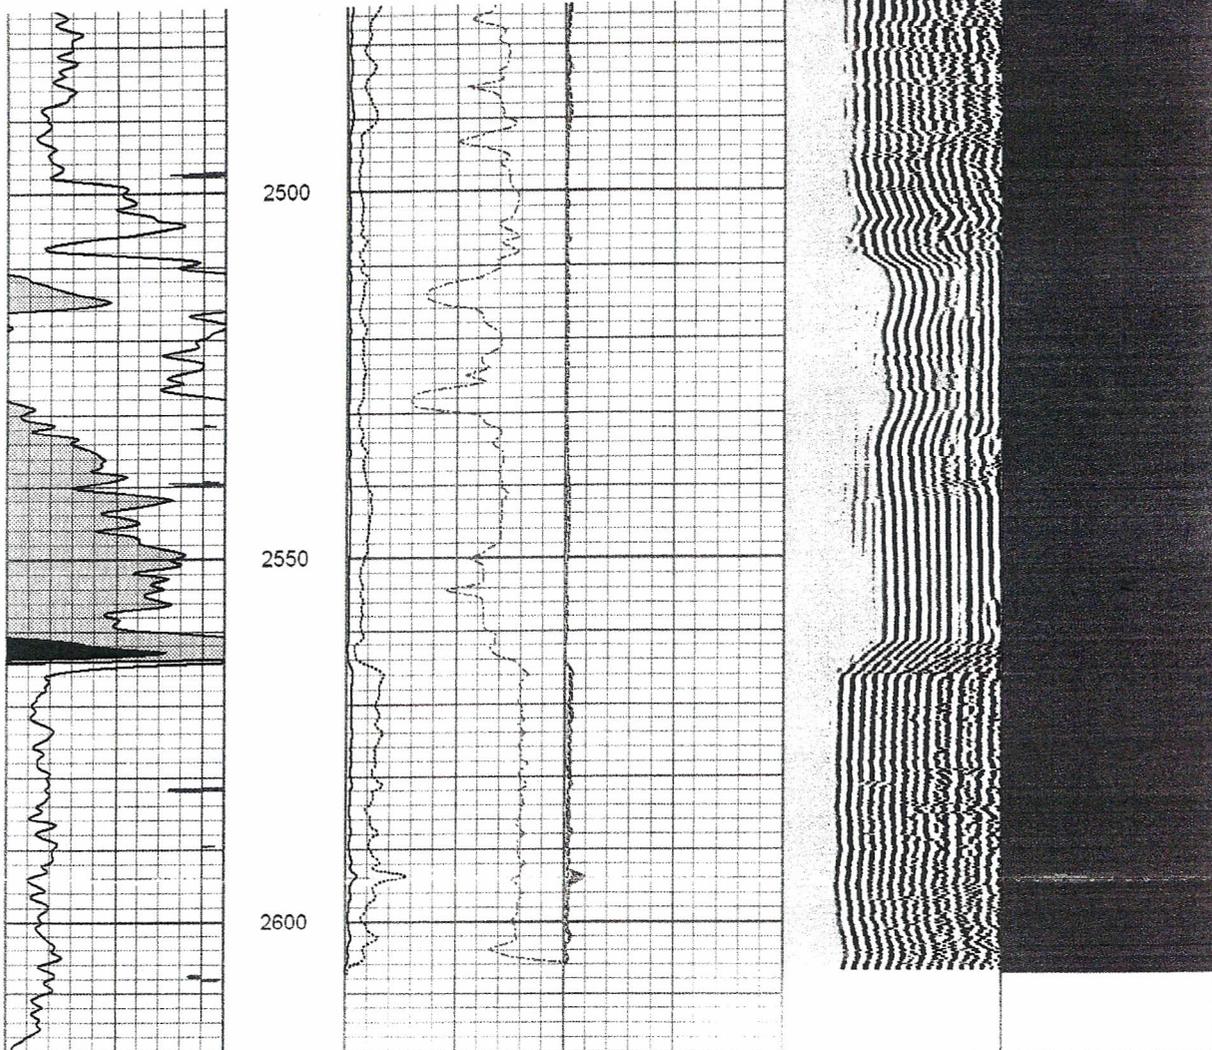

60	Casing Collar -6.5	Pipe Bond	0	Sector 1	100	Variable Density	1	Radial Map	8
	Gamma Ray	0 (mV)	100	Sector 2	100	200	1200		72
0	(GAPI) 150	Pipe Bond x5	0	Sector 3	100				
		0 (mV)	20	Sector 4	100				
		Travel Time	0	Sector 5	100				
		1000 (usec)	220	Sector 6	100				
				Sector 7	100				
				Sector 8	100				



## Gr/Ccl/Radial

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
			STNDRD Standard Cable Head	1.00	1.69	10.00
			SDSCENT Centralizer	3.00	3.25	20.00
			RBT-Probe (070566) Prototype Probe Radial Bond Tool with Digital Telemetry	8.75	2.75	90.00
WV3FT	11.73					
WVFCAL	11.73					
WVFS1	11.73					
WVFS2	11.73					
WVFS3	11.73					