

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-19001-00-02
Spot: SESENW Sec/Twnshp/Rge: 10-33S-42W
2970 feet from S Section Line, 2890 feet from E Section Line
Lease Name: BOEHM Well #: 6
County: MORTON Total Vertical Depth: 5076 feet

Operator License No.: 7117
Op Name: COLORADO INTERSTATE GAS COMPA
Address: PO BOX 1087
COLORADO SPRINGS, CO 80944

String	Size	Depth (ft)	Pulled (ft)	Comment
L1	3.5	5037		
PROD	5.5	5075	0	
SURF	8.625	1359		WITH 600 SX CMT

Well Type: SGWI UIC Docket No: S017.4 Date/Time to Plug: 01/17/2006 10:00 AM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE
Proposal Rcvd. from: CHRIS Company: EAGLE WELL SERVICE Phone: (620) 624-1904

Proposed Plugging Method: PUMP 25 SX CMT & 150# HULLS. FILL 3 1/2" WITH 205 SX CMT. PRESSURE TEST. CHECK 3 1/2" X 5 1/2" ANNULUS. CHECK 5 1/2" X 8 5/8" ANNULUS.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/17/2006 2:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 25 SX CMT AND 150# HULLS. FILL 3 1/2" CASING WITH 205 SX CMT. PRESSURE TO 250#. HELD AT 200#. HOOK UP TO 3 1/2" X 5 1/2" ANNULUS. PUMP 30 SX CMT. PRESSURE TO 200# & HELD. HOOK UP TO 5 1/2" X 8 5/8" ANNULUS. PUMP 15 SX CMT. PRESSURE TO 520# & HELD.

Perfs:


Top	Bot	Thru	Comments
4852	4862		

RECEIVED
KANSAS CORPORATION COMMISSION
FEB 02 2006
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED COMMON CEMENT BY EAGLE WELL SERVICE.

Plugged through: CSG

District: 01

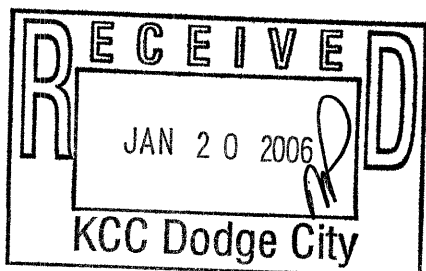

Signed

[Signature]

(TECHNICIAN)

INVOICED

DATE

2-2-06

INV. NO

2006061056