

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-20279-00-00  
Spot: NWNESE Sec/Twnshp/Rge: 5-22S-14W  
2310 feet from S Section Line, 990 feet from E Section Line  
Lease Name: MORRISON-LONG A Well #: 1  
County: STAFFORD Total Vertical Depth: 3893 feet

Operator License No.: 30681  
Op Name: HOFFMAN OIL, INC.  
Address: 18368 LAWRENCE 2100  
MOUNT VERNON, MO 65712

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3884	0	WITH 100 SX CMT
SURF	8.625	450		WITH 325 SX CMT

*52*  
*126*

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 01/11/2006 1:00 PM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: RAN TUBING TO 890'. PUMPED 300 SX CMT DOWN TUBING. CIRCULATE UP ANNULUS.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 01/11/2006 5:50 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

HOLE IS COLLAPSED AT 1147'. RAN TUBING TO 890'. PUMPED 300 SX CMT DOWN TUBING. CIRCULATED UP 4 1/2" & 8 5/8" X 4 1/2" ANNULUS. NO CMT TO SURFACE. PULLED TUBING TO 450'. PUMPED 150 SX CMT. CIRCULATED CMT TO SURFACE UP 4 1/2" & 8 5/8" X 4 1/2" ANNULUS. PULLED TUBING. TOPPED OFF HOLE WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3846	3854		


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

RECEIVED  
FEB 6 2006

KCC WICHITA

District: 01

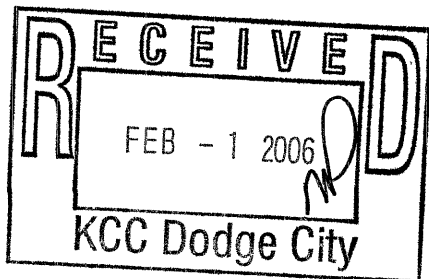

Signed

*Richard W. Lacey*

(TECHNICIAN)

INVOICED

DATE 2-7-06

INV. NO. 2006061072

Form CP-133