



**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	VINCENT OIL CORPORATION		
Well	BROWN #2-28		
Field	MULBERRY CREEK		
County	FORD	State	KANSAS
Location:	API # : 15-057-20957-00-00		Other Services CNL/CDL/PE DIL/SON
Permanent Datum	1605' FSL & 1625' FEL	Elevation	2473
Log Measured From	SE - SE - NW - SE		
Drilling Measured From	SEC 28 TWP 28S RGE 23W		
Date	1/6/15		
Run Number	TWO		
Depth Driller	5300		
Depth Logger	5302		
Bottom Logged Interval	5284		
Top Log Interval	4150		
Casing Driller	8 5/8 @ 603'		
Casing Logger	604'		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.1/53	CHLORIDES 11,200 PPM	
pH / Fluid Loss	10.5/10.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.40 @ 76F		
Rmf @ Meas. Temp	0.30 @ 76F		
Rmc @ Meas. Temp	0.48 @ 76F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	0.24 @ 128F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	127F		
Equipment Number	3802		
Location	HAYS, KS.		
Recorded By	IAN MABB		
Witnessed By	TOM DUDGEON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments



NABORS COMPLETION & PRODUCTION SERVICES CO.
785 (628 - 6395)
THANK YOU FOR YOUR BUSINESS
DIRECTIONS : FORD, KS. - SOUTH TO WILBURN RD. - WEST 4 MILES TO RD 121 - NORTH 1 1/2 MILES - WEST INTO


Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

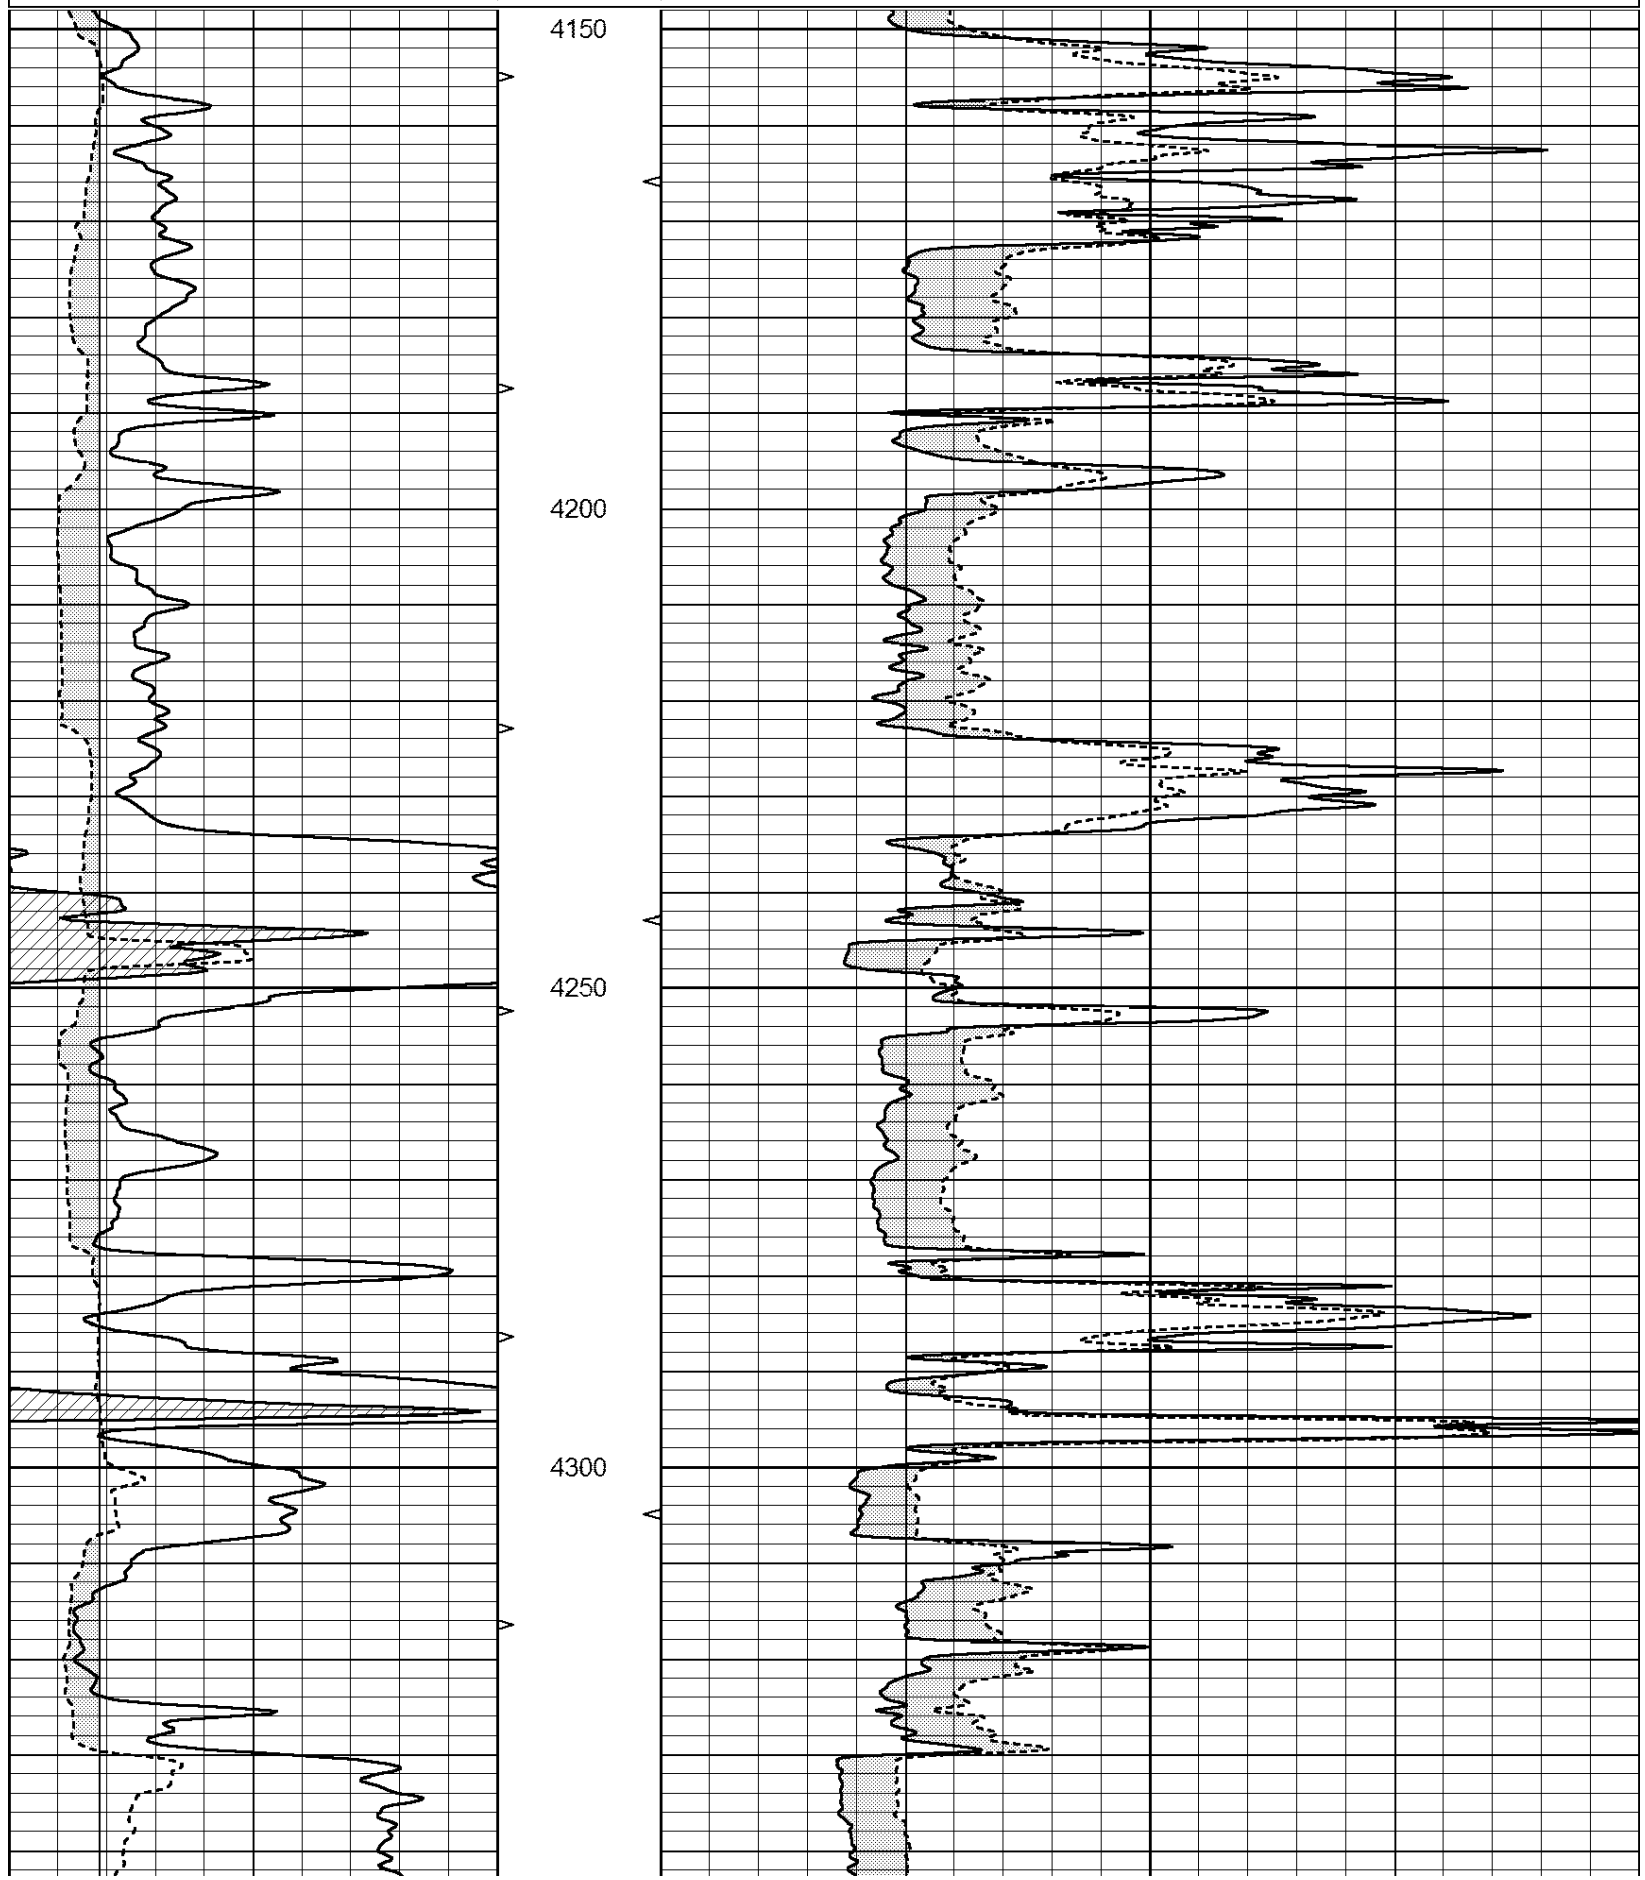

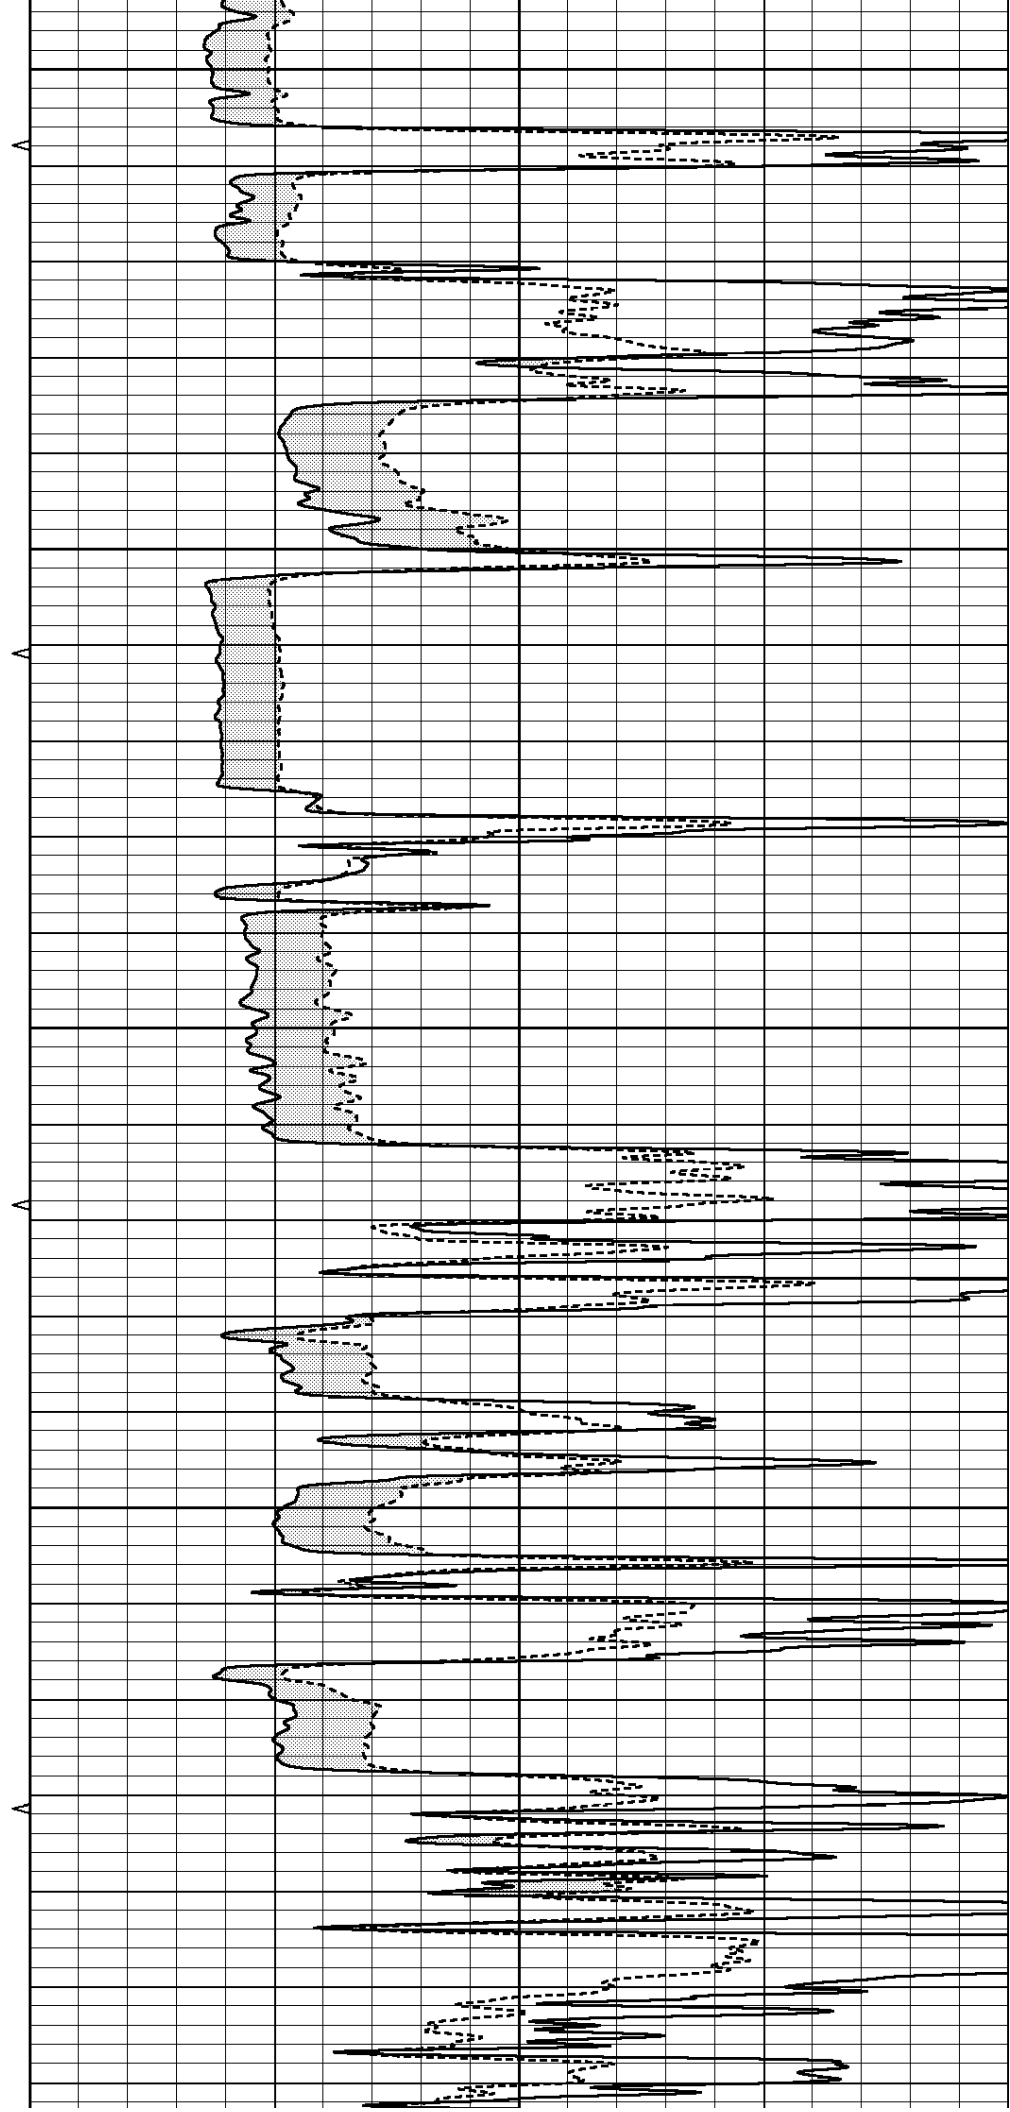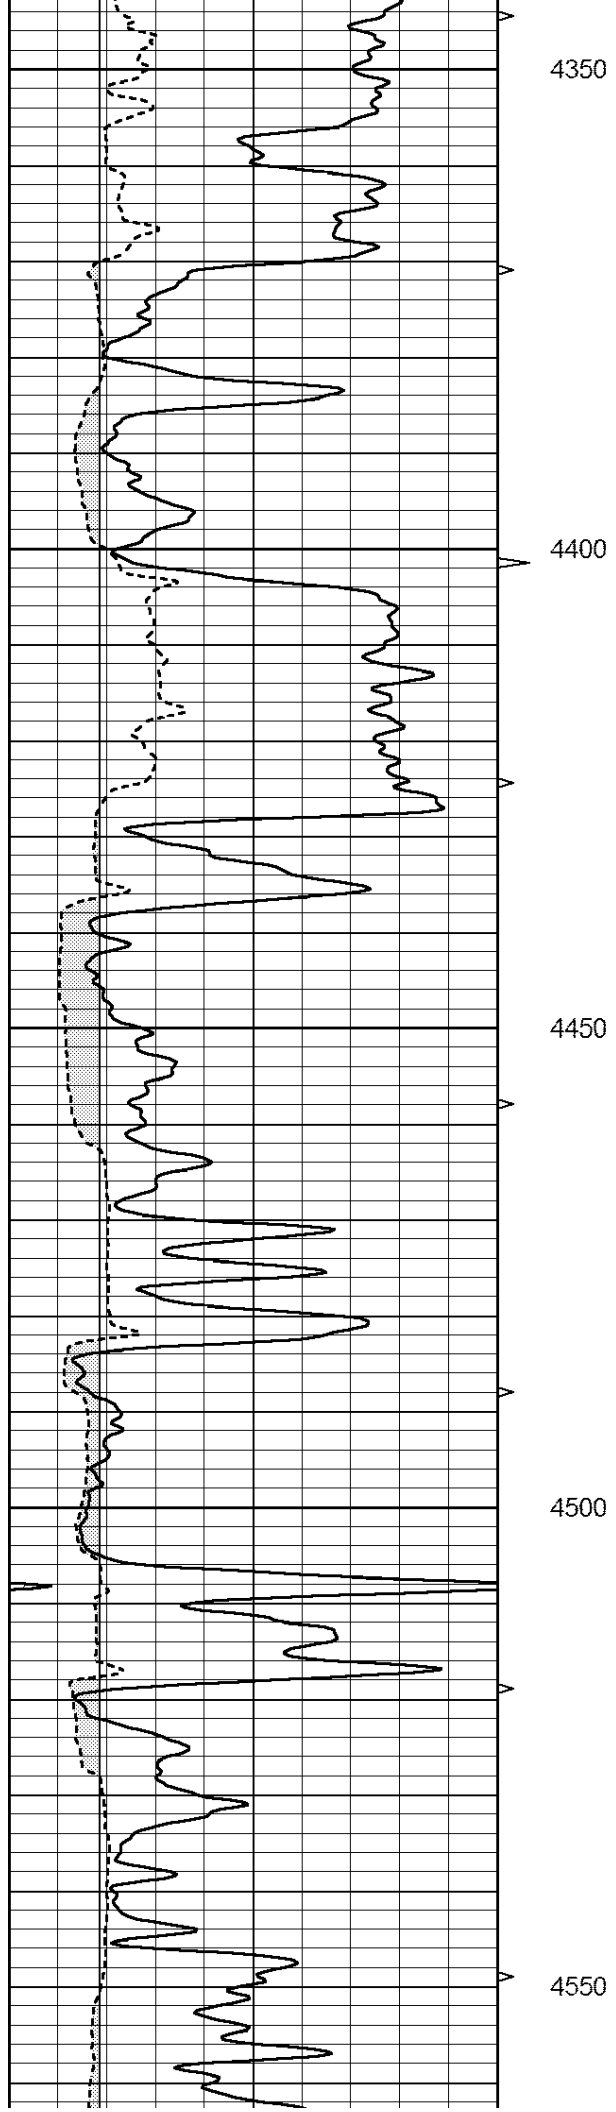

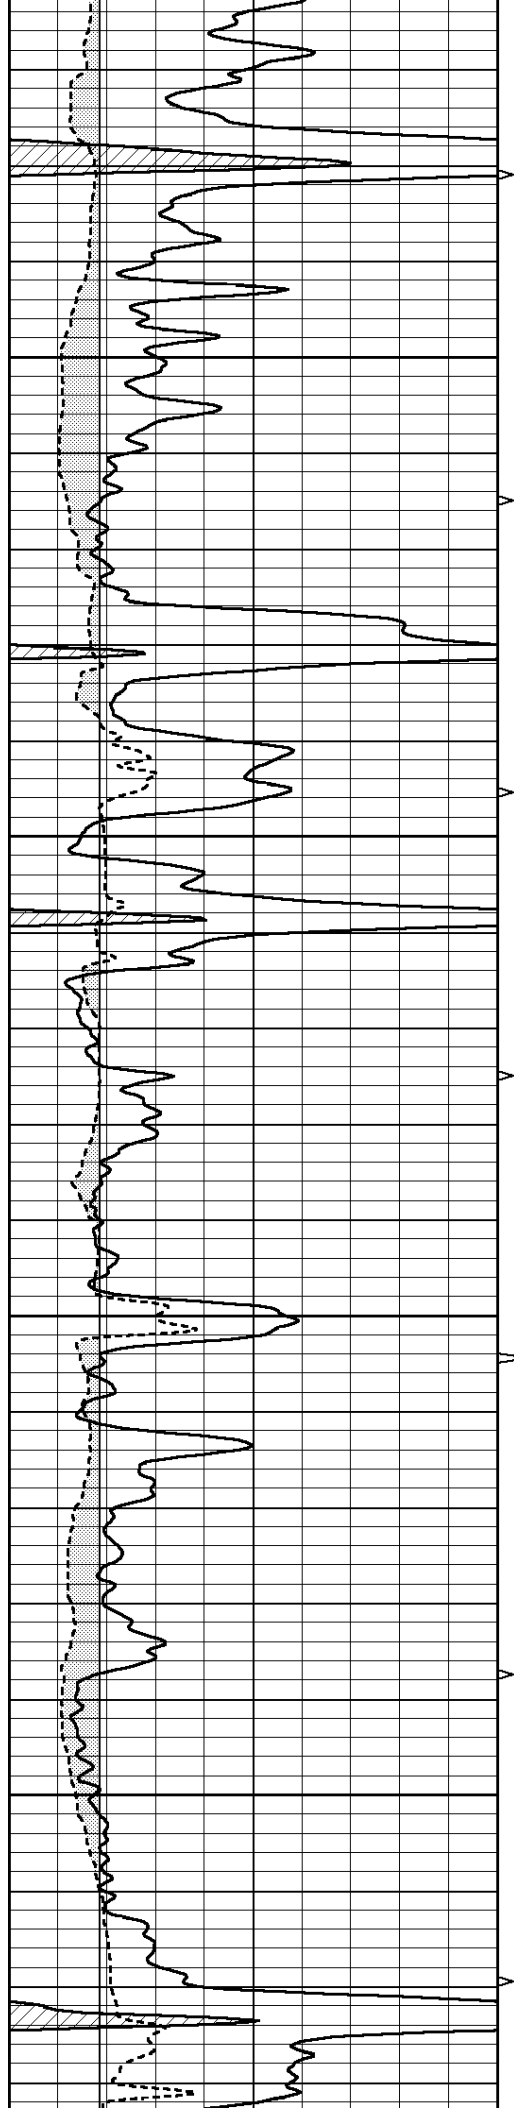




4600


4650


4700

4750

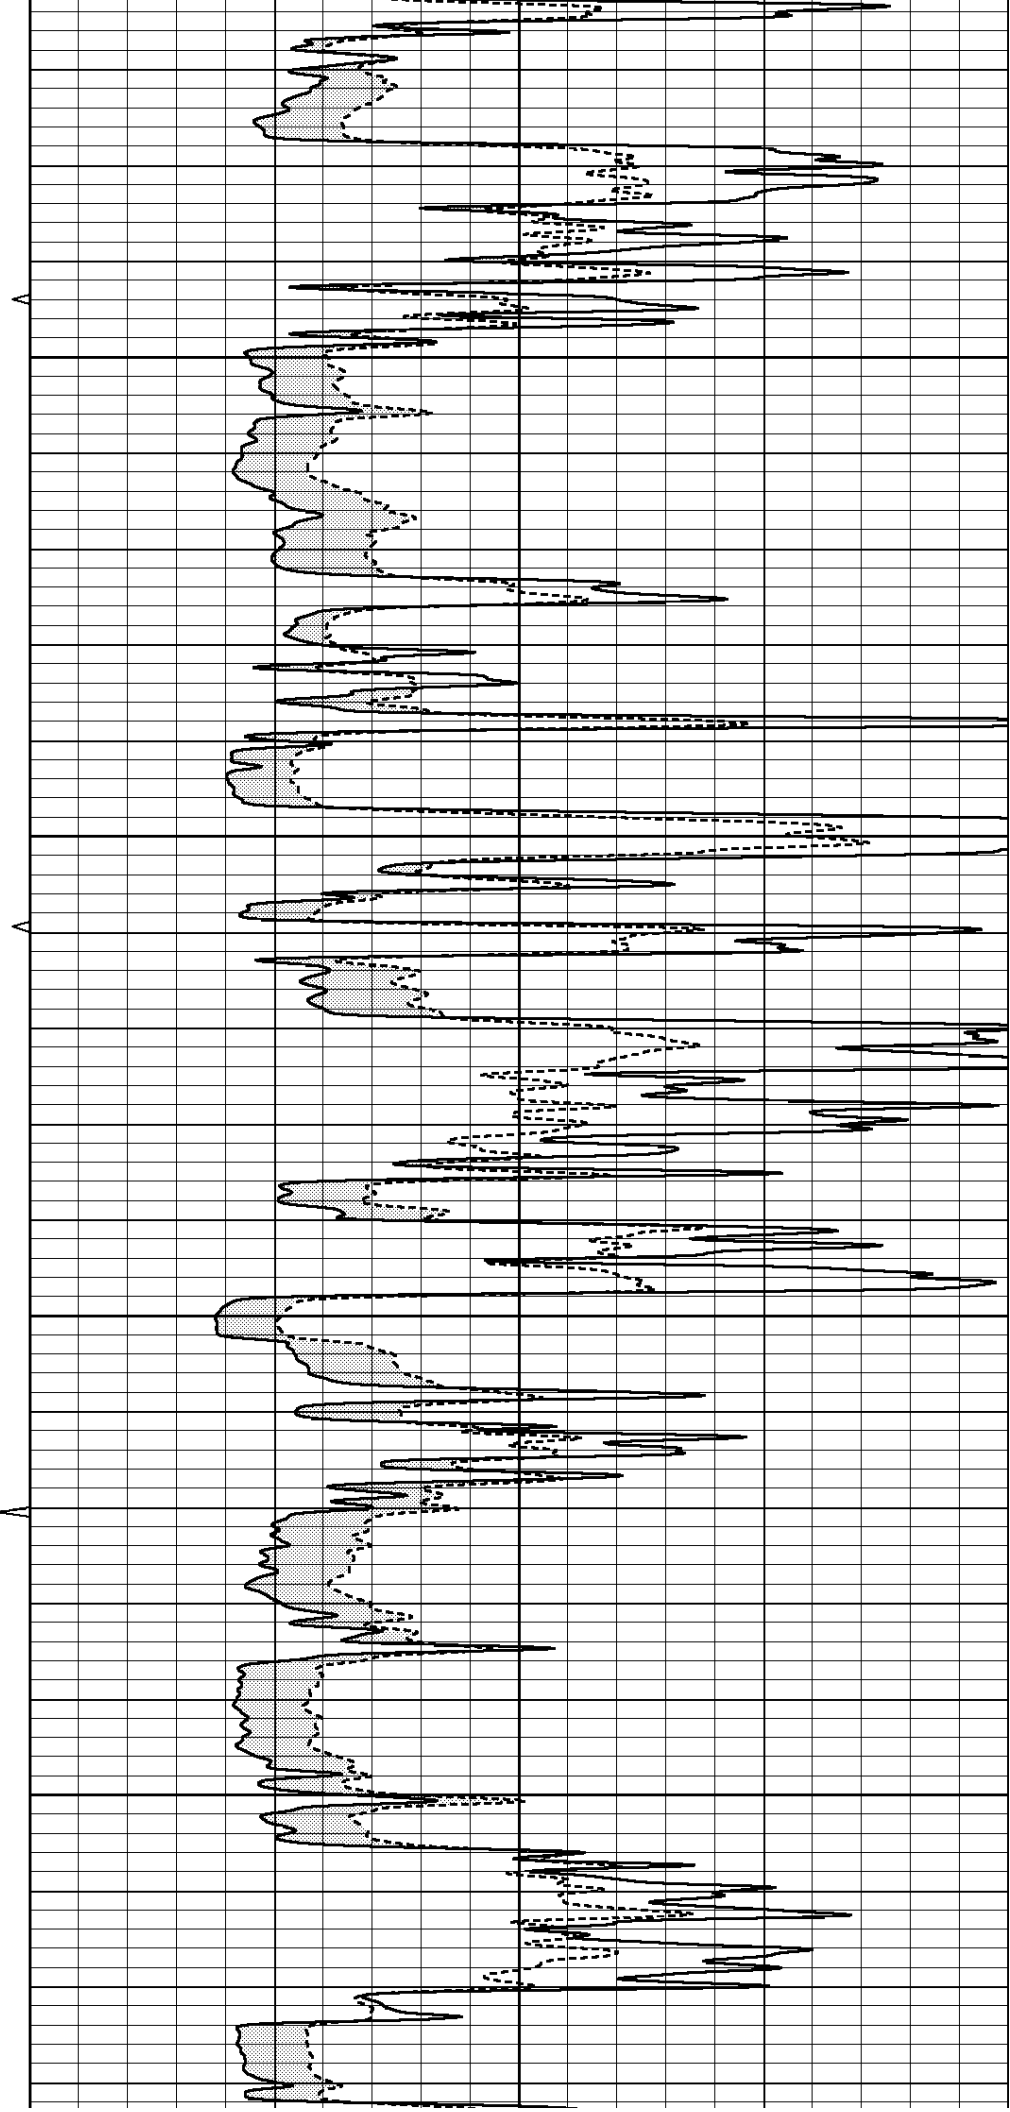

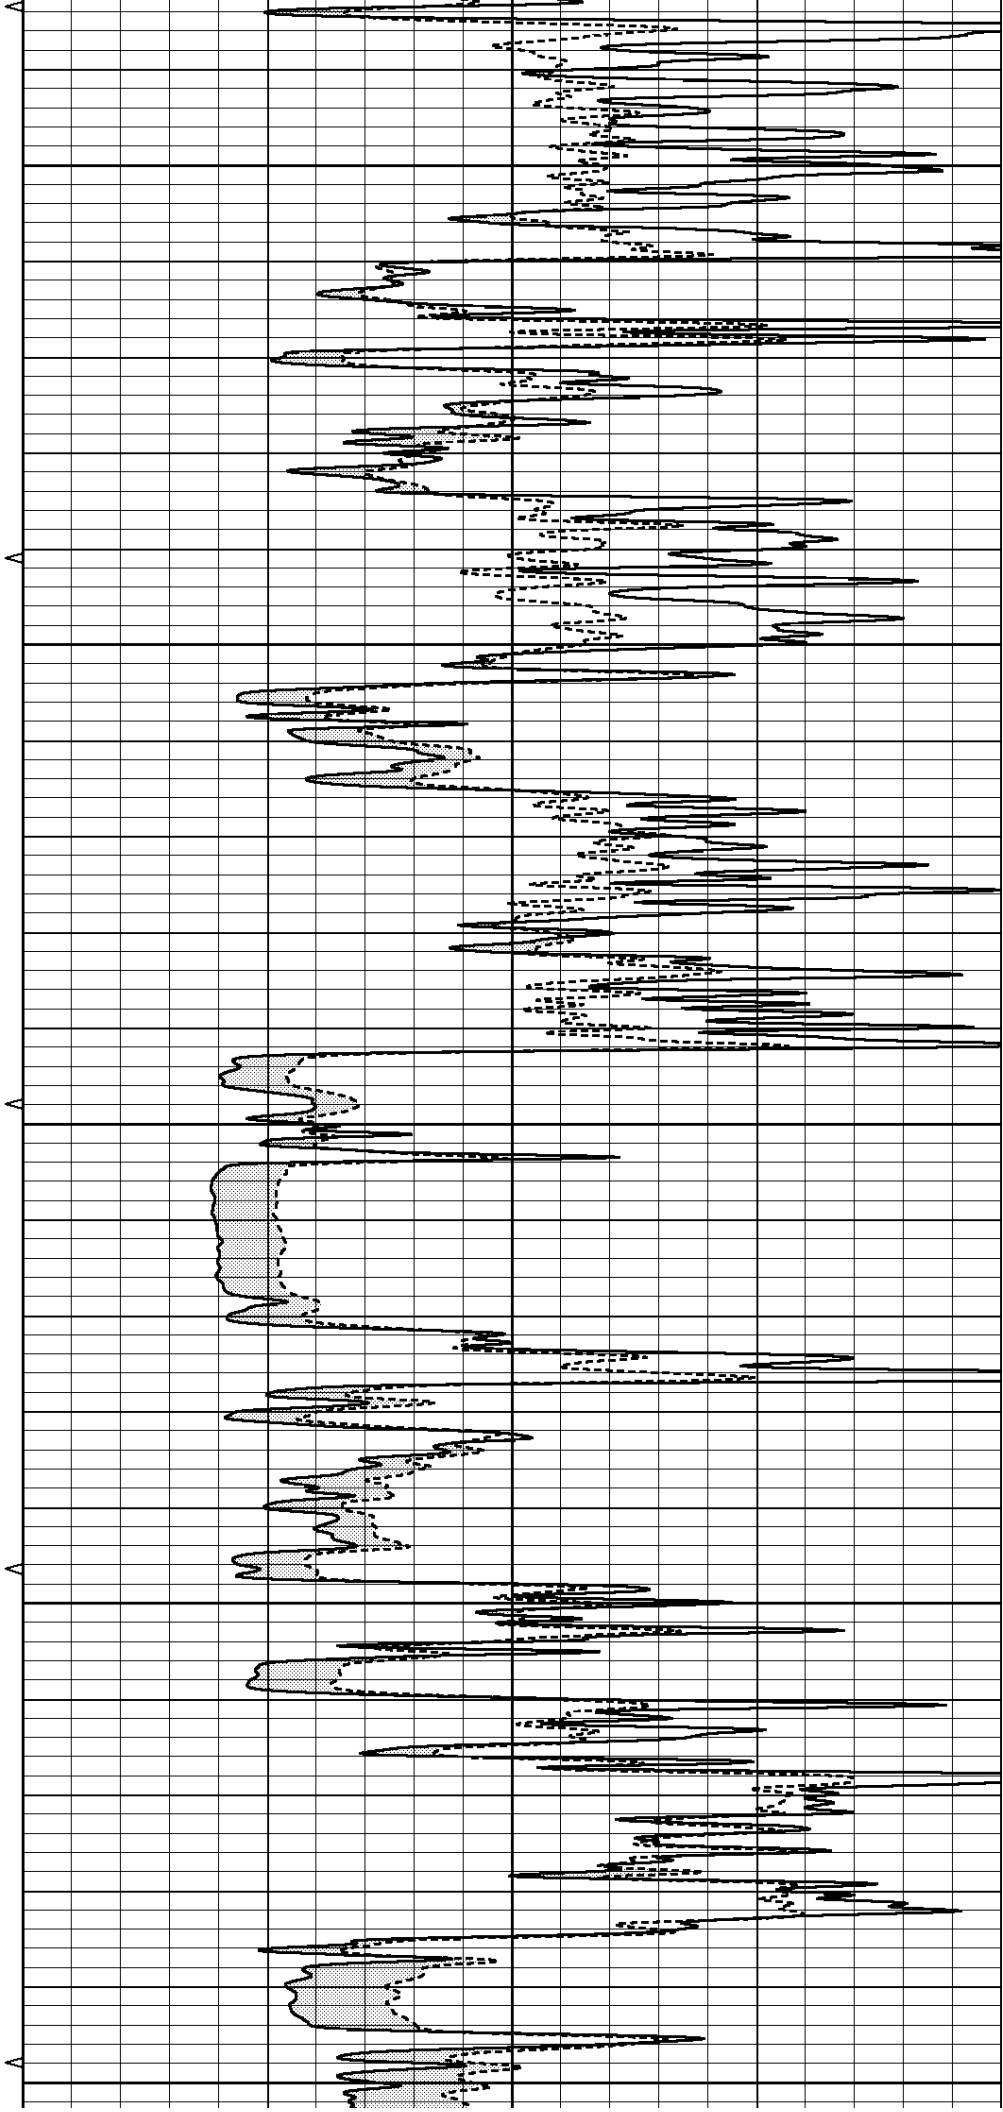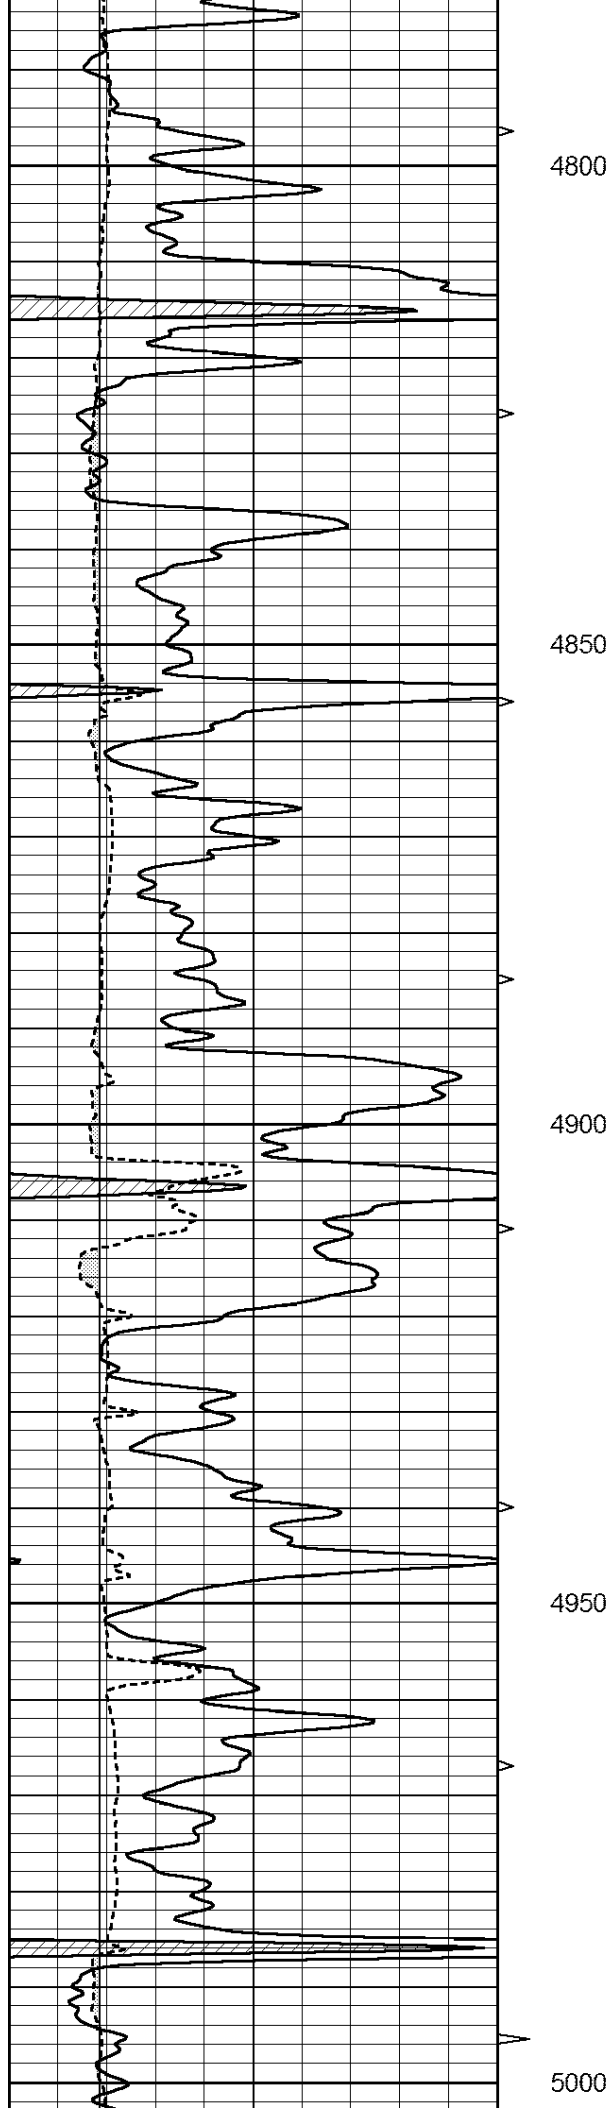

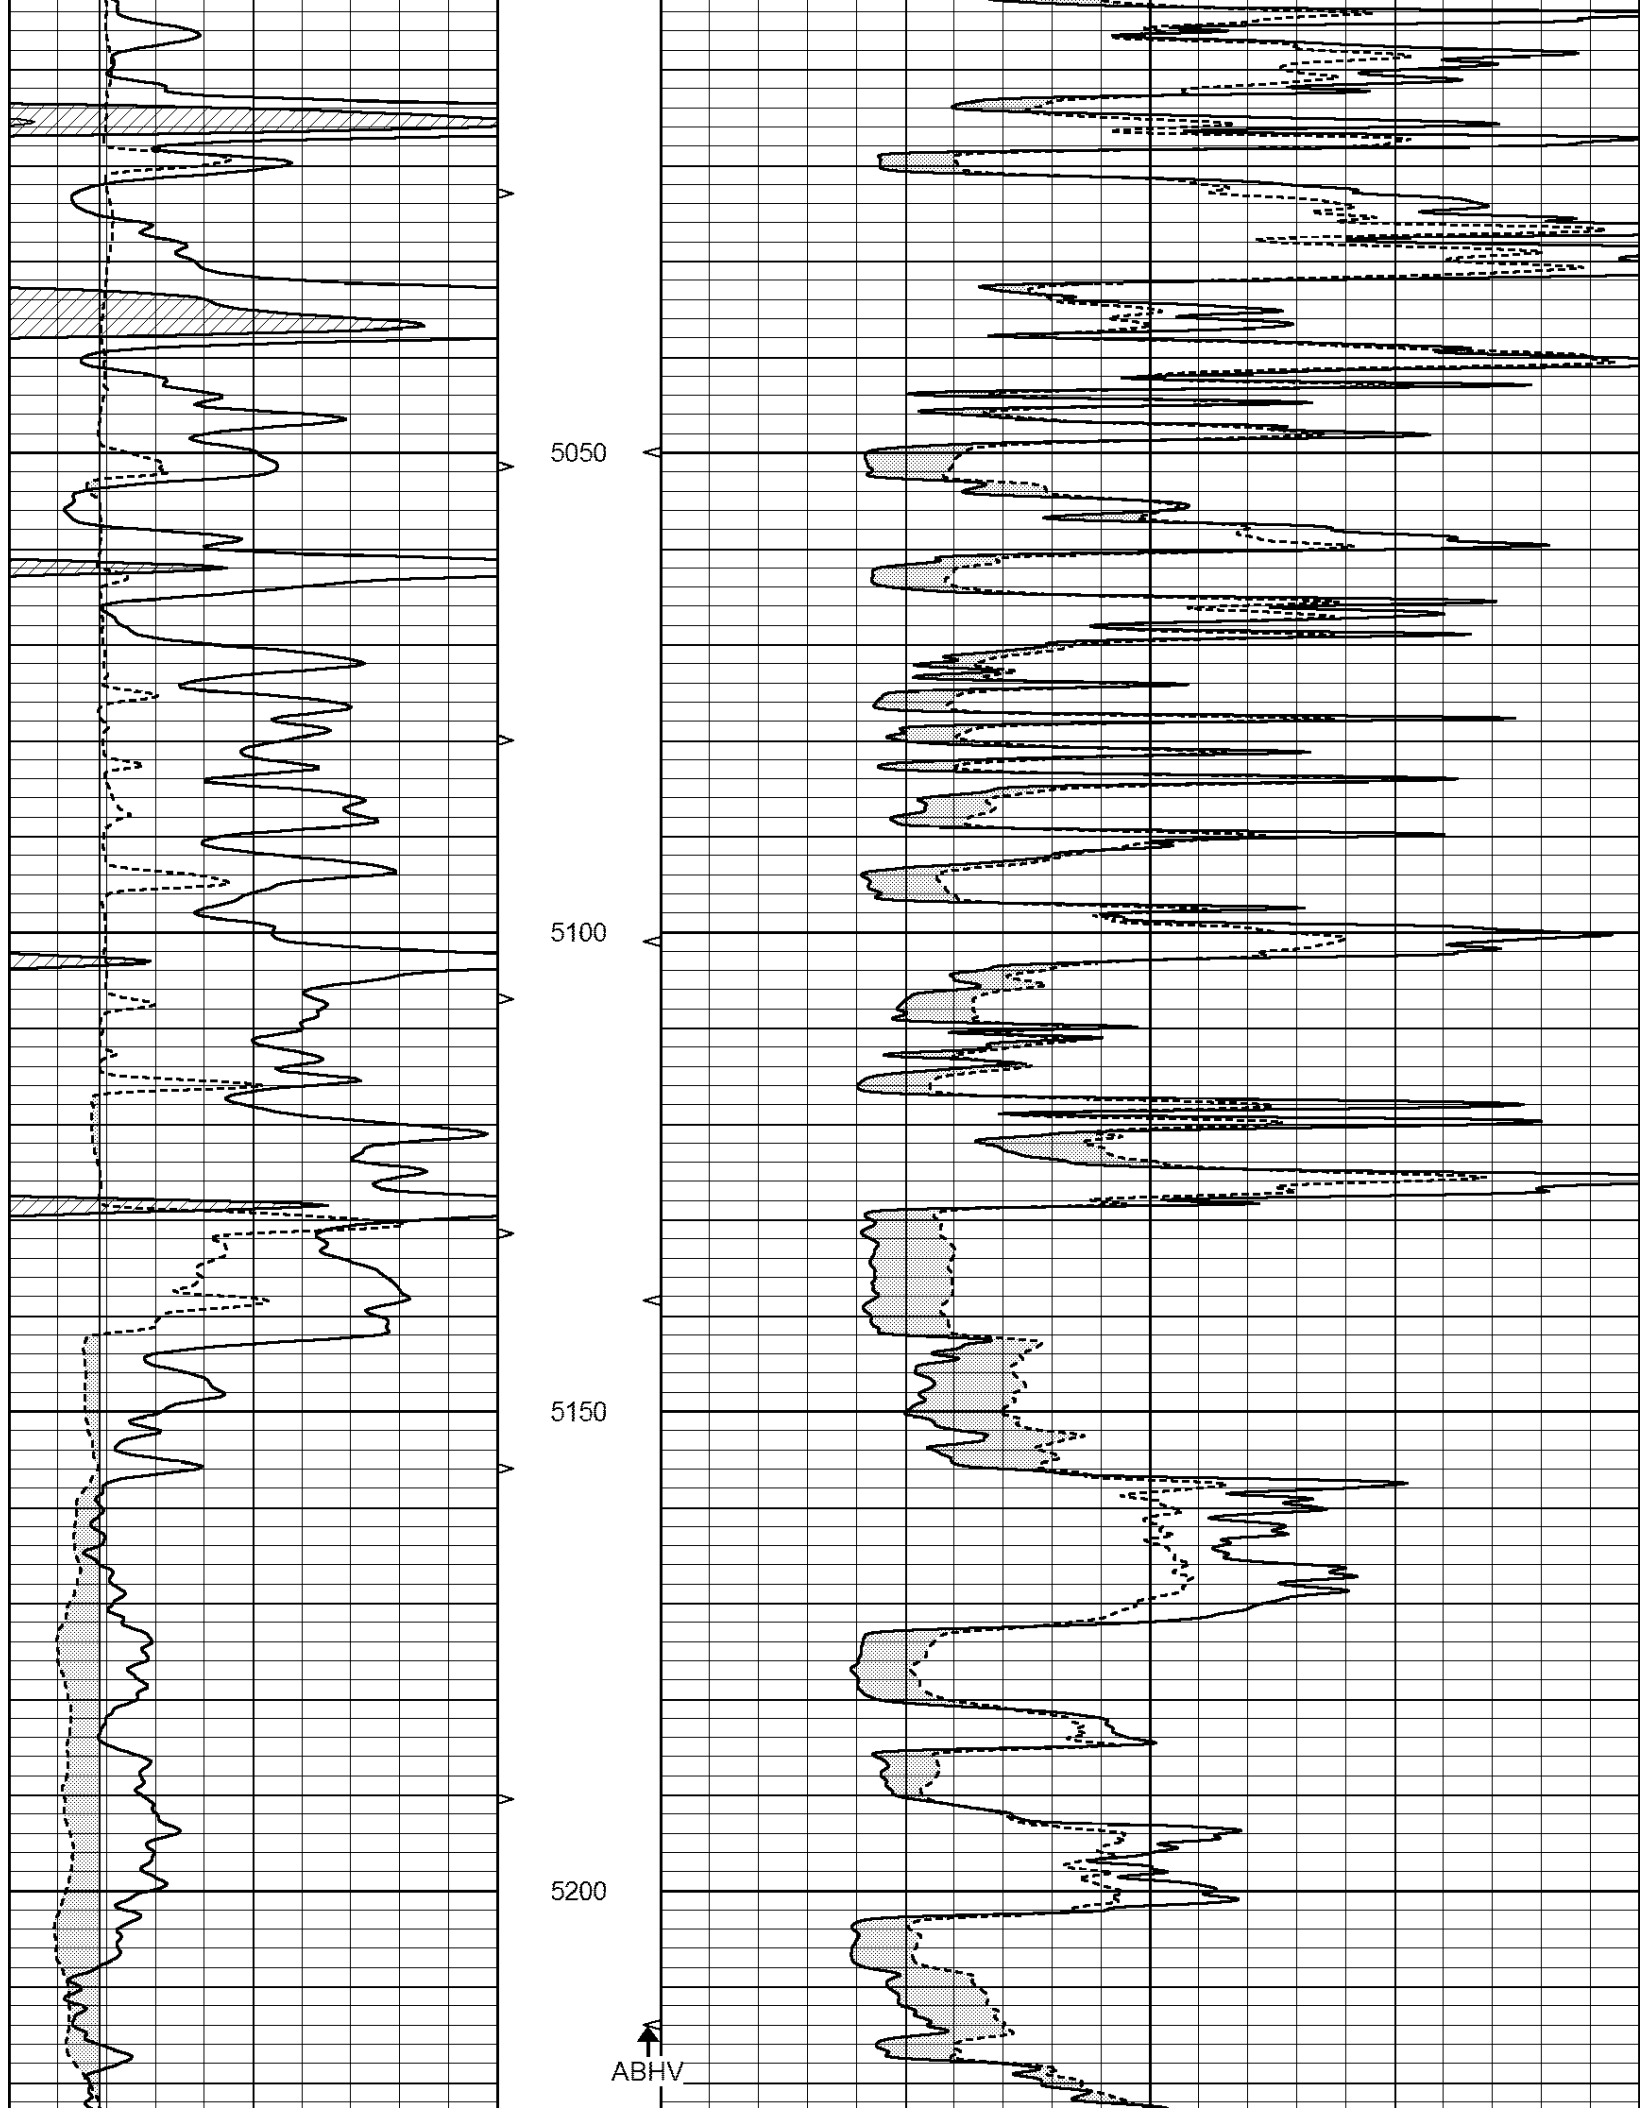



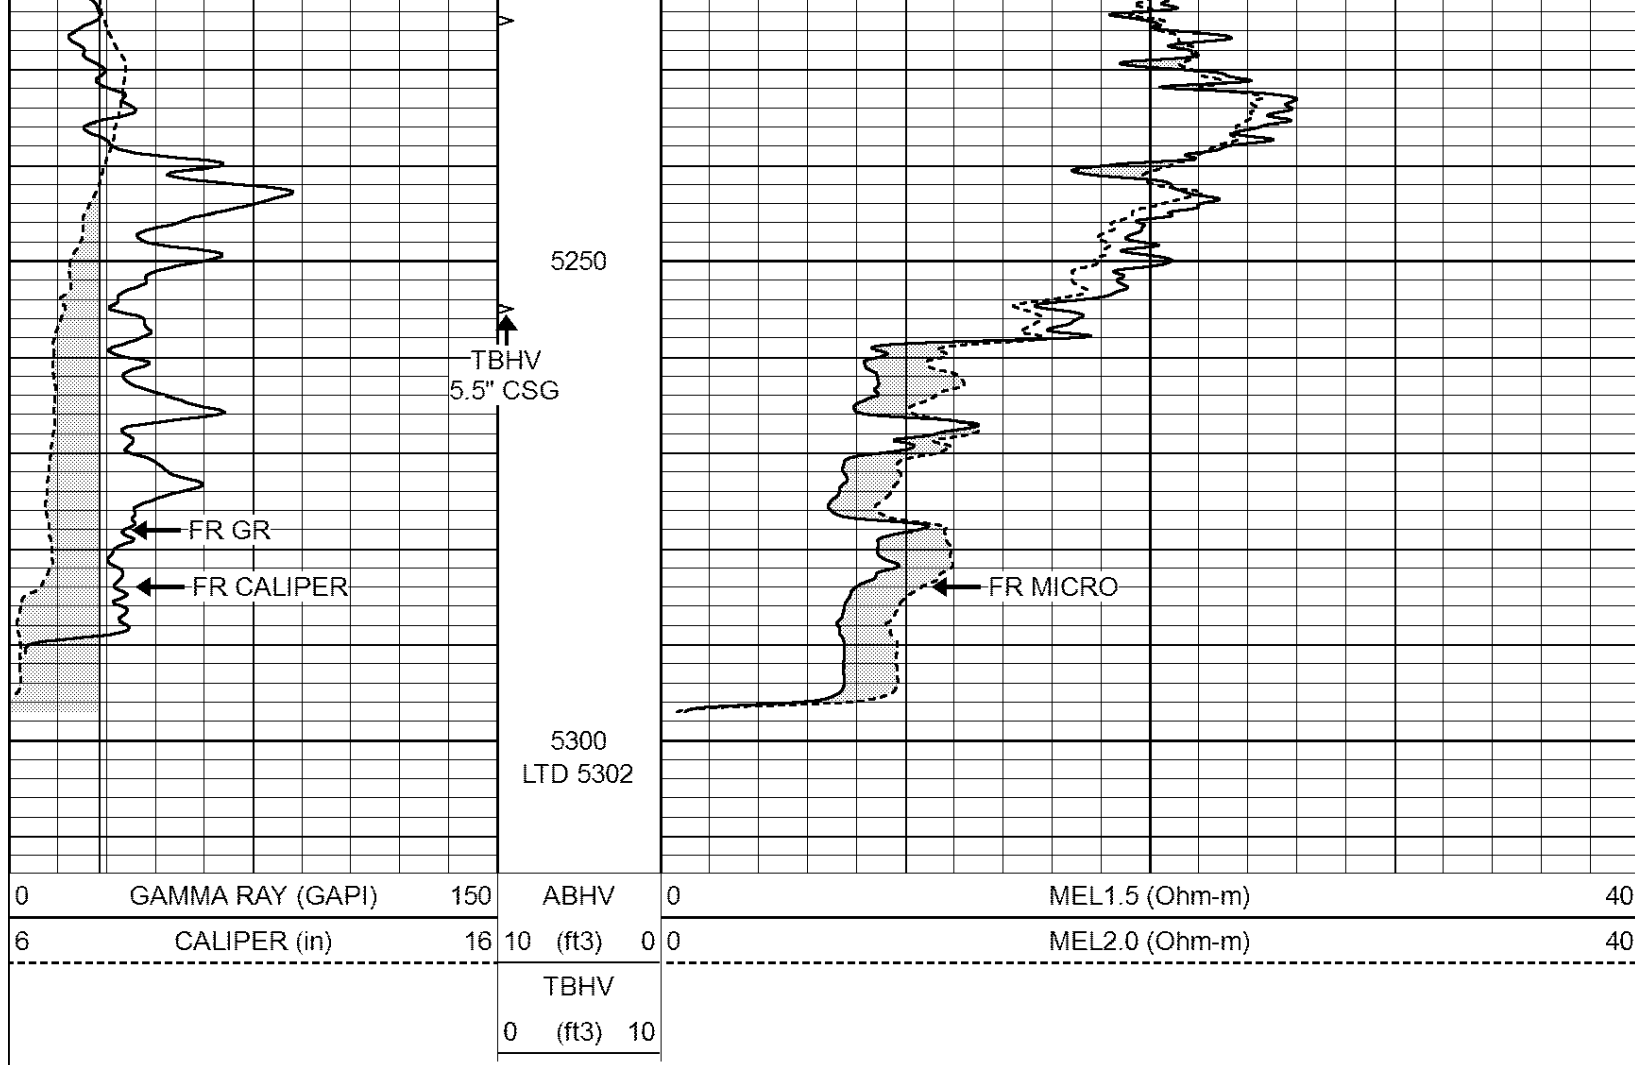



REPEAT SECTION

Database File: 26429pe.db
 Dataset Pathname: pass6.8
 Presentation Format: _micro
 Dataset Creation: Wed Jan 07 05:12:00 2015
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

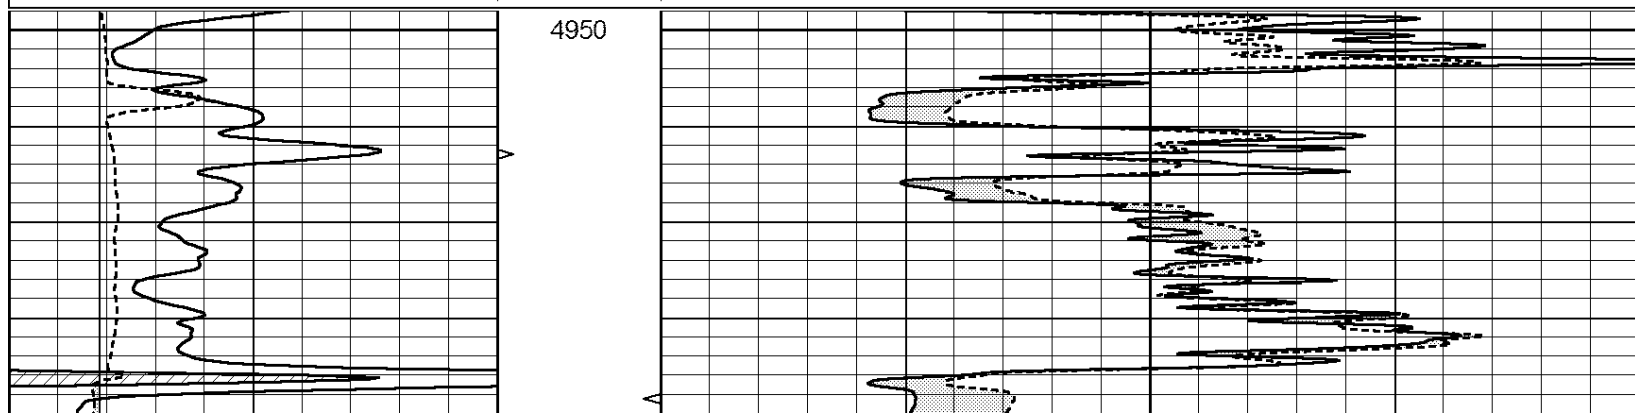

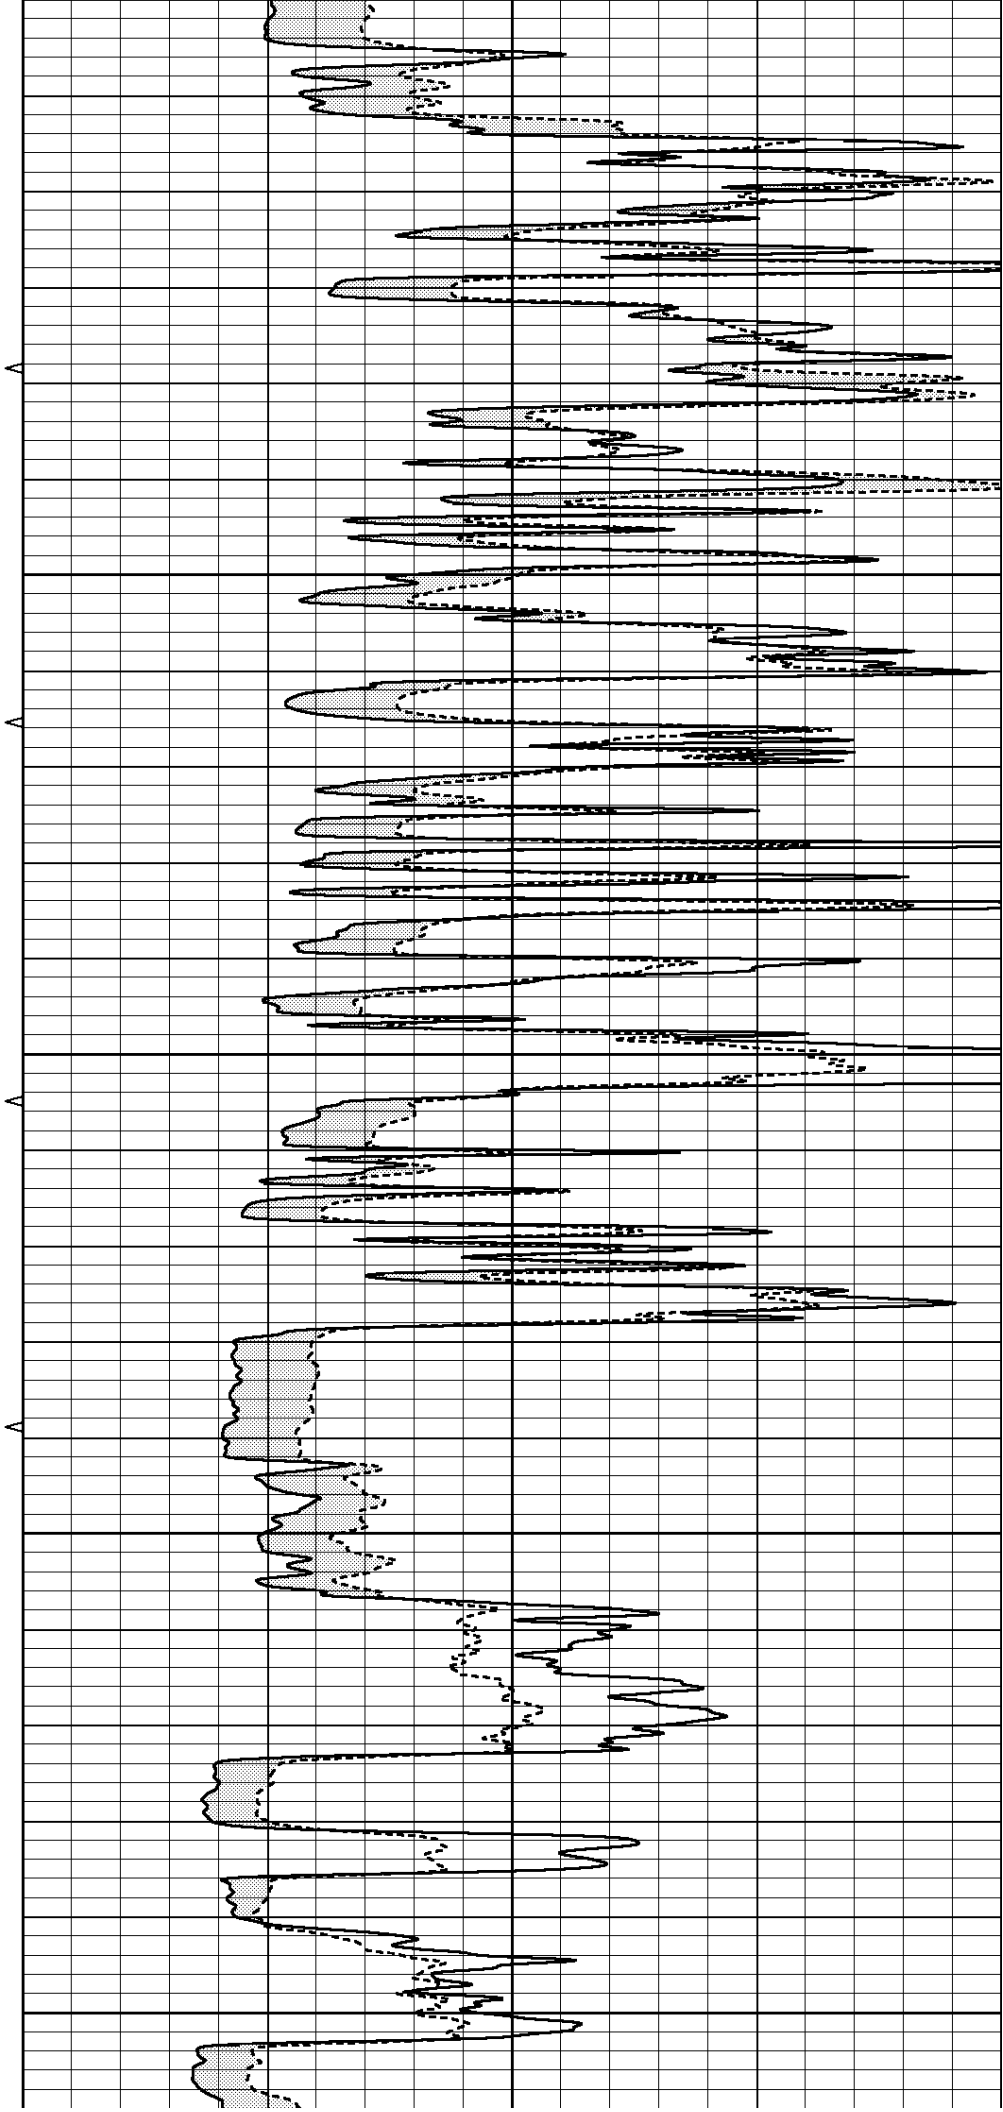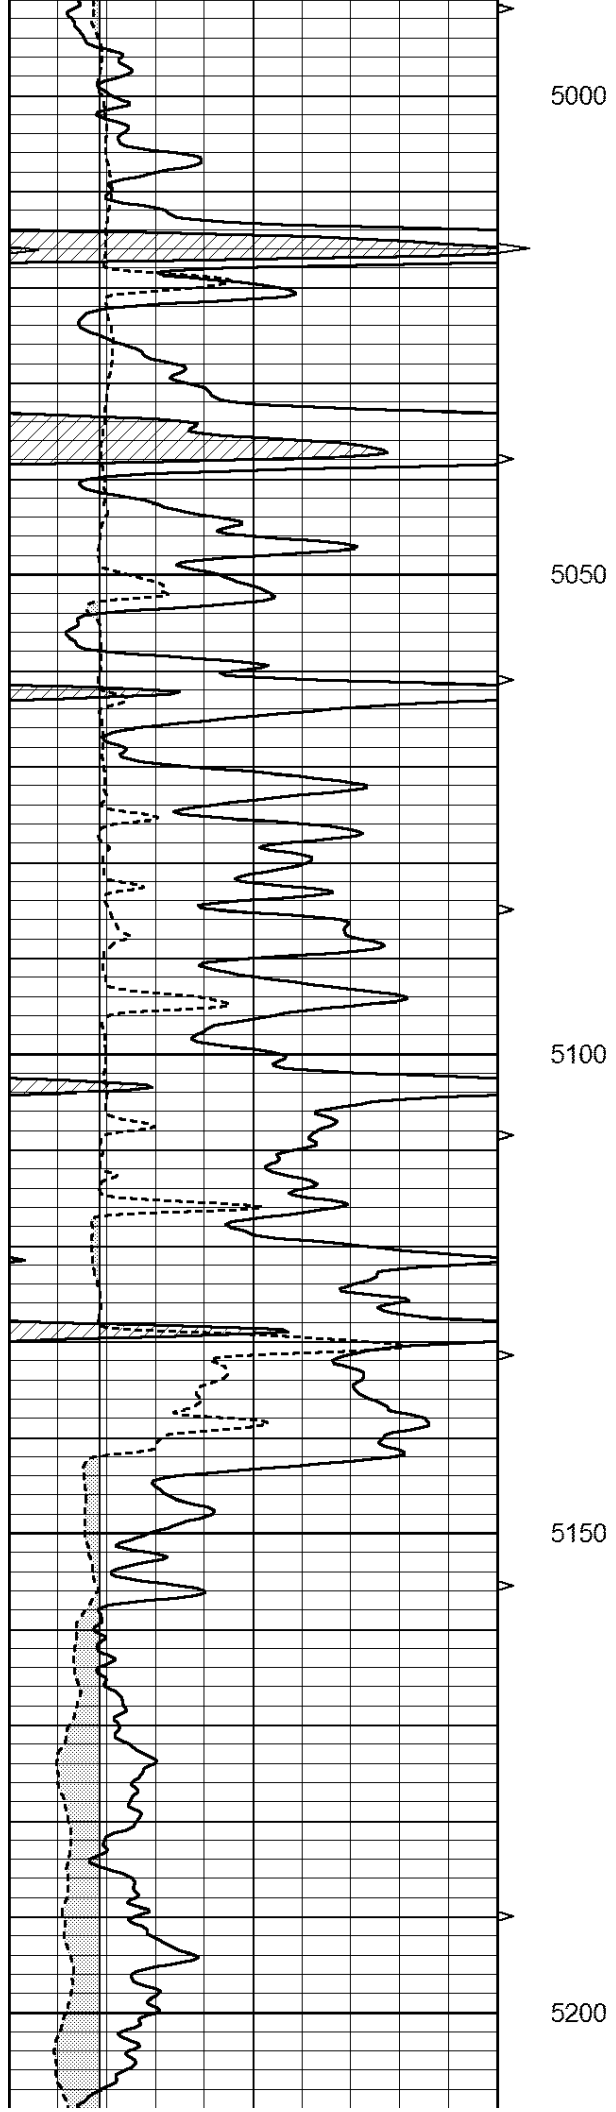

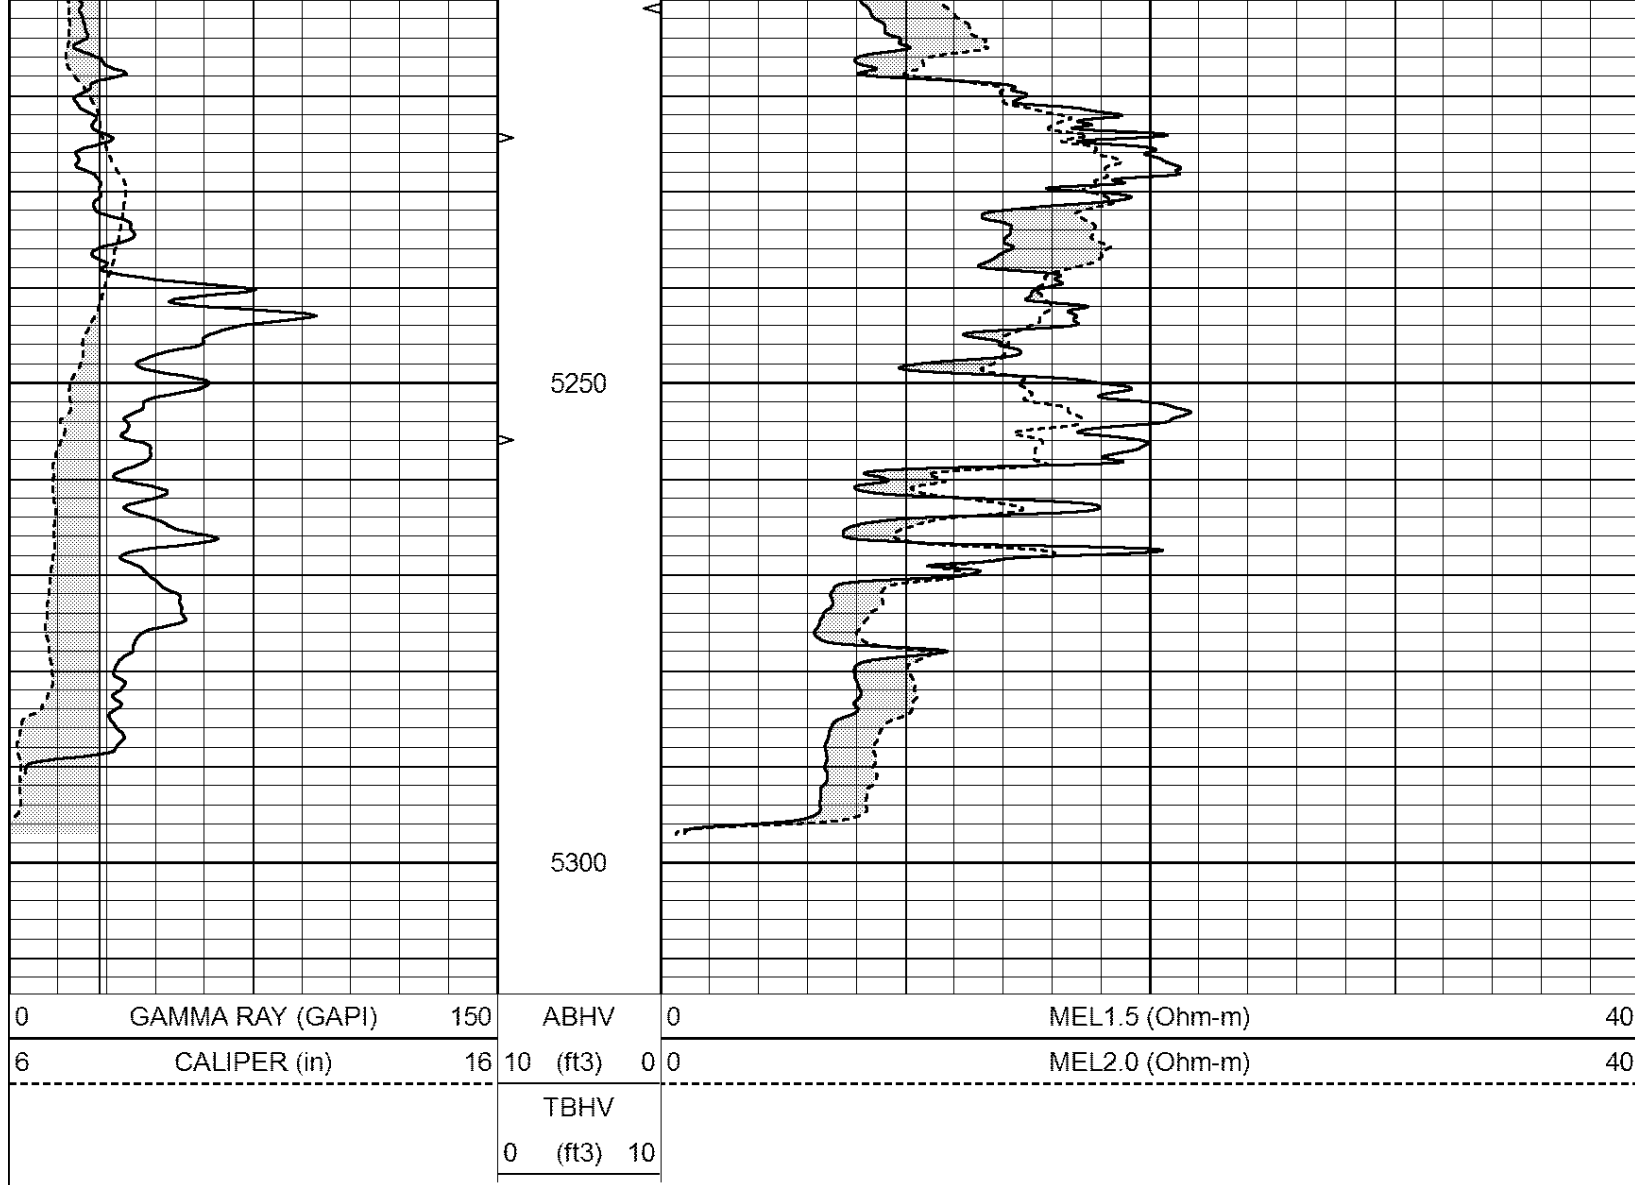

Calibration Report

Database File: 26429pe.db
 Dataset Pathname: pass7.2
 Dataset Creation: Wed Jan 07 04:46:27 2015 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: 070911
 Tool Model: ProbeL
 Performed: Thu Nov 20 18:56:37 2014

Caliper Calibration: Gain=4.161 Offset=0.400

References	Low Cal	High Cal
	8.000	14.000
Readings	1.333	2.775

1.5" Calibration: Gain=17.000 Offset=1.000

References	Low Cal	High Cal
	0.000	20.000
Readings	0.004	0.843

2" Calibration: Gain=25.000 Offset=0.650

References	Low Cal	High Cal
	0.000	20.000
Readings	0.021	0.810

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Thu Jan 01 09:43:47 2015	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5000	GAPI/cps