



DUAL INDUCTION LOG

Company RED OAK ENERGY, INC.
 Well PWAB #1-35
 Field LADDER CREEK N.W.
 County WALLACE
 State KANSAS

Company RED OAK ENERGY, INC.
 Well PWAB #1-35
 Field LADDER CREEK N.W.
 County WALLACE State KANSAS

Location: API # : 15-199-20438-0000
 2480' FNL & 2442' FWL
 SE - SE - SE - NW
 SEC 35 TWP 14S RGE 41W
 Permanent Datum GROUND LEVEL Elevation 3775
 Log Measured From KELLY BUSHING 11' A.G.L.
 Drilling Measured From KELLY BUSHING
 Other Services CDL/CNL/PE
 Elevation K.B. 3786
 D.F. 3784
 G.L. 3775

Date	12/14/16	
Run Number	ONE	
Depth Driller	5170	
Depth Logger	5171	
Bottom Logged Interval	5169	
Top Log Interval	00	
Casing Driller	8 5/8" @ 506'	
Casing Logger	506	
Bit Size	7 7/8"	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,000 PPM
Density / Viscosity	9.3/55	
pH / Fluid Loss	10.0/9.6	
Source of Sample	FLOWLINE	
Rim @ Meas. Temp	.500 @ 50F	
Rmf @ Meas. Temp	.375 @ 50F	
Rmc @ Meas. Temp	.600 @ 50F	
Source of Rmf / Rmc	MEASUREMENT	
Rim @ BHT	.197 @ 127F	
Time Circulation Stopped	3 HOURS	
Time Logger on Bottom	12:30 P.M.	
Maximum Recorded Temperature	127F	
Equipment Number	922339	
Location	HAYS, KANSAS	
Recorded By	JEFF LUEBBERS	
Witnessed By	SEAN DEENIHAN	KEVIN DAVIS
		SCOTT BANKS

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
 DIRECTIONS
 SHARON SPRINGS, KS., 8S. ON HWY 27 TO "GOOSEBERRY RD.", 5 1/4W., N. INTO





MAIN SECTION


Database File: 1335pe.db
 Dataset Pathname: pass3.8
 Presentation Format: dil2
 Dataset Creation: Wed Dec 14 14:21:22 2016
 Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

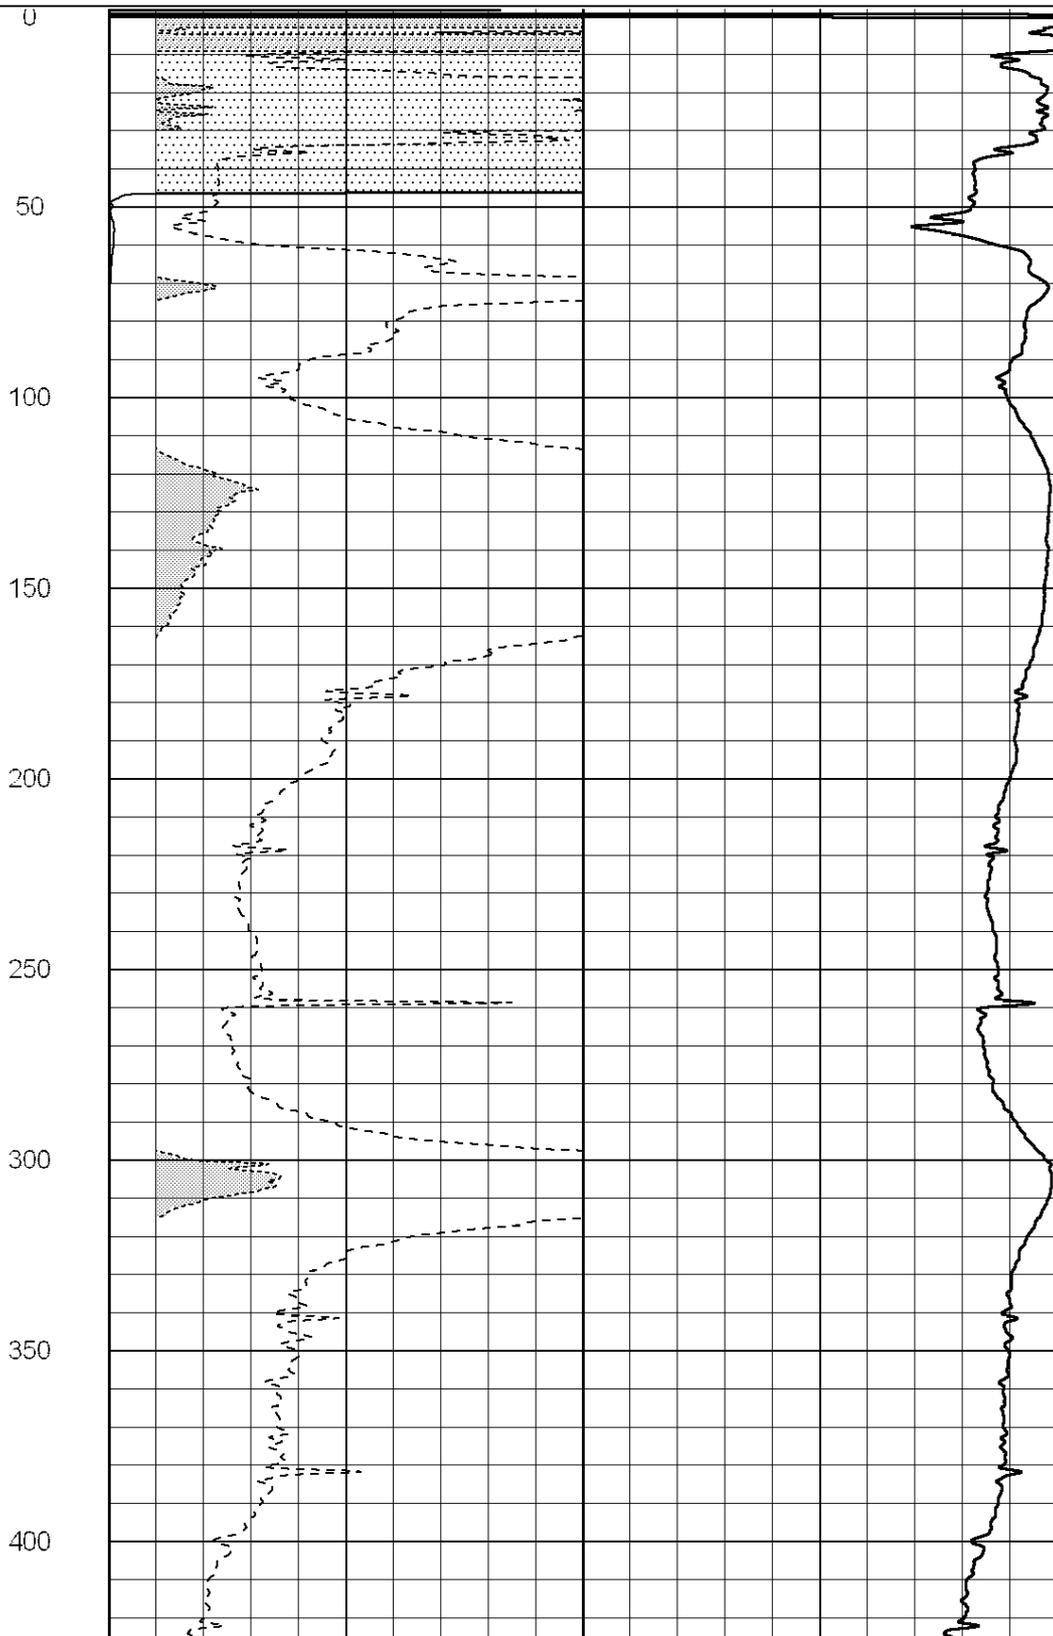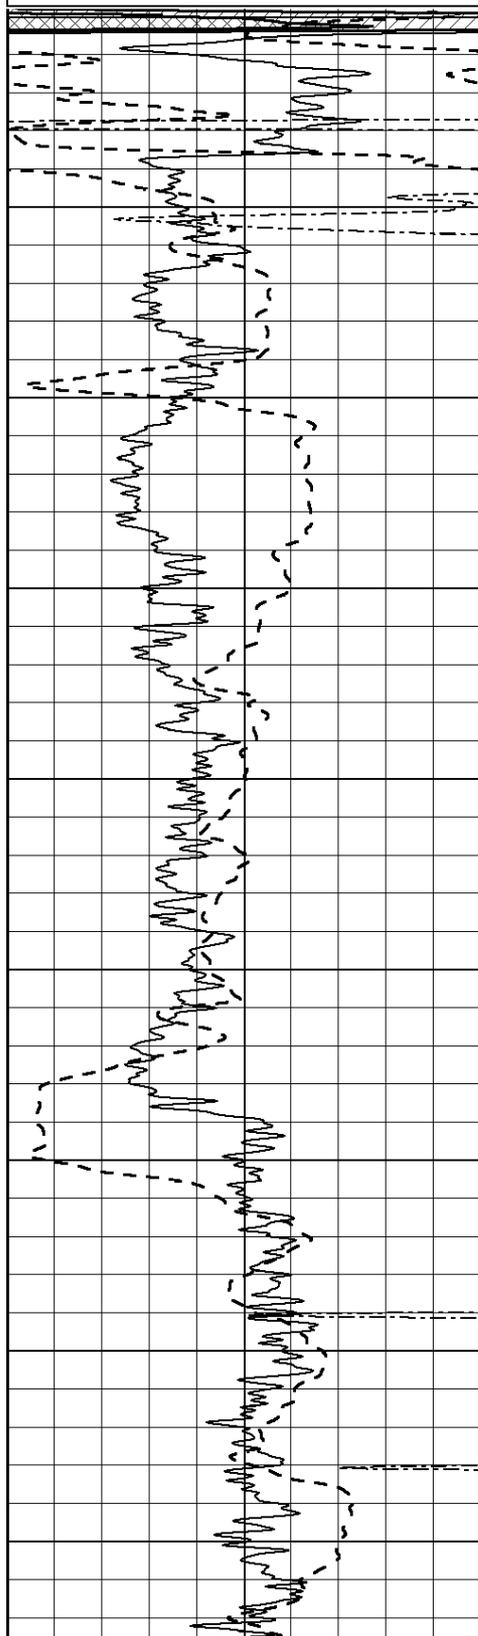

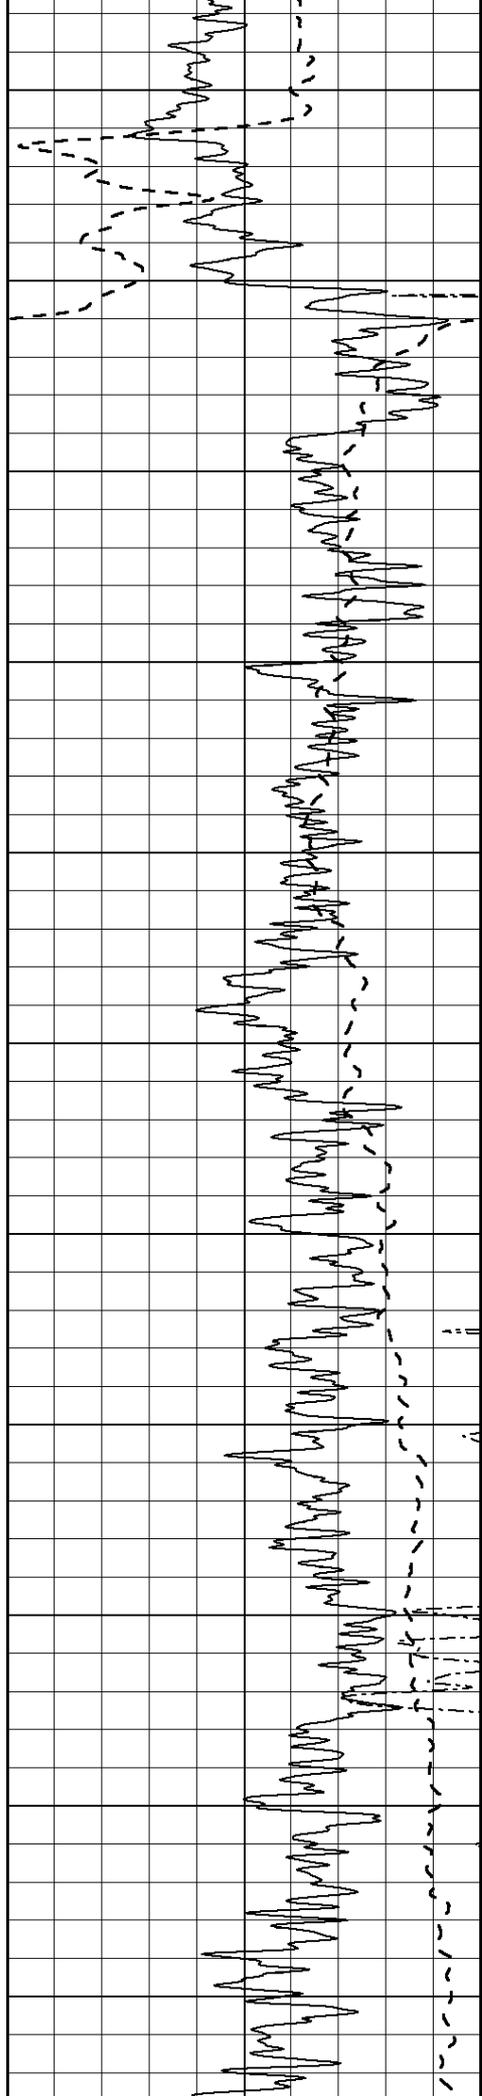

450

500

550

600

650

700


750


800

850

900

950

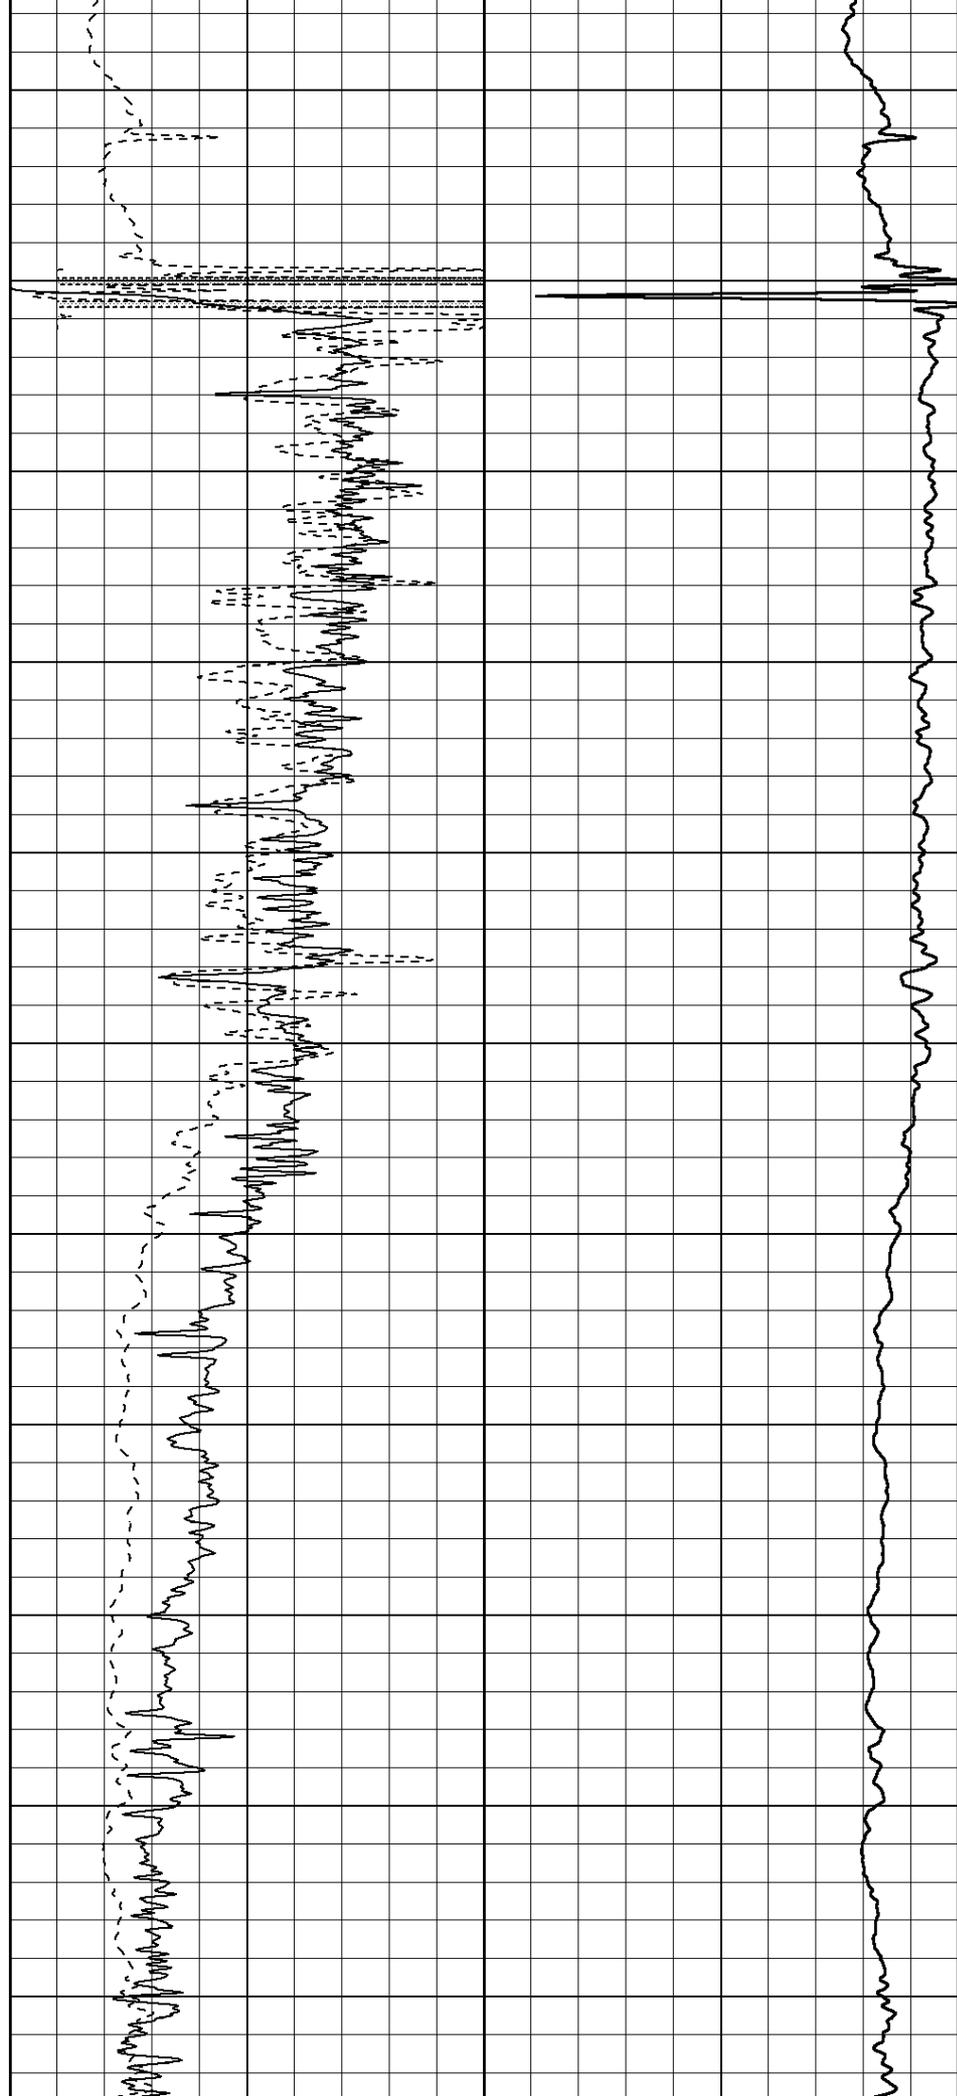

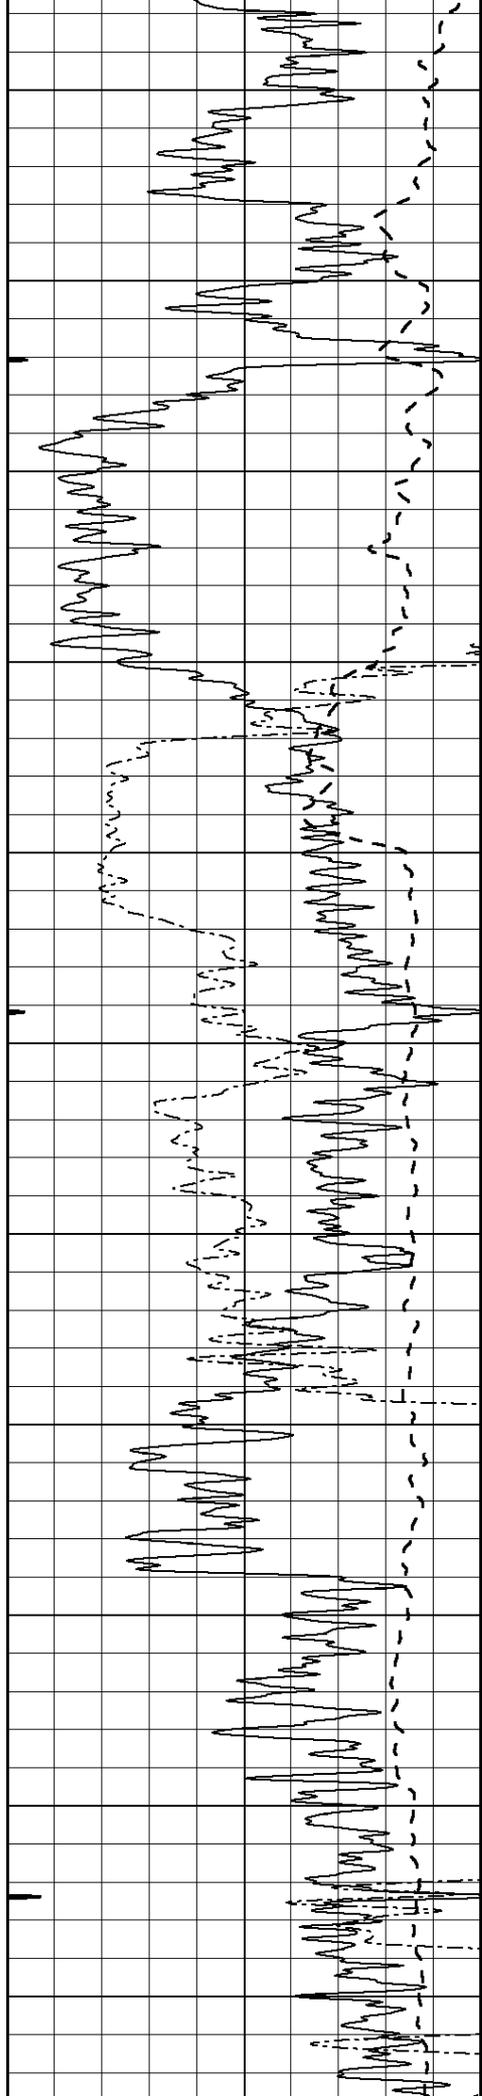

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

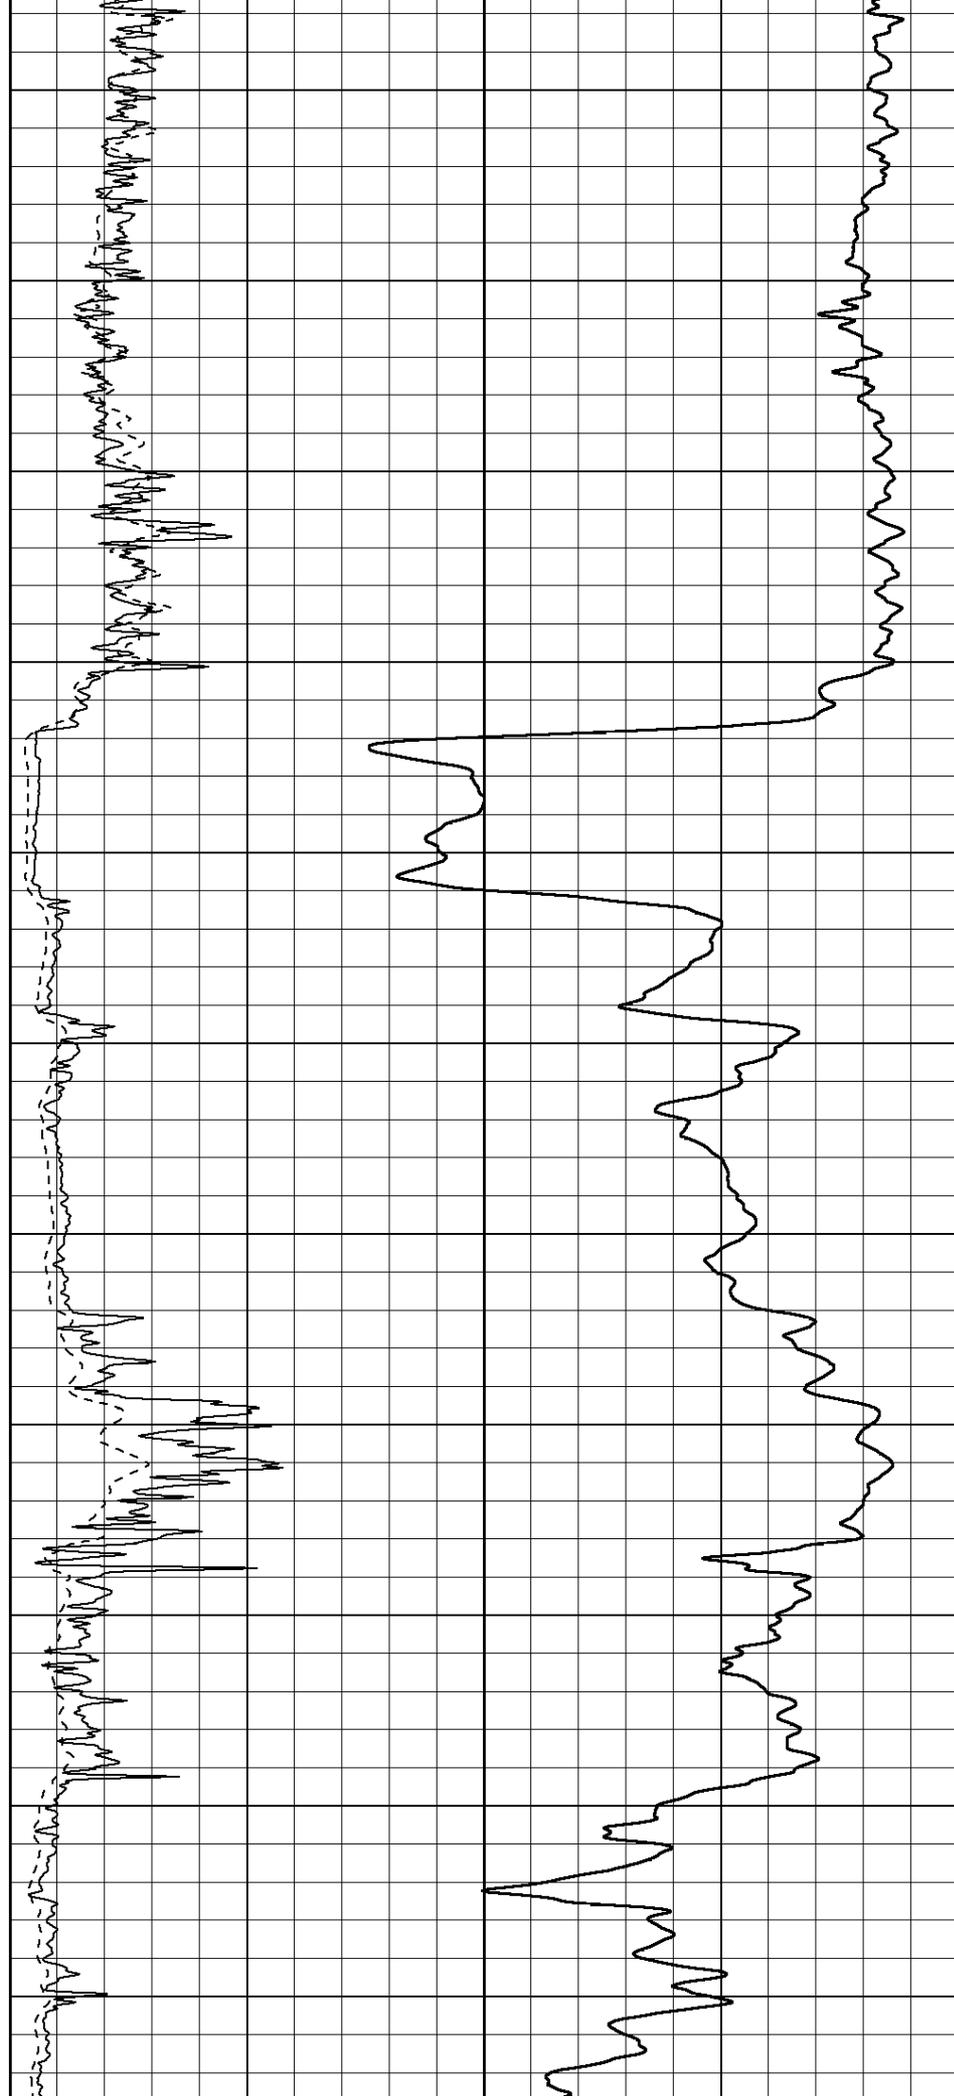

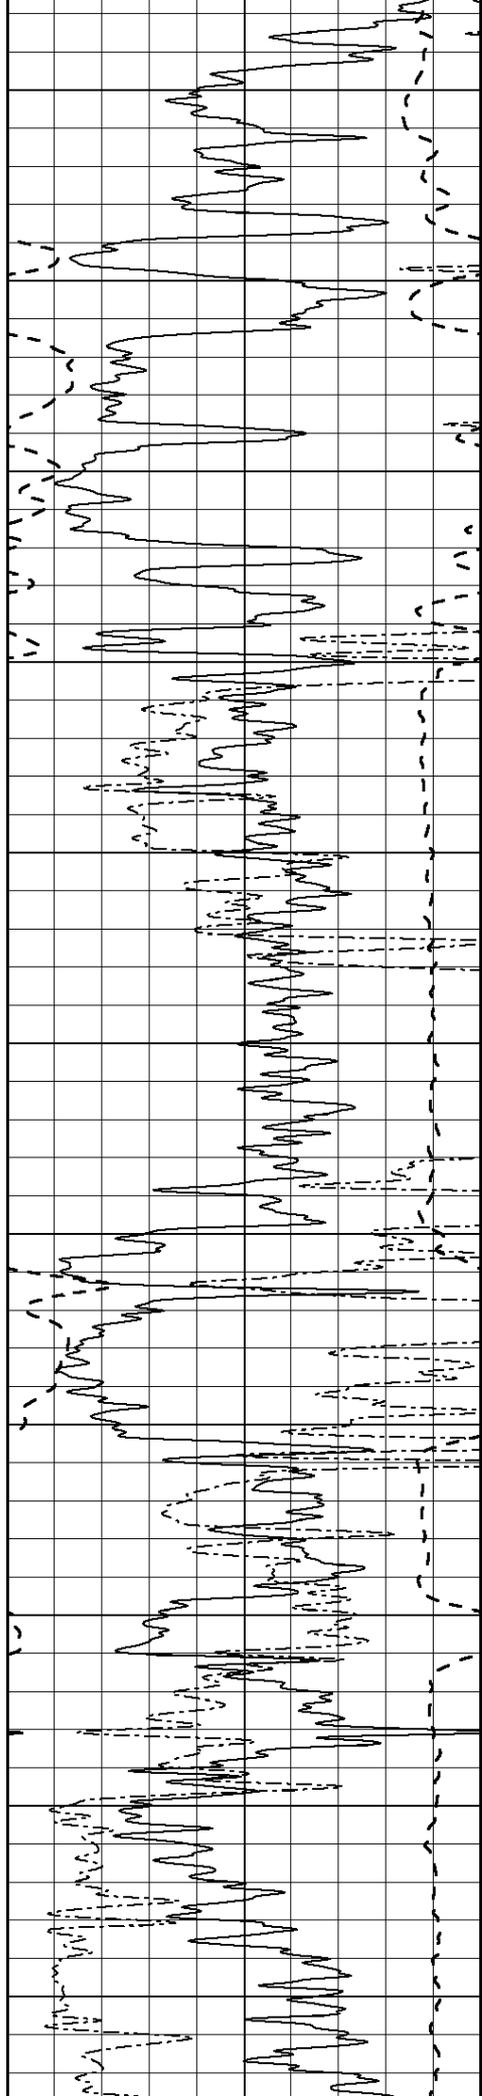

1550

1600

1650

1700

1750

1800


1850

1900

1950

2000

2050

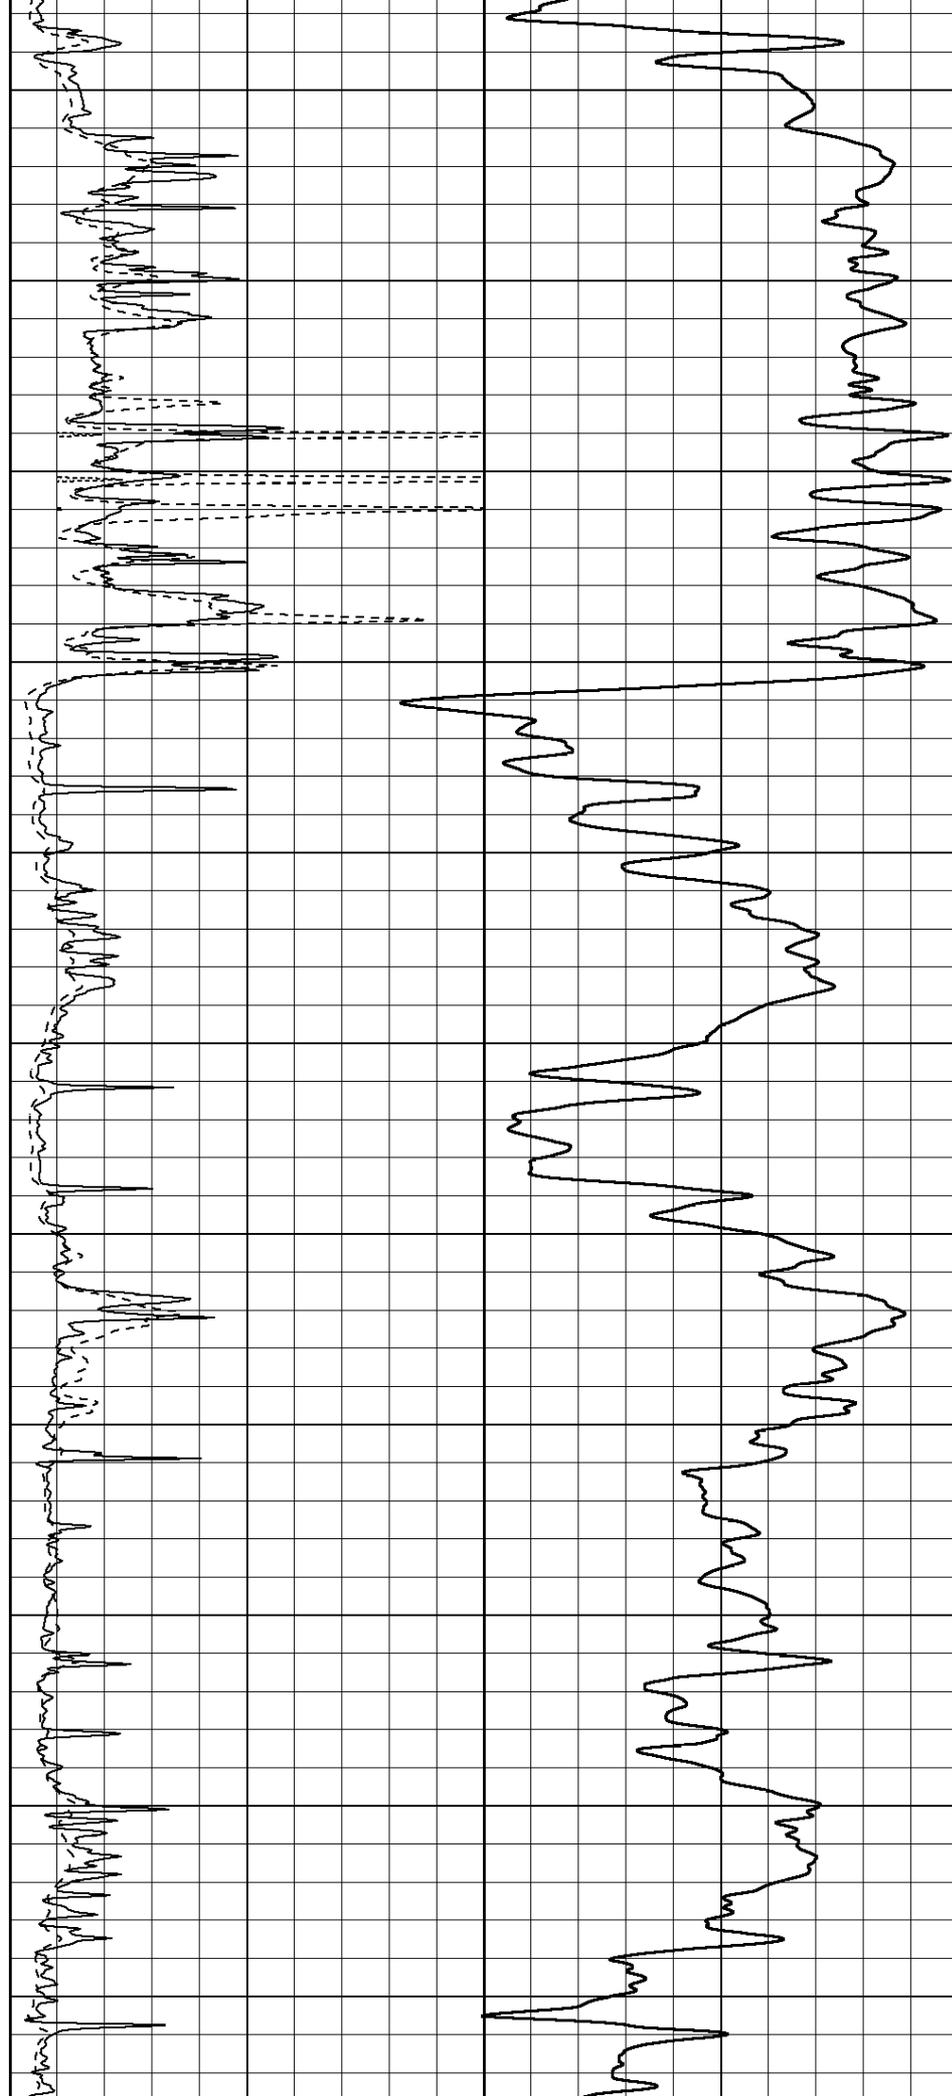

1550

1600

1650

1700

1750

1800


1850

1900

1950

2000

2050

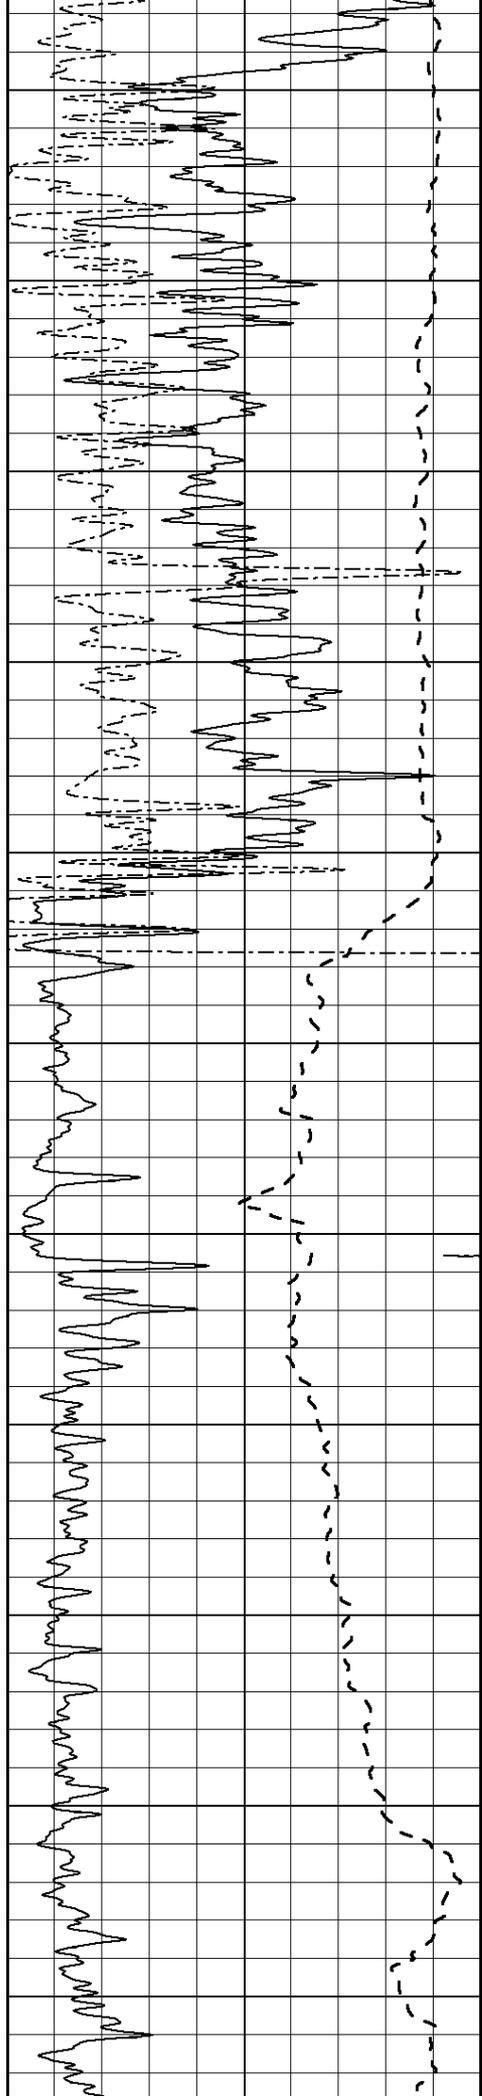

2100

2150

2200

2250

2300

2350


2400



2450


2500

2550

2600

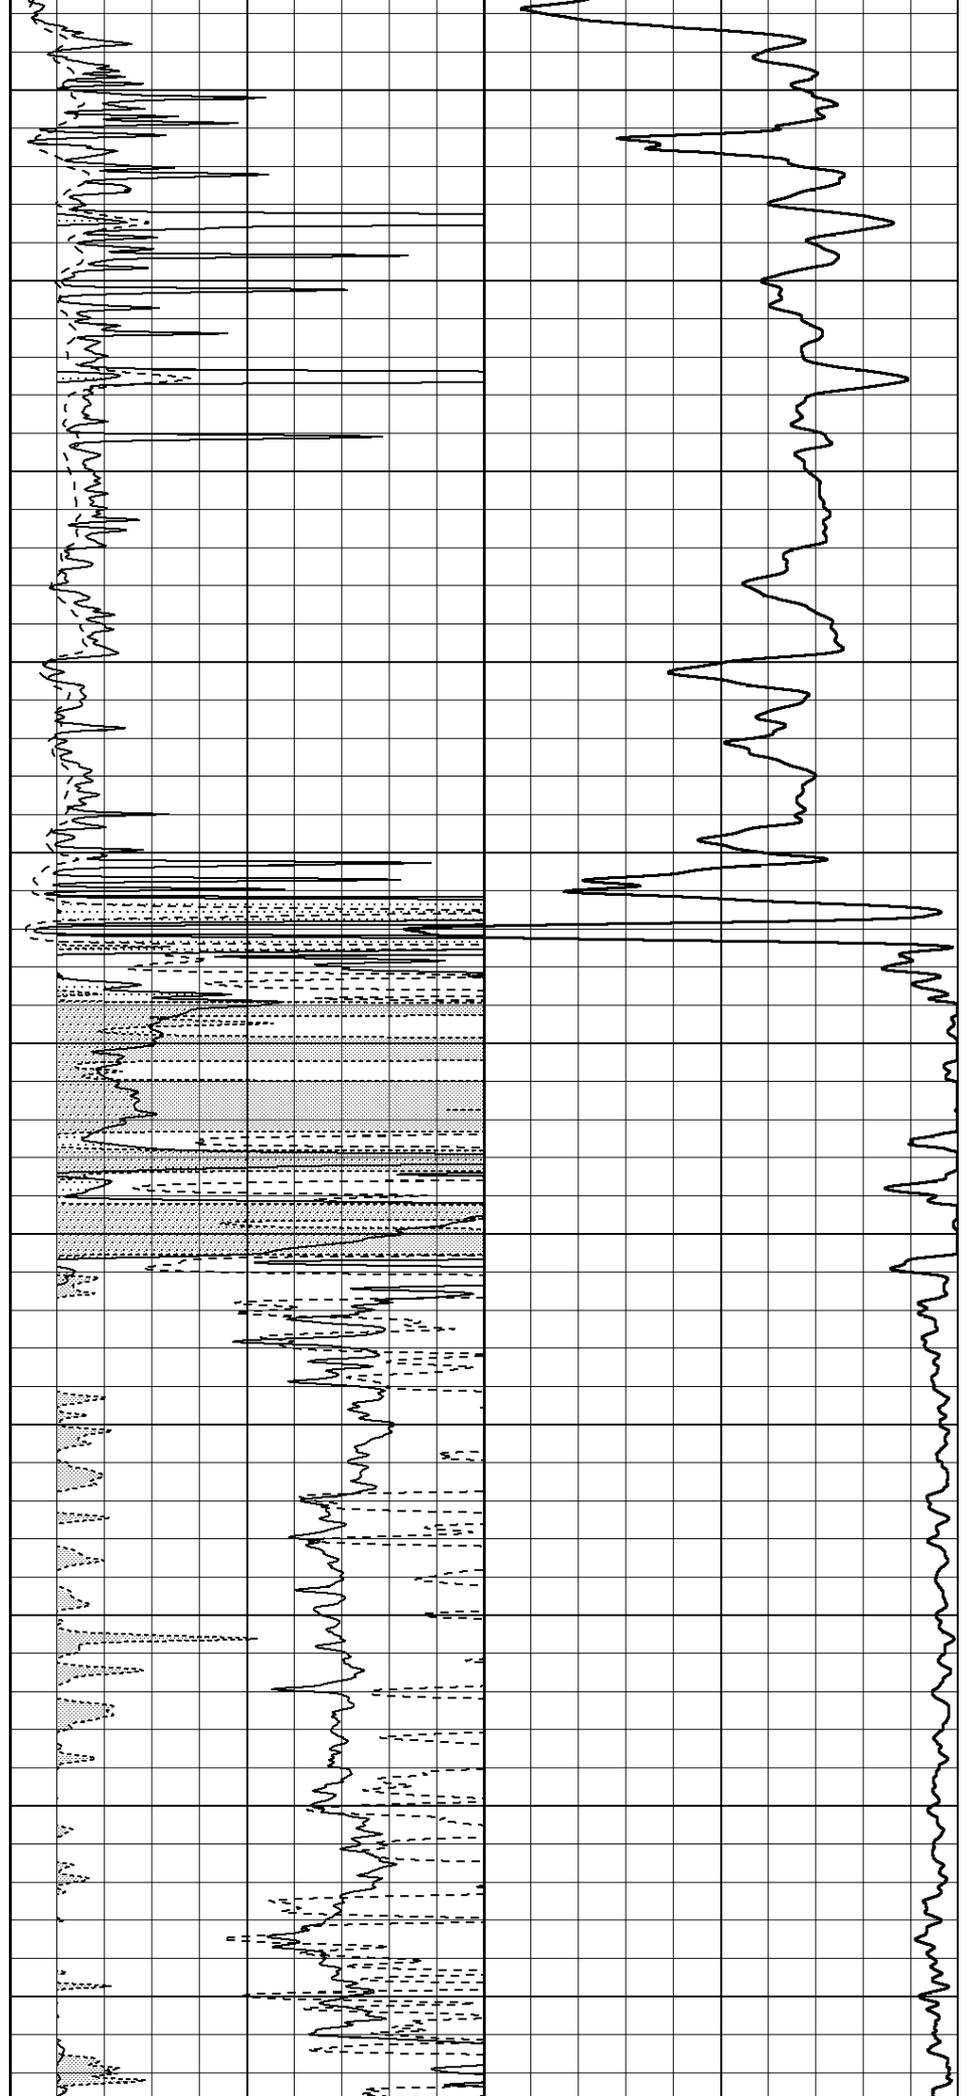

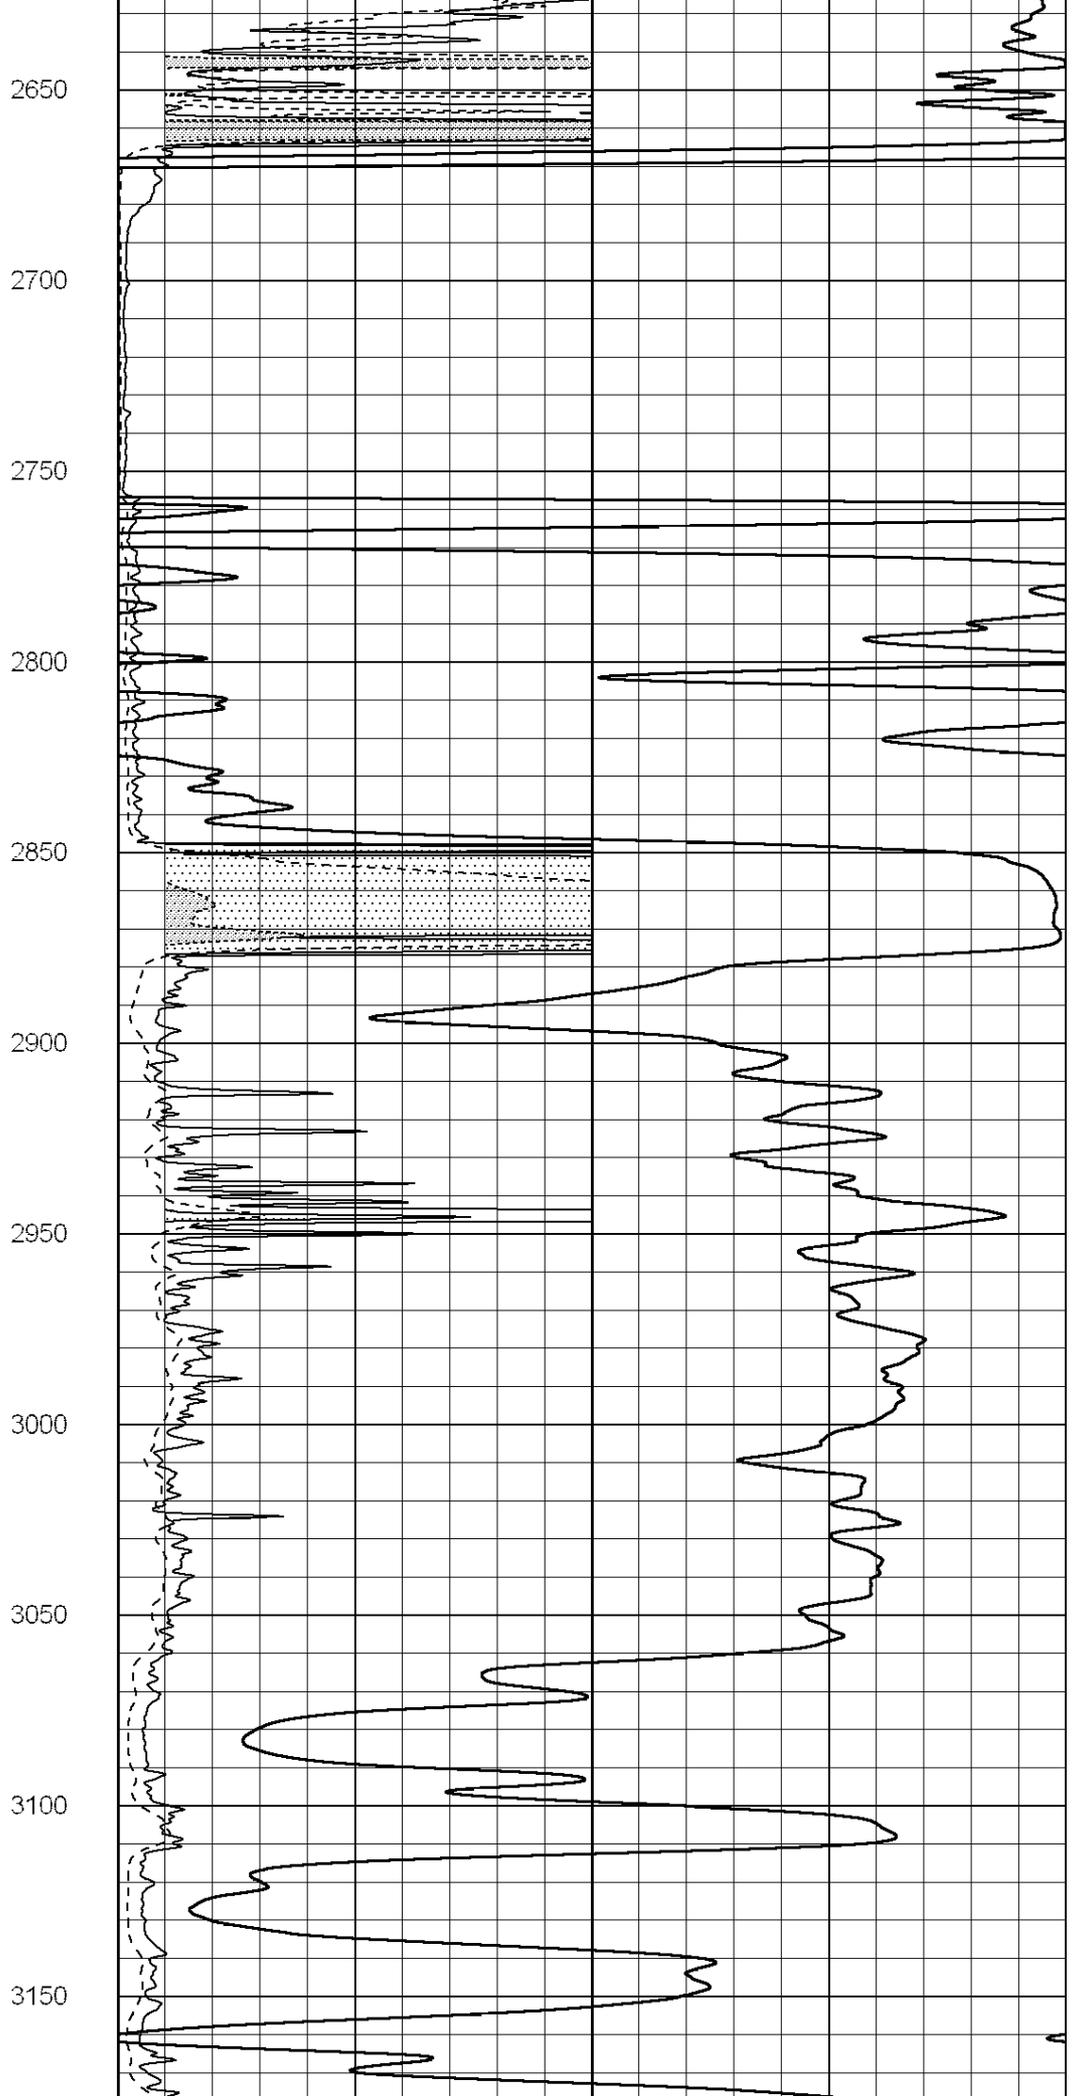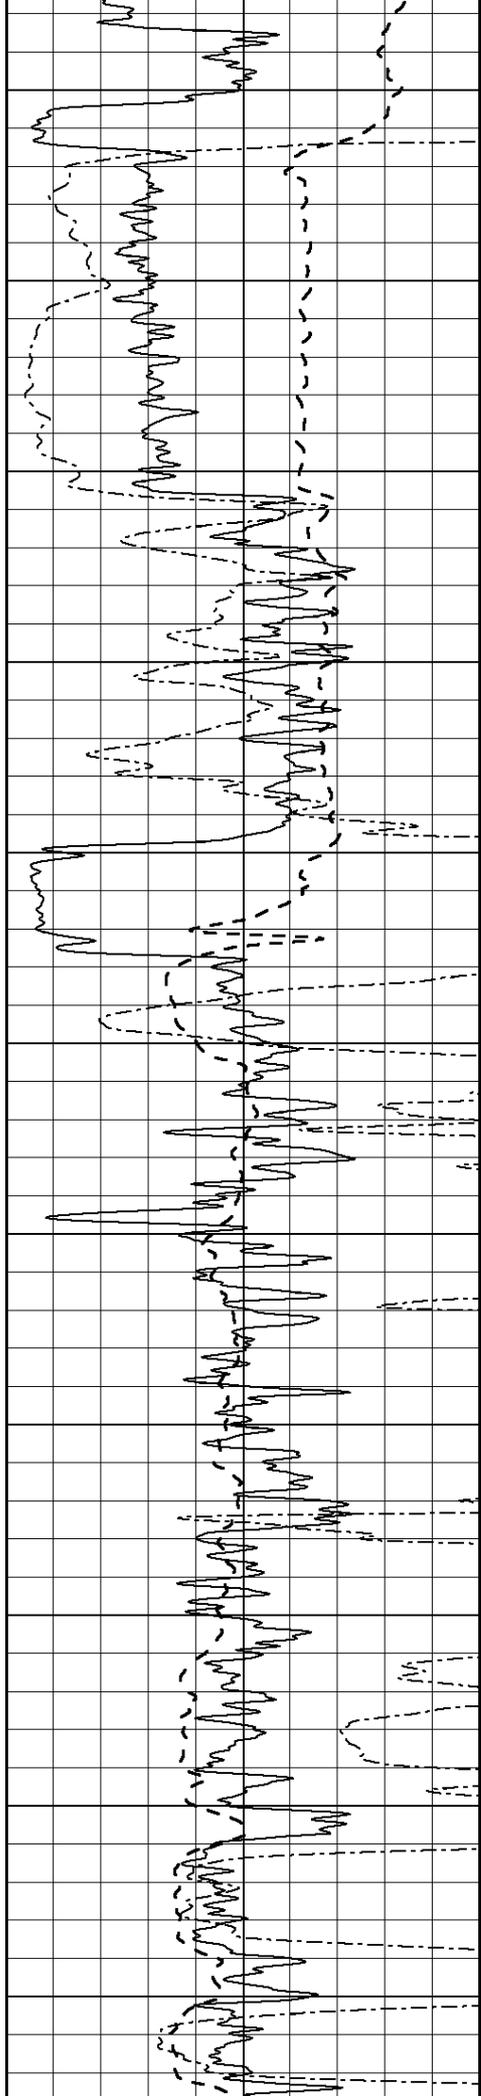

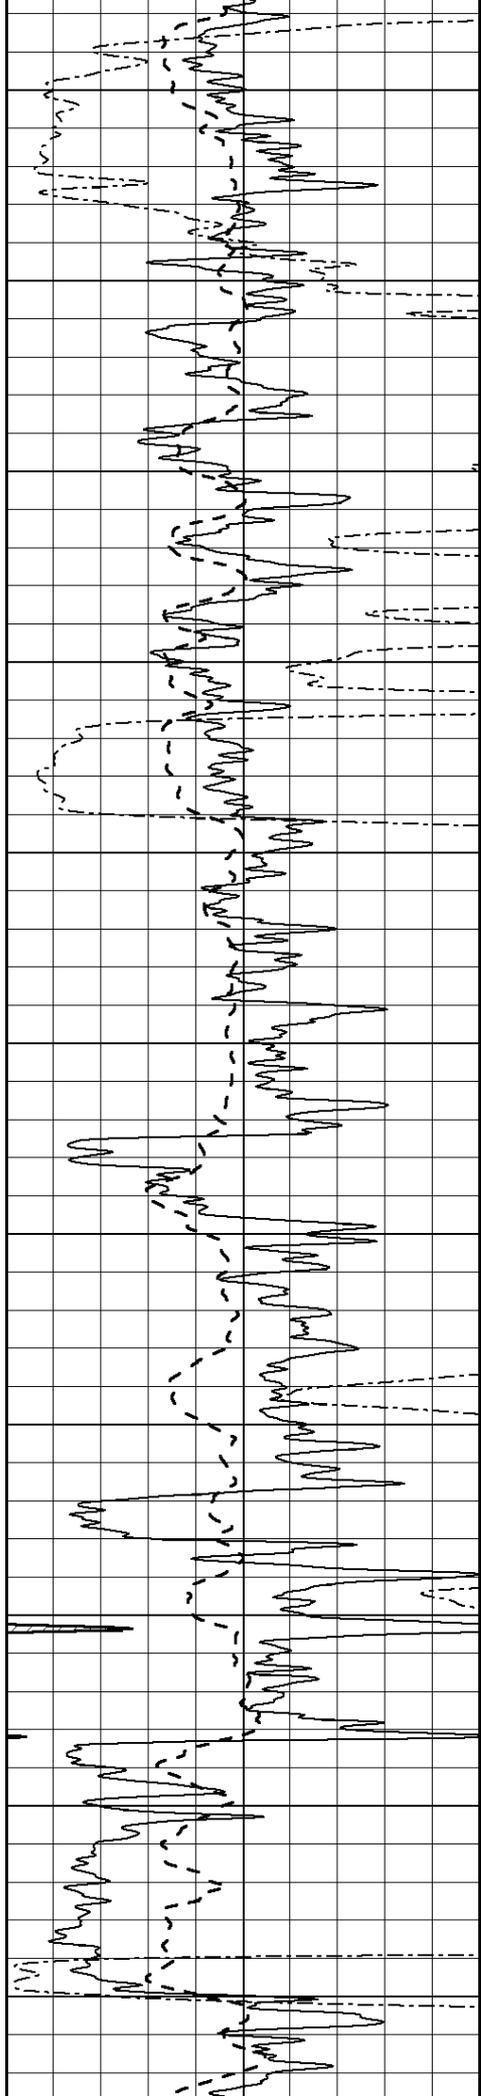

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

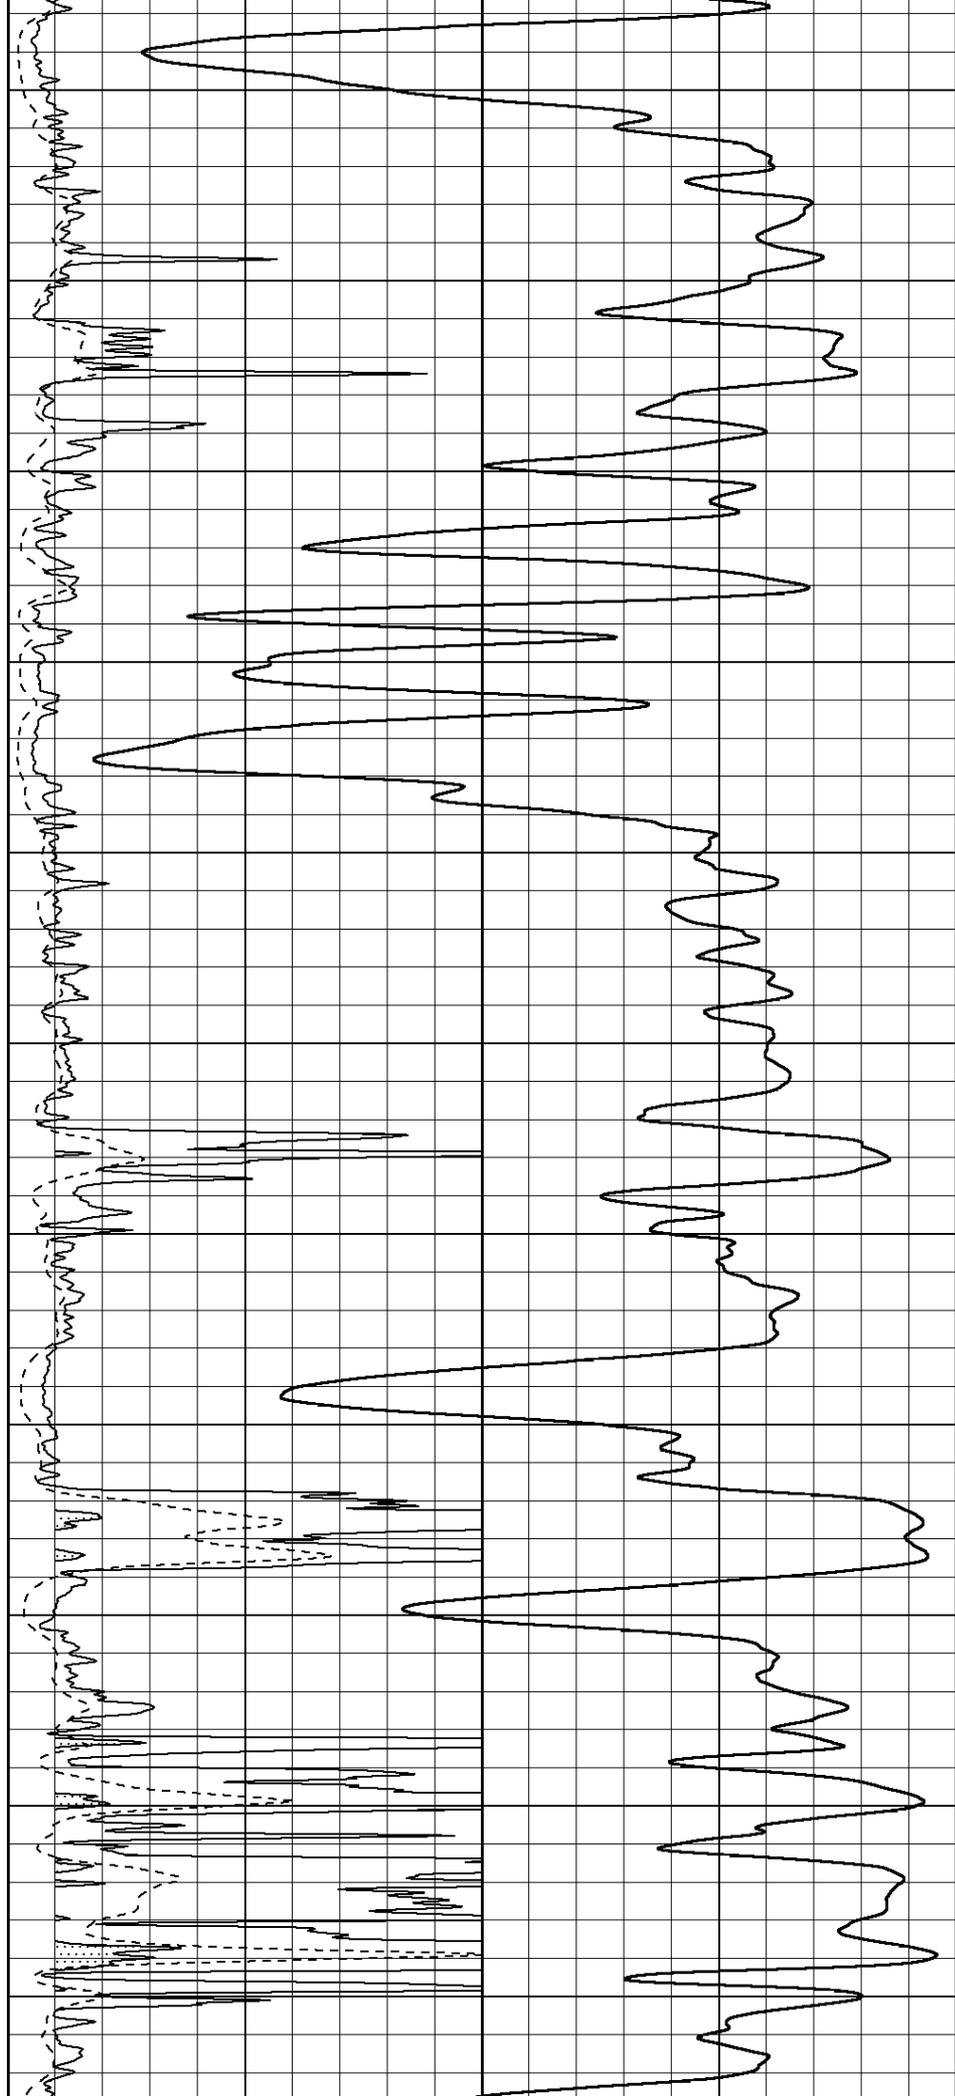

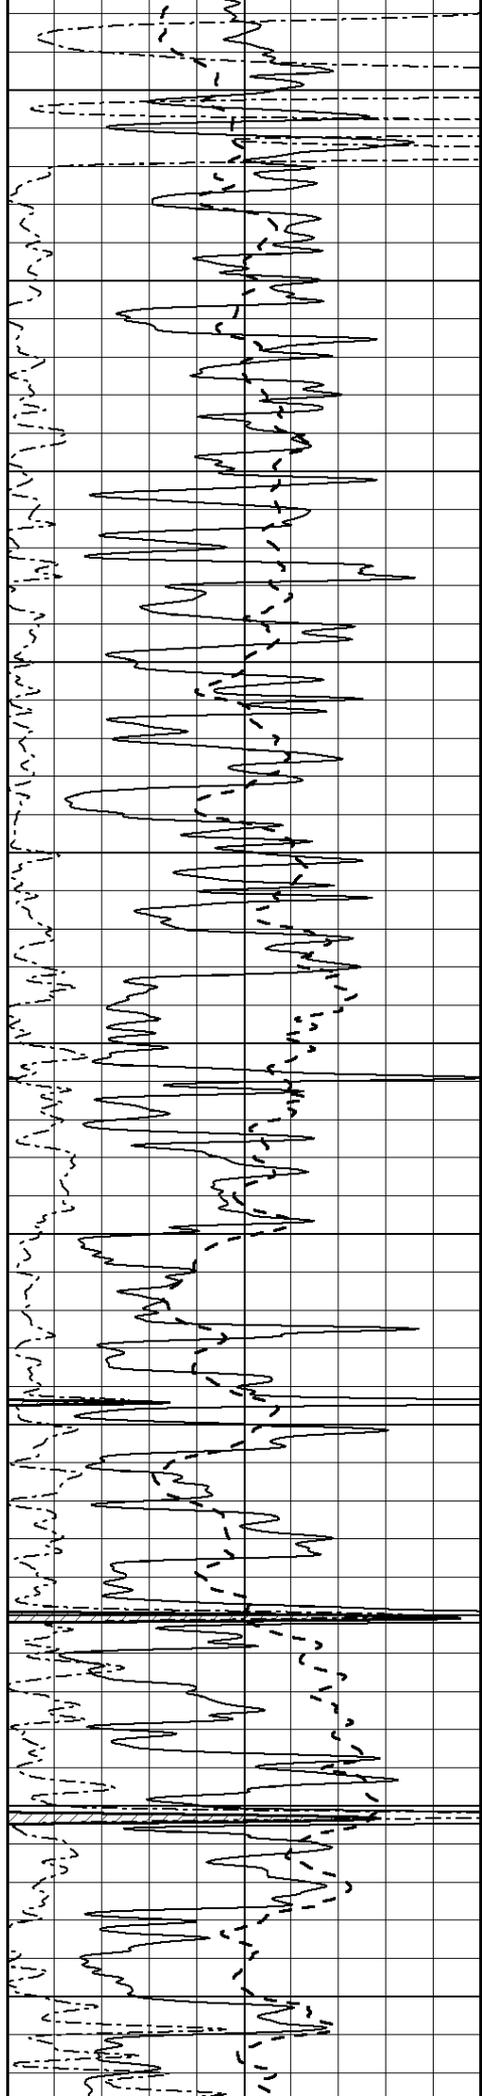

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

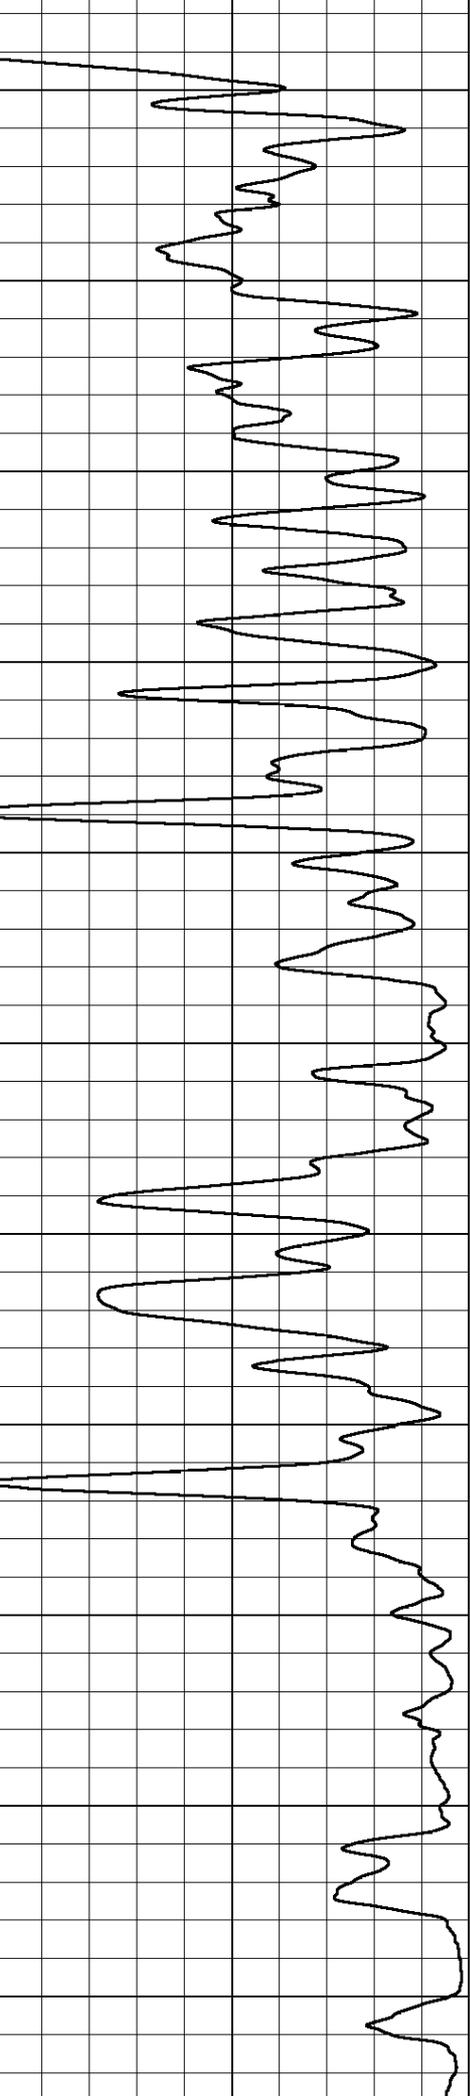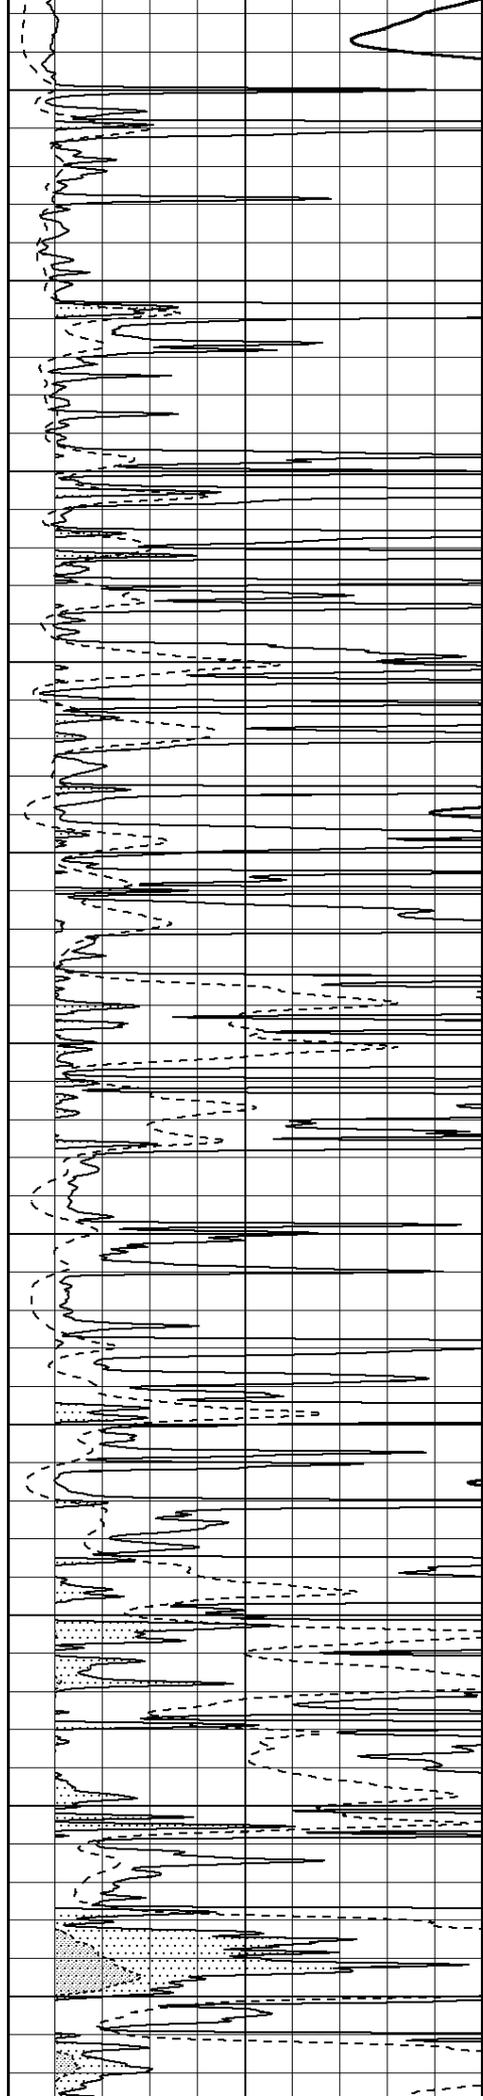

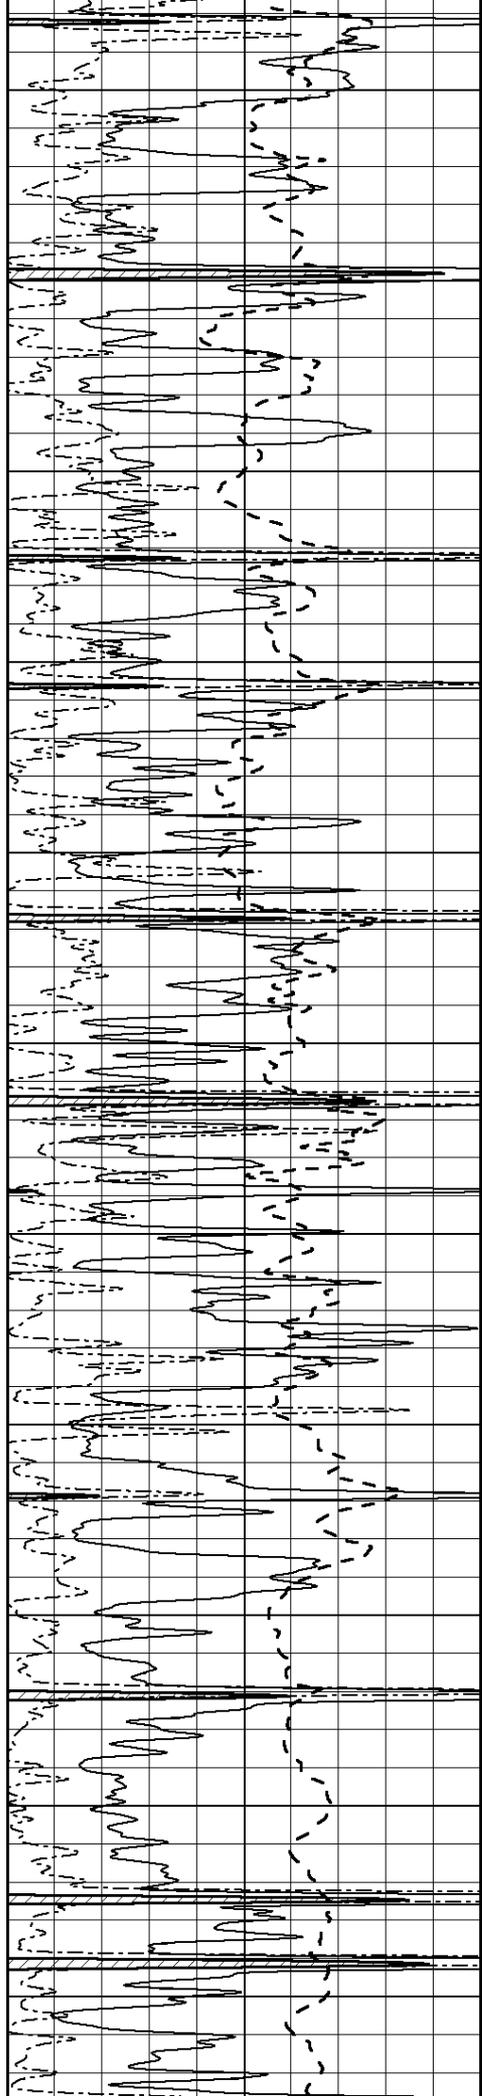

4300

4350

4400

4450

4500

4550



4600


4650

4700

4750


4800

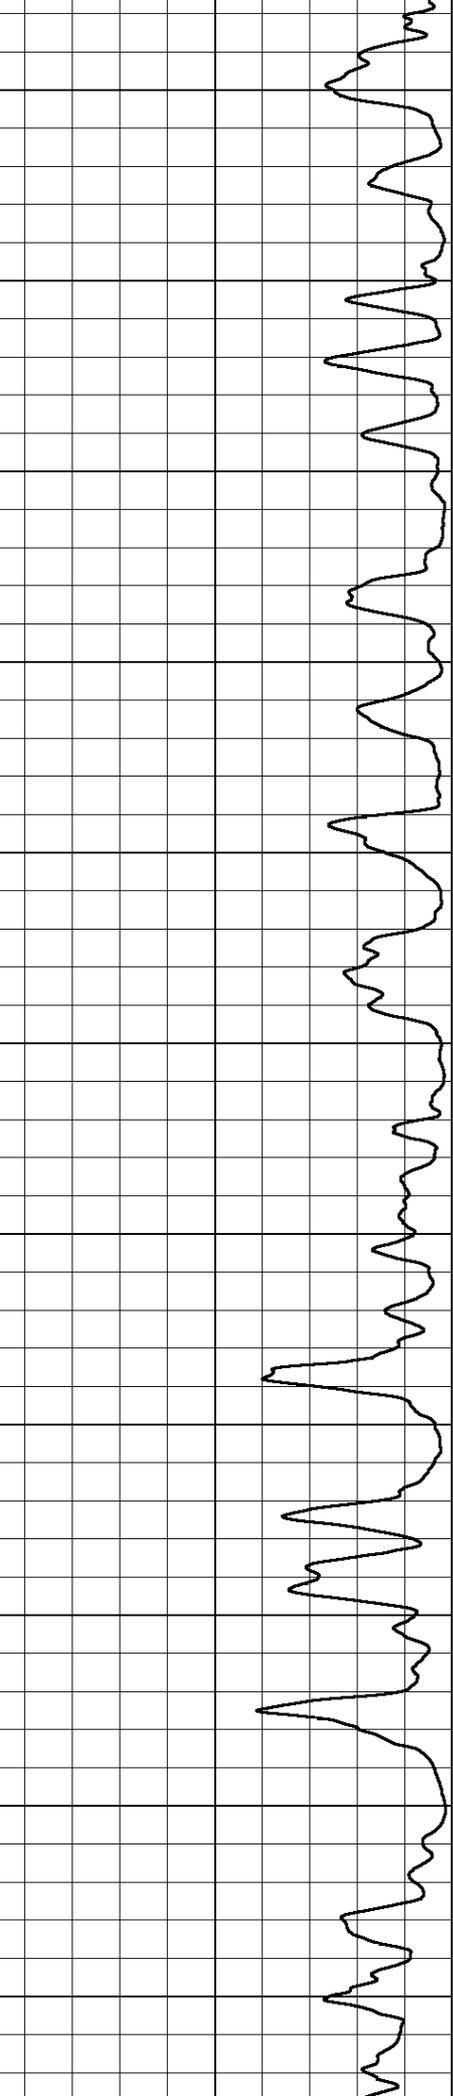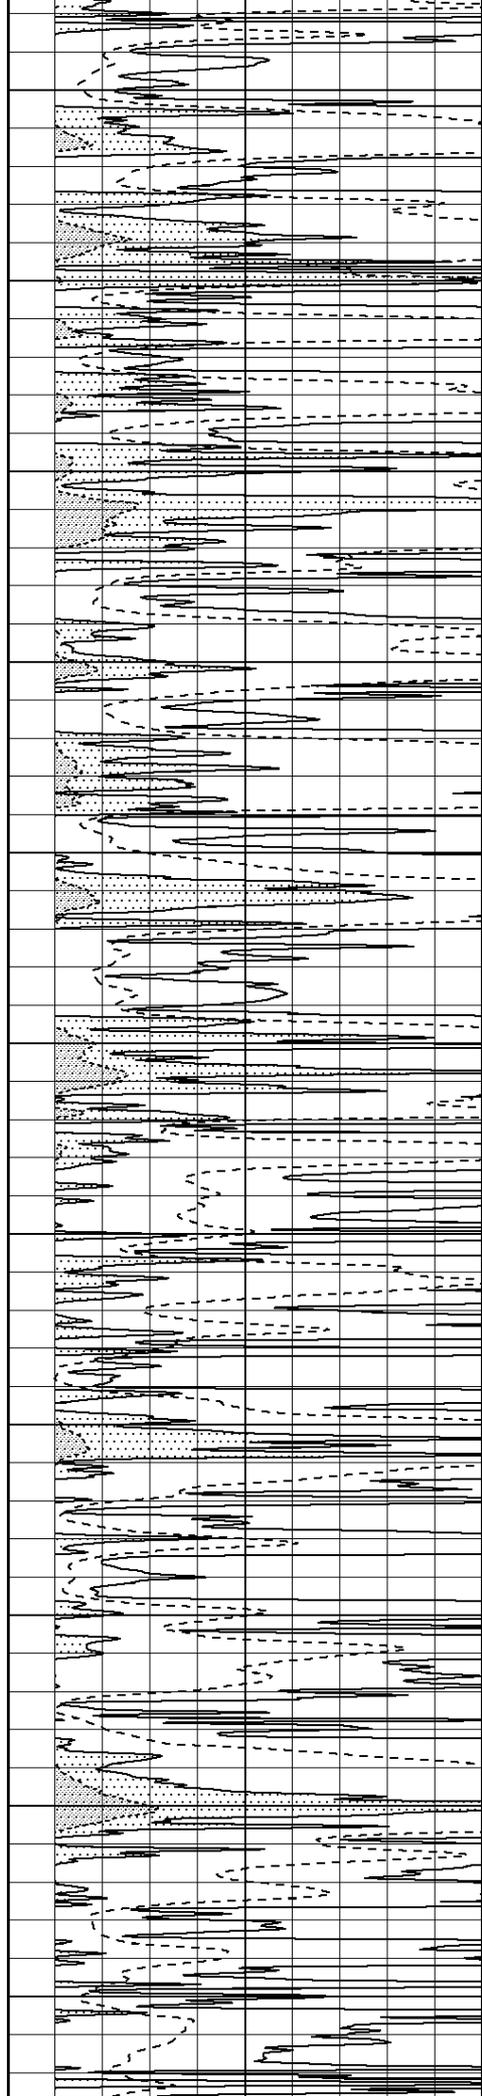

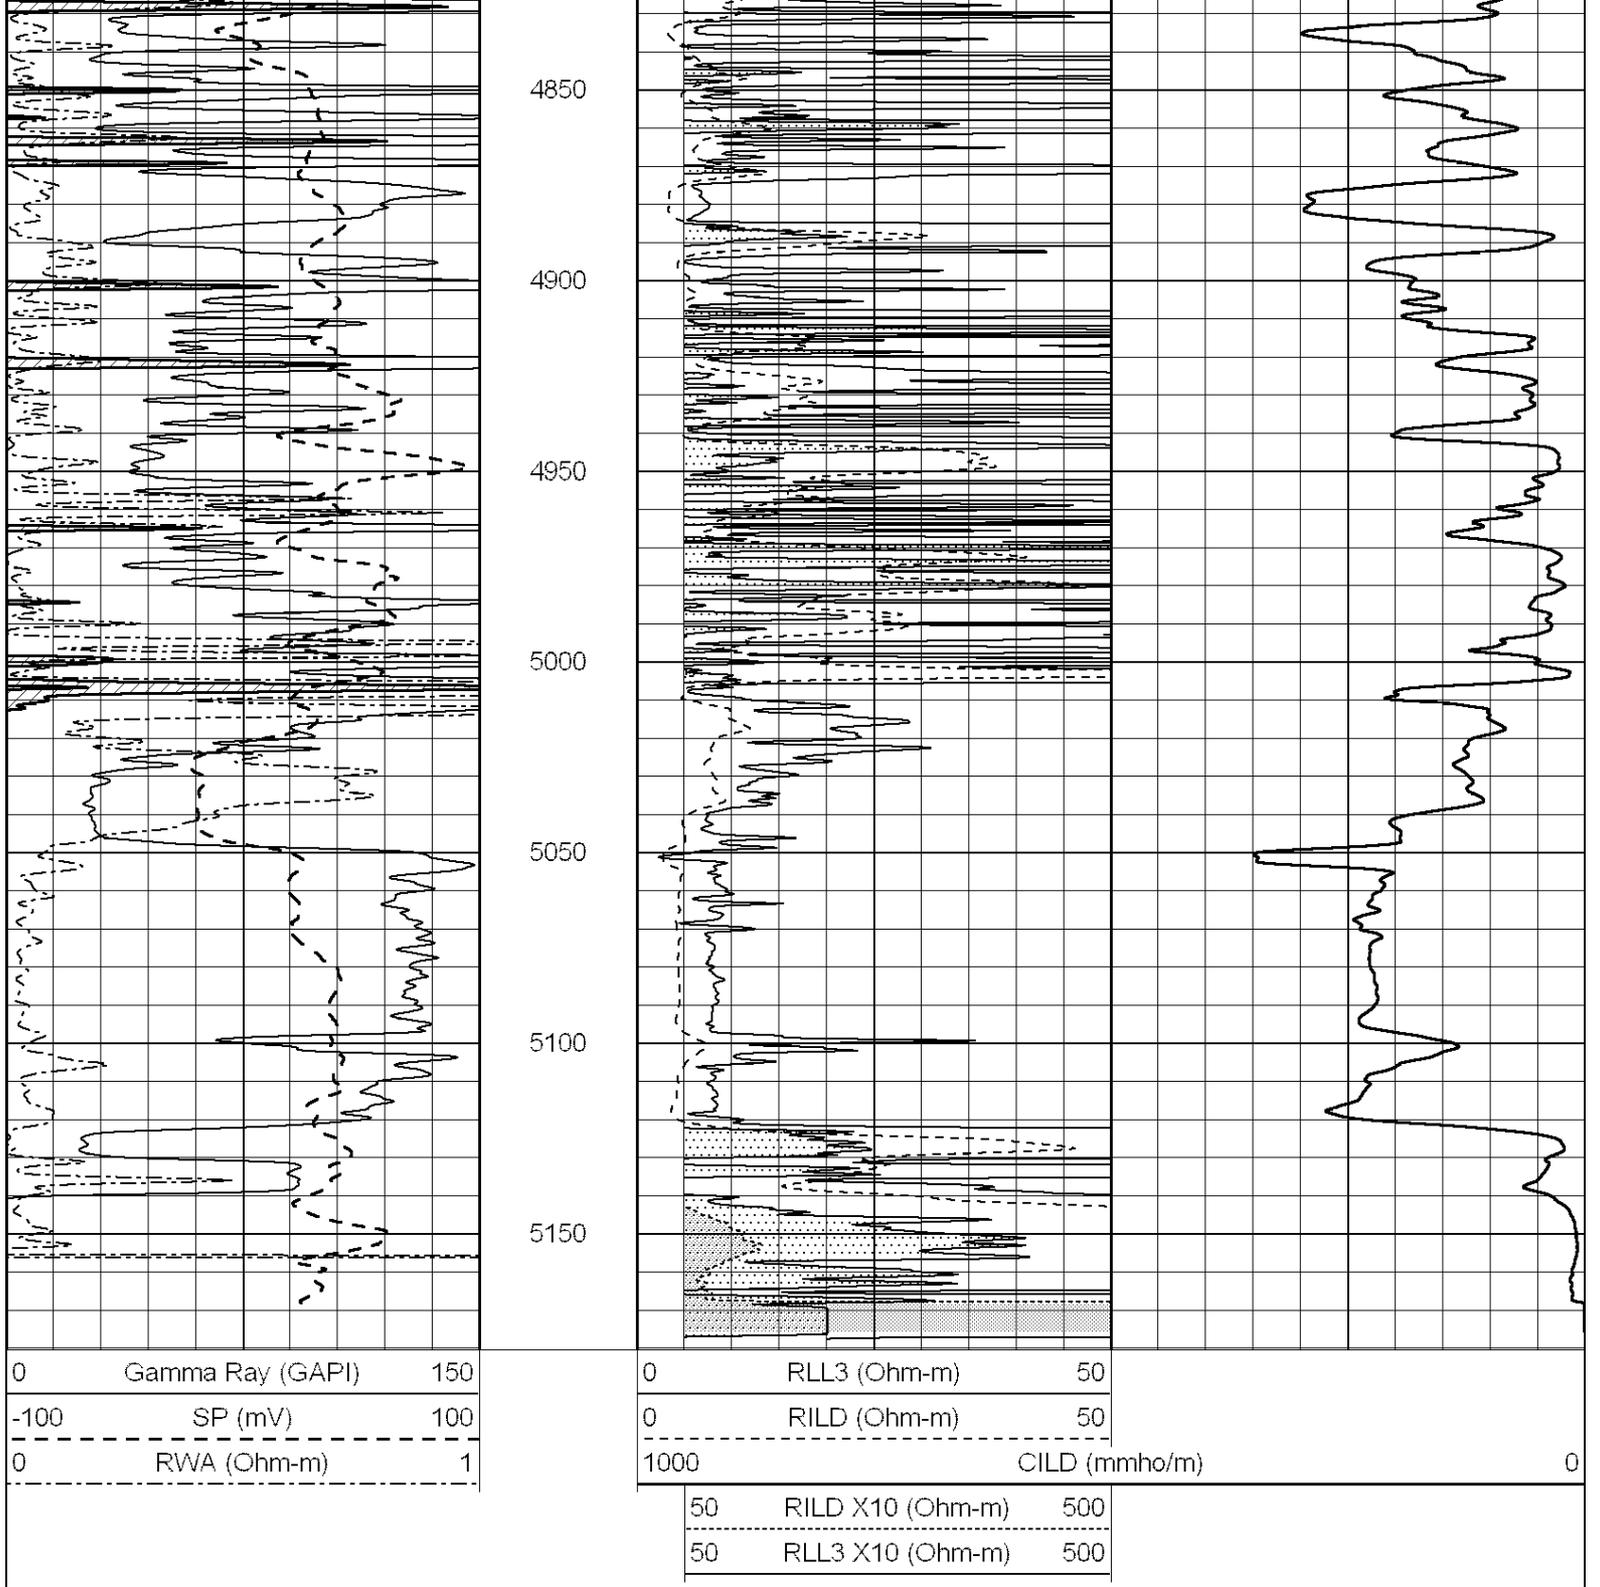


ANHYDRITE

Database File: 1335pe.db
 Dataset Pathname: pass3.9
 Presentation Format: _dil
 Dataset Creation: Wed Dec 14 14:22:08 2016
 Charted by: Depth in Feet scaled 1:240



-250	Rxo/Rt	50
0	MINMK	20


0.2	MEDIUM INDUCTION (Ohm-m)	2000
-----	--------------------------	------

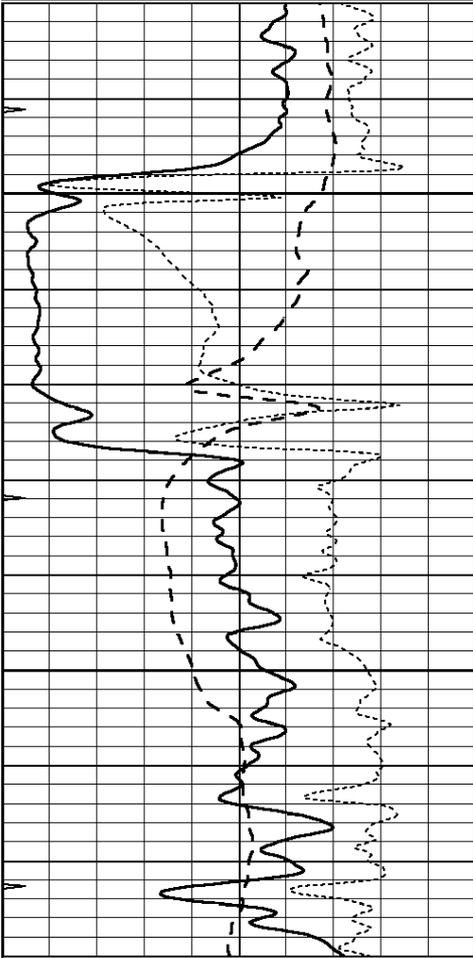


2850

2900

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

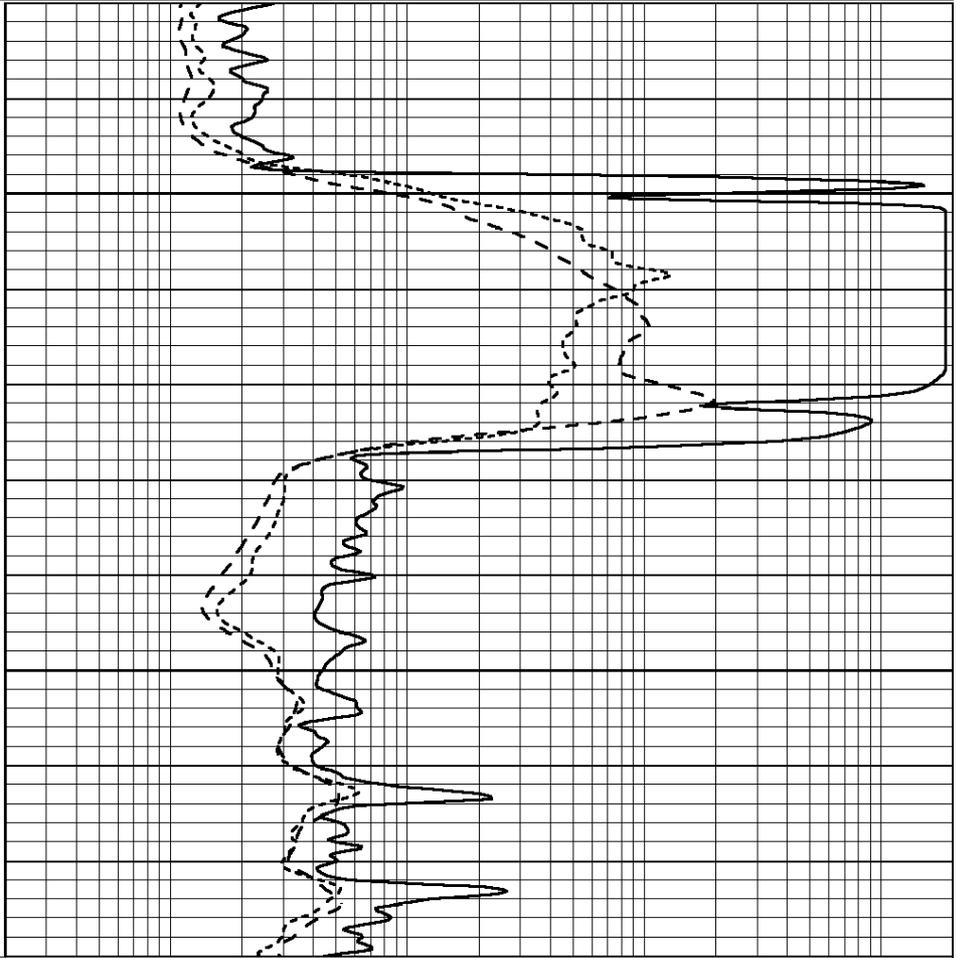

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

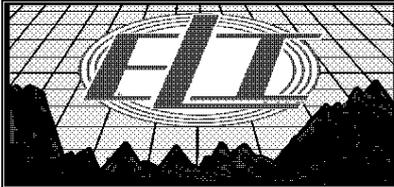

MAIN SECTION


Database File: 1335pe.db
 Dataset Pathname: pass3.8
 Presentation Format: _dil
 Dataset Creation: Wed Dec 14 14:21:22 2016
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



3800



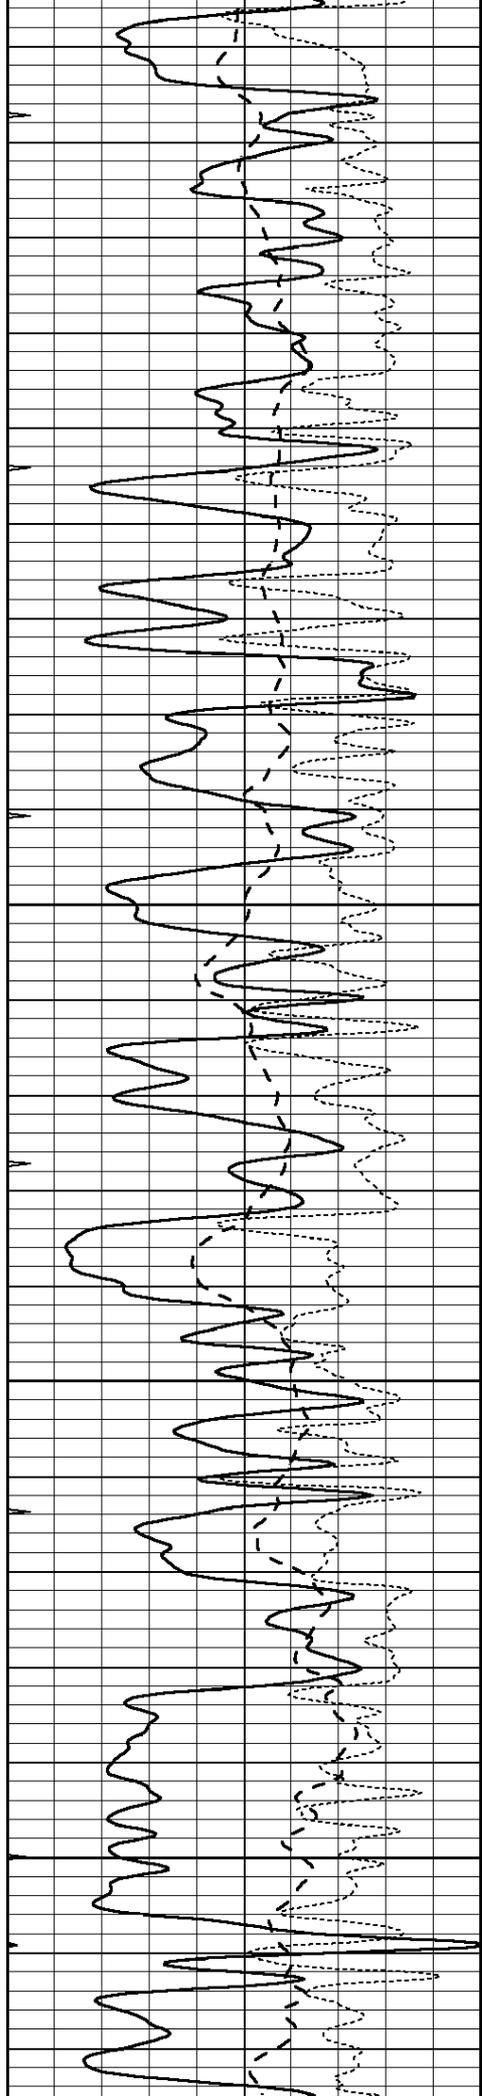



3850

3900

3950

4000

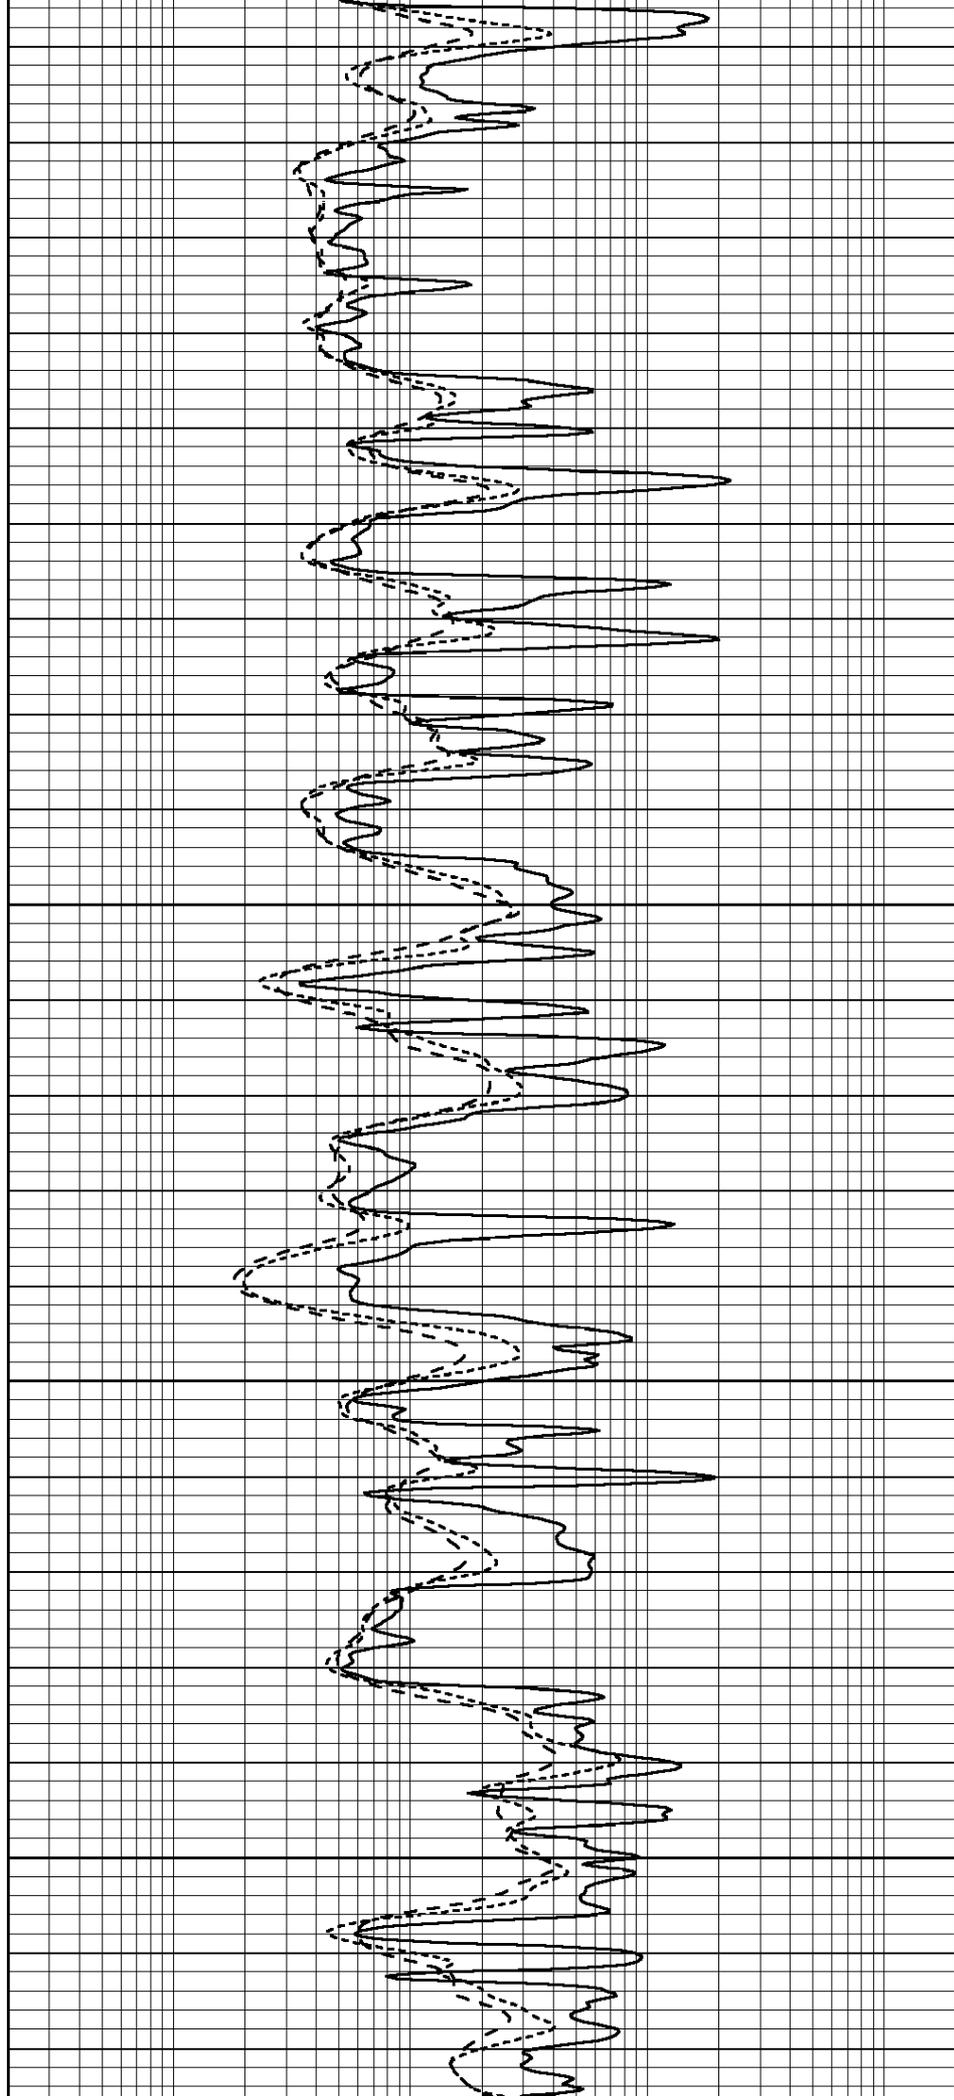

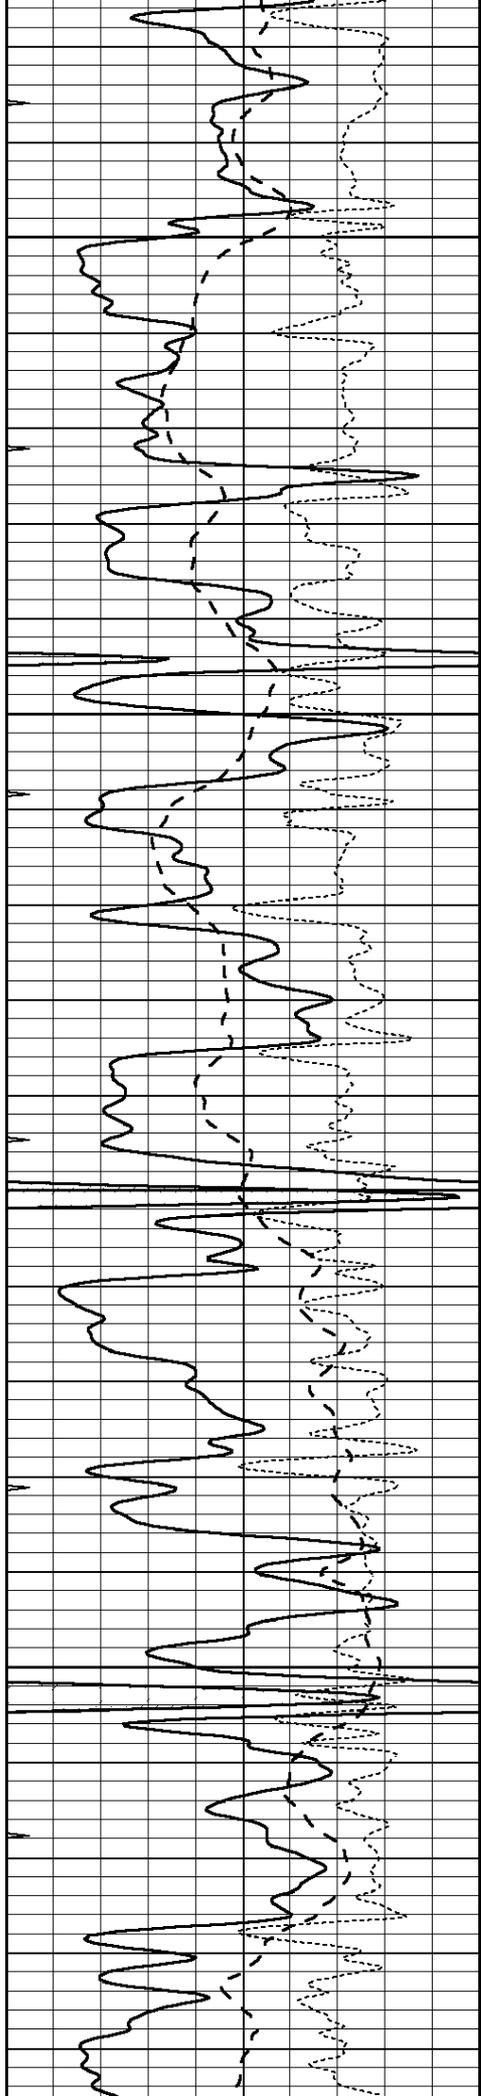



4050

4100

4150

4200

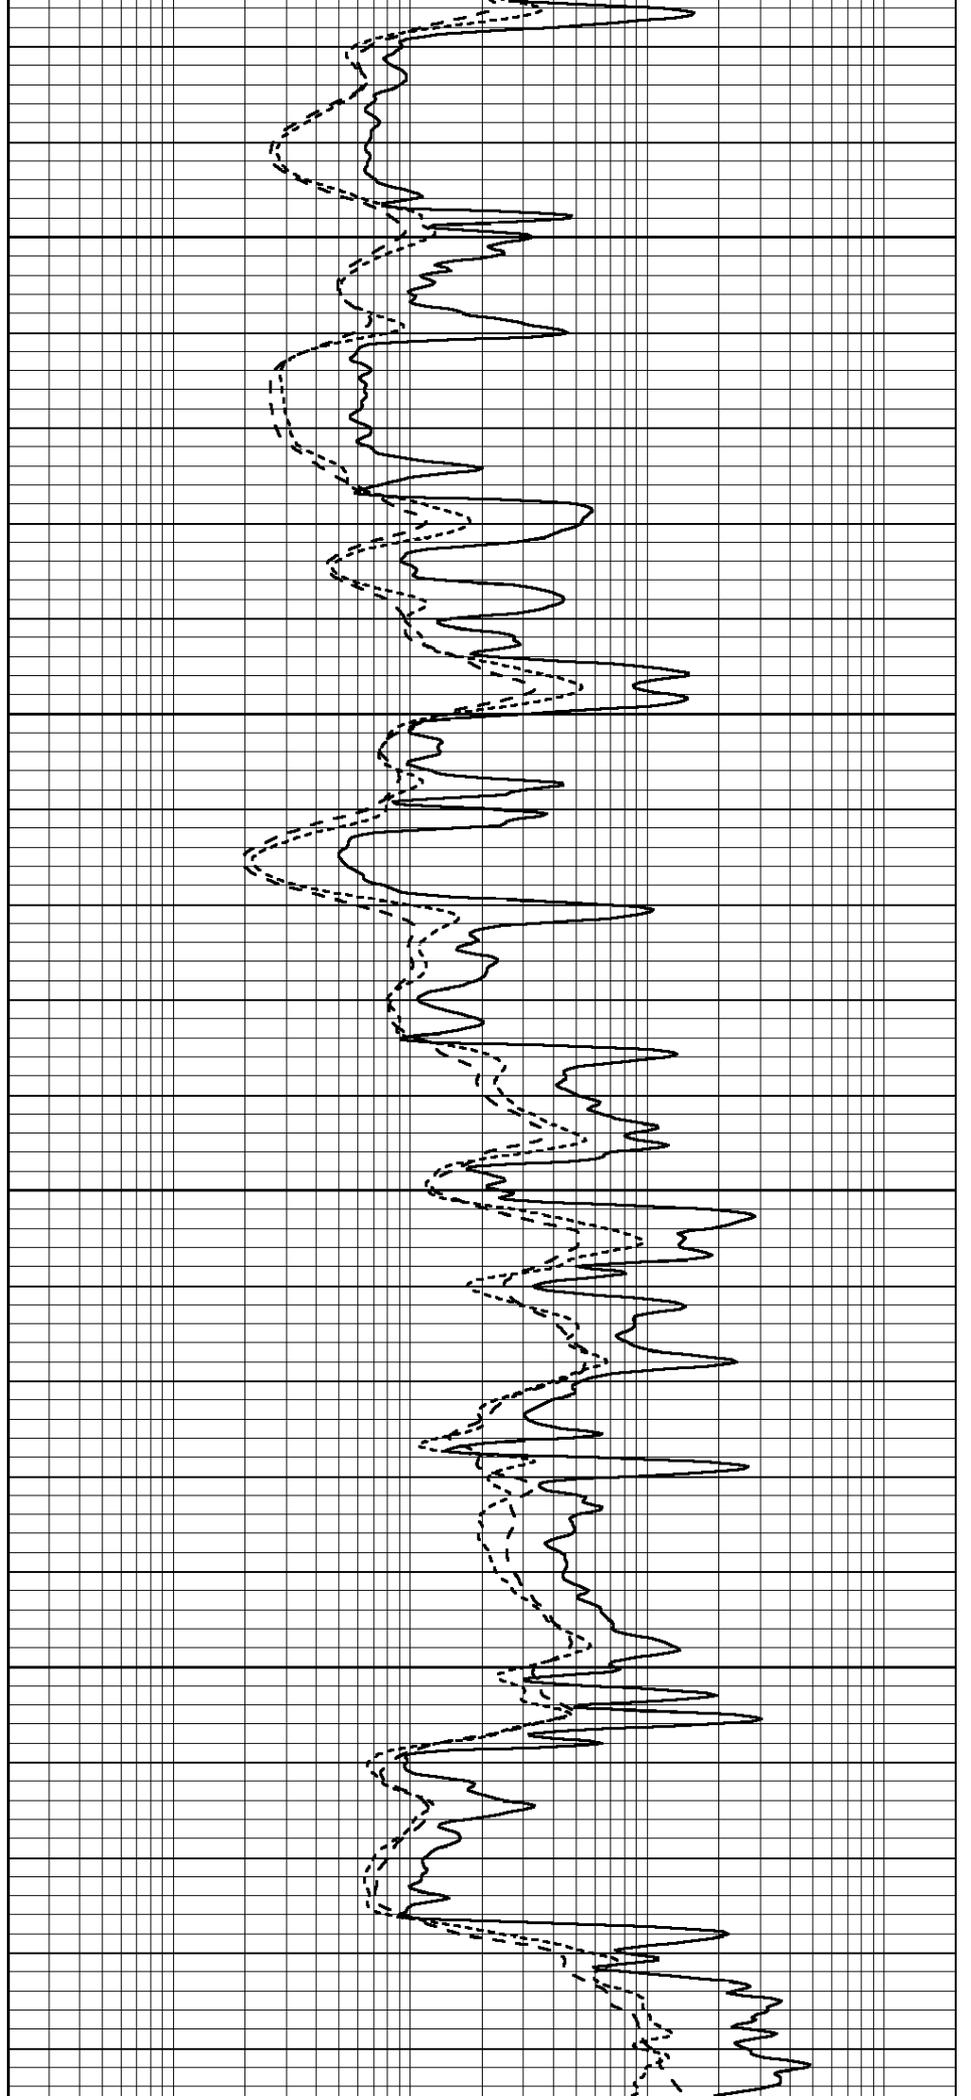

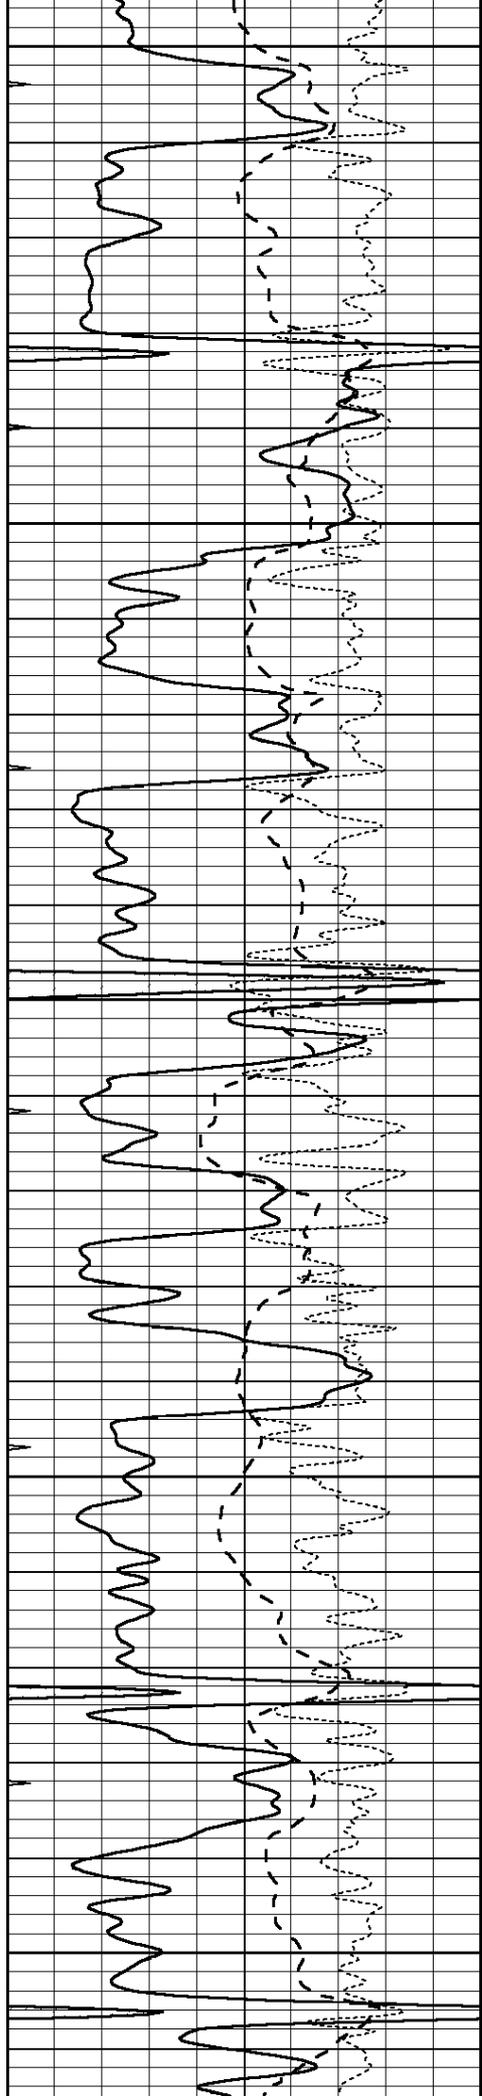


4250


4300

4350

4400

4450

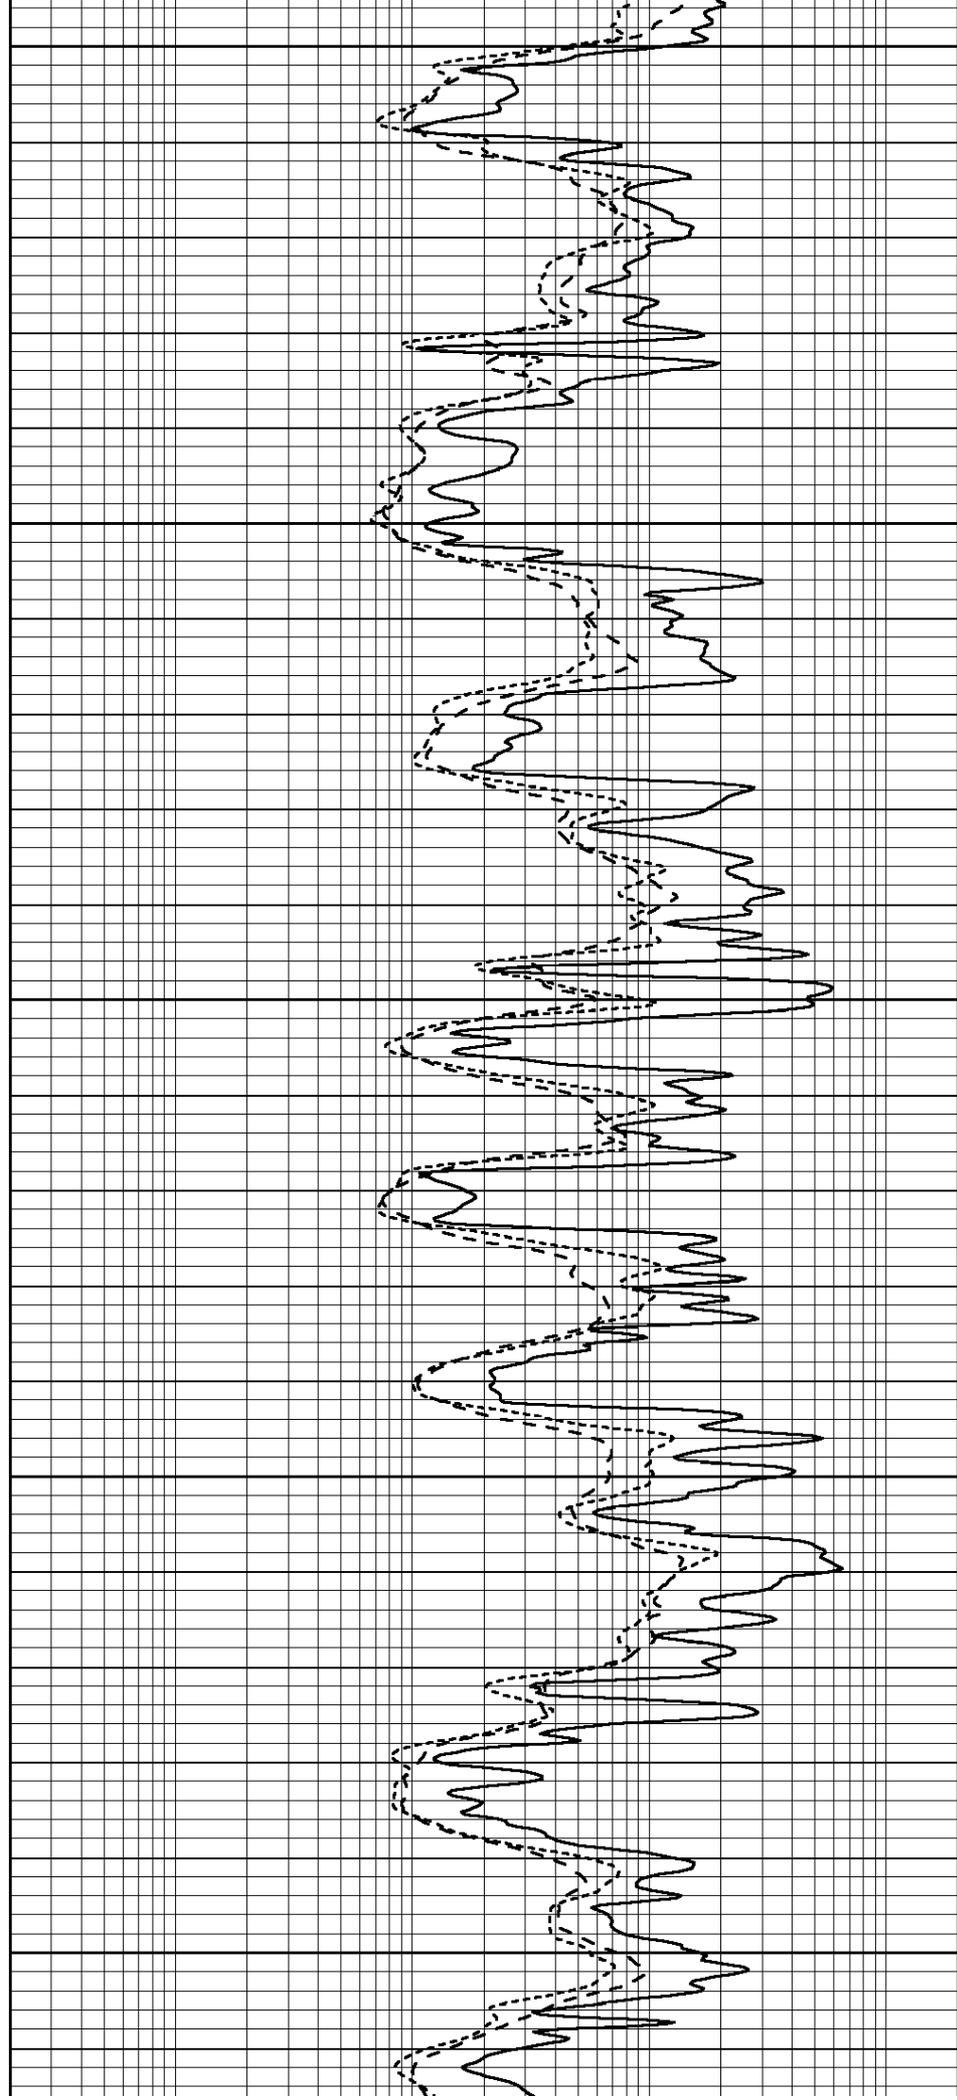

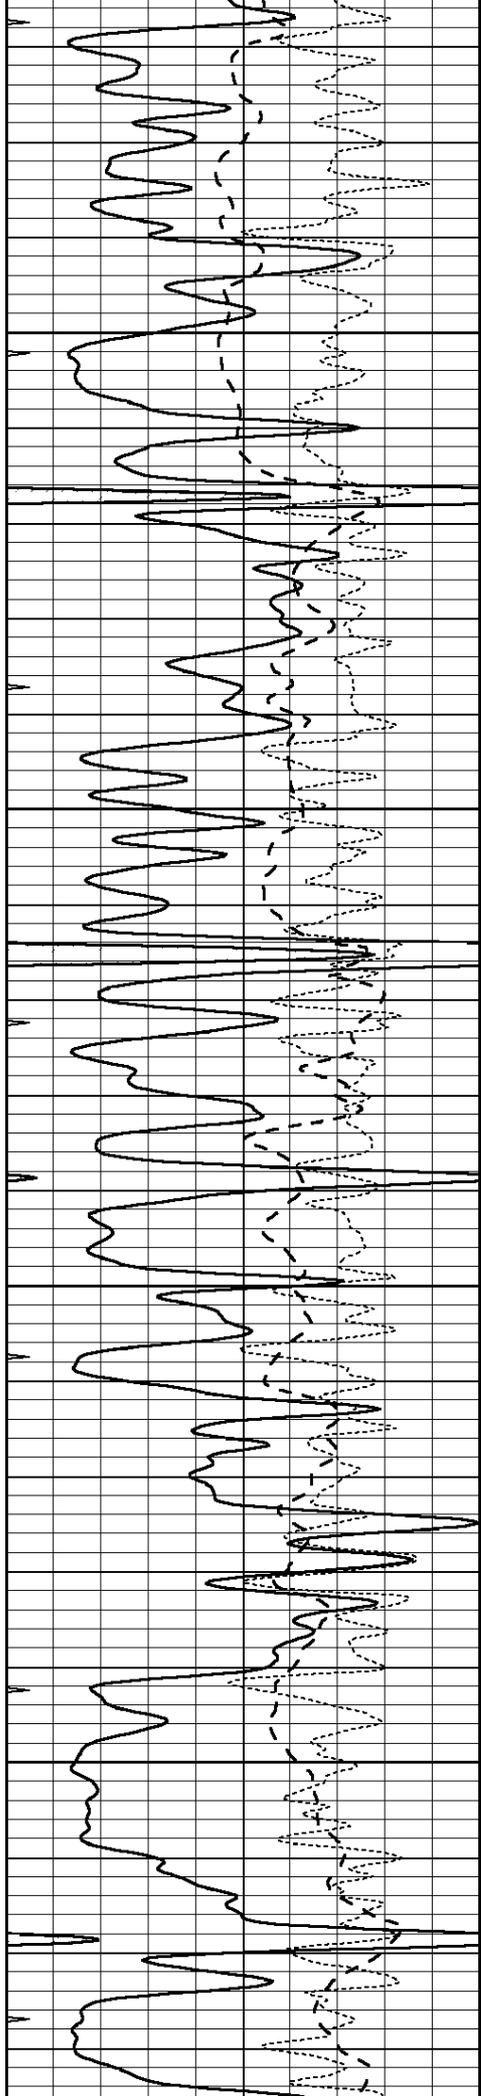



4500

4550

4600

4650

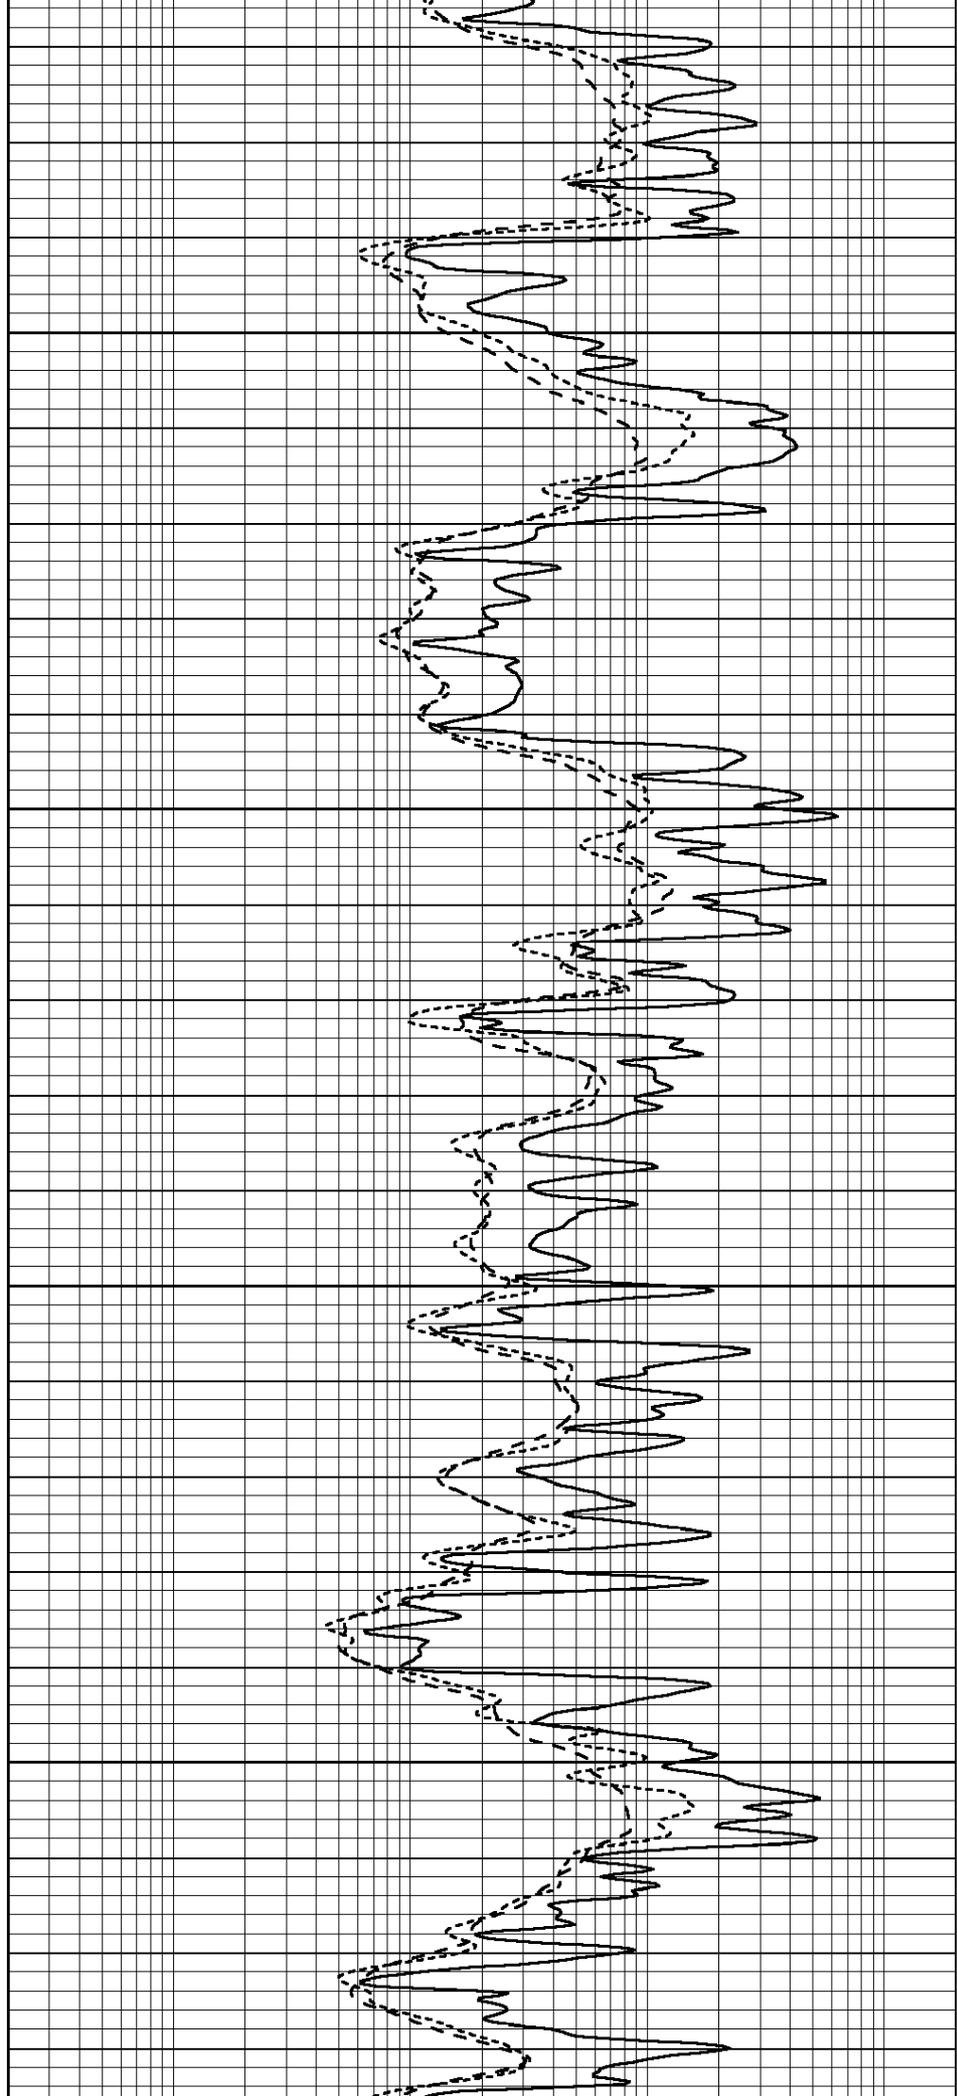

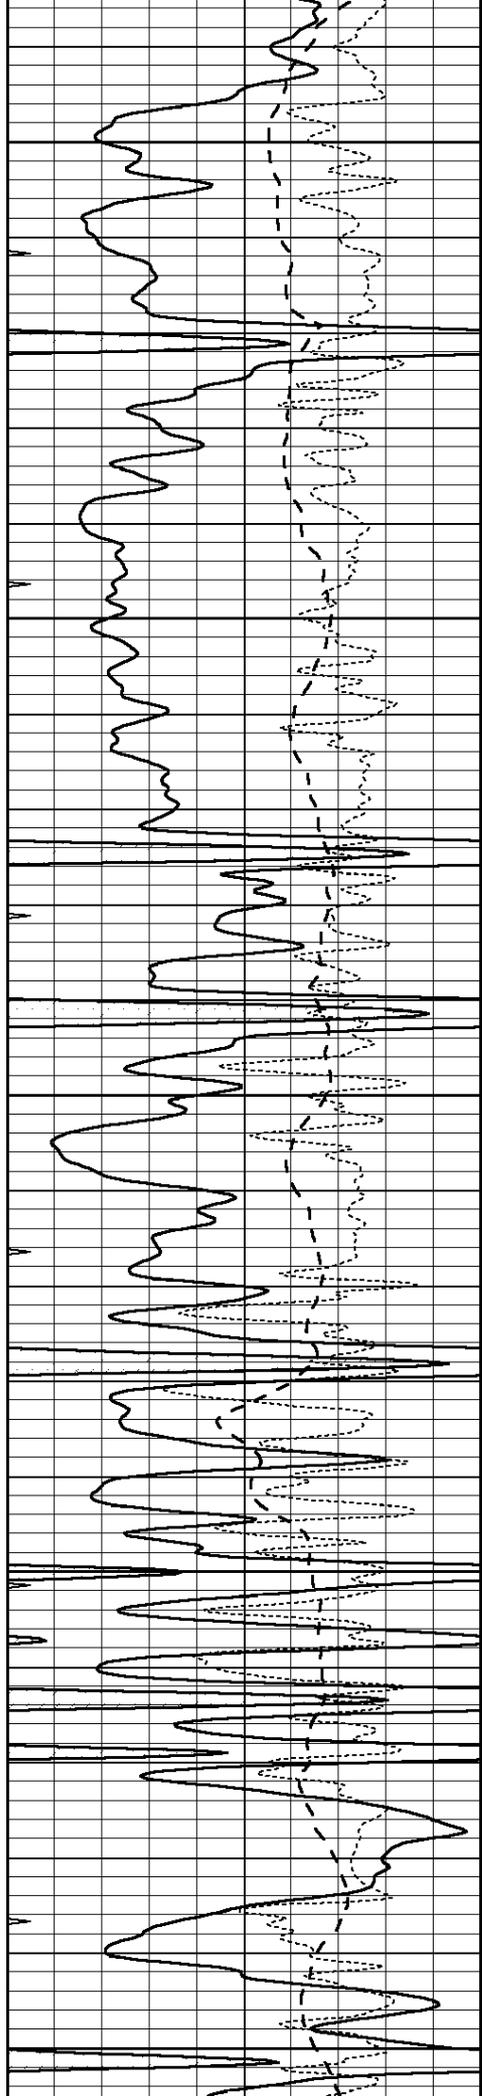


4700


4750

4800

4850

4900

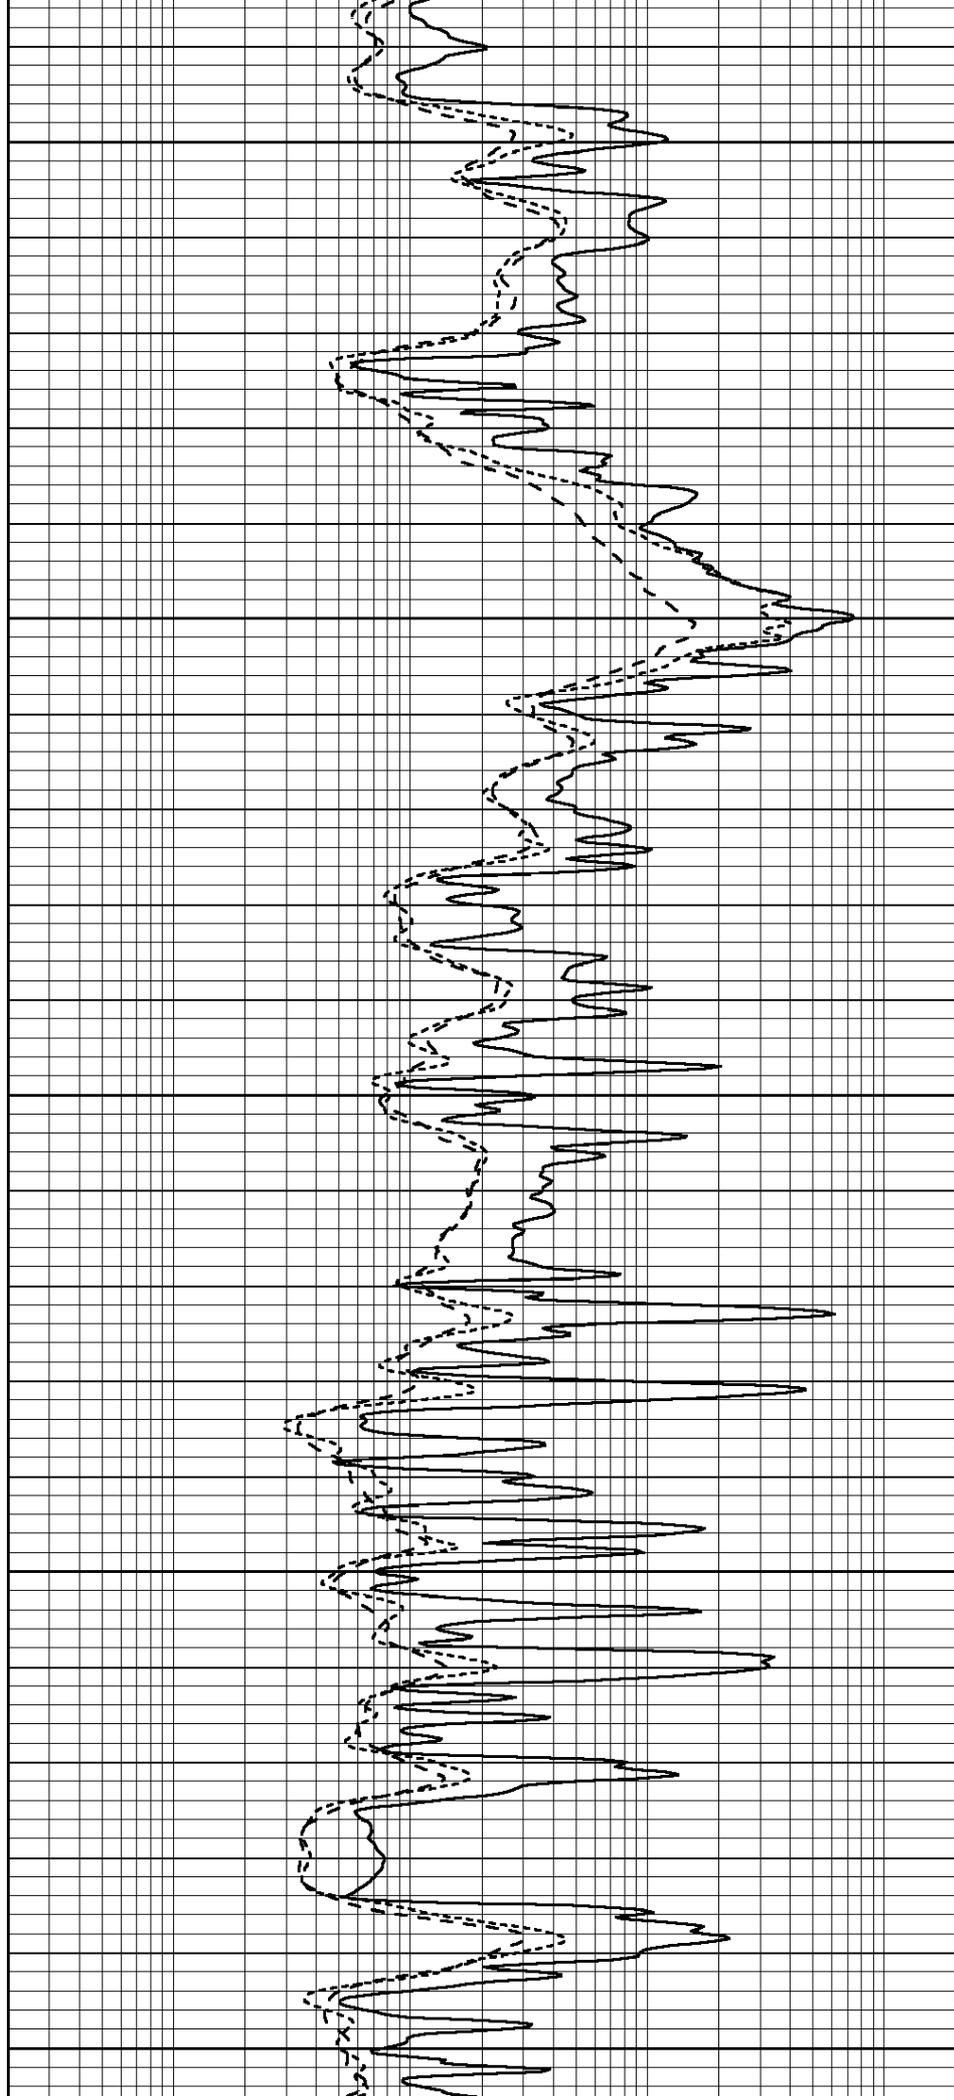

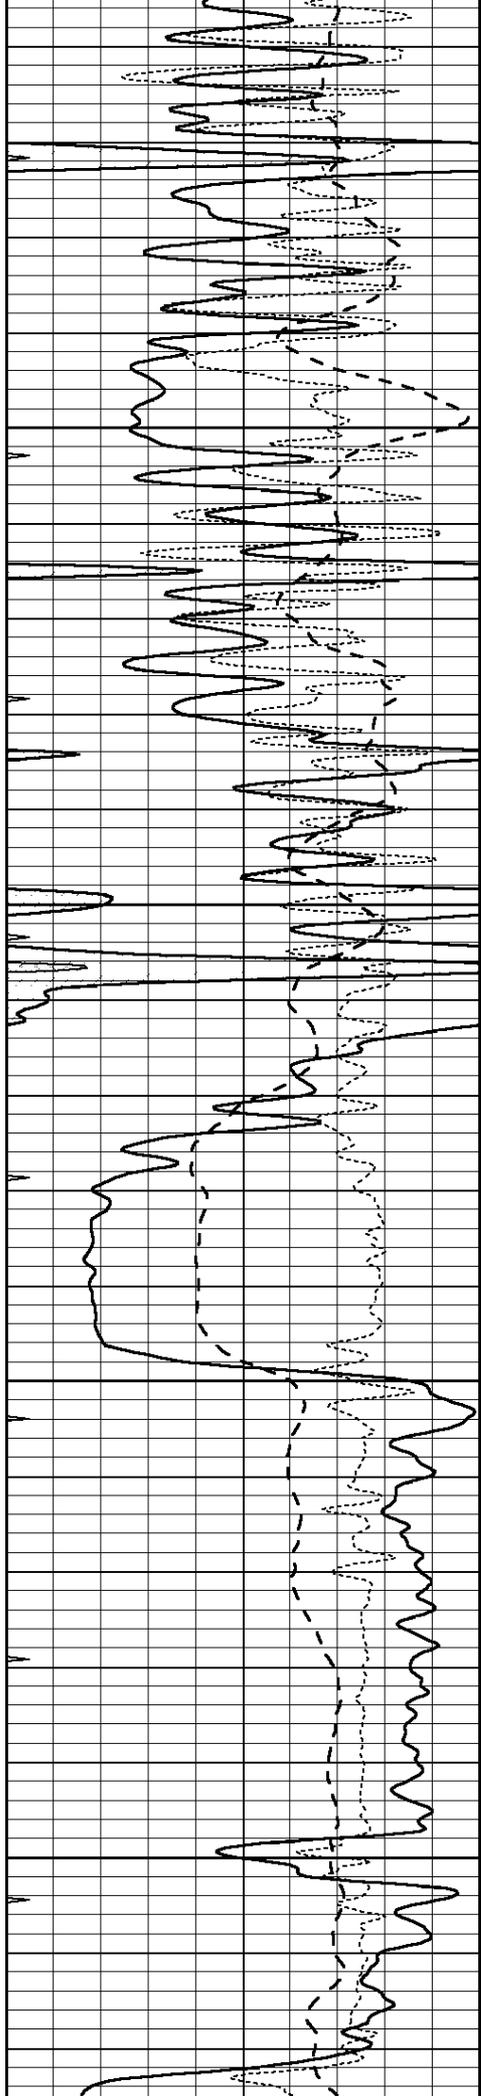



4950

5000

5050

5100

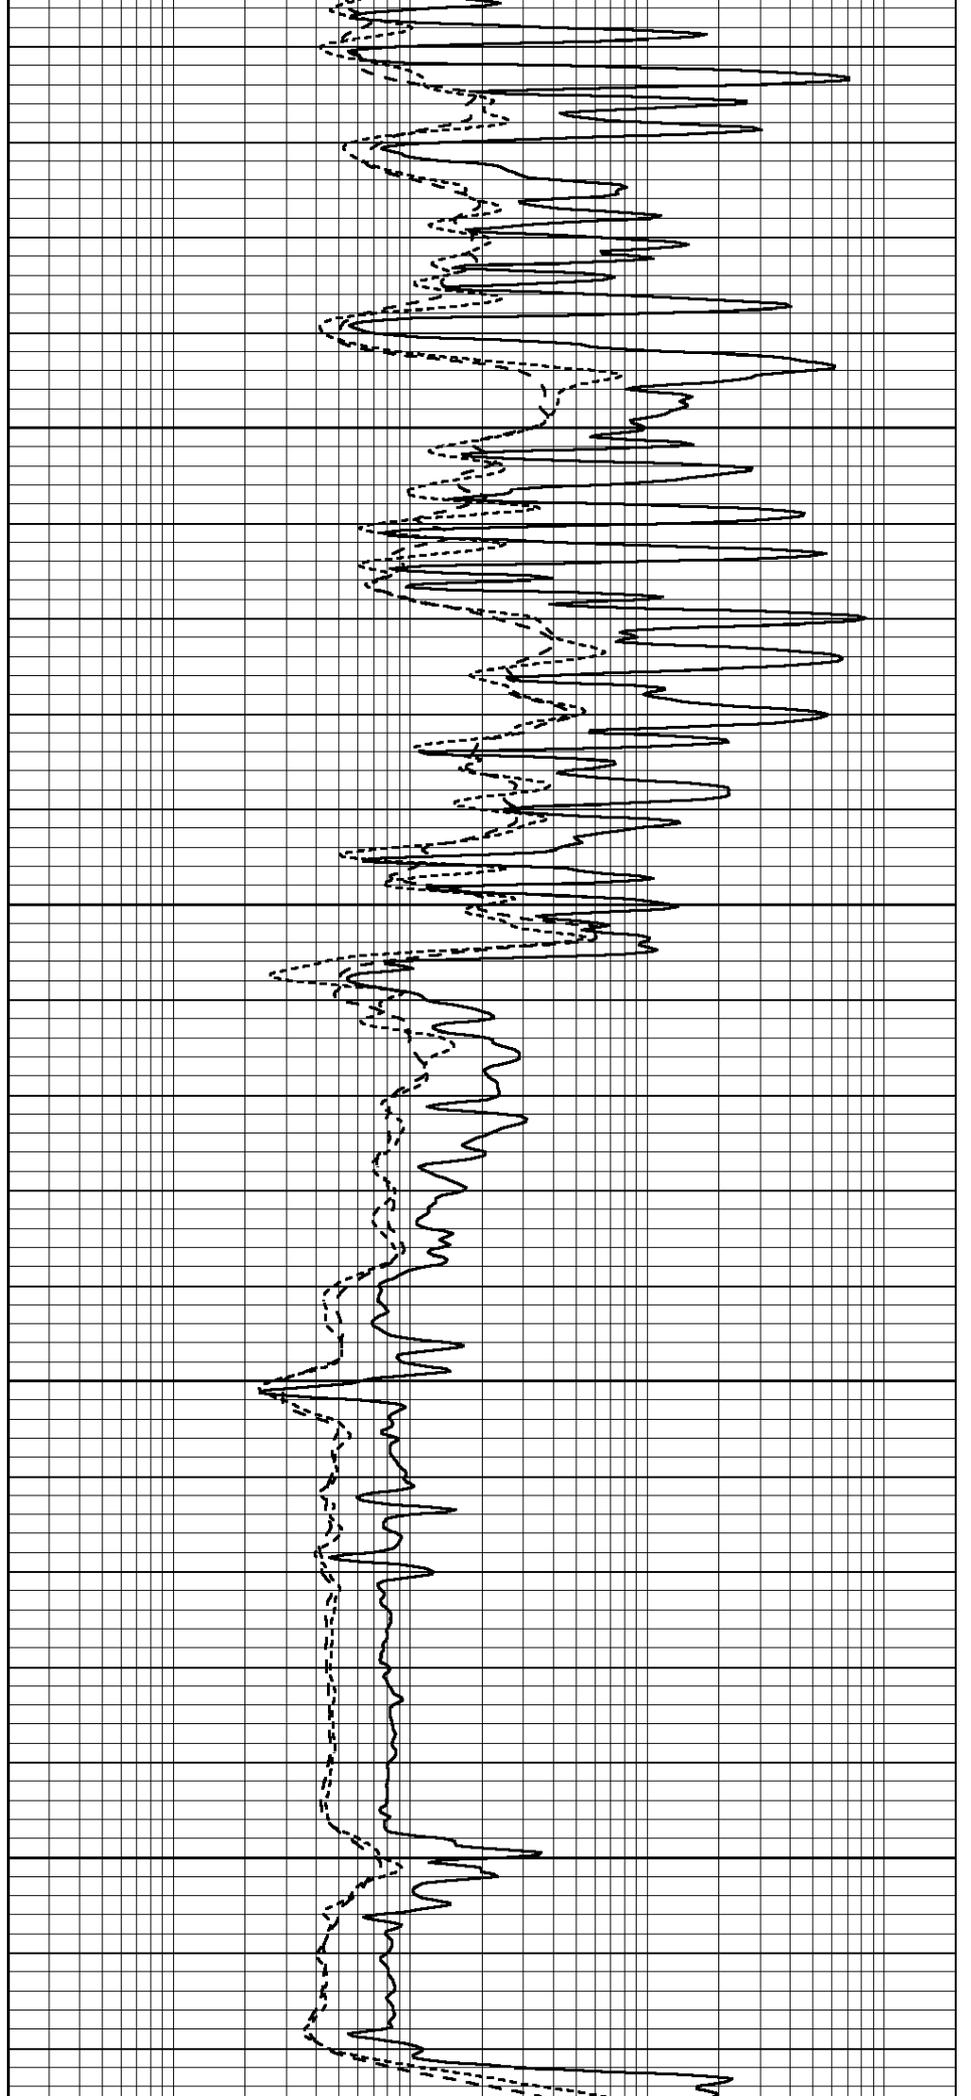


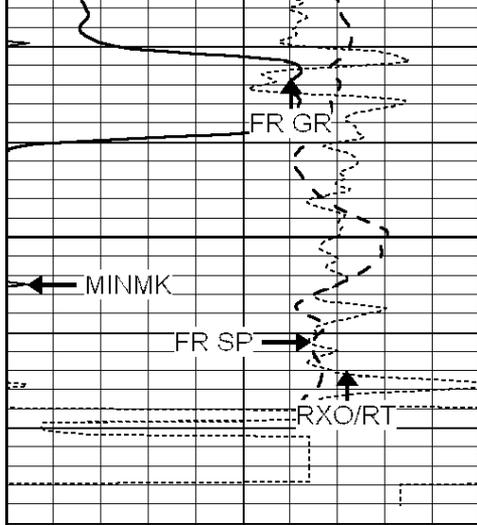

5150

LTD 5171

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

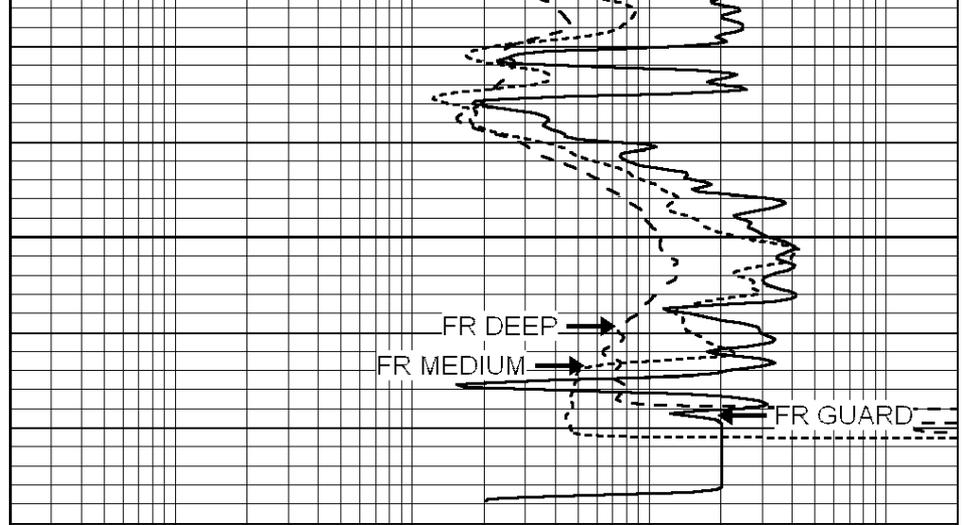

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




REPEAT SECTION

Database File: 1335pe.db
 Dataset Pathname: pass2.5
 Presentation Format: _dil
 Dataset Creation: Wed Dec 14 14:15:07 2016 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

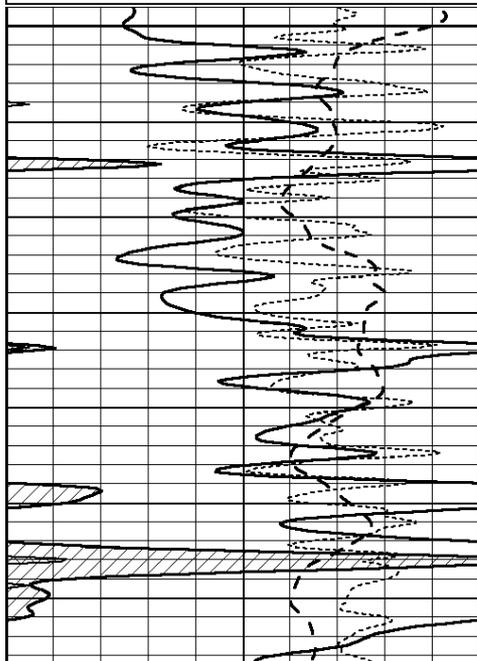

4950

5000

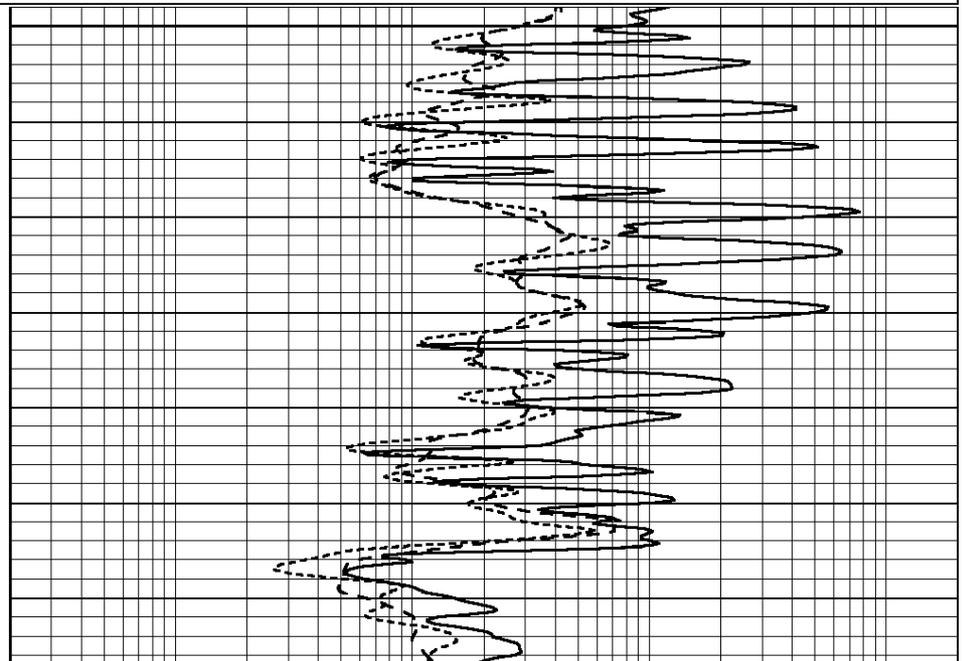

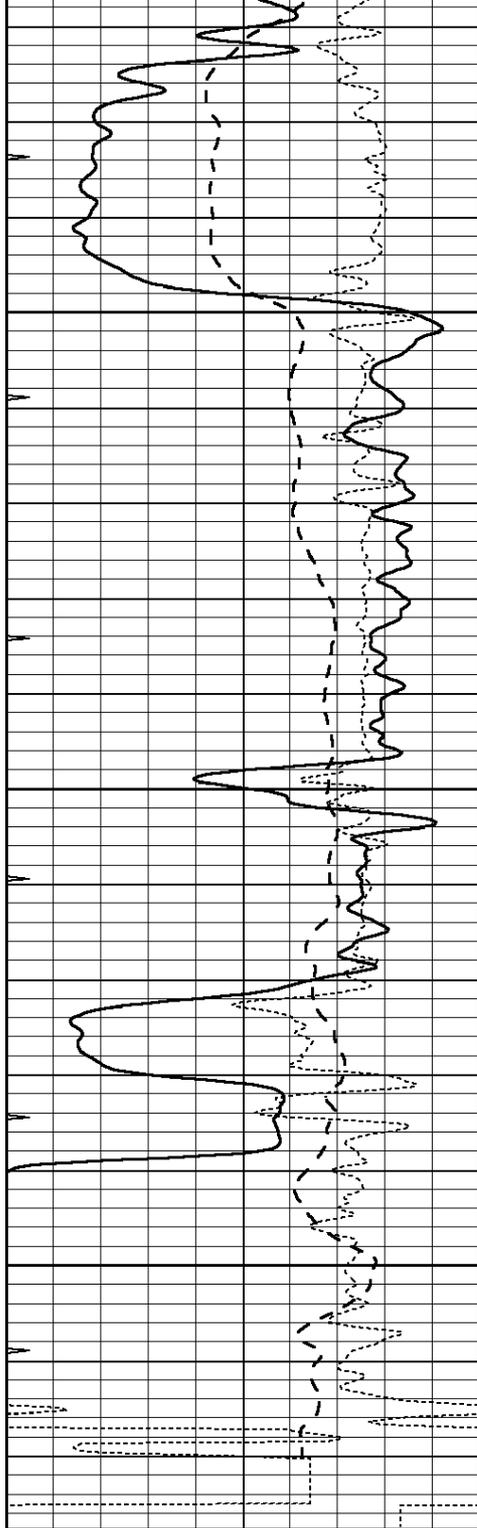


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

5050

5100

5150

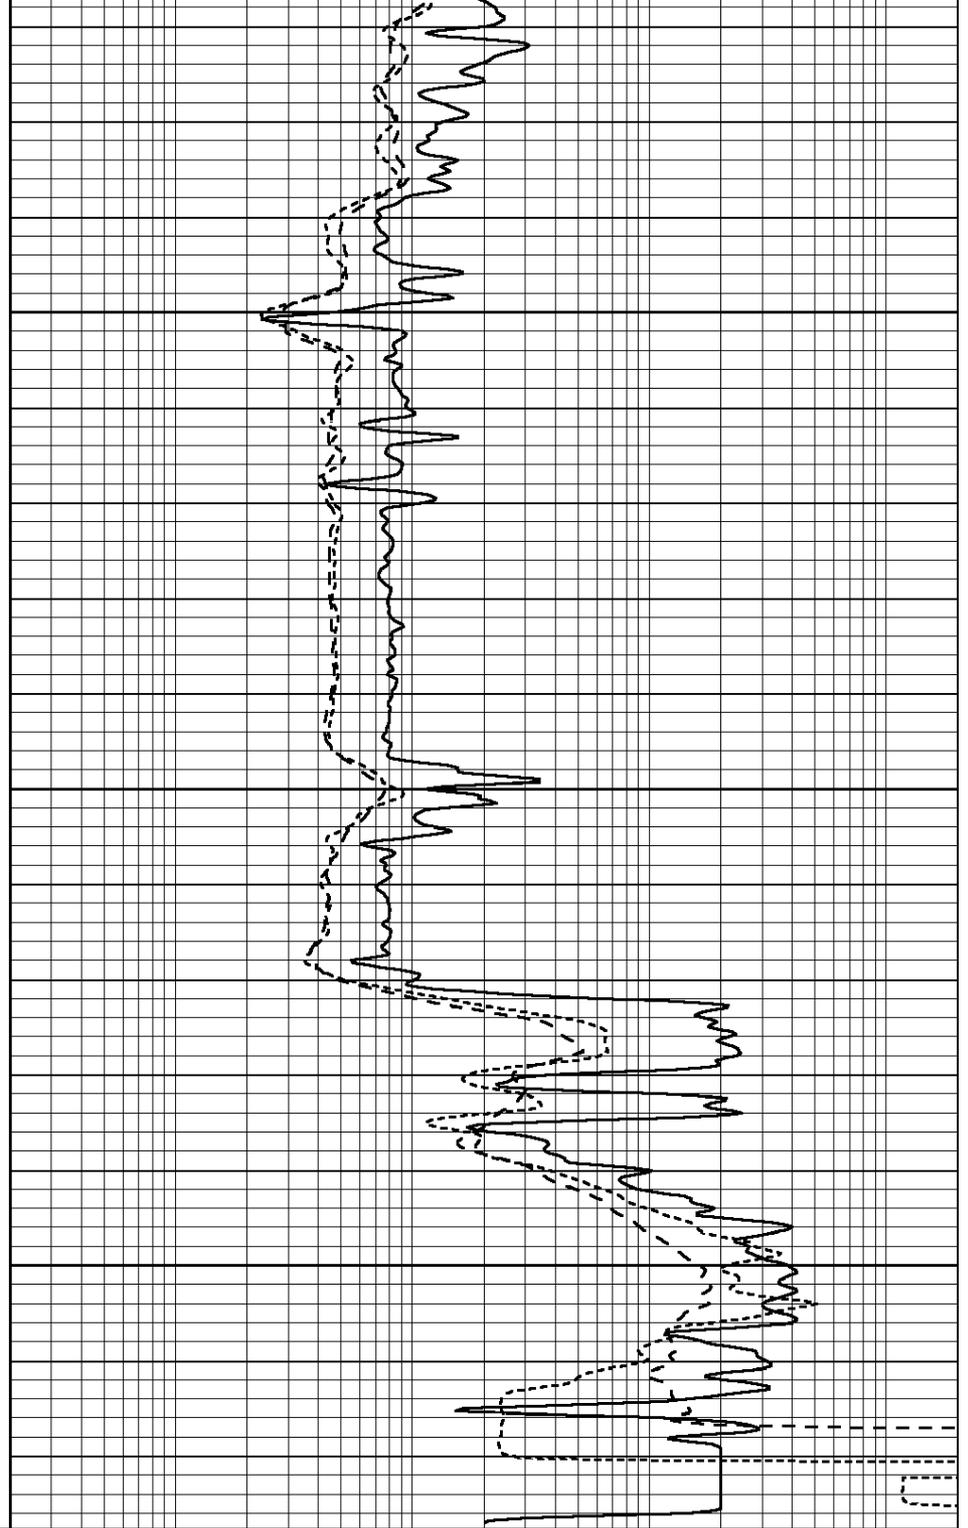

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 1335pe.db
 Dataset Pathname: pass3.8
 Dataset Creation: Wed Dec 14 14:21:22 2016

Dual Induction Calibration Report

Serial-Model:
 Surface Cal Performed:

PROBE7-DILG
 Wed Dec 14 12:18:49 2016

Surface Calibration								
Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	625.000	-8.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-54.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 004N Model: PRB

Master Calibration						Performed Fri May 30 11:01:00 2014		
	Background	Magnesium	Aluminum	Sandstone				
Window 1	1378.8	10804.6	3492.0	12453.4				cps
Window 2	1262.4	9313.5	3076.7	10594.7				cps
Window 3	1077.6	5668.7	2076.0	6314.8				cps
Window 4	306.4	313.0	306.4	315.6				cps
Long Space	0.0	8051.0	1814.3	9332.3				cps
Short Space	1.9	1706.1	1146.0	1707.6				cps
Rho		1.7100	2.5900	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.0	Rib Slope	: 1.002	Density/Spine Ratio				: 0.571
Spine Angle	: 75.0	Spine Slope	: 3.745	Spine Intercept				: -18.9

Before Survey Verification						Performed Wed Dec 31 18:00:00 1969		
	Background	Magnesium	Aluminum	Sandstone				
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Pe		0.0000	0.0000	0.0000				

Measured Correction	0.0000	0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808
 Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070558
 Tool Model: OPEN_GR
 Performed: Mon Aug 22 01:00:15 2016

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2800 GAPI/cps