

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-21212-00-00
Spot: NENW Sec/Twnshp/Rge: 2-29S-20W
4620 feet from S Section Line, 3300 feet from E Section Line
Lease Name: MORFORD A Well #: 2
County: KIOWA Total Vertical Depth: 5090 feet

Operator License No.: 33388
Op Name: J. MARK RICHARDSON FAMILY TRUS
Address: 1406 N. CHARLES
WICHITA, KS 67203

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	5089	2800	WITH 275 SX CMT
SURF	8.625	614		WITH 380 SX CMT

#16543

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/07/2006 8:30 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND BACK TO 4600' & 4 SX CMT. PLUG AT 1300' WITH 12 SX GEL & 50 SX CMT. PLUG AT 640' WITH 50 SX CMT. PLUG AT 40-0' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/07/2006 10:00 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4600' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH CASING. 1ST PLUG AT 1300' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 640' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4760	4763		
4668	4676		

INVOICE
DATE 2-10-06
NO. 2006061097


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

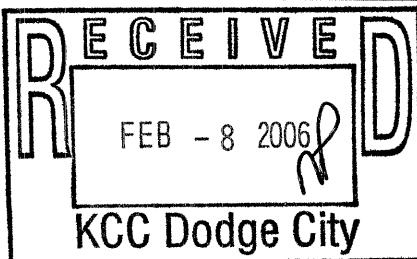

Signed [Signature]
(TECHNICIAN)



Form C-273