

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-063-21609-00-00
Spot: S2S2NWSE Sec/Twnshp/Rge: 35-15S-29W
1485 feet from S Section Line, 1980 feet from E Section Line
Lease Name: KS5G SPEER 35 3 Well #: 1
County: GOVE Total Vertical Depth: 4250 feet

Operator License No.: 33396

Op Name: FAIR OIL, LTD.

Address: 225 S. COLLEGE P. O. BOX 689
TYLER, TX 75710

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	300		

13
\$138

Well Type: DH

UIC Docket No:

Date/Time to Plug: 10/30/2005 9:00 PM

Plug Co. License No.: 5822

Plug Co. Name: VAL ENERGY, INC.

Proposal Rcvd. from: JOHN ROBERTS

Company: VAL ENERGY, INC.

Phone: (316) 263-6688

Proposed Plugging Method: Ordeer 200 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES

WitnessType: NONE

Date/Time Plugging Completed: 10/30/2005 10:00 PM

KCC Agent: HERB DEINES

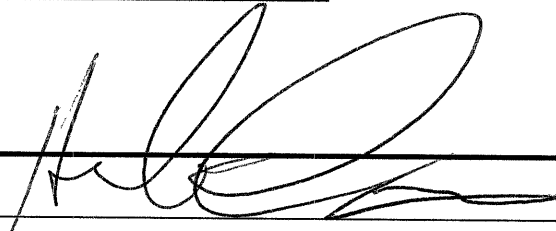
Actual Plugging Report:

Perfs:

1st. Plug at 1960' w/25 sxs.
2nd. Plug at 1000' w/100 sxs.
3rd. Plug at 350' w/40 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 15 sxs.
Mousehole with 10 sxs.

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

Signed 

(TECHNICIAN)

District: 04

Signed

RECEIVED

FEB 08 2006

KCC WICHITA

INVOICED

DATE 2-8-06

INV. NO. 2006061067

FEB 03 2006