

Top - Bottom

A	BOREID	BOTTEMP	CASEOD	CASETHCK	FLUIDDEN	M	MATRXDEN
1	in 7.875	degF 109	in 5.5	in 0	g/cc 1	2	g/cc 2.71
NPORSEL	PERFS	SNDERR	SNDERRM	SPSHIFT	SRFTEMP	SZCOR	TDEPTH
Limestone	0	mmho/m 0	mmho/m 0	mV -170	degF 36	Off	ft 0

Sensor	Offset (ft)	Schematic		Description	Length (ft)	O.D. (in)	Weight (lb)
GR	24.50			GR-M&W (89-M&W)	3.00	3.50	50.00
CNLSC	21.40			CNT-M&W (tk10-MW)	5.50	3.50	100.00
CNSSC	20.65						
RLL3F	15.80						
	RLL3 15.80						
CILD	8.00			DIL-PSI HIGH TEMP (PSI 216 HT)	18.50	3.50	220.00
CILM	4.70						

SP 0.20

Dataset: berexco_rusch_seeley_1.db: field/well/STACK/pass3.1
Total length: 27.00 ft
Total weight: 370.00 lb
O.D.: 3.50 in





MAIN PASS

Database File berexco_rusch_seeley_1.db
Dataset Pathname STACK/pass3.1
Presentation Format dil
Dataset Creation Fri Mar 03 06:51:37 2017
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-200	SP (mV)	0

0.2	DEEP RESISTIVITY (Ohm-m)	2000
0.2	MEDIUM RESISTIVITY (Ohm-m)	2000
0.2	RLL3 (Ohm-m)	2000
15000	LINE TENSION (lb)	0

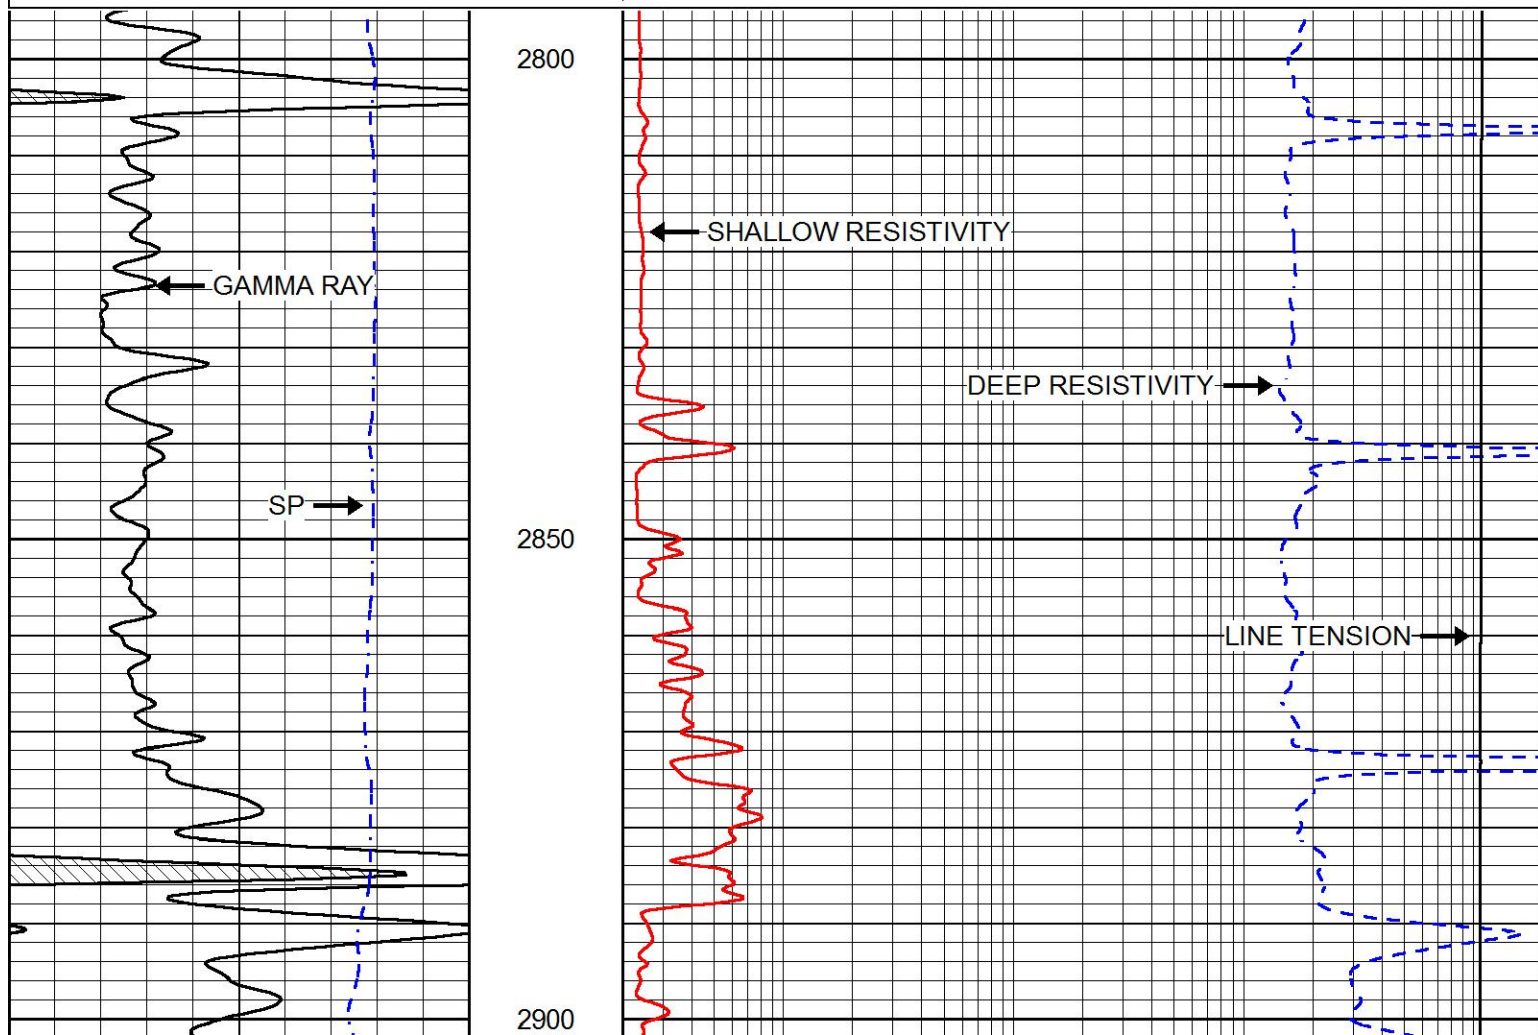

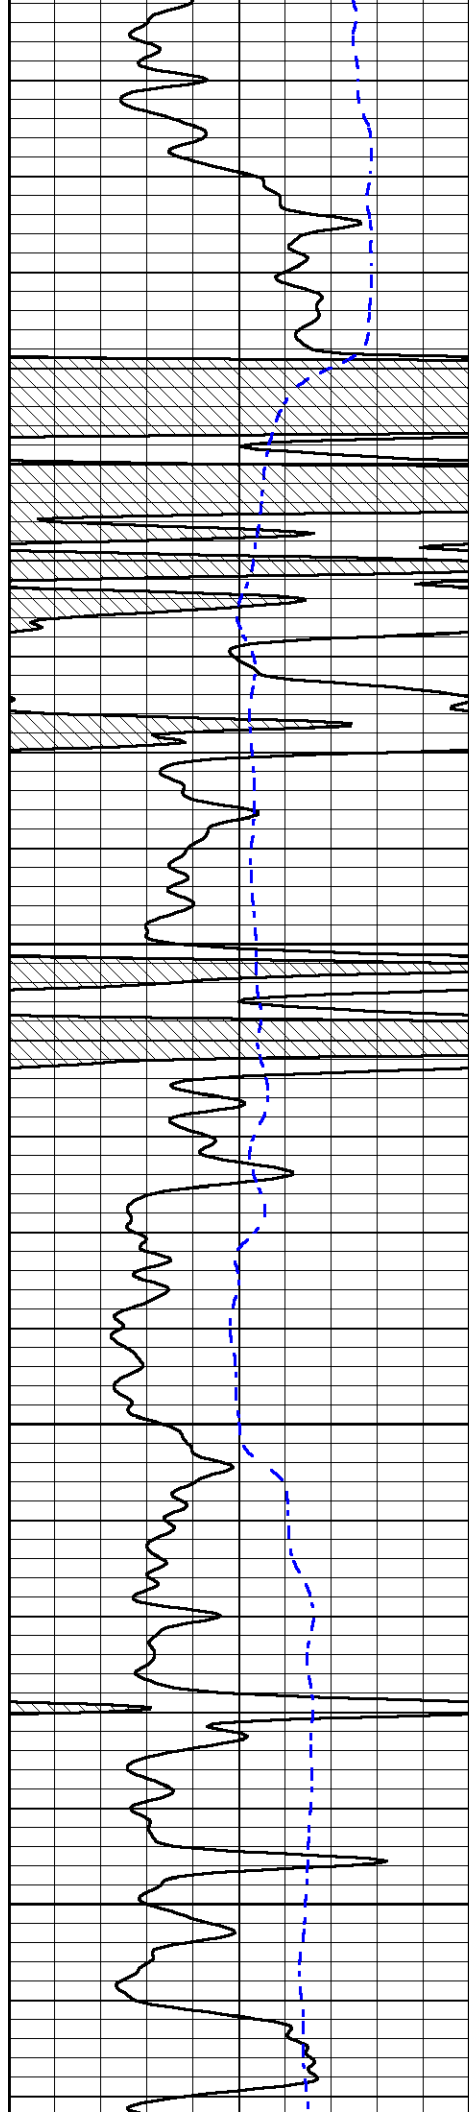



2950

3000

3050

3100

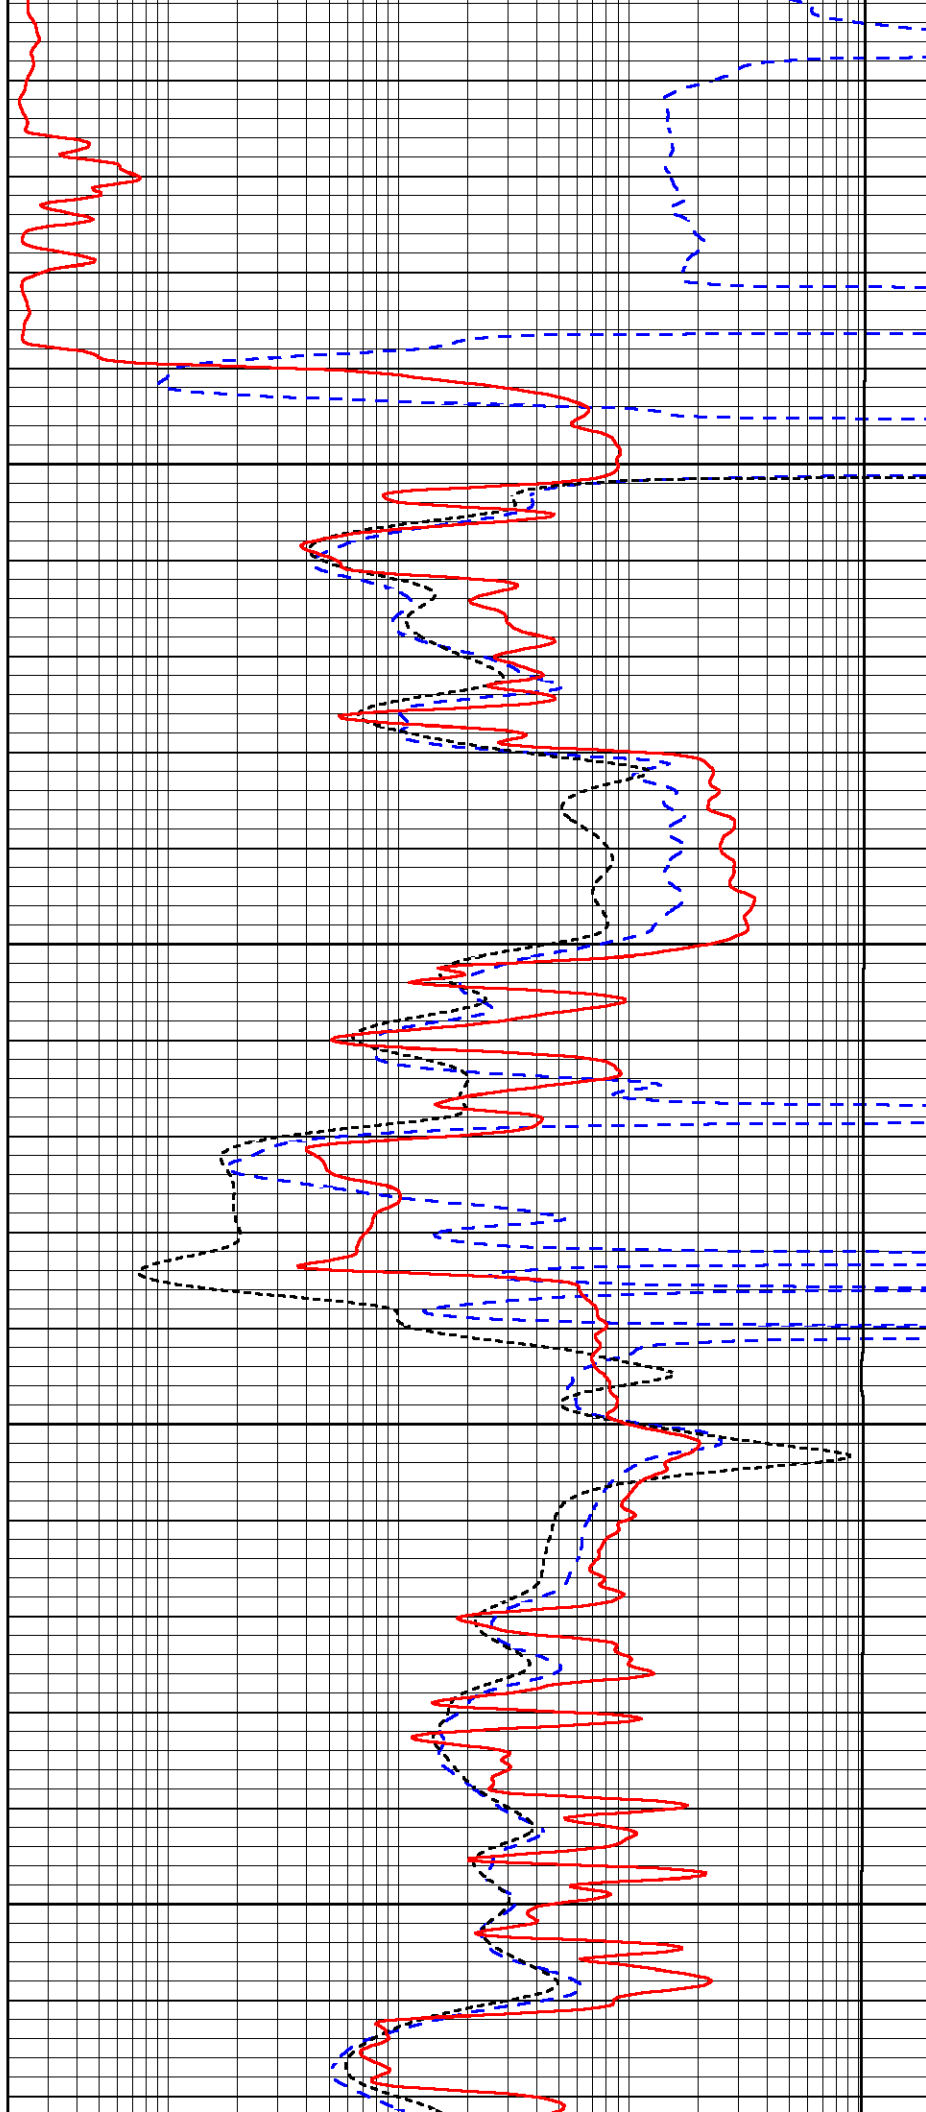


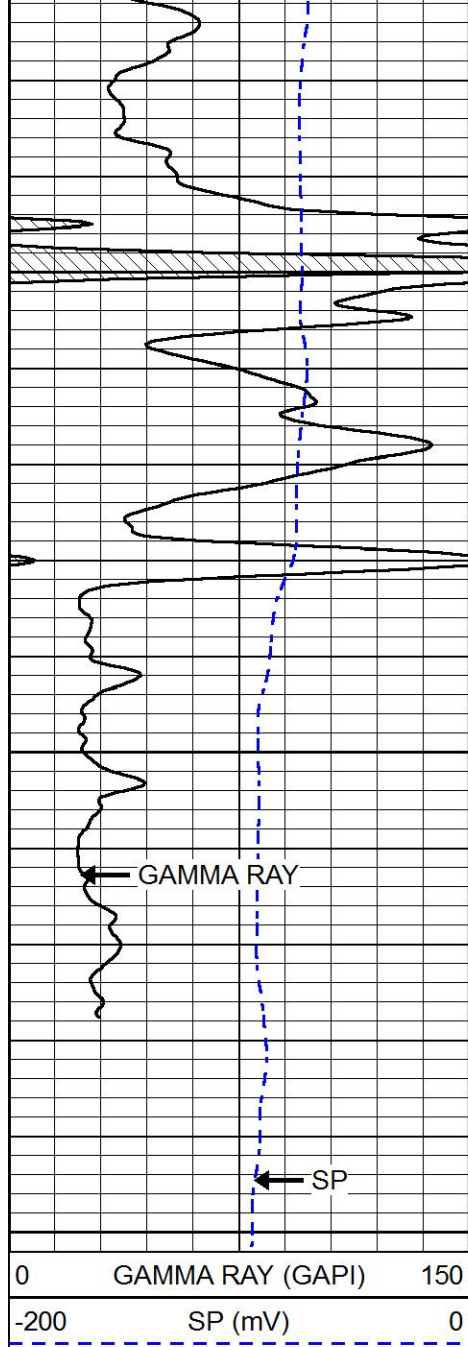

3150



3200


3250

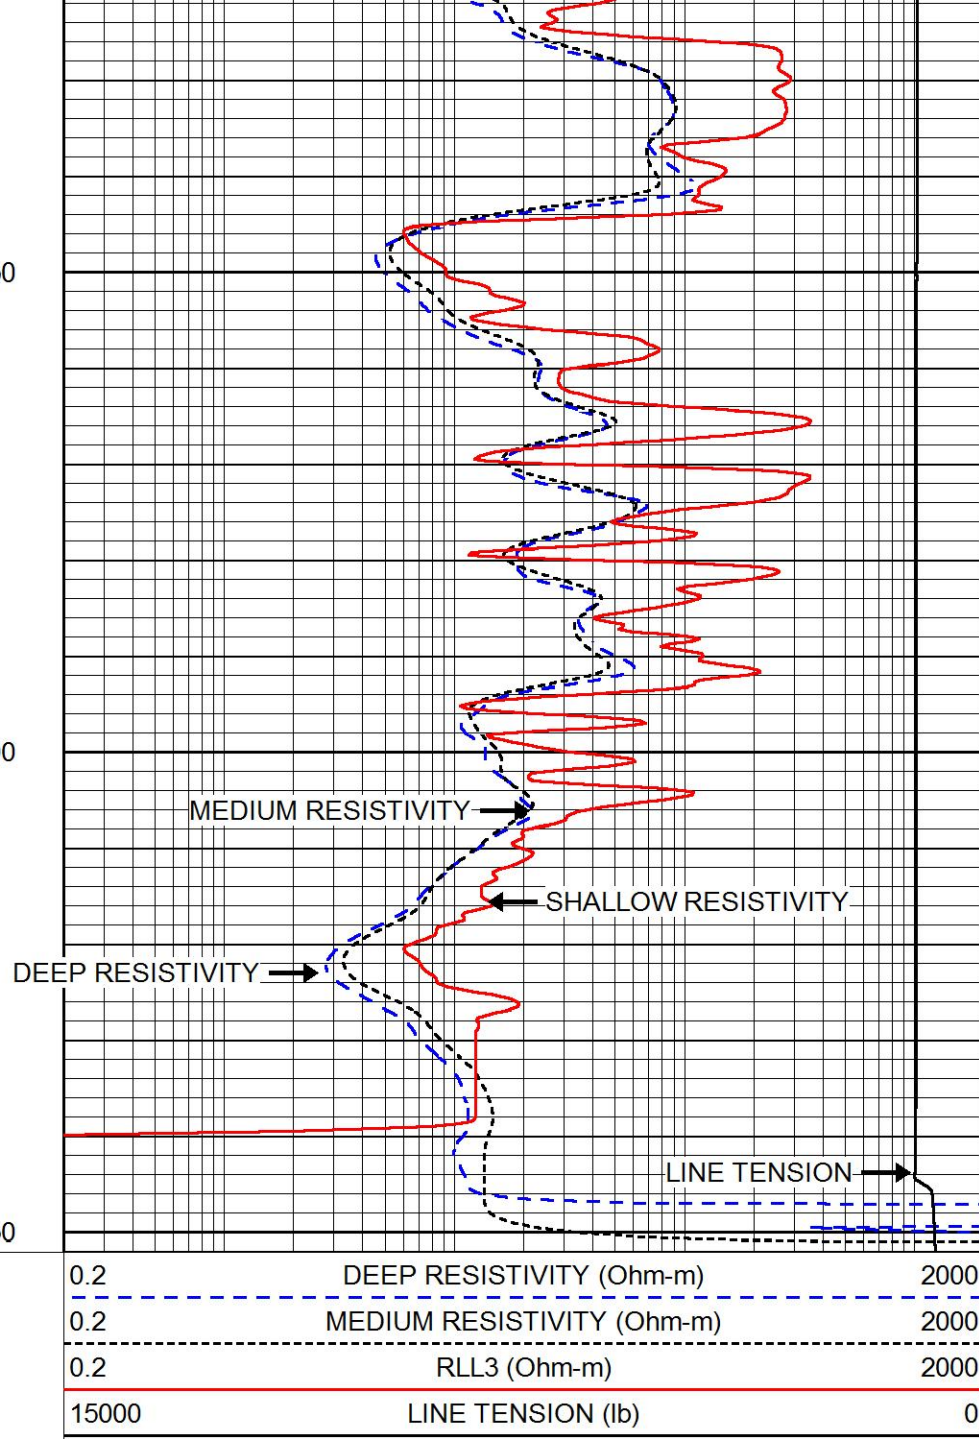

REPEAT SECTION

Database File berexco_rusch_seeley_1.db
 Dataset Pathname STACK/pass2.1
 Presentation Format dil
 Dataset Creation Fri Mar 03 06:58:25 2017
 Charted by Depth in Feet scaled 1:240

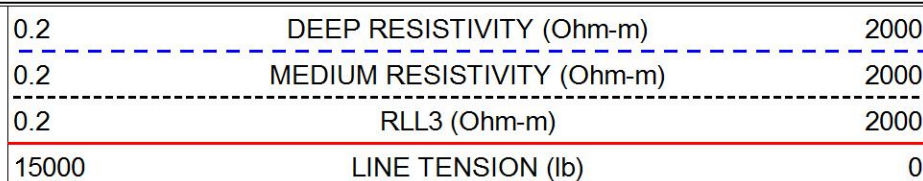

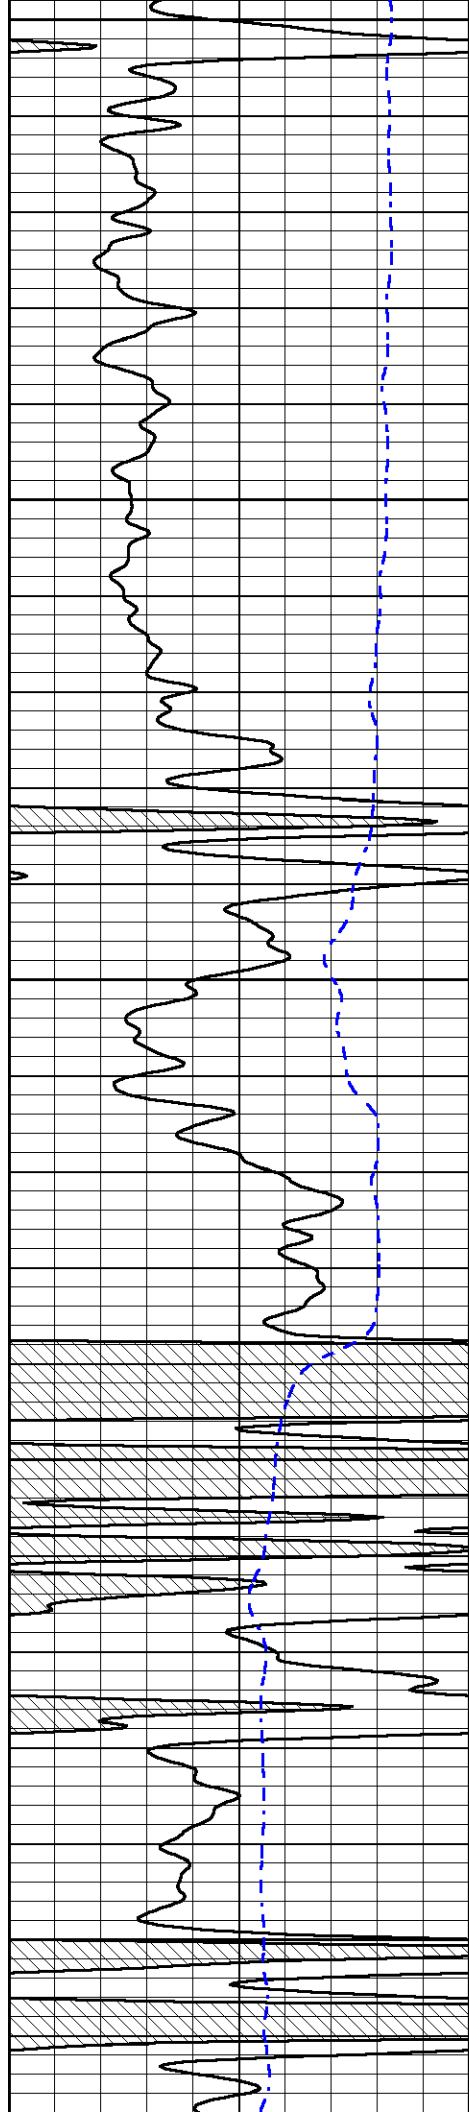


2800


2850

2900

2950

3000

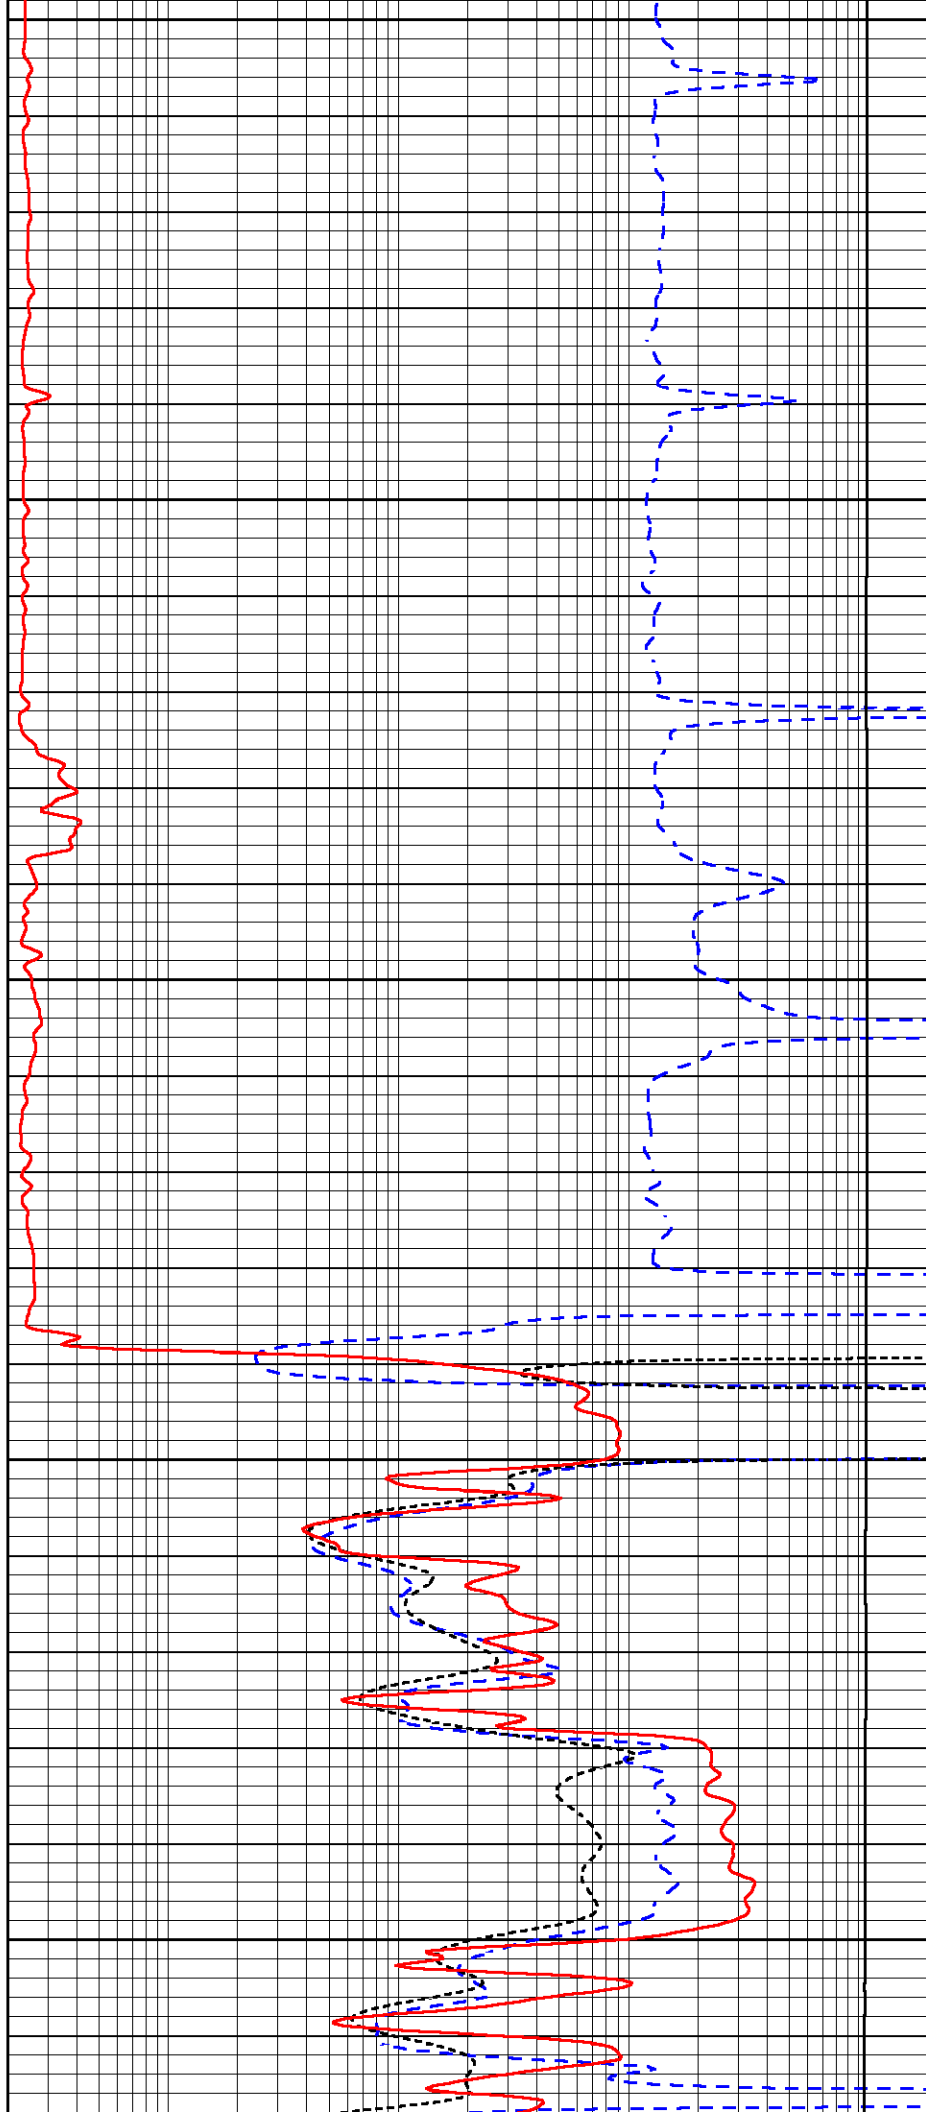

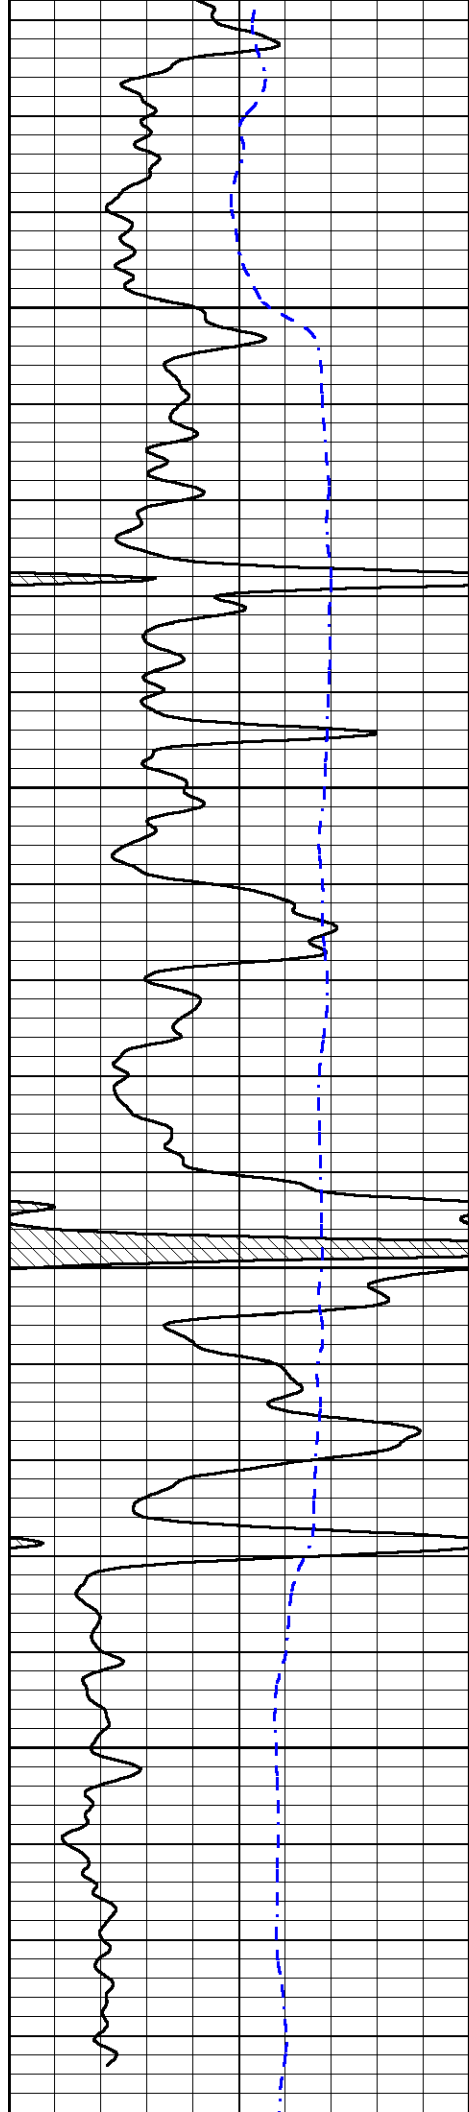



3050

3100

3150

3200

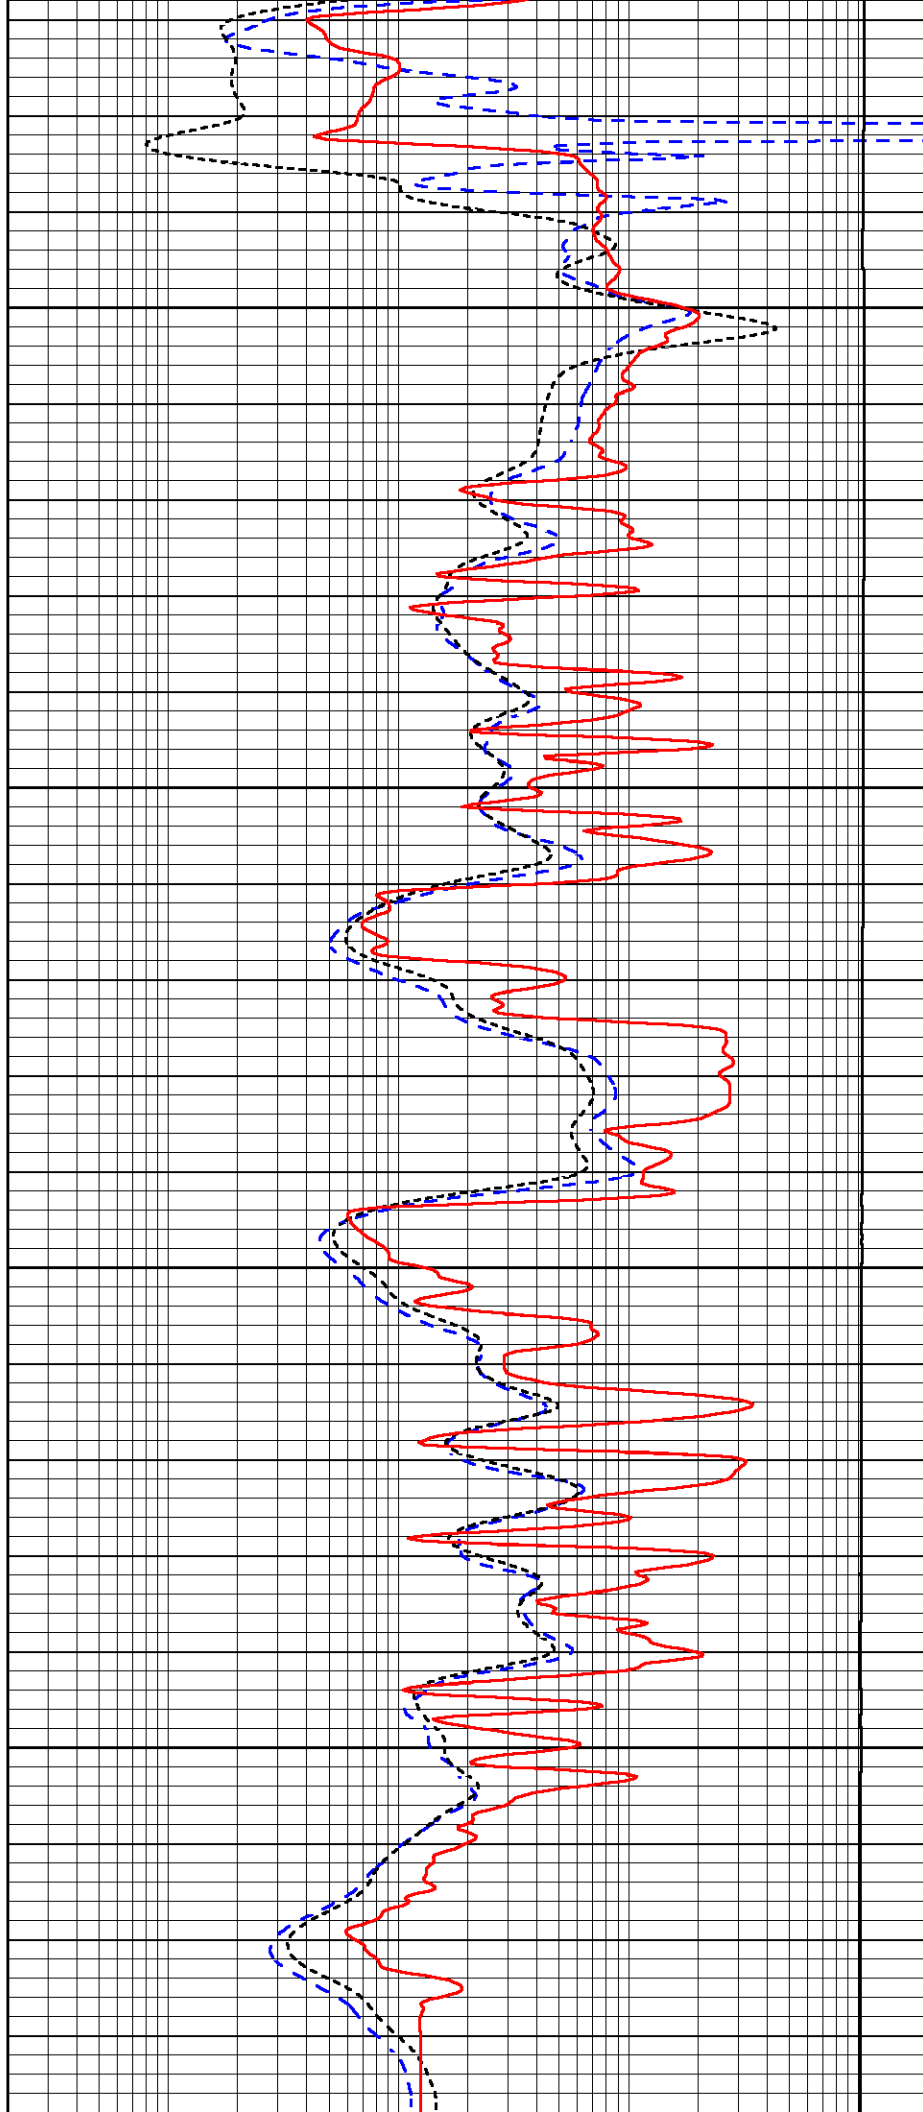

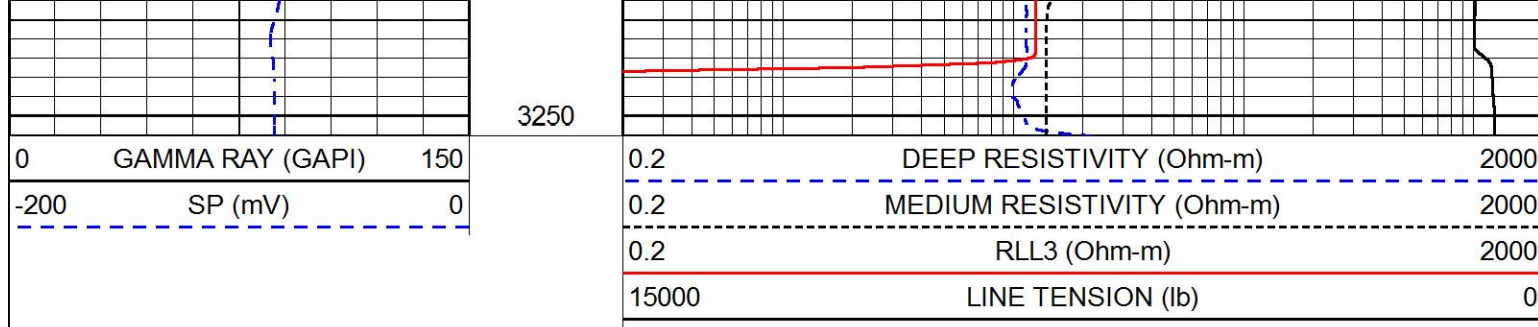

Calibration Report

Database File berexco_rusch_seeley_1.db
Dataset Pathname STACK/pass3.1
Dataset Creation Fri Mar 03 06:51:37 2017

Dual Induction Calibration Report

Serial-Model: PSI 216 HT-PSI HIGH TEMP
Calibration Performed: Thu Mar 31 15:54:48 2016

Loop:	Readings		References			Results	
	Air	Loop	Air	Loop		Gain	Offset
Deep	75.411	495.929	4.000	250.000	mmho/m	0.580	-40.115
Medium	75.269	470.661	10.000	100.000	mmho/m	0.490	-22.133

Compensated Neutron Calibration Report

Serial Number: tk10-MW
Tool Model: M&W
Calibration Performed: Wed Nov 16 11:21:36 2016

Detector	Readings		Target		Normalization
Short Space	6240.00	cps	1000.00	cps	1.6025
Long Space	460.00	cps	1000.00	cps	1.9500

Gamma Ray Calibration Report

Serial Number: 89-M&W
Tool Model: M&W
Calibration Performed: Fri Dec 23 14:43:38 2016

Calibrator Value: 1000.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 6.2 cps

Sensitivity: 0.5200 GAPI/cps



Company BEREXCO, LLC
Well RUSCH-SEELEY NO.1
Field GORHAM
County RUSSELL
State KANSAS