


15-141-00037-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

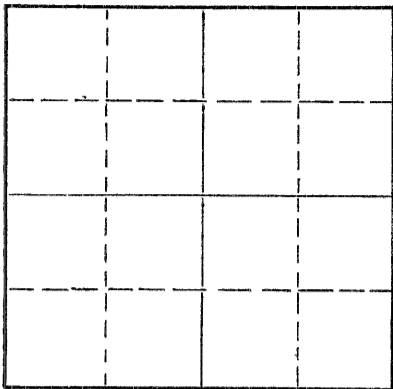

Locate well correctly on above
Section Plat

Osborne County. Sec. 35 Twp. 8 Rge. 15 (E) (W)
Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Trans Era Petroleum, Inc.
Lease Name Koelling Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4/26/55 19_____
Application for plugging filed 4/25/55 19_____
Application for plugging approved 4/25/55 19_____
Plugging commenced 4/26/55 19_____
Plugging completed 4/26/55 19_____
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19_____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Milton Galyardt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3880 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	180	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGING RECORD

Filled hole to 180'. Set wooden plug - 1/3 sack hulls, 15 sacks cement thru drill pipe. Filled hole to 40' - Set wooden plug - 1/3 sacks hulls, 10 sacks cement. Top plug tied.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Trans Era Petroleum, Inc. 5-7-55
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
H. R. Michaelis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) H. R. Michaelis
(Address) _____

SUBSCRIBED AND SWORN TO before me this 5th day of May, 19 55

Margie Cooper

My commission expires 1-30-57

Notary Public.



15-141-00037-00-00

Trans Era Petroleum, Inc.
Osborne County, Kansas
Koelling #1

SW SW NE 35-8-15

Total Depth: 3880*

Comm: 4/14/55
Comp: 4/26/55

Casing
8 5/8" @ 180*

Cement
145 sacks of L Star

FORMATION	DEPTH
Clay & shale	180
Shale & sand & shale	970
Red Bed & shale	1160
Anhydrite	1205
Shale	1910
Shale & Lime	3210
Lime	3508
Lime & Shale	3598
Cherty lime	3656
Conglomerate	3692
Lime	3726
Lime & shale	3834
Shale & lime	3846
Lime & Shale	3849
Arbuckle	3880

STATE OF KANSAS)
) ss:
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

H. C. Michaelis

Subscribed and sworn to before me this 5th day of May, 1955.

Margie Cooper

My commission expires 1-30-57.

RECEIVED
STATE OF KANSAS COMMISSION

5-7-55

PLUGGING
FILE NO. 35-8-15W
BOOK PAGE 115 LINE 9