


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD Strike out upper line when reporting plugging off formations.

Rocks _____ County. Sec. 18 Twp. 8S Rge. 16 (A) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW SW
Lease Owner. Crowe Drilling Co., Inc.
Lease Name. Chesney Well No. 1
Office Address. 323 Wheeler Kelly Hagny Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed July 11 19 48
Application for plugging filed July 11 19 48
Application for plugging approved July 15 19 48
Plugging commenced July 21 19 49
Plugging completed July 29 19 48
Reason for abandonment of well or producing formation Dry

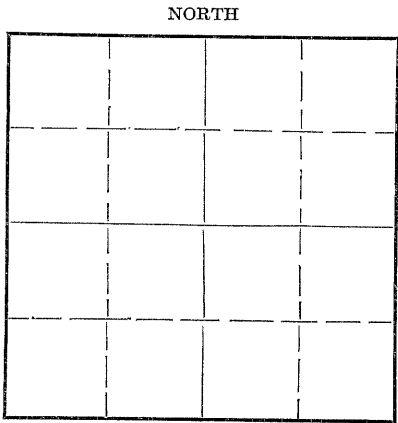

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production --- 19 ---
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3365 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Water Sand	Water	37'	60'	8 5/8"	153'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Lane Well plug set at 3060'.
Rock from 3060' to 3040'.
Dumped 5 sacks cement at 3040'.
Heavy mud from top of cement to 155'.
Set bridge at 155' and dumped 15 sacks of cement.
Mud from top of cement to 25'.
10 sacks Cement to the surface.

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Crowe Drilling Co., Inc.
Address 323 Wheeler Kelly Hagny Bldg., Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
L. C. Crowe, Pres. Crowe Drilling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. C. Crowe

SUBSCRIBED AND SWORN to before me this 2nd day of August, 19 48.
(Address)

My commission expires January 30, 1950
Laurena Pearl Bedinger Notary Public.

22-2625 2-48-15M
PLUGGING
FILE SEC 18 T 8 R (6a)
BOOK PAGE 45 LINE 14

82-48

15-163-00165-0000

WELL No. 1

18-3-15

Rooks County
Kansas

Surface Casing	153'	
	0 - 545'	Shale, Sandy Lime & Shells
	545 - 663'	Shale, Shells
	663 - 700'	Iron
	700 - 755'	Red Bed
	755 - 930'	Iron - Sand
	930 - 1135'	Shale & Shells
	1135 - 1195'	Shale
	1195 - 1230'	Anhydrite
	1230 - 1710'	Shale & Shells
	1710 - 1735'	Shale
	1735 - 2255'	Lime & Shale
	2255 - 2375'	Shale - Streak Lime
	2375 - 2455'	Shale - Lime
	2455 - 2515'	Lime
	2515 - 2575'	Shale
	2575 - 2645'	Shale - Lime
	2645 - 2755'	Shale
	2755 - 2775'	Shale & Lime
	2775 - 2895'	Lime
	2895 - 2960'	Lime & Shale
	2960 - 3010'	Shale - Lime
	3010 - 3060'	Lime
	3060 - 3068'	Lime (K.O.)
	3068 - 3072'	Lime (good odor)
	3072 - 3180'	Lime
	3180 - 3225'	K. O. Lime
	3225 - 3250'	Lime - Shale
	3250 - 3330'	Shale Lime
	3330 - 3365'	Lime
	3365 -	Total Depth

CERTIFICATION

STATE OF KANSAS }
COUNTY OF SEDGWICK } SS

I, L. C. Crowe, President of Crowe Drilling Company, Inc., hereby certify that the foregoing is a true and correct statement of drilling depths and formations of the above captioned well.

L. C. Crowe
L. C. Crowe

Subscribed and sworn to before me this 18th day of July, 1945.

Lawrence Pearl Biedinger
Notary Public

My commission expires January 30, 1950.

PLUGGING
FILE NO. 187-2-14
DATE FILED 45 JUL 14