

15-163-30135-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County. Sec. 9 Twp. 8S Rge. 16W (E) (W)  
NW NE SE

Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{4}$ " or footage from lines  
Lease Owner Petroleum Management, Inc.  
Lease Name Kollman Well No. 1  
Office Address 1515 Wichita Plaza, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed February 19, 19 66  
Application for plugging filed February 19, 19 66  
Application for plugging approved February 19, 19 66  
Plugging commenced February 19, 19 66  
Plugging completed February 19, 19 66  
Reason for abandonment of well or producing formation D & A

NORTH

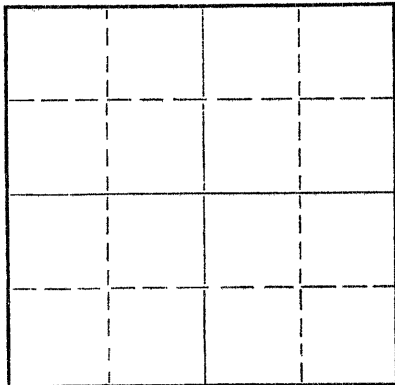

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3360 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	200'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 540',  
plug, 20 sacks of cement, plug at  
180', 20 sacks of cement, plug at  
40', 1/2 sack of hulls, 10 sacks of  
cement to bottom collar.

RECEIVED  
STATE CORPORATION COMMISSION

MAR 3 1966

3-3-66  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Red Tiger Drilling Company  
Address Box 173 -- Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Maxine V. Starr (employee of owner) or (~~owner~~ ~~operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Starr  
1720 Wichita Plaza, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of February, 19 66

My commission expires 5-22-66

Dean Stellas  
Notary Public.

15-163-30135-00-00

DRILLERS LOG

Kollman No. 1

CASINO RECORD: 8 5/8" @ 200' w/145 sx cement  
 COMPANY: Petroleum Management, Inc.  
 CONTRACTOR: Red Tiger Drilling Company  
 COMMENCED: February 14, 1966  
 COMPLETED: February 19, 1966  
 DESCRIPTION: NW NE SE 9-SS-16W Rocks Co., Ks.  
 ELEVATION: 1933 DF 1936 RB  
 TOTAL DEPTH: 3360'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post Rock	0	60	
Shale	60	620	
Sand & Shale	620	925	
Shale & Red Bed	925	1200	
Shale	1200	1233	
Anhydrite	1233	1266	
Shale	1266	1620	
Shale & Shells & Lime	1620	2005	
Shale & Lime	2005	3010	
Lime	3010	3360	

RECEIVED  
 STATE CORPORATION COMMISSION  
 MAR 3 1966  
 3-3-66  
 CONSERVATION DIVISION  
 Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Maxine V. Starr  
 Maxine V. Starr

Subscribed and sworn to before me this 24th day of February, 1966.

Dean Hallen  
 Notary Public

My Commission Expires:

5-22-66