


15-163-00376-06-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

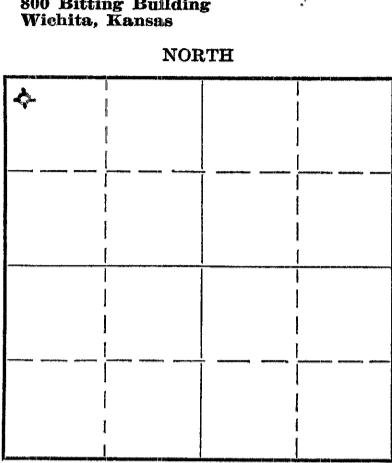

Rooks County. Sec. 17 Twp. 8S Rge. 16 (E) (W)
Location as "NE/CNW 1/4 SW 1/4" or footage from lines NW NW NW
Lease Owner K & E Drilling, Inc.
Lease Name Kollman Well No. 1
Office Address 1006 Central Bldg., Wichita
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-24 19 51
Application for plugging filed 12-24 19 51
Application for plugging approved 12-24 19 51
Plugging commenced 12-24 19 51
Plugging completed 12-24 19 51
Reason for abandonment of well or producing formation Commercial quantity of
oil not found.
If a producing well is abandoned, date of last production 19.....
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Dry Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	205	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole from 334 1/2 (T.D.) to 190' with heavy rotary mud. Put in plug and one-half sack cotton seed hulls and 15 sacks cement. Then filled to 41' with heavy rotary mud. Set another plug and one-half sack hulls and 10 sacks cement and capped with cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to K & E Drilling, Inc.
Address 1006 Central Bldg., Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Clinton Engstrand (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Clinton Engstrand*
12-29-51 1006 Central Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 28th day of December, 19 51
Eldon Petty
Notary Public.

My commission expires 6-5-54

28-3278-s 4-50-10M



Well: Kollman #1
 Location: NW NW NW Section 17-8s-16w, Rocks Co., Kansas
 Company: K & E Drilling Co., Inc.
 Contractor: Virginia Drilling Co., Inc.
 Commenced: December 11, 1951
 Completed: December 24, 1951
 Elevation: 1832 D. F.
 Total Depth: 3342

FORMATION	DEPTH		
Cellar	0-8	Set 8-5/8" csg. @ 205'	
Shale	8-25		
Sand-shale	25-75		
Sand	75-133	TOPS:	
Shale	133-194		
Hd. sandstone-shale brkn.	194-205		
Shale	205-795		Topeka 2726
Sand	795-1160		Heebner 2928
Anhydrite	1160-1198		Kansas City 2962
Shale & hd. sandstone	1198-1245		Arbuckle 3317
Shale-shells	1245-1565		
Shale-sand	1565-1770		
Shale-shells	1770-1980		
Shale-lime	1980-2627		
Shale-lime-shells	2627-2717		
Shale-lime	2717-2840		
Lime	2840-2978		
Lime-shale	2978-3020		
Lime	3020-3155		
Lime-shale	3155-3188		
Lime	3188-3224		
Lime-shale	3224-3328		
Lime	3328-3342		

Now comes S. A. Murphy, who states that he is familiar with the drilling of oil and gas wells and knows of his own knowledge that the Kollman #1, located in the NW NW NW of Section 17-8s-16w, Rocks Co., Kansas, was drilled to a total rotary depth of 3342 feet. Same was plugged and abandoned.

S. A. Murphy

Subscribed and sworn to before me this 27th day of December, 1951.

Inez M. Newman

My commission expires March 15, 1954.

PLUGGING
 FILE SEC 17-8-16w
 BOOK PAGE 133 LINE 3Y

STATE OF KANSAS
 DEC 29 1951
 COMMISSIONER OF GEOL. & MINES
 Topeka, Kas.
 12-29-51