


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-163-02979-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

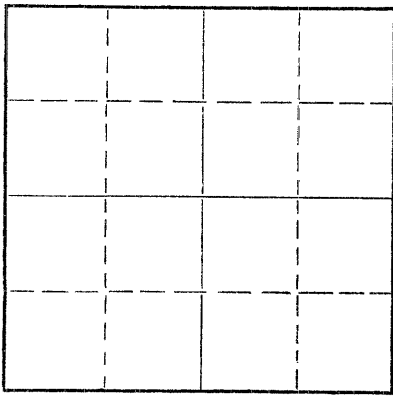

Locate well correctly on above
Section Plat

Rooks _____ County. Sec. 18 Twp. 8 Rge. 16 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines SW SE NE
Lease Owner Herndon Drilling Co.
Lease Name Chesney "A" #1 Well No. _____
Office Address Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 7- 9-58 19____
Plugging completed 7-11-58 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3210 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1190'	none
				5-1/2"	3175'	2182'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked the hole to 3050' and found it open.
Filled w/sand to 3046' and ran 4 sacks of cement. P lled casing to 600' and pumped in 11 sacks of gel mud. Pulled to 500' and pumped in 20 sacks of cement. Pulled casing to 190' and pumped in 20 sacks of cement. P lled rest of casing, 6 jts, cleared hole and bailed to to 35', set a 5' rock bridge and ran 10 sacks of cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor WEST SUPPLY CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel Knight, employee of contractor (employed by/owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of JULY 19 58

My commission expires 9-27-58

Thomas V. Diggins
Notary Public.

PLUGGING
FILE SEC 18 T. 8 R. 16W
BOOK PAGE 110 LINE 40

RECEIVED
STATE CORPORATION COMMISSION
9-6-58
SEP 6 1958
CONSERVATION DIVISION
Wichita, Kansas