



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

COMPENSATED DENSITY / NEUTRON LOG

Company MAI OIL OPERATIONS, INC. Well WILBORN "A" #1 Field TRAPP County BARTON State KANSAS		Company MAI OIL OPERATIONS, INC. Well WILBORN "A" #1 Field TRAPP County BARTON State KANSAS	
Location: API # : 15-009-26107-0000 715' FNL & 440' FWL NE - SW - NW - NW SEC 28 TWP 16S RGE 13WQ		Other Services DIL/MEL Elevation K.B. 1961 D.F. 1959 G.L. 1953	
Permanent Datum GROUND LEVEL Log Measured From KELLY BUSHING 8' A.G.L. Drilling Measured From KELLY BUSHING			
Date	7/13/15		
Run Number	ONE		
Depth Driller	3475		
Depth Logger	3475		
Bottom Logged Interval	3451		
Top Log Interval	2700		
Casing Driller	8 5/8" @ 514'		
Casing Logger	514		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,200 PPM	
Density / Viscosity	9.0/46		
pH / Fluid Loss	8.0/8.8		
Source of Sample	FLOWLINE		
Rin @ Meas. Temp	.500 @ 100F		
Rinf @ Meas. Temp	.375 @ 100F		
Rinc @ Meas. Temp	.600 @ 100F		
Source of Rinf / Rinc	MEASUREMENT		
Rin @ BHT	.450 @ 111F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	4:00 P.M.		
Maximum Recorded Temperature	111F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
 DIRECTIONS
 SUSANK, KS., S. TO INTERSECTION, E. ACROSS BLKTOP, S. INTO



NABORS

**COMPLETION
& PRODUCTION**

MAIN SECTION

Database File:

26627ddn.db

Dataset Pathname:

pass3.5

Presentation Format:

den_neu


Dataset Creation:


Mon Jul 13 17:16:49 2015


Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

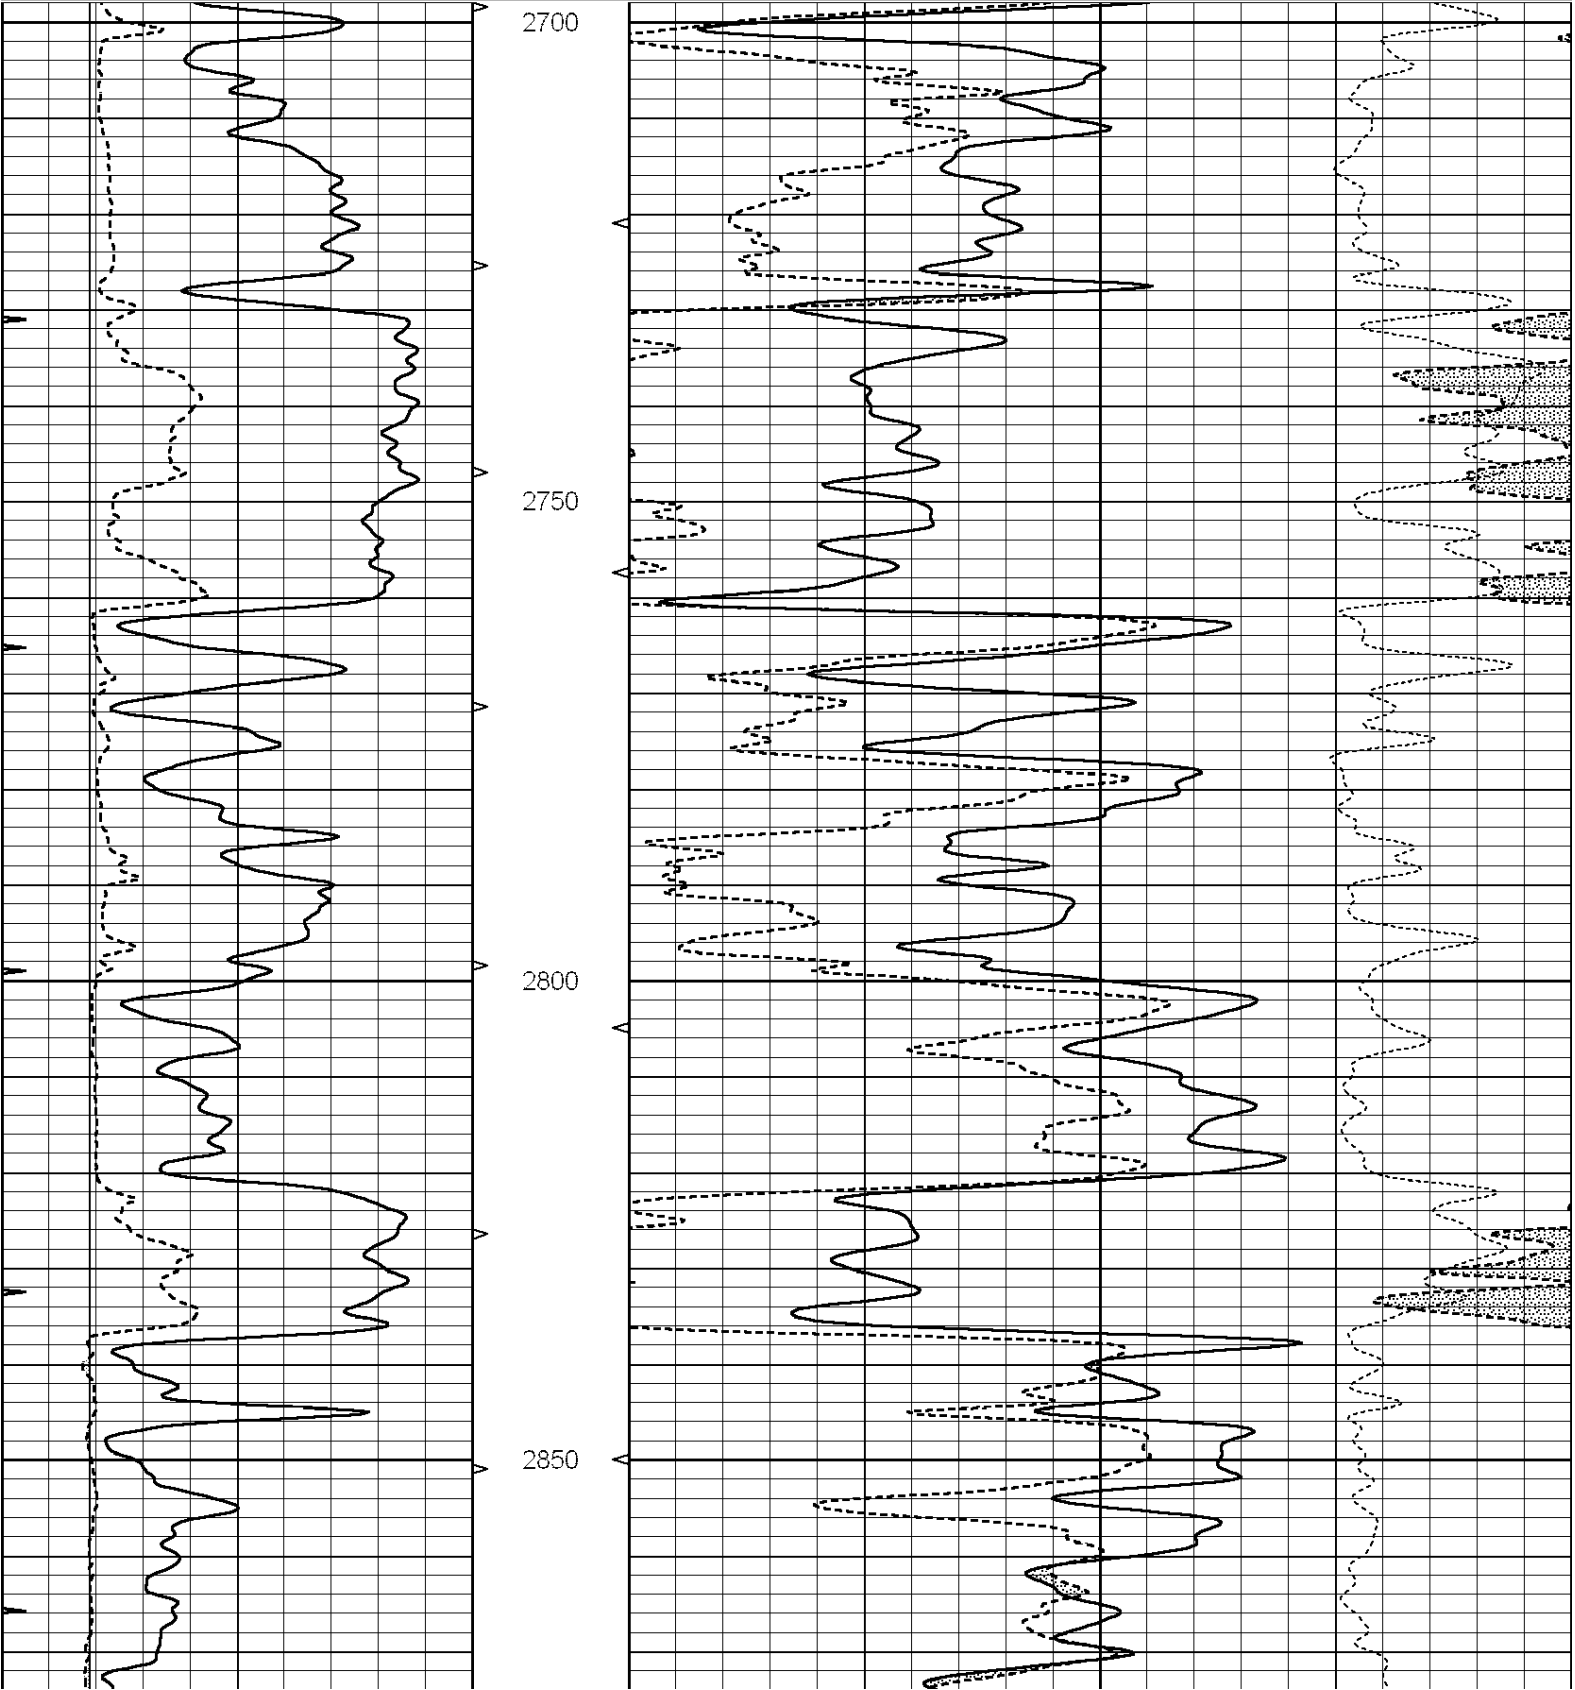

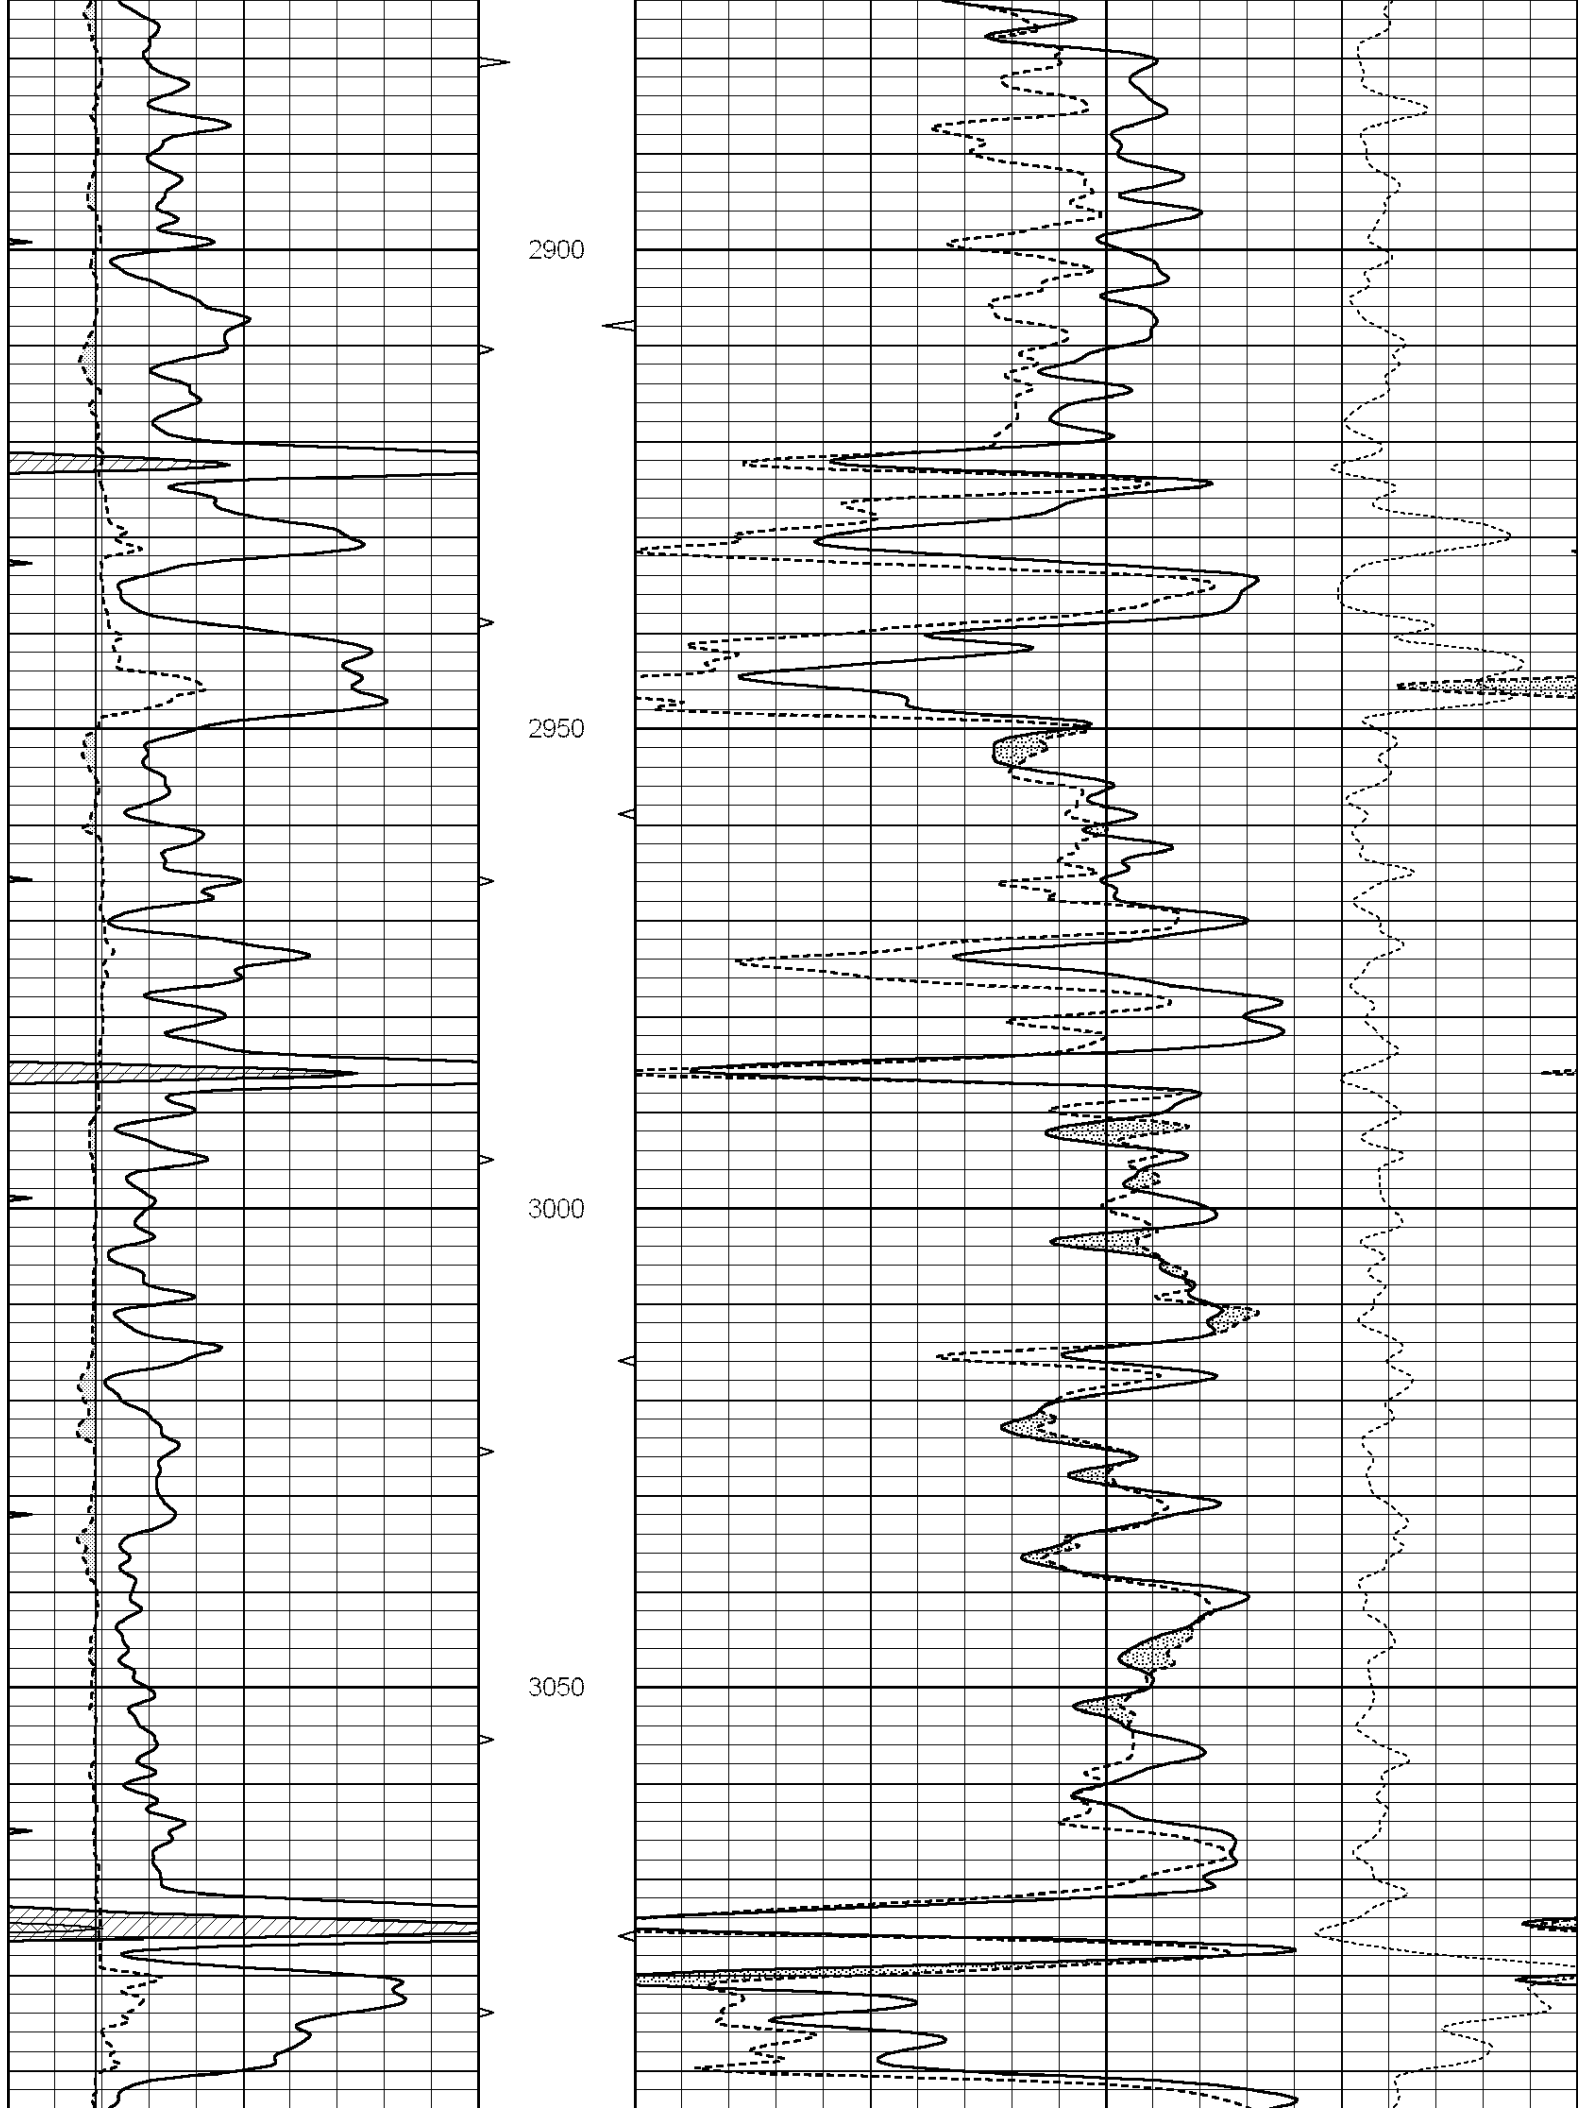

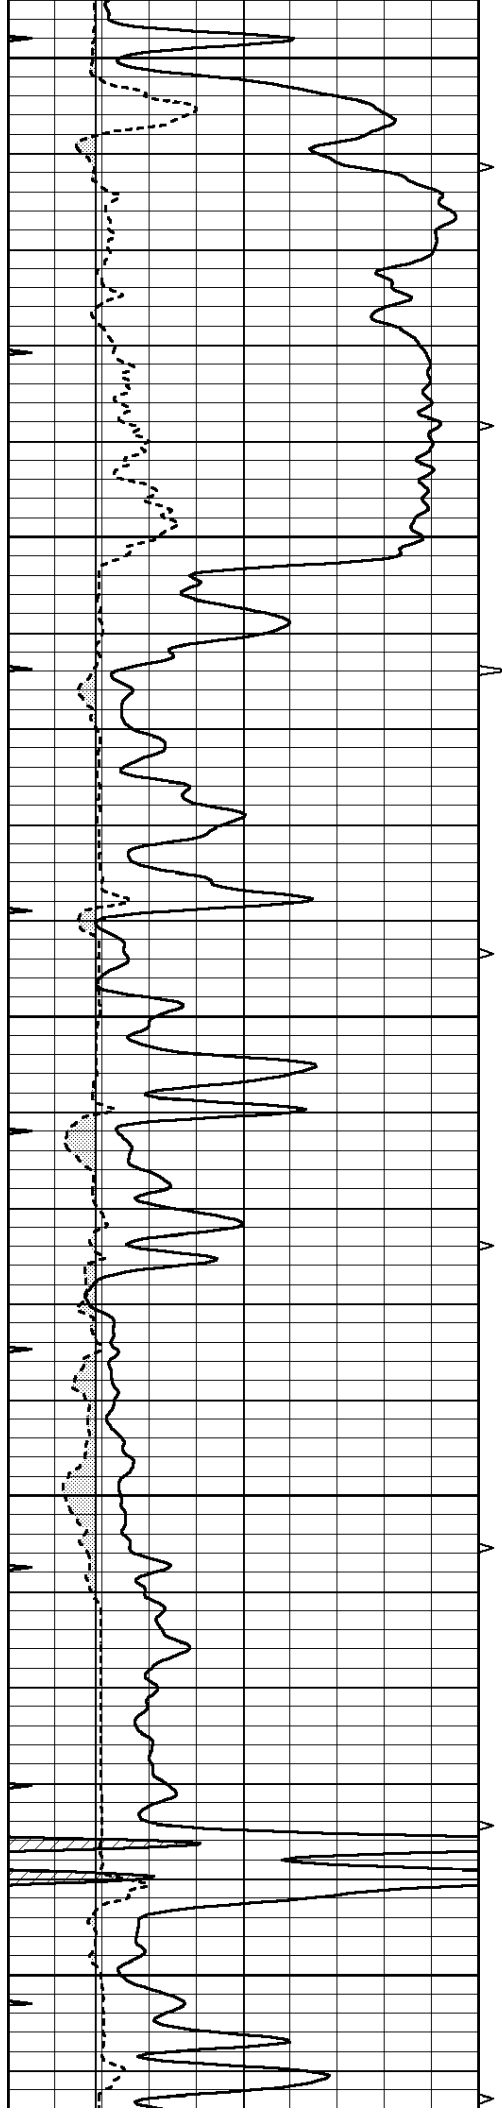


3100


3150

3200

3250

3300

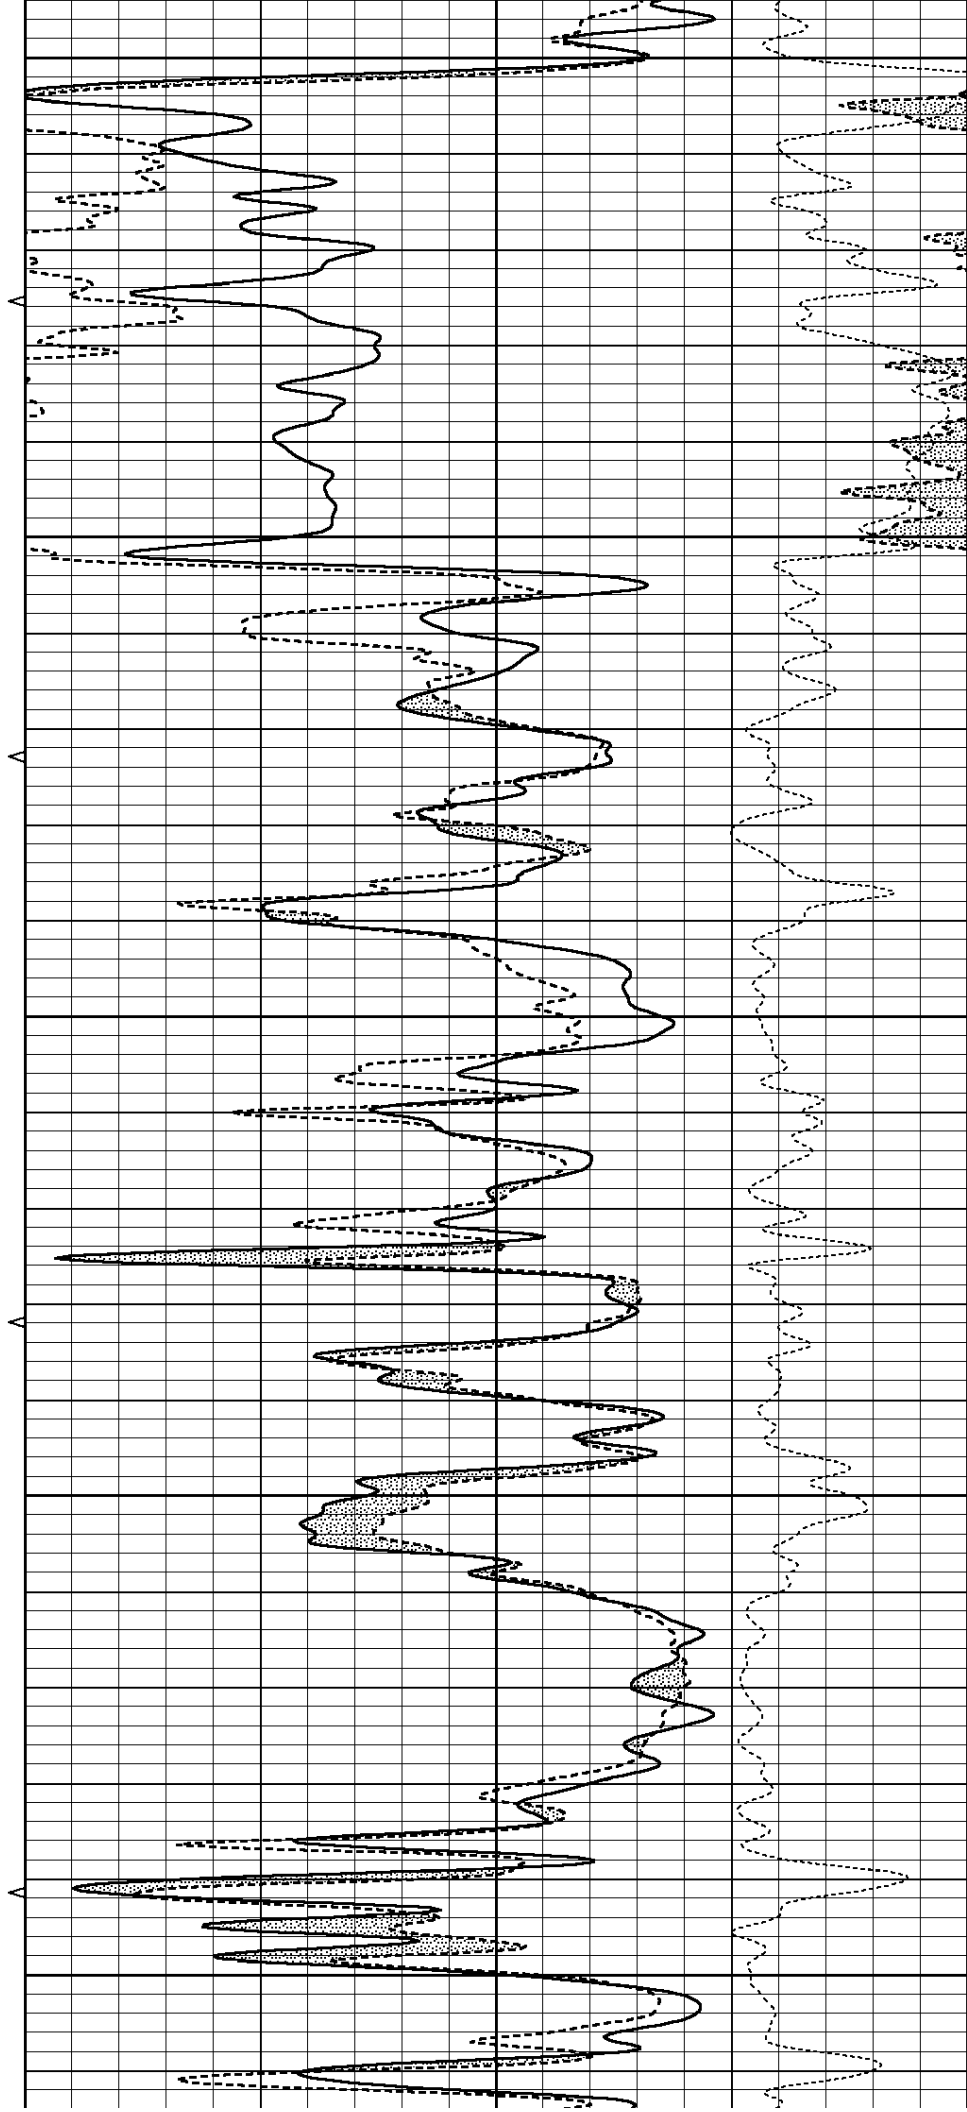

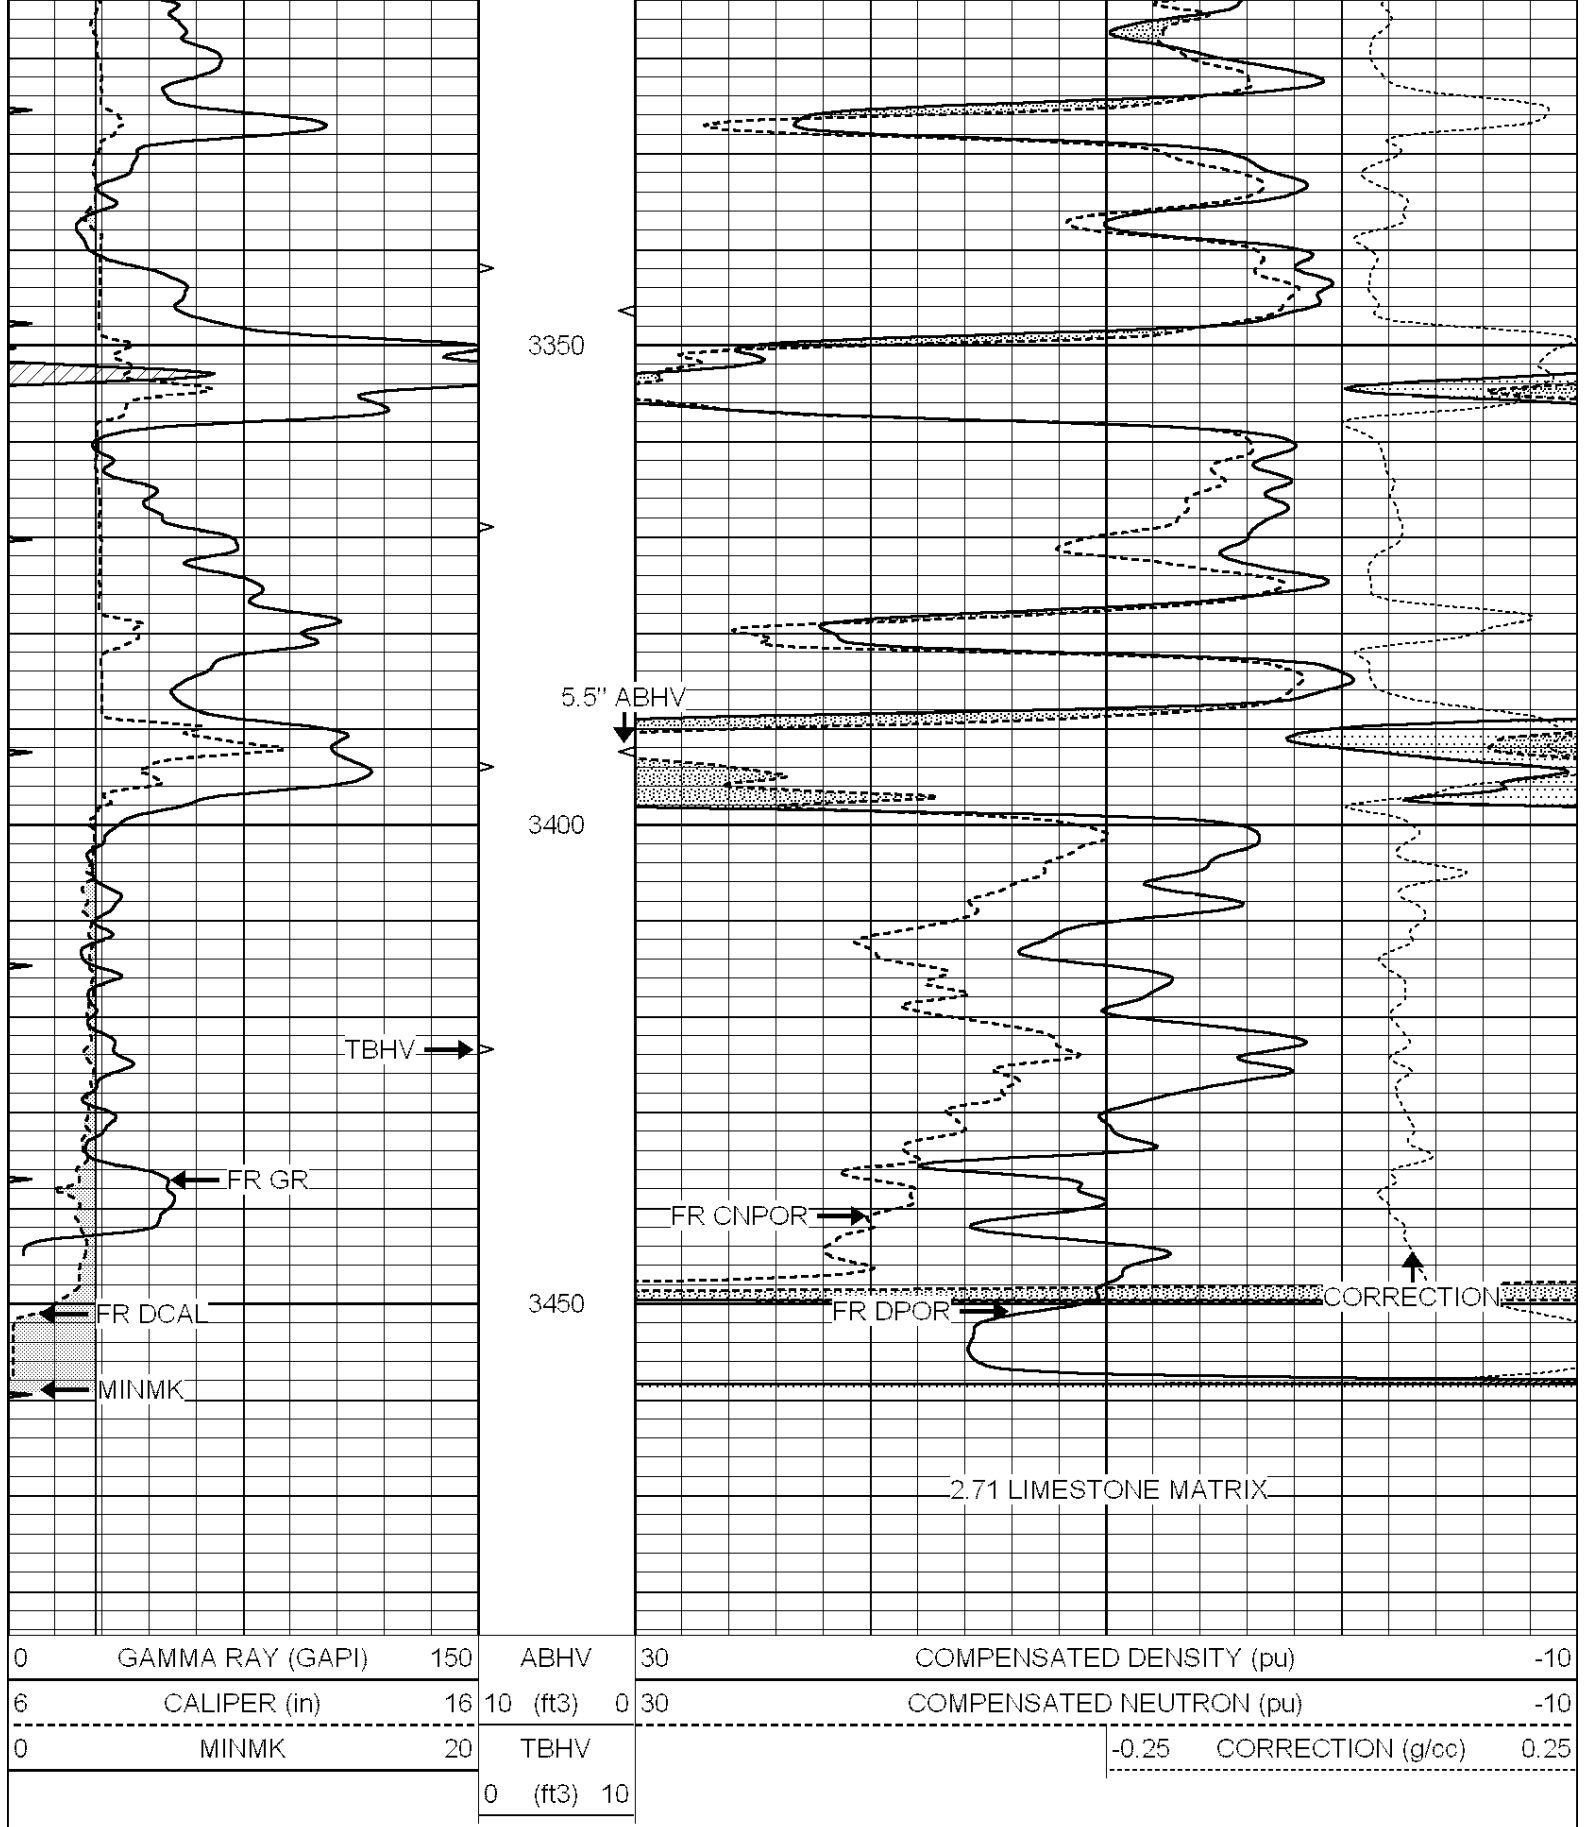



NABORS
COMPLETION
& PRODUCTION
SERVICES CO.

REPEAT SECTION

Database File: 20027.dan.db
Dataset Pathname: pass2.3
Presentation Format: den_neu
Dataset Creation: Mon Jul 13 16:10:00 2015 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		


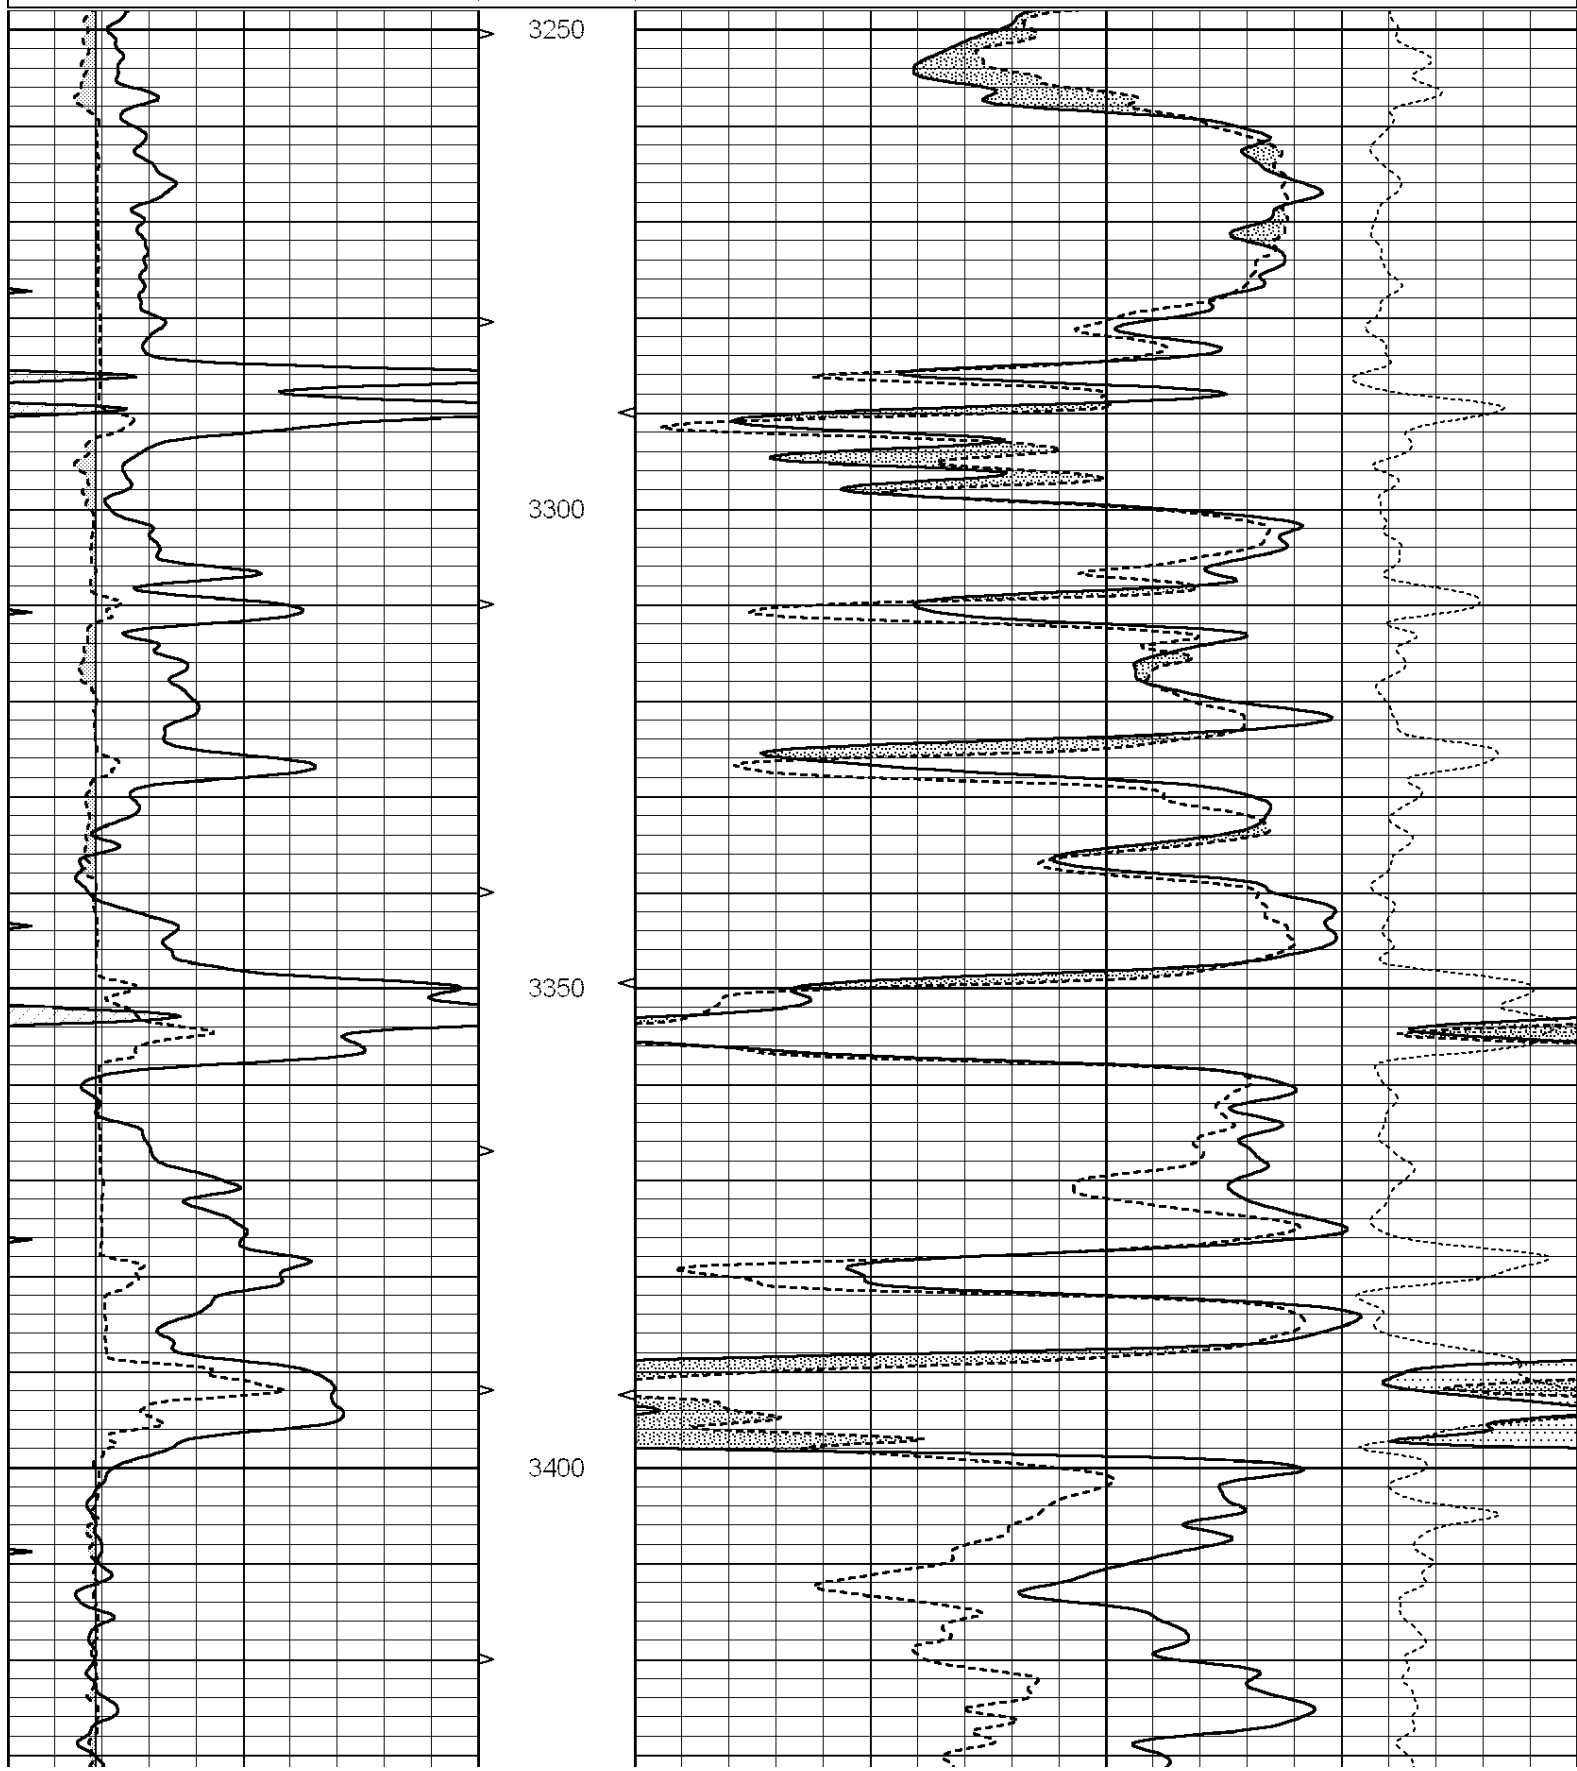


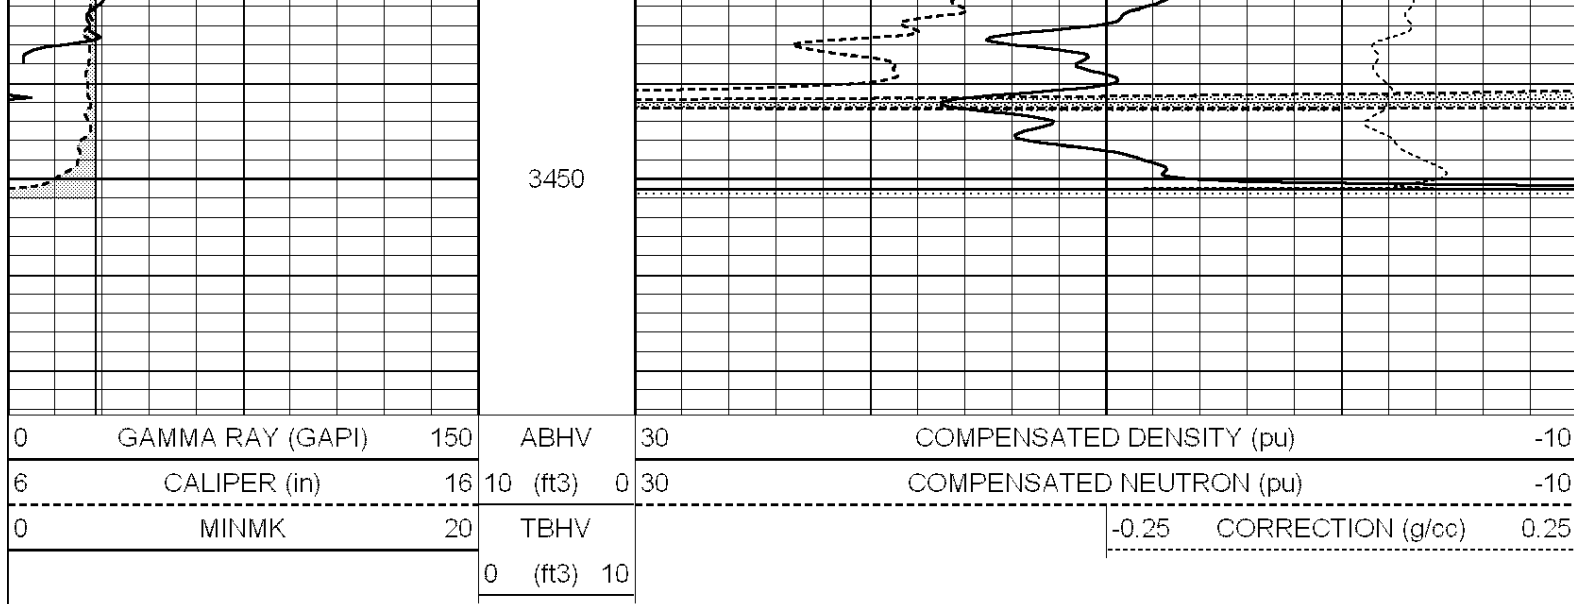


**COMPLETION
& PRODUCTION
SERVICES CO.**

DOLOMITE MATRIX

Database File: 26627ddn.db
 Dataset Pathname: pass2.3D
 Presentation Format: den_neu
 Dataset Creation: Mon Jul 13 16:11:49 2015
 Charted by: Depth in Feet scaled 1:240

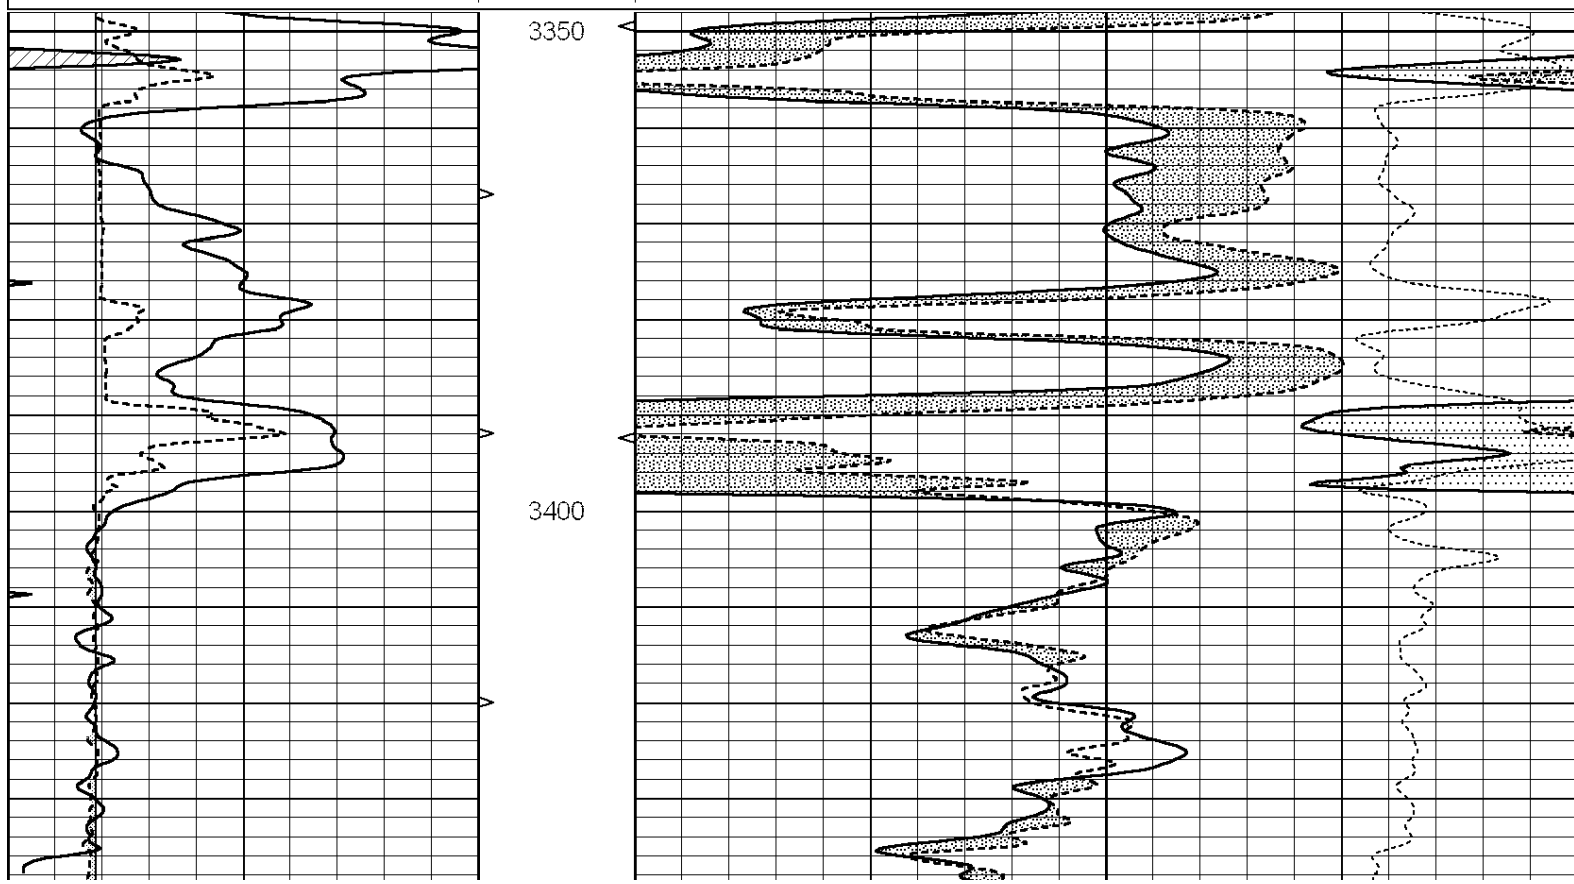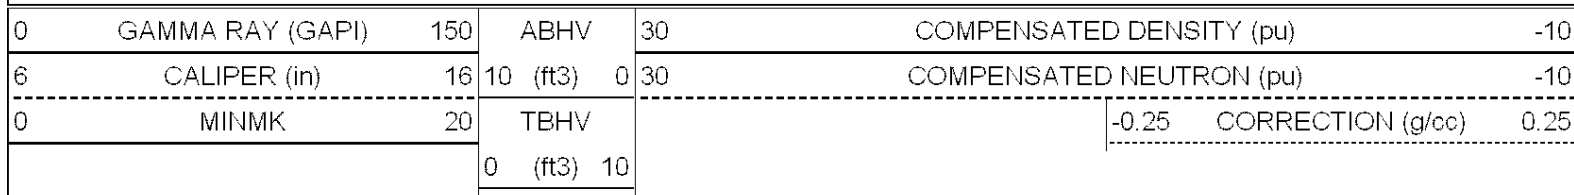

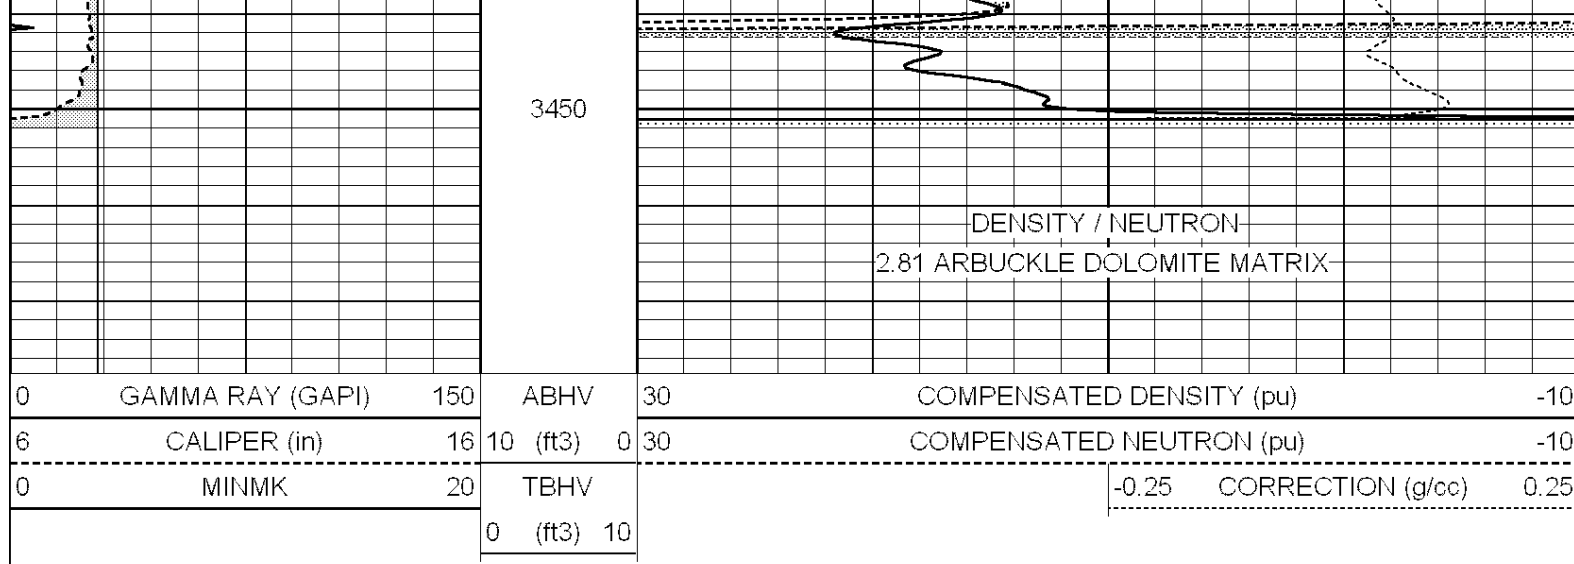

Calibration Report

Database File: 26627ddn.db
 Dataset Pathname: pass3.5
 Dataset Creation: Mon Jul 13 17:16:49 2015

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG
 Surface Cal Performed: Mon May 04 16:08:03 2015
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	670.000	-16.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	670.000	-28.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Master Calibration

Performed Tue Sep 08 14:14:44 2009

	Background	Magnesium	Aluminum	Sandstone	
Window 1	2042.6	12312.8	4225.8	13758.4	cps
Window 2	1855.8	10134.7	3624.2	11113.1	cps
Window 3	1639.4	6760.2	2716.3	7260.3	cps
Window 4	466.4	469.2	466.1	476.5	cps
Long Space	0.0	8278.9	1768.4	9257.4	cps
Short Space	2.2	2377.3	1544.1	2574.2	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio	: 0.549
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept	: -18.8

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808
Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070558
Tool Model:	OPEN_GR
Performed:	Sat Mar 21 17:40:37 2015

Calibrator Value:	1.0	GAPI
-------------------	-----	------

Background Reading:	0.0	cps
---------------------	-----	-----

Calibrator Reading:	1.0	cps
---------------------	-----	-----

Sensitivity:	0.2800	GAPI/cps
--------------	--------	----------