



PIONEER

Pioneer Energy Services

Microresistivity Log

API No.	15-153-21149-00-00		
Company	BEREXCO, LLC		
Well	MOSER C #6-28		
Field	WILDCAT		
County	RAWLINS	State	KANSAS
Location	600' FSL & 1320' FWL		Other Services RAG
Sec: 28	Twp: 1S	Rge: 36W	Elevation
Permanent Datum	GROUND LEVEL	Elevation 3283	K.B. 3294
Log Measured From	KELLY BUSHING	11 Ft. Above Perm. Datum	D.F. N/A
Drilling Measured From	KELLY BUSHING		G.L. 3283
Date	7/2/2015		
Run Number	TWO		
Depth Driller	4658		
Depth Logger	4655		
Bottom Logged Interval	4654		
Top Log Interval	3500		
Casing Driller	8.625 @ 294		
Casing Logger	295		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL		
Salinity, ppm CL	1000		
Density / Viscosity	9.1 45		
pH / Fluid Loss	10.5 6.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.20 @ 72		
Rmf @ Meas. Temp	0.90 @ 72		
Rmc @ Meas. Temp	1.62 @ 72		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.70 @ 123		
Operating Rig Time	4 HOURS		
Max Rec. Temp. F	123		
Equipment Number	91		
Location	HAYS		
Recorded By	D. SCHMIDT		
Witnessed By	BRYAN BYNOG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Pioneer Energy Services
785.625.3858


MCDONALD,
NORTH TO Z RD, 1 EAST, 1 NORTH, 1/2 EAST,
NORTH AND WEST INTO


Database File berexco_moser c_6-28hd.db
Dataset Pathname rag/bxrag
Presentation Format micro
Dataset Creation Thu Jul 02 08:03:00 2015
Charted by Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
-200	SP (mV)	0

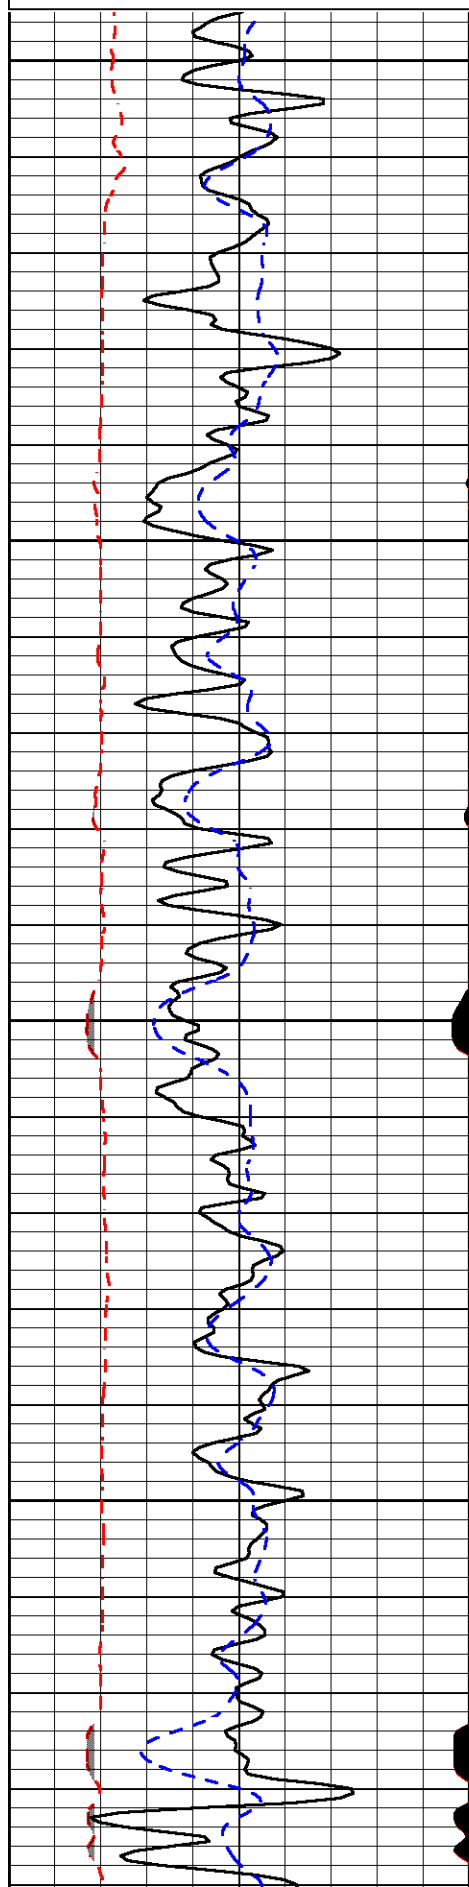

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0
		LSPD (ft/min)

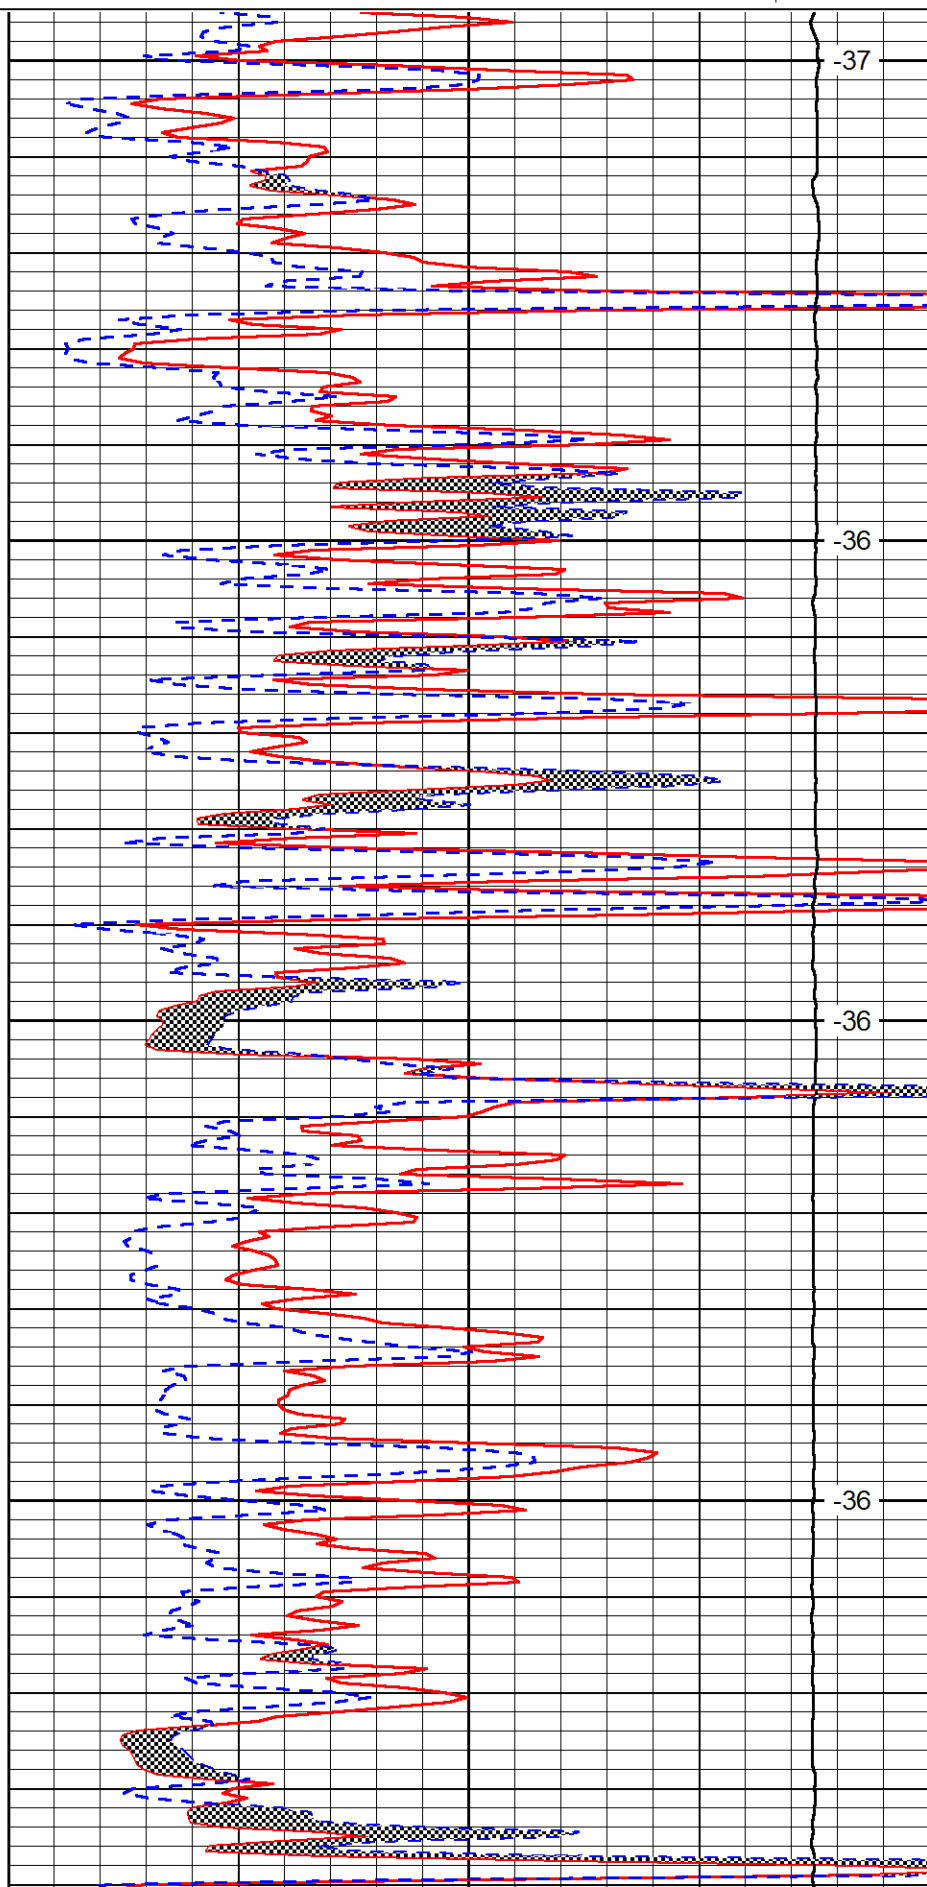

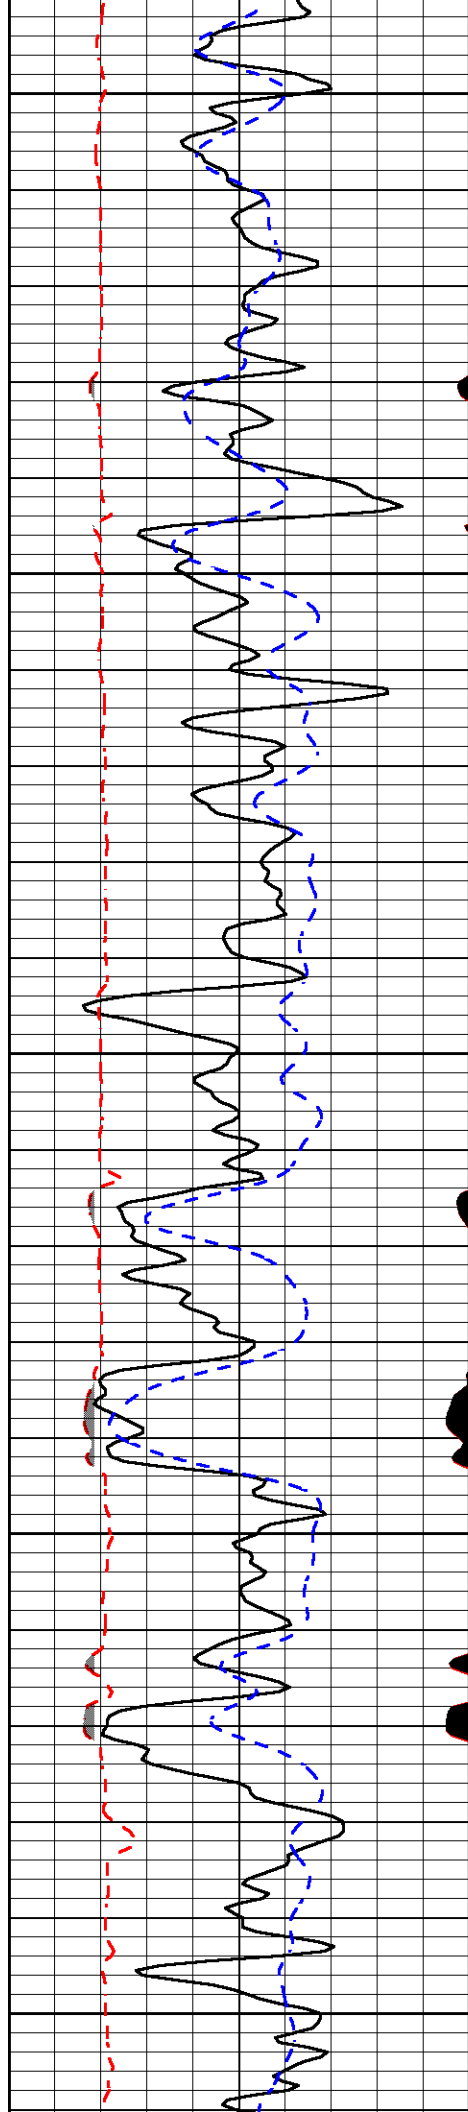


3700

3750

3800

3850

3900

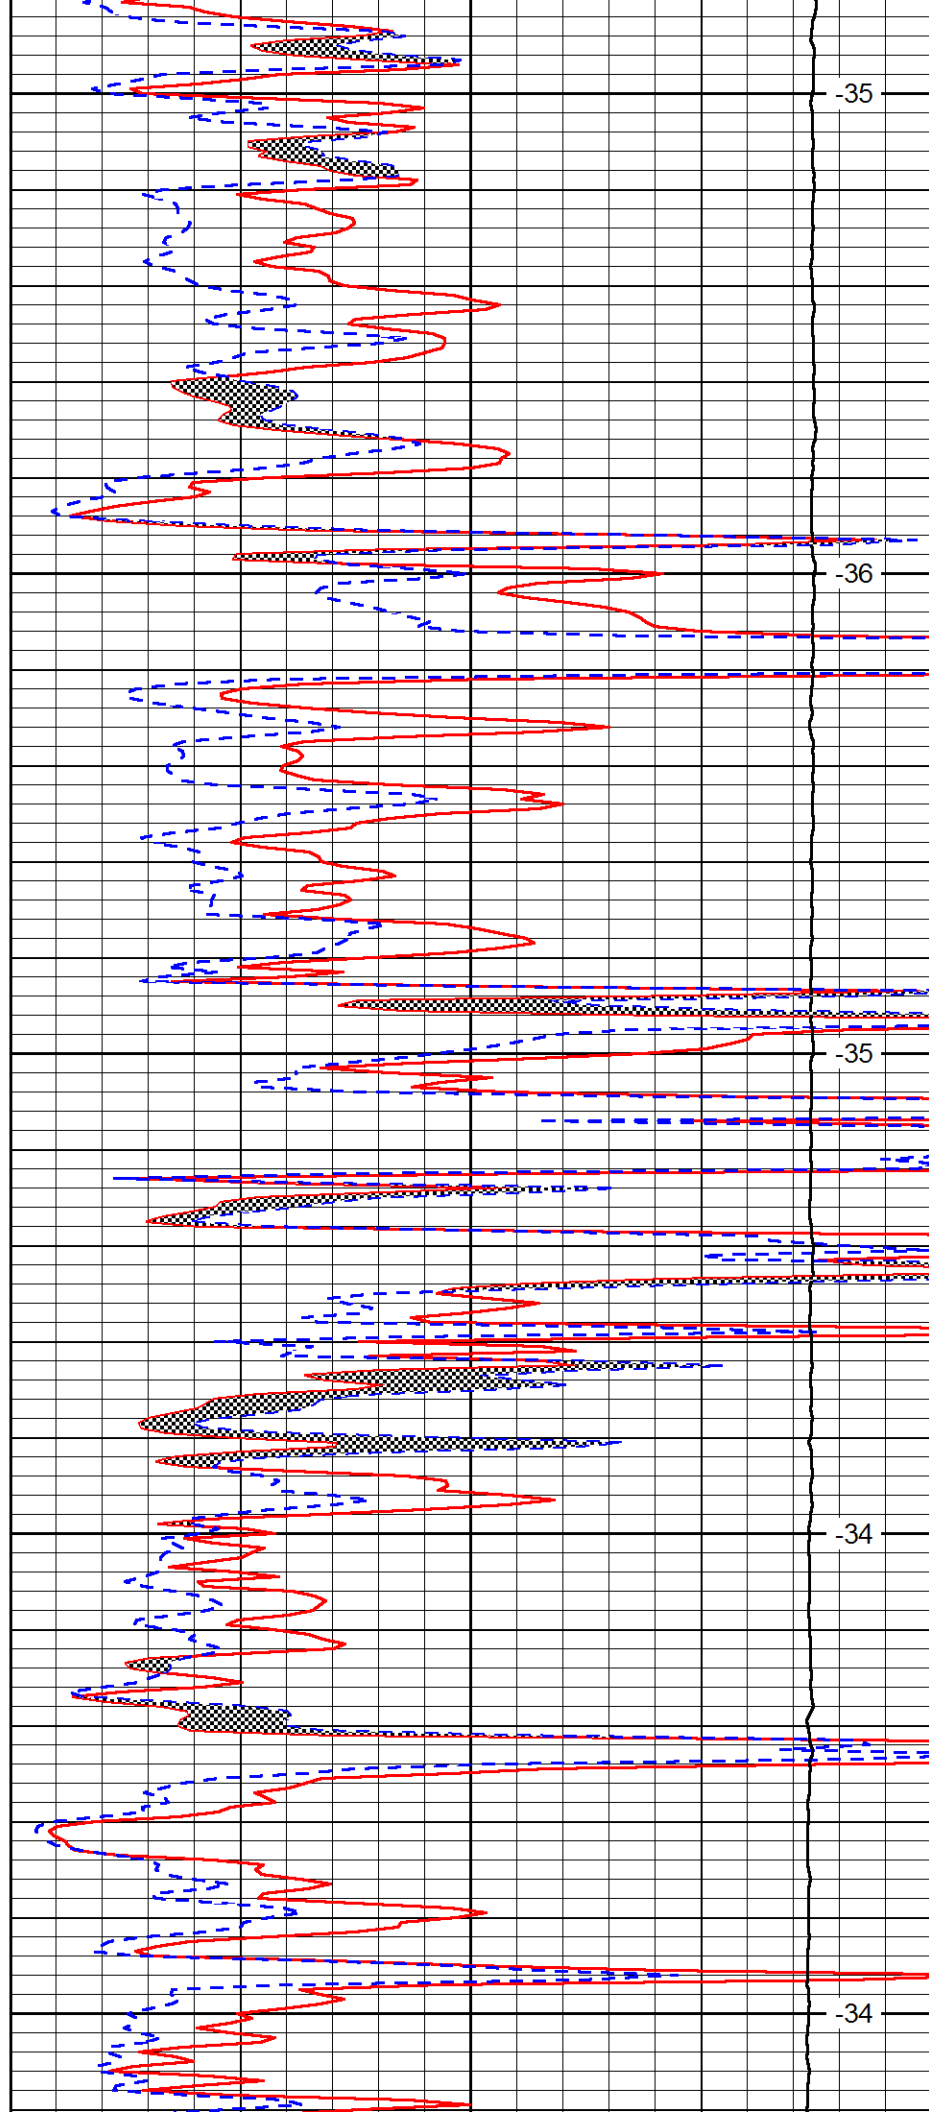


-35

-36

-35

-34

-34

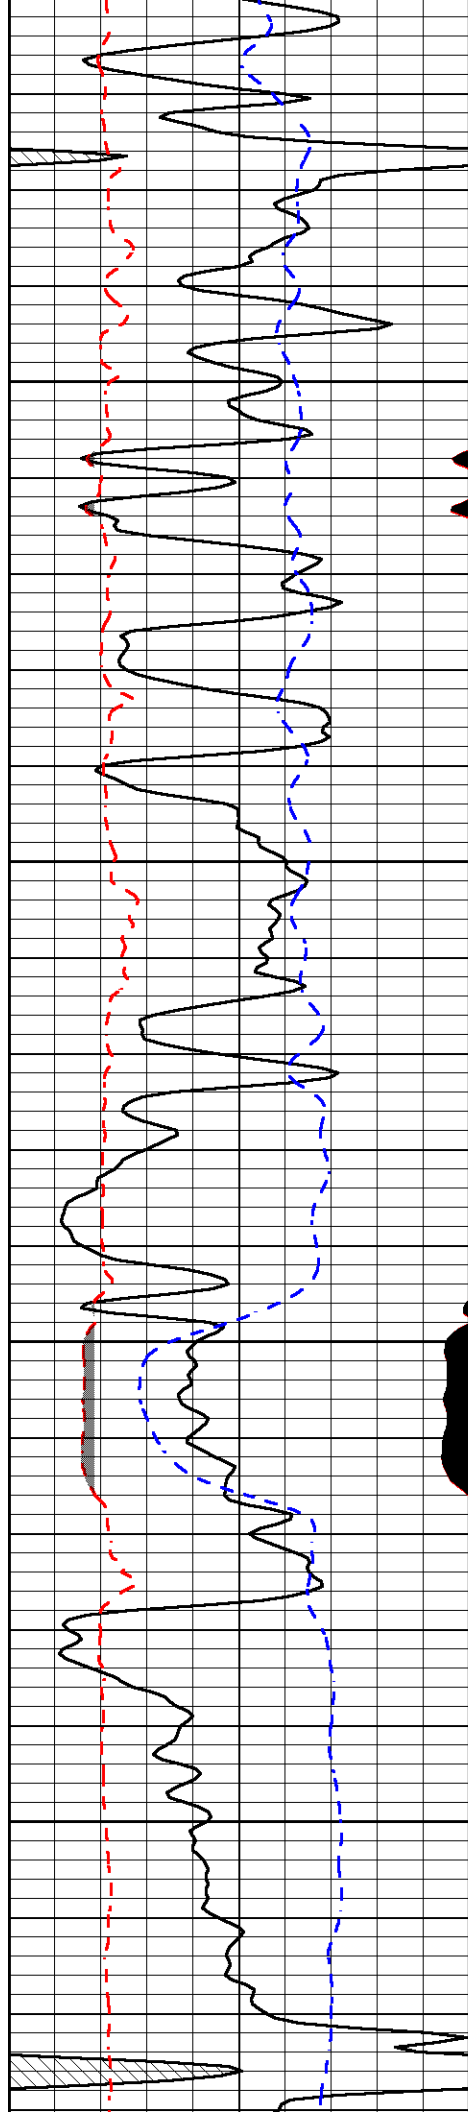


3950

4000

4050

4100

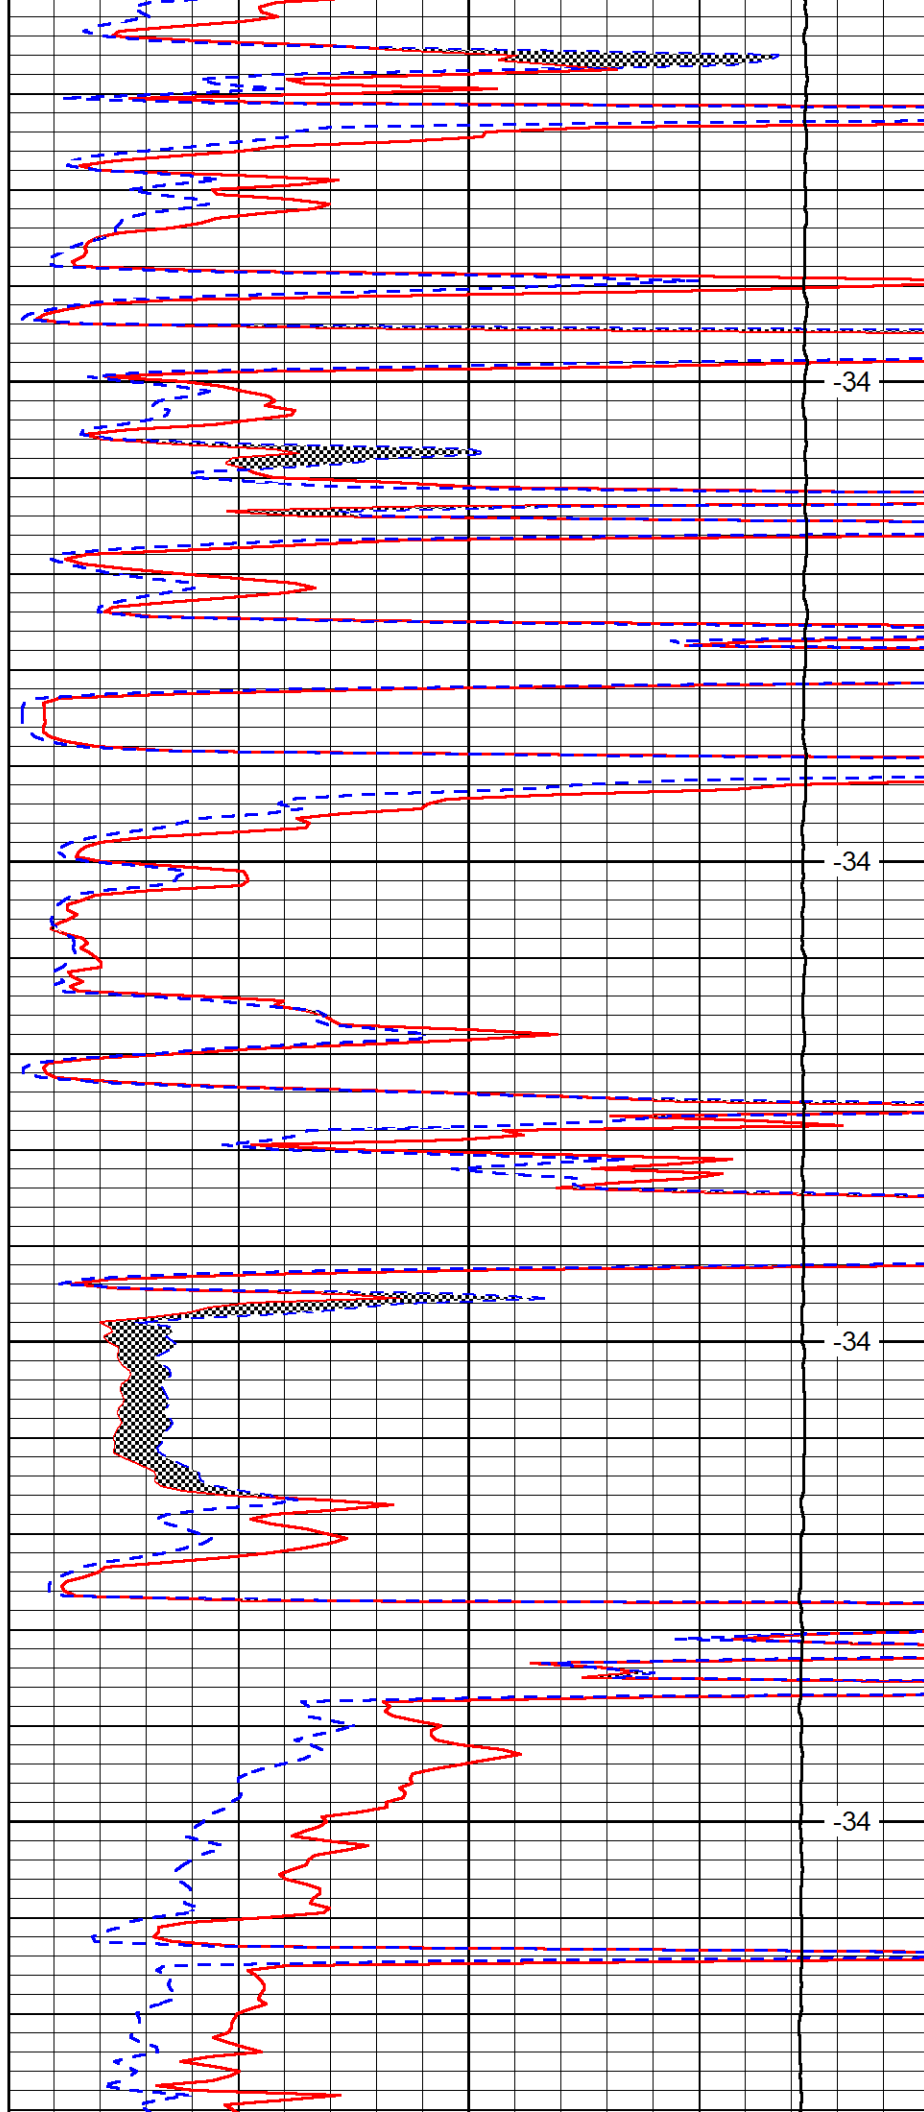


-34

-34

-34

-34

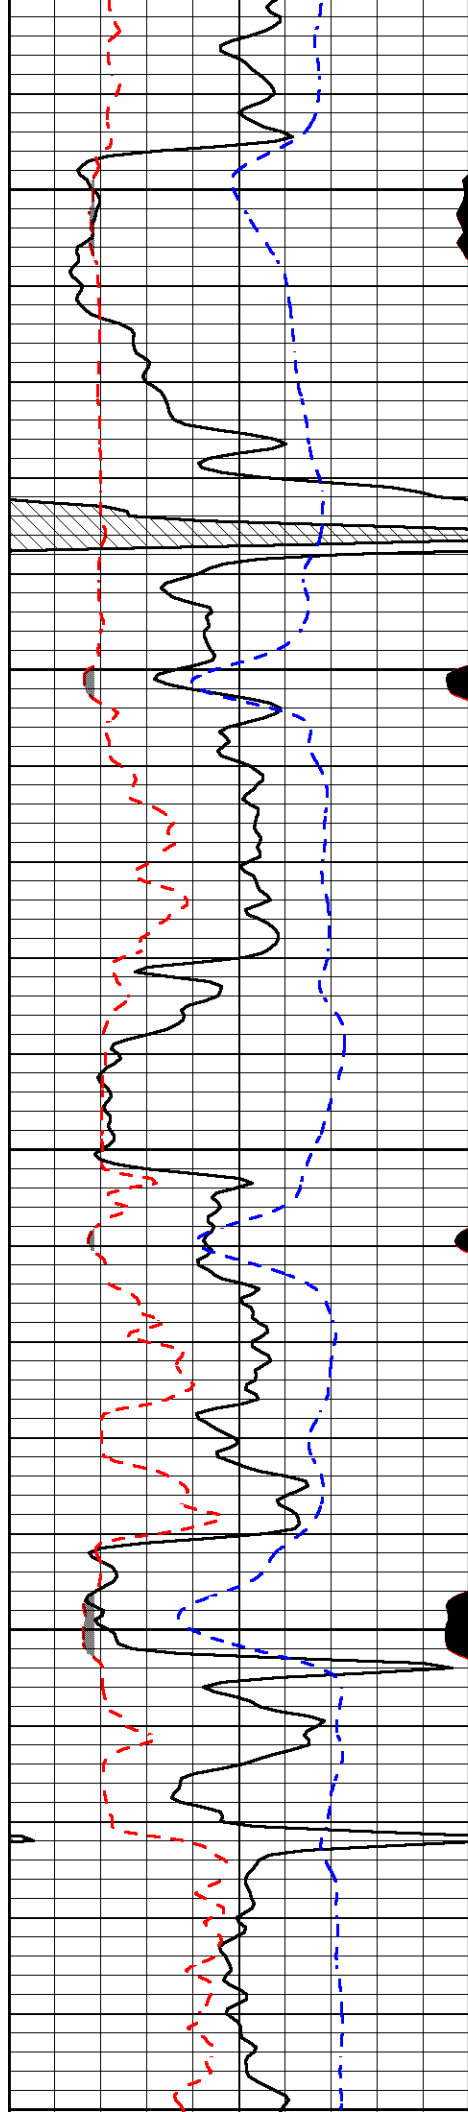


4150



4200


4250

4300

4350

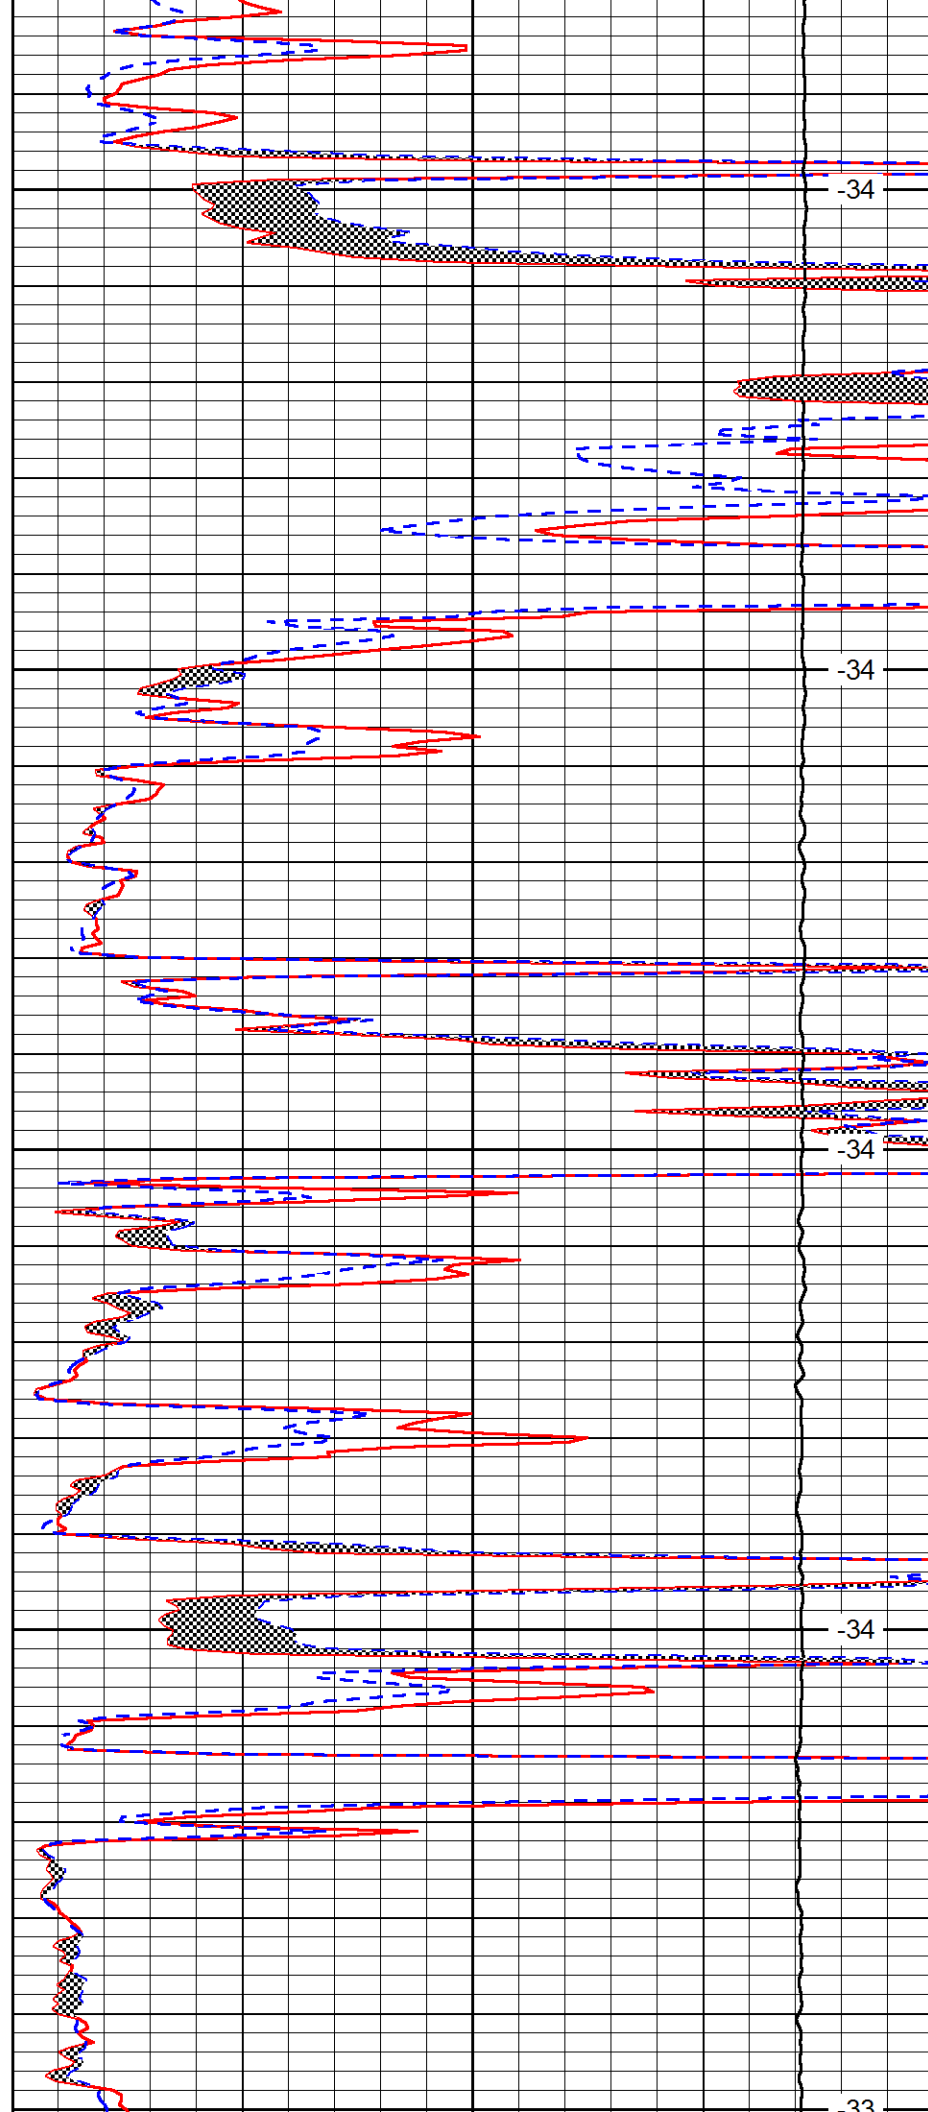

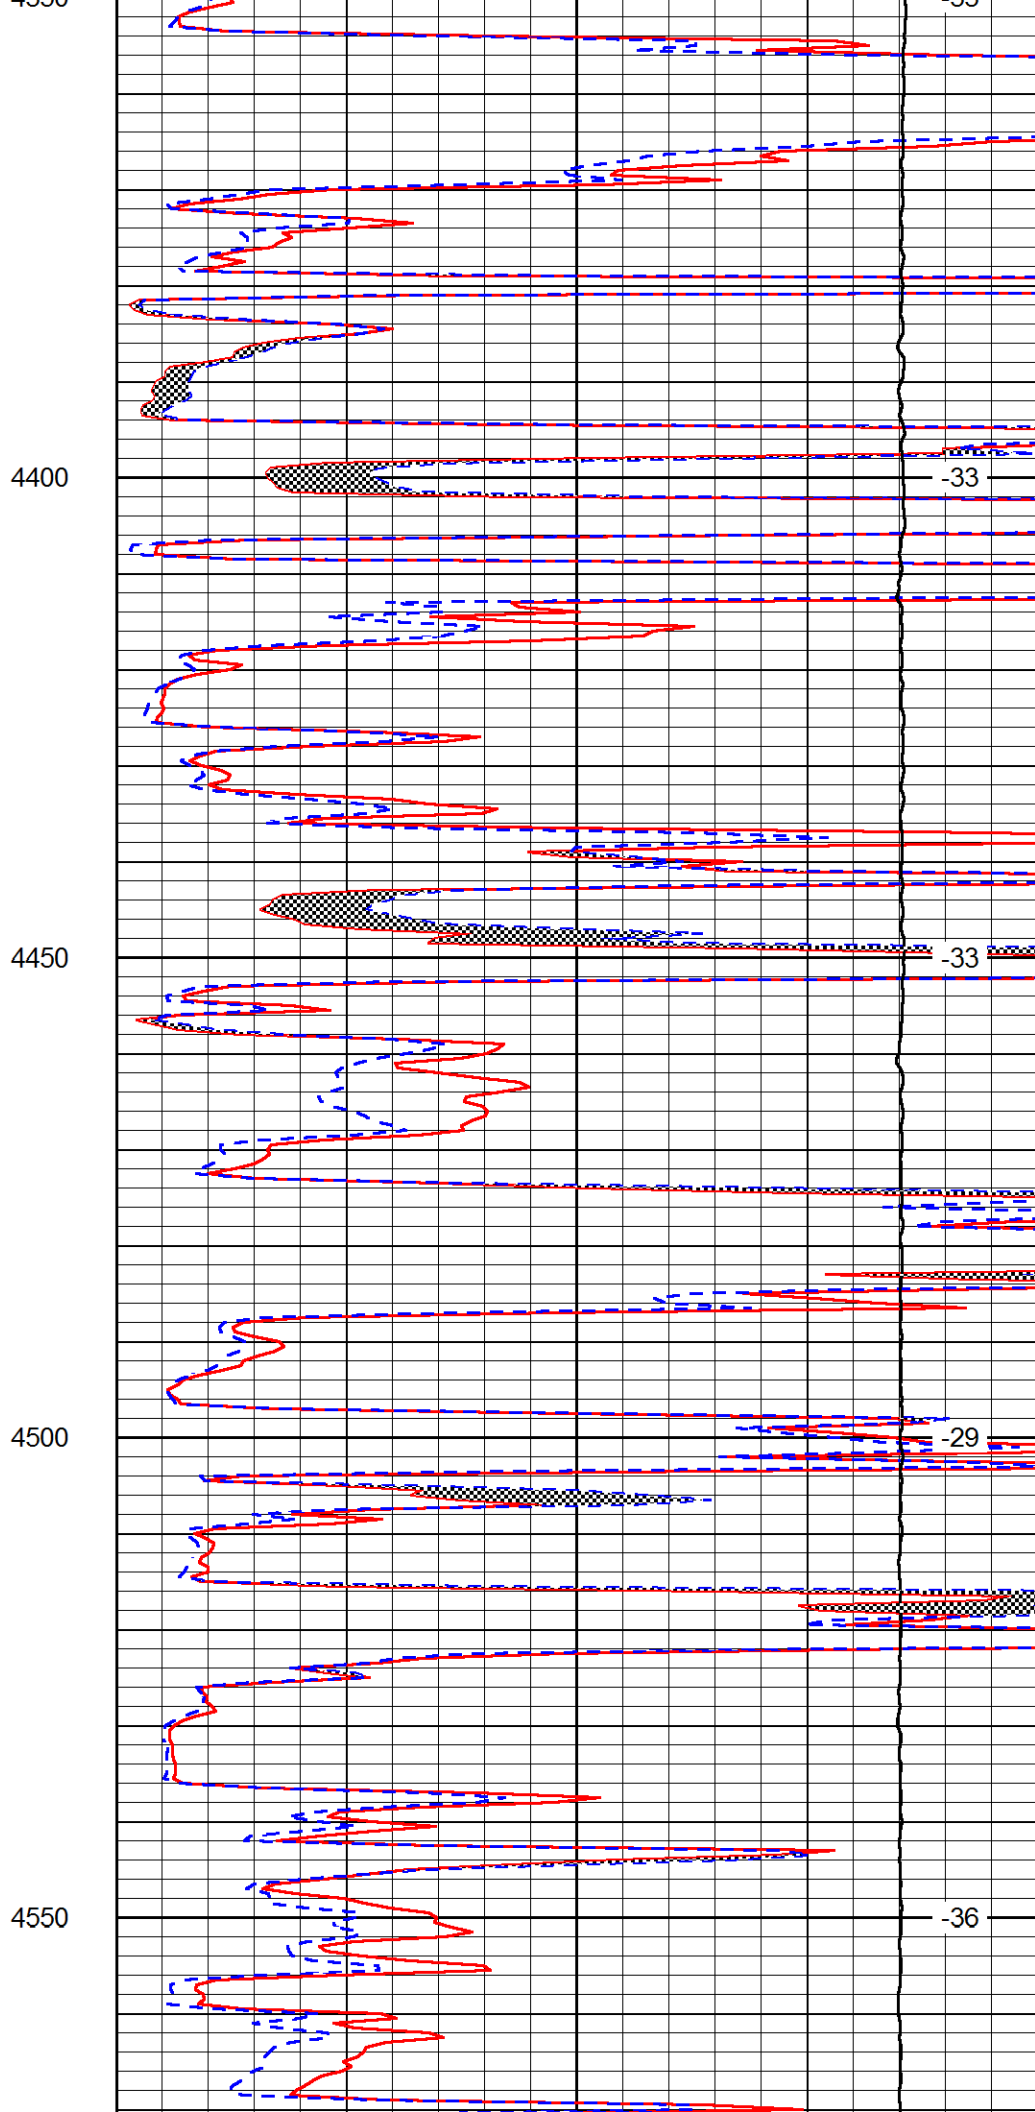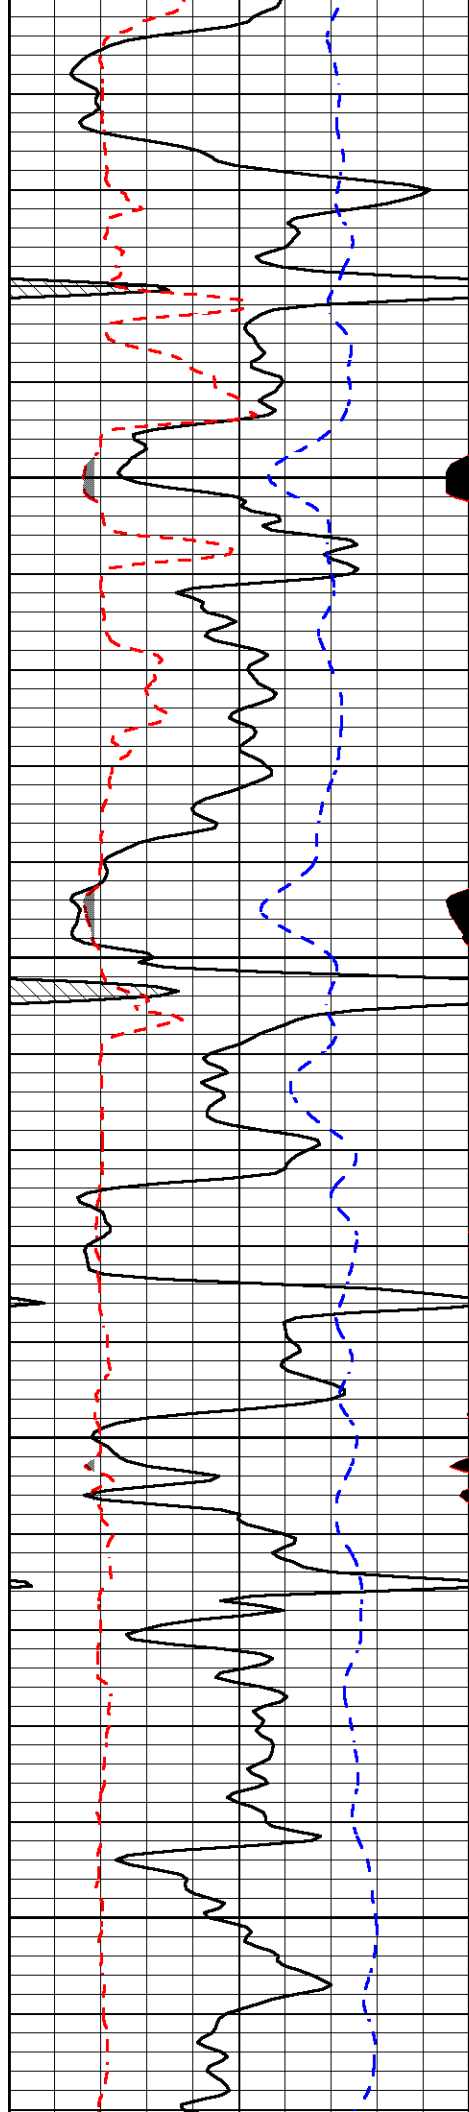

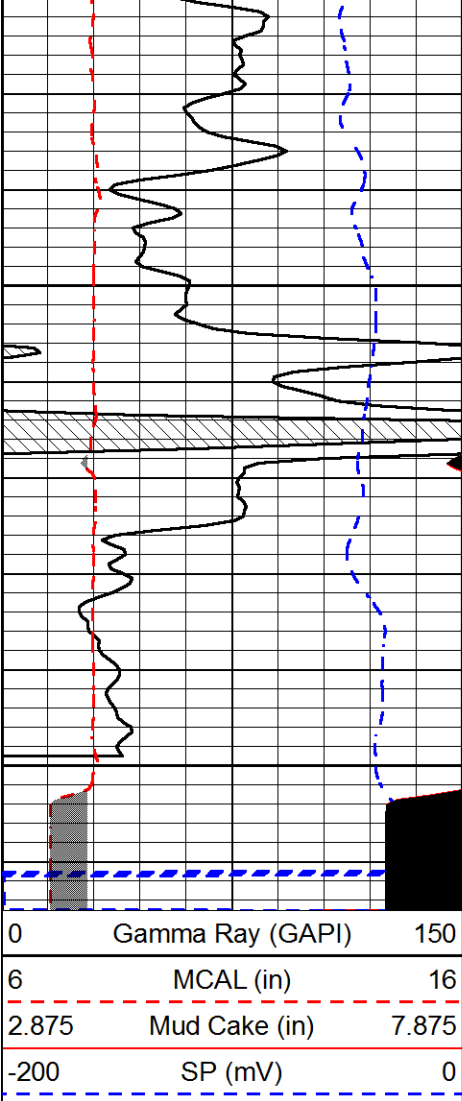

4600

4650

