

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-00182-00-01
Spot: NWNWNW Sec/Twnshp/Rge: 2-29S-20W
4950 feet from S Section Line, 4950 feet from E Section Line
Lease Name: MORFORD OWWO Well #: 1
County: KIOWA Total Vertical Depth: 5779 feet

Operator License No.: 33388
Op Name: J. MARK RICHARDSON FAMILY TRUS
Address: 1406 N. CHARLES
WICHITA, KS 67203

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4712		
PROD	4.5	5772	2600	WITH 250 SX CMT #187 ⁸²
SURF	10.25	184		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/09/2006 9:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 4300' WITH 4 SX CMT. PLUG AT 1300' WITH 12 SX GEL - 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 215' WITH 75 SX CMT. PLUG AT 40' WITH 25 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/09/2006 10:30 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SAND BACK TO 4300' WITH 4 SX CMT ON TOP. 1ST PLUG AT 1300' WITH 12 SX GEL - 50 SX CMT. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 215' WITH 75 SX CMT. 4TH PLUG AT 40' WITH 25 SX CMT. CMT CIRCULATED.

Perfs:


Top	Bot	Thru	Comments
5598	5602		
4977	4983		
4672	4676		
4654	4662		
4640	4646		
4390	4394		
4389	4395		
4388	4394		

RECEIVED
FEB 16 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

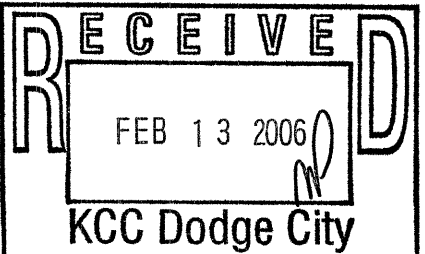

Signed Eric MacLaren
(TECHNICIAN)

INVOICED
DATE 2-16-06
INV. NO. 2006061134

Form CP-277
[Signature]