

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-075-40772-00-00
 Spot: NWNWNWSE Sec/Twnshp/Rge: 30-26S-39W
2490 feet from S Section Line, 2490 feet from E Section Line
 Lease Name: HATTRUP Well #: 1
 County: HAMILTON Total Vertical Depth: 2595 feet

Operator License No.: 4824
 Op Name: PIONEER NATURAL RESOURCES USA,
 Address: 5205 N. O'CONNOR BLVD.
IRVING, TX 75039

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2350		WITH 2 SX CMT
CIBP		2466		
L1	4.5	2466	1414	WITH 250 SX CMT
PROD	7	2499	652	WITH 400 SX CMT
SURF	10.75	540		WITH 250 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 02/03/2006 12:00 PM
 Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
 Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: CIBP @ 2350' WITH 2 SX CMT. 1ST PLUG 25 SX CMT FREE POINT 4 1/2". 2ND PLUG FREE POINT 7" & CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
 Date/Time Plugging Completed: 02/07/2006 5:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 2350' IN 4 1/2" CASING WITH 2 SX CMT. PUMP 20 SX CMT AT 1900' IN 4 1/2" CASING. MUD BACK TO 652'. PUMP 75 SX CMT AT 652' IN 7" CASING. MUD BACK TO 40'. PUMP 15 SX CMT AT 40' IN 10 3/4" CASING.


Perfs:

Top	Bot	Thru	Comments
2408	2466		

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

District: 01

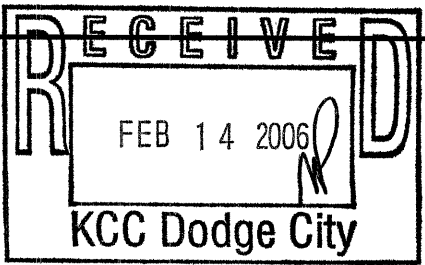

Signed Ken Jehlik (TECHNICIAN)

INVOICED
 DATE 2-21-06
 INV. NO. 2006061155

