

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-23083-00-00
Spot: NWNWSW Sec/Twnshp/Rge: 21-22S-11W
2336 feet from S Section Line, 425 feet from W Section Line
Lease Name: SLEEPER J Well #: 1-21
County: STAFFORD Total Vertical Depth: 2900 feet

Operator License No.: 5614
Op Name: HUTCHINSON, WILLIAM S. DBA HUTC
Address: PO BOX 521
DERBY, KS 67037

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	2892	1502	WITH 150 SX CMT
SURF	8.625	266		WITH 225 SX CMT

#94²⁵

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 02/08/2006 1:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 2350' & 4 SX CMT. PLUG AT 600' WITH 10 SX GEL - 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/08/2006 2:30 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE = 562-82'. SANDED TO 2350' & 4 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 600' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 300' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
2755	2763		
2510	2514		
2426	2432		

RECEIVED
FEB 16 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

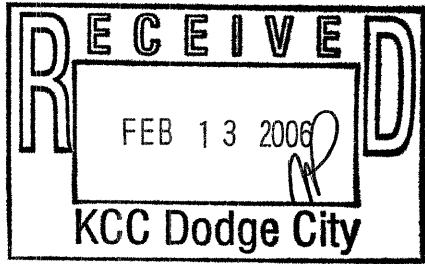

Signed Richard W. Lacey
(TECHNICIAN)

INVOICED
DATE 2-16-06
INV. NO. 2006061132