



**Casedhole
Solutions**

**MICRO
LOG**

Company	RED OAK ENERGY, INC.	Company	RED OAK ENERGY, INC.
Well	SCHEMM TRUST #1-16	Well	SCHEMM TRUST #1-16
Field	WILDCAT	Field	WILDCAT
County	WALLACE	County	WALLACE
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-199-20432-0000 77' FSL & 1476' FEL	Other Services	CDL/CNL DIL/SON
Permanent Datum	GROUND LEVEL	Elevation	3686
Log Measured From	KELLY BUSHING 11' A.G.L.	K.B. 3697 D.F. 3695 G.L. 3686	
Drilling Measured From	KELLY BUSHING		
SEC 16	TWP 14S	RGE 40W	
Date	9/25/15		
Run Number	TWO		
Depth Driller	5173		
Depth Logger	5174		
Bottom Logged Interval	5152		
Top Log Interval	3700		
Casing Driller	8 5/8" @ 307		
Casing Logger	306		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2700 PPM	
Density / Viscosity	9.3/55		
pH / Fluid Loss	10.0/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.80 @ 85F		
Rmt @ Meas. Temp	.60 @ 85F		
Rmc @ Meas. Temp	.96 @ 85F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.53 @ 127F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	127F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	SEAN DEENIHAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING CASEDHOLE SOLUTIONS, HAYS, KS. (785) 628-6395
DIRECTIONS:
SHARON SPRINGS, KS. - 5 SOUTH TO JACKRABBIT RD. - 3/4 WEST - NORTH INTO





**Casedhole
Solutions**

MAIN SECTION

Database File: 30523ddn.db
 Dataset Pathname: pass6.1
 Presentation Format: _micro
 Dataset Creation: Fri Sep 25 08:42:36 2015 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

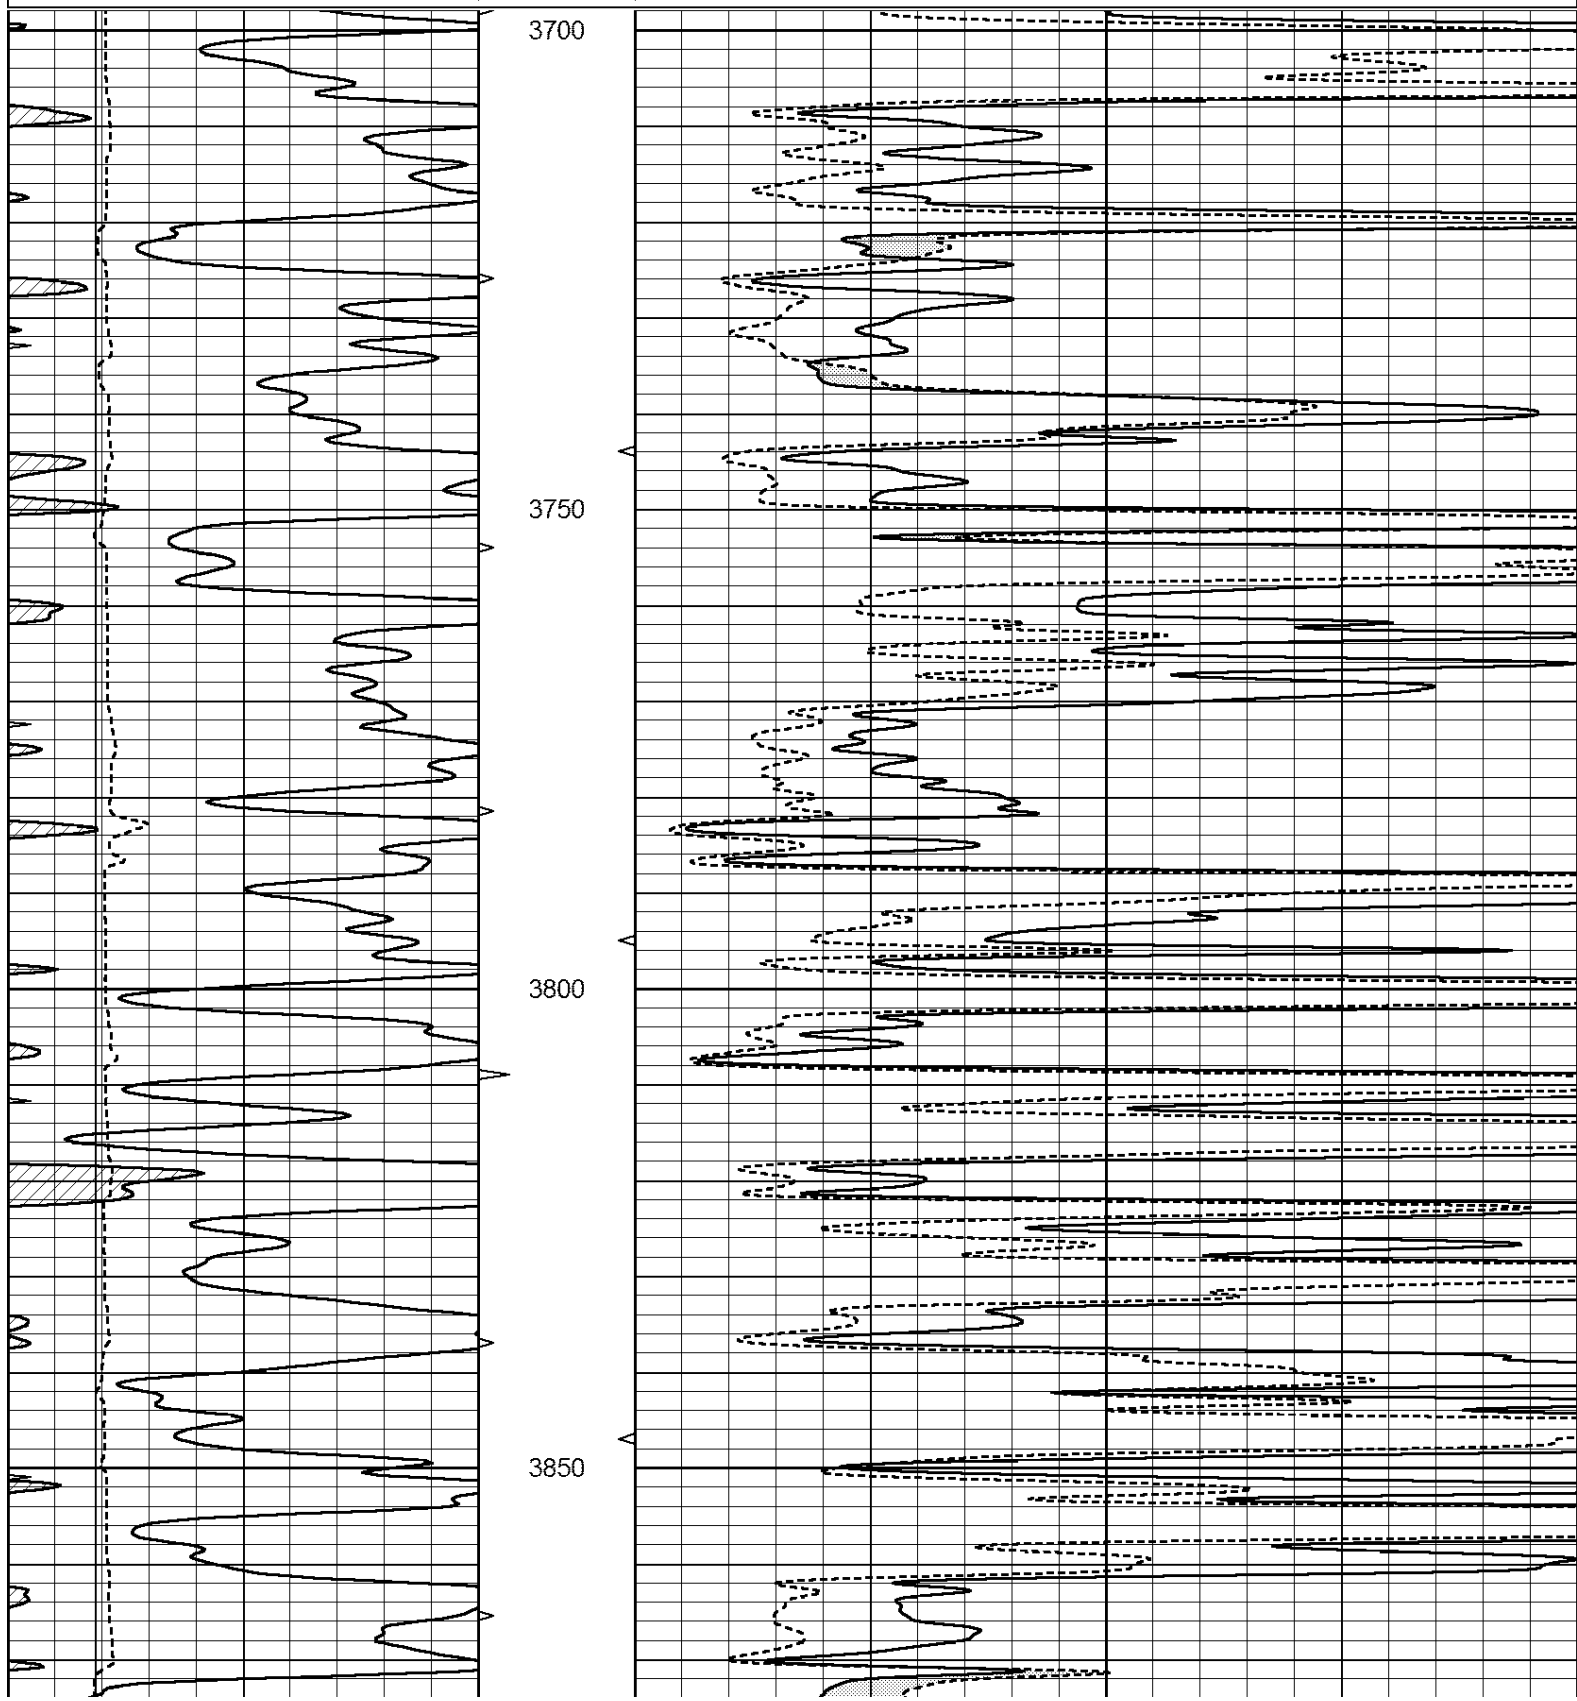

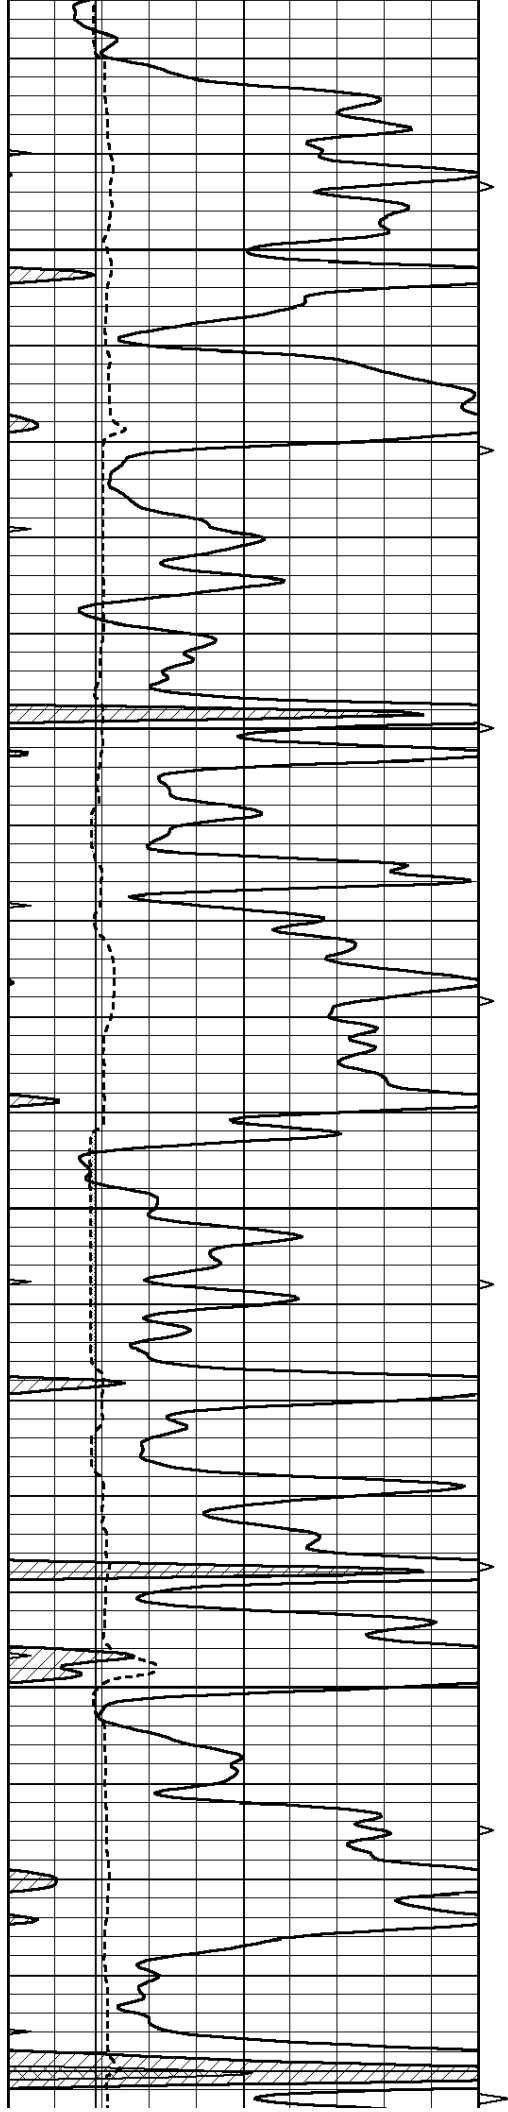



3900

3950

4000

4050

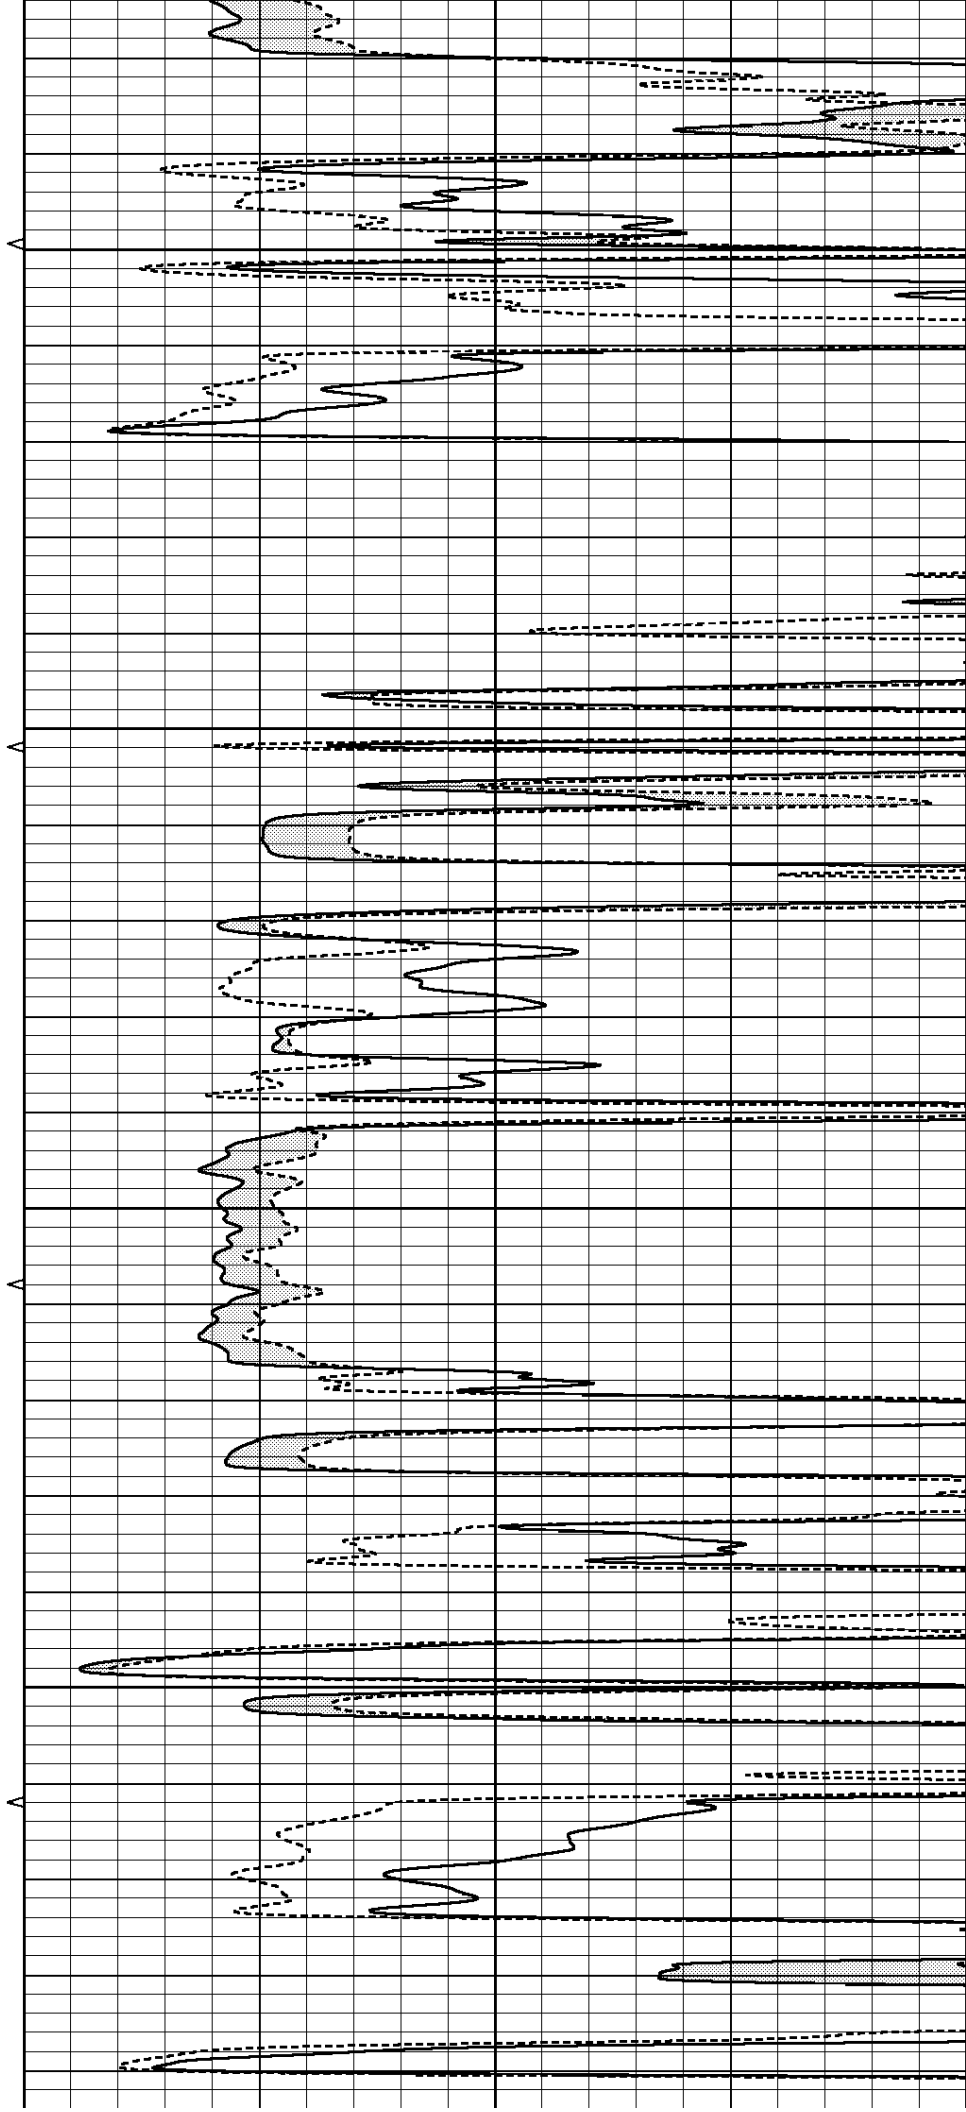

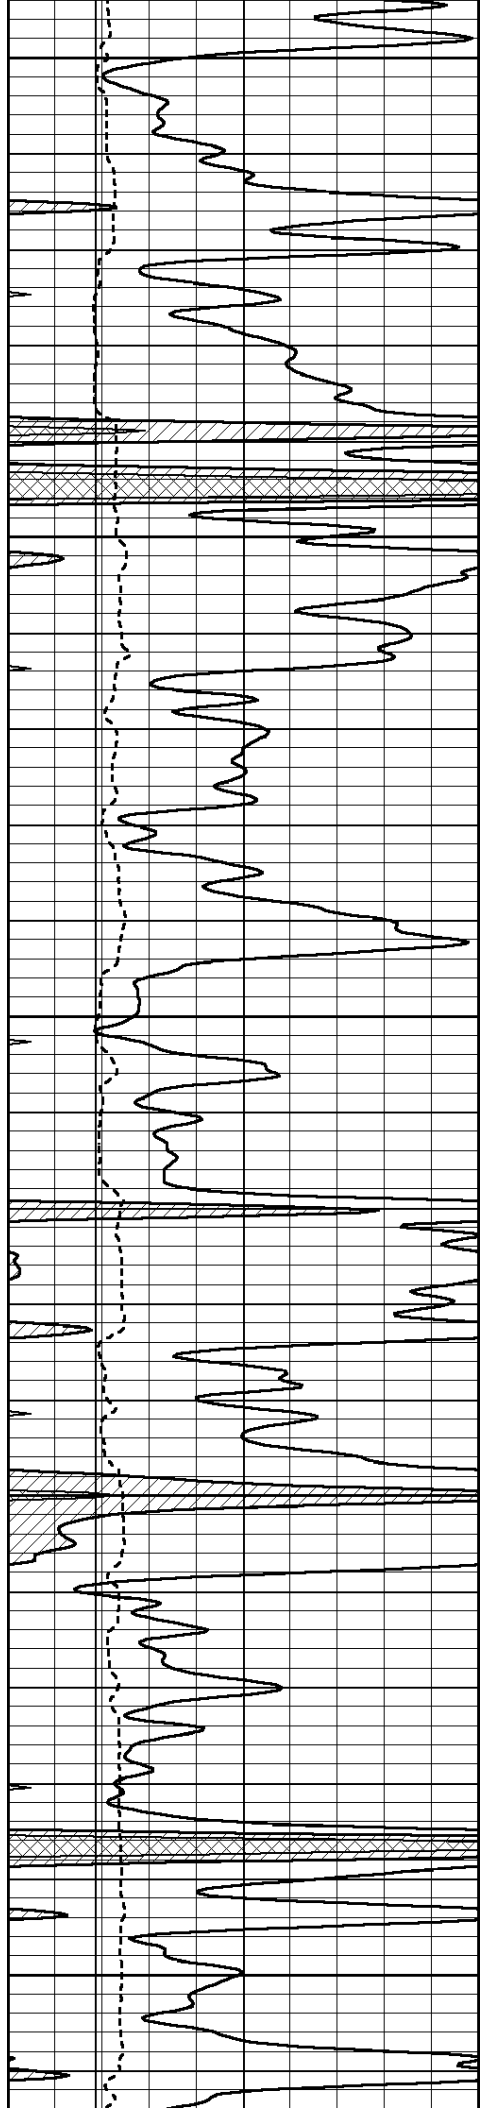


4100


4150

4200

4250

4300

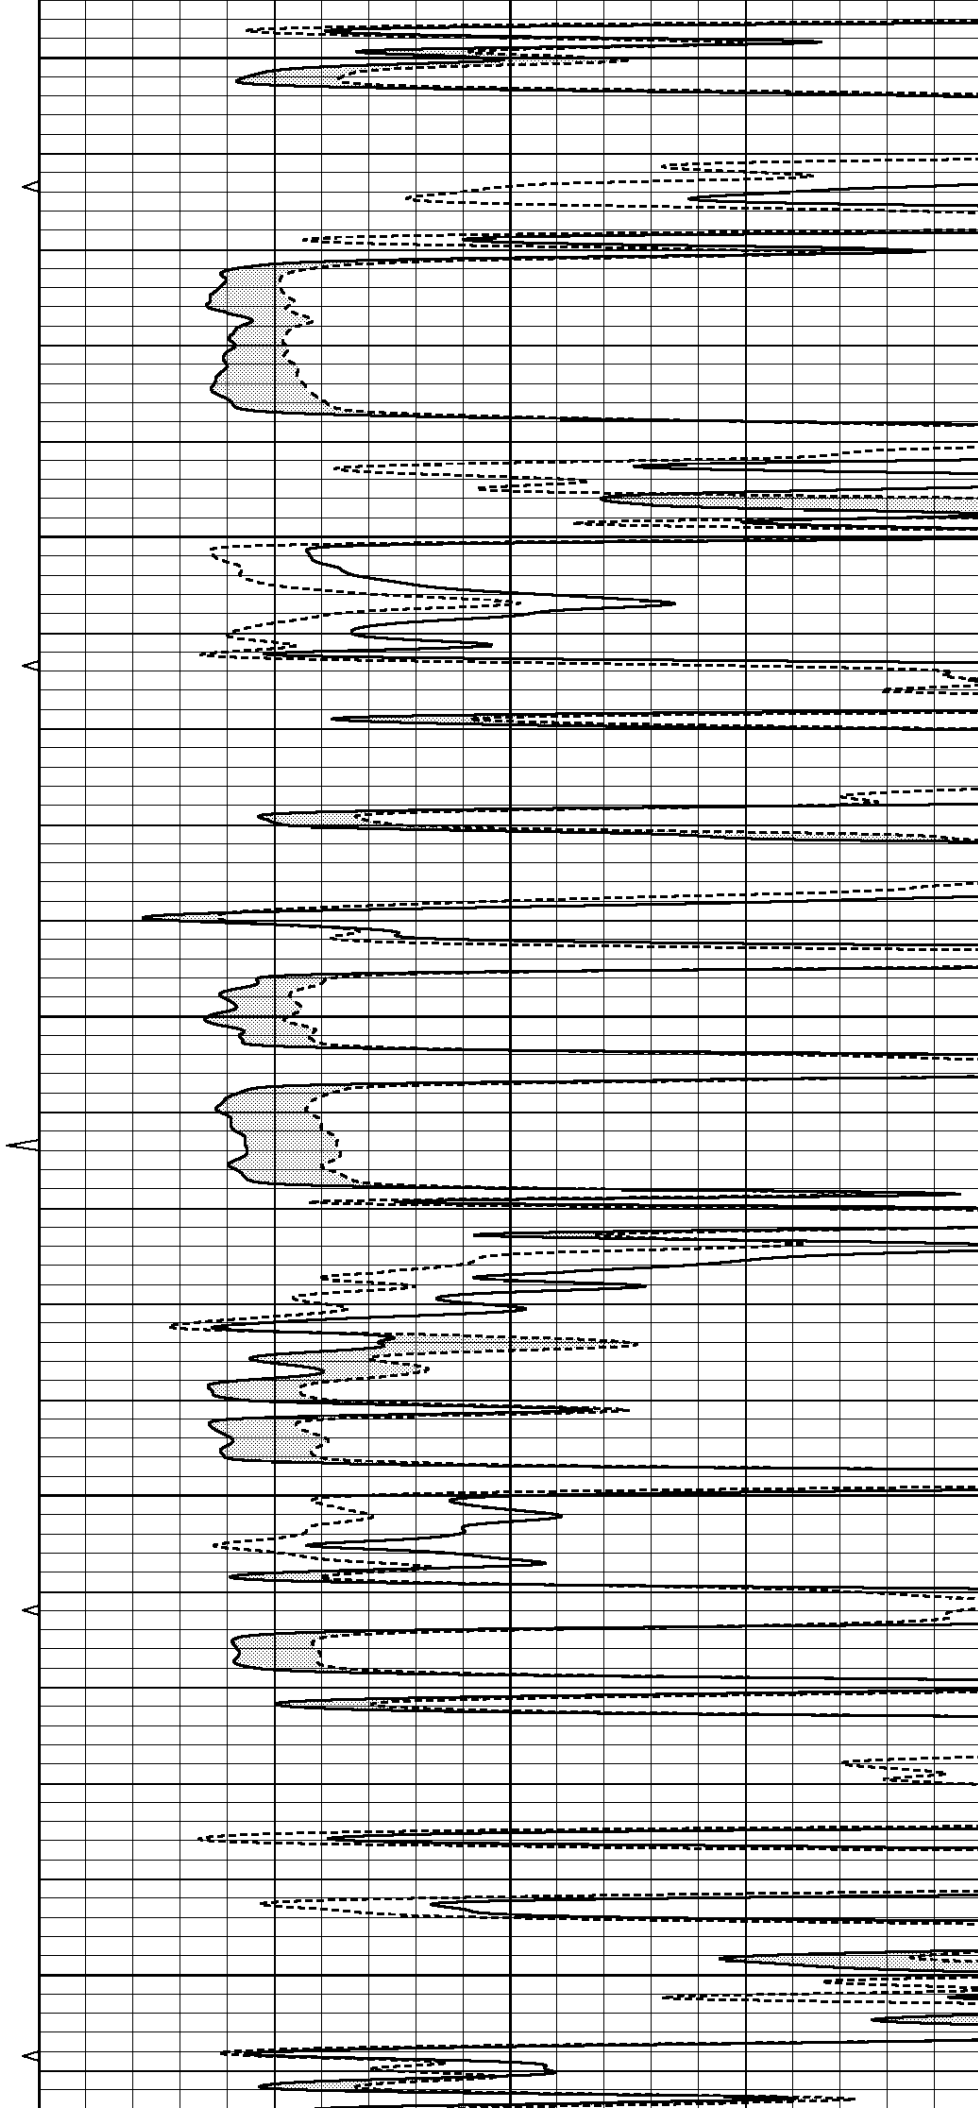

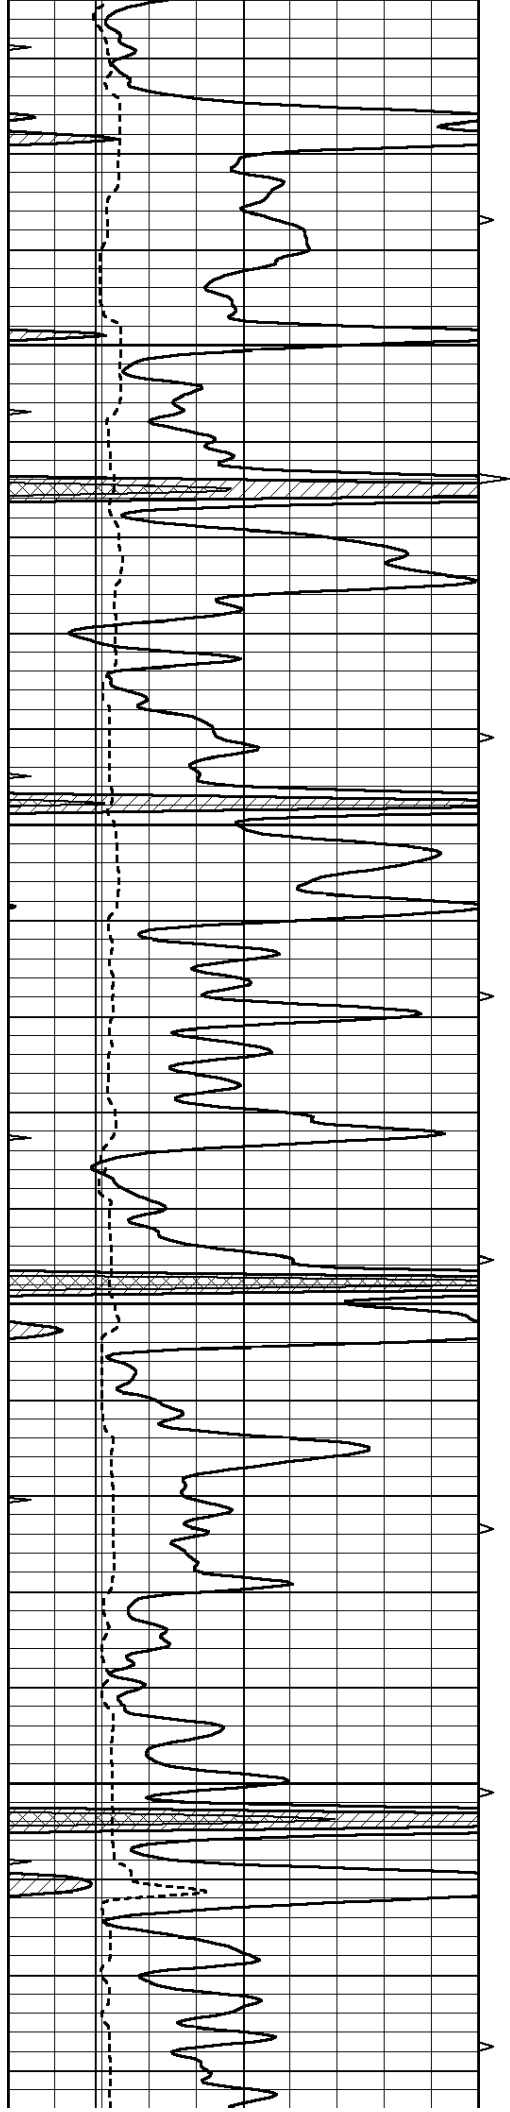



4350

4400

4450

4500

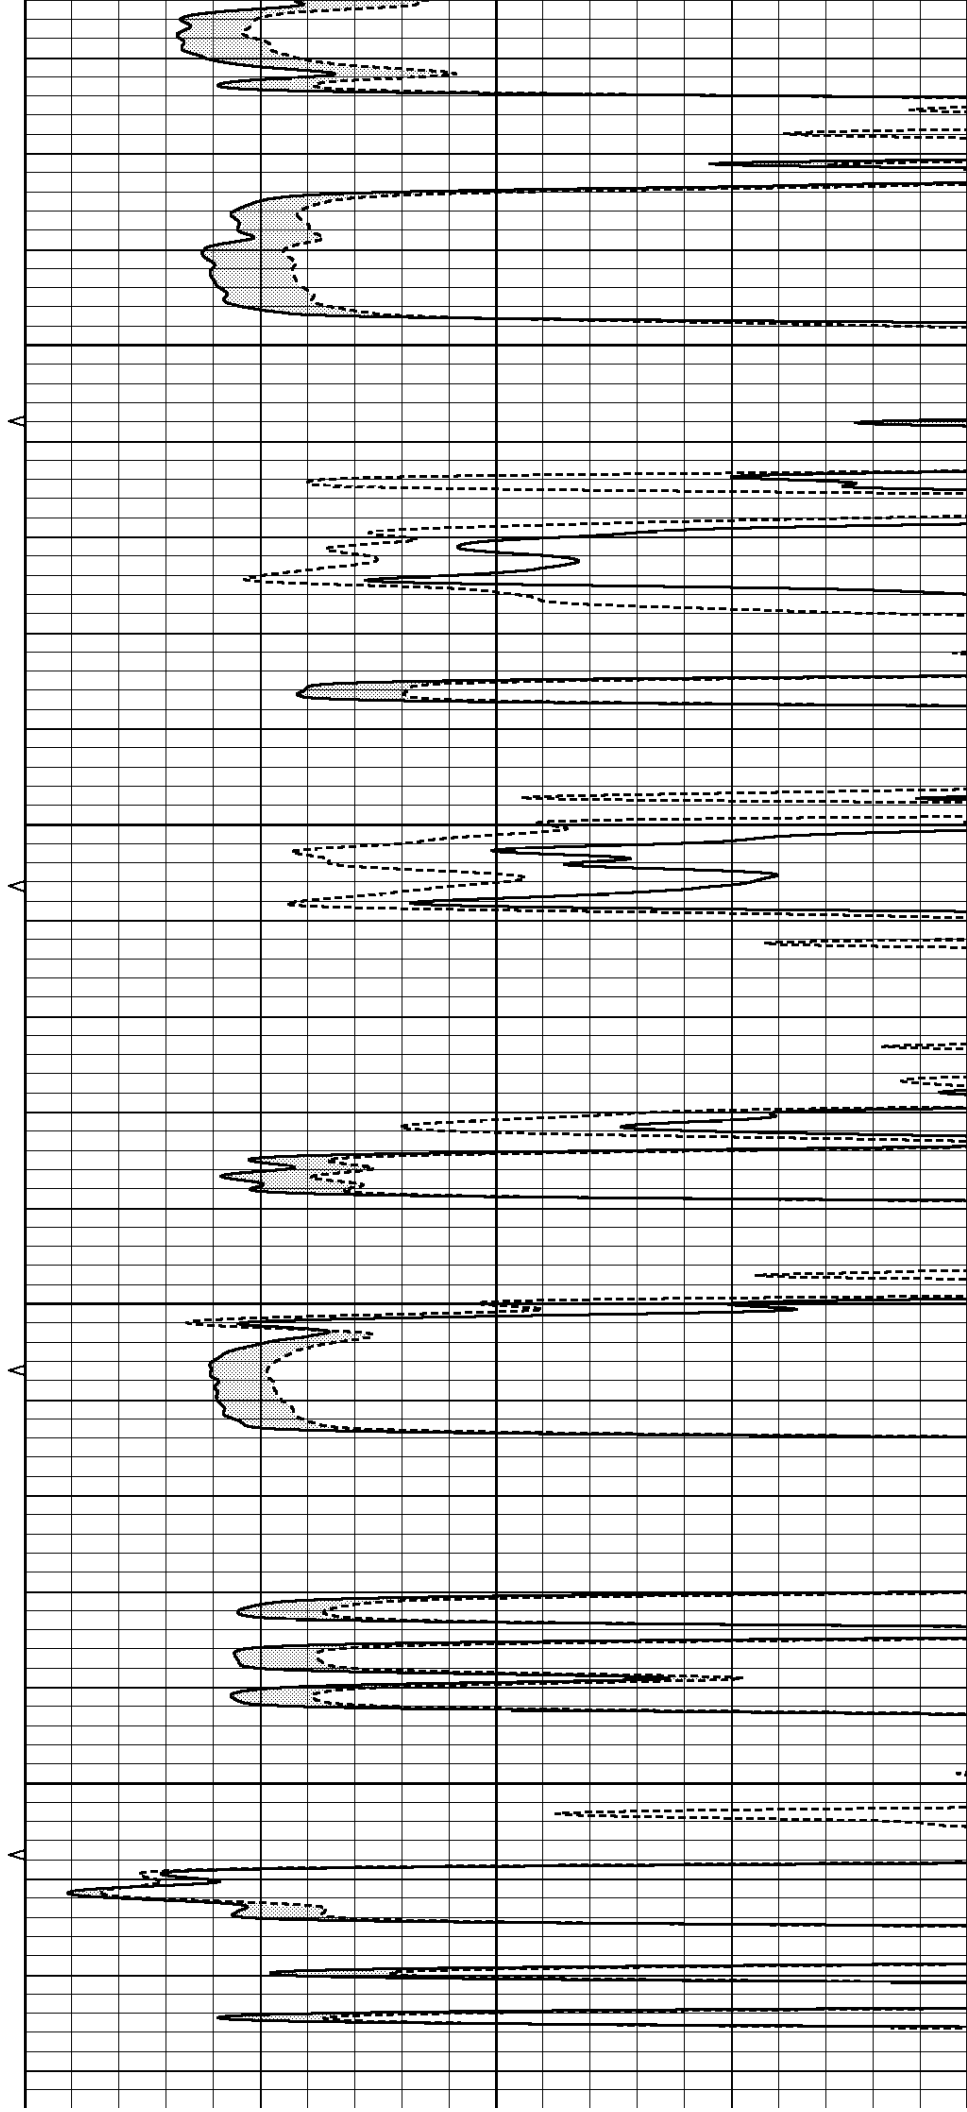

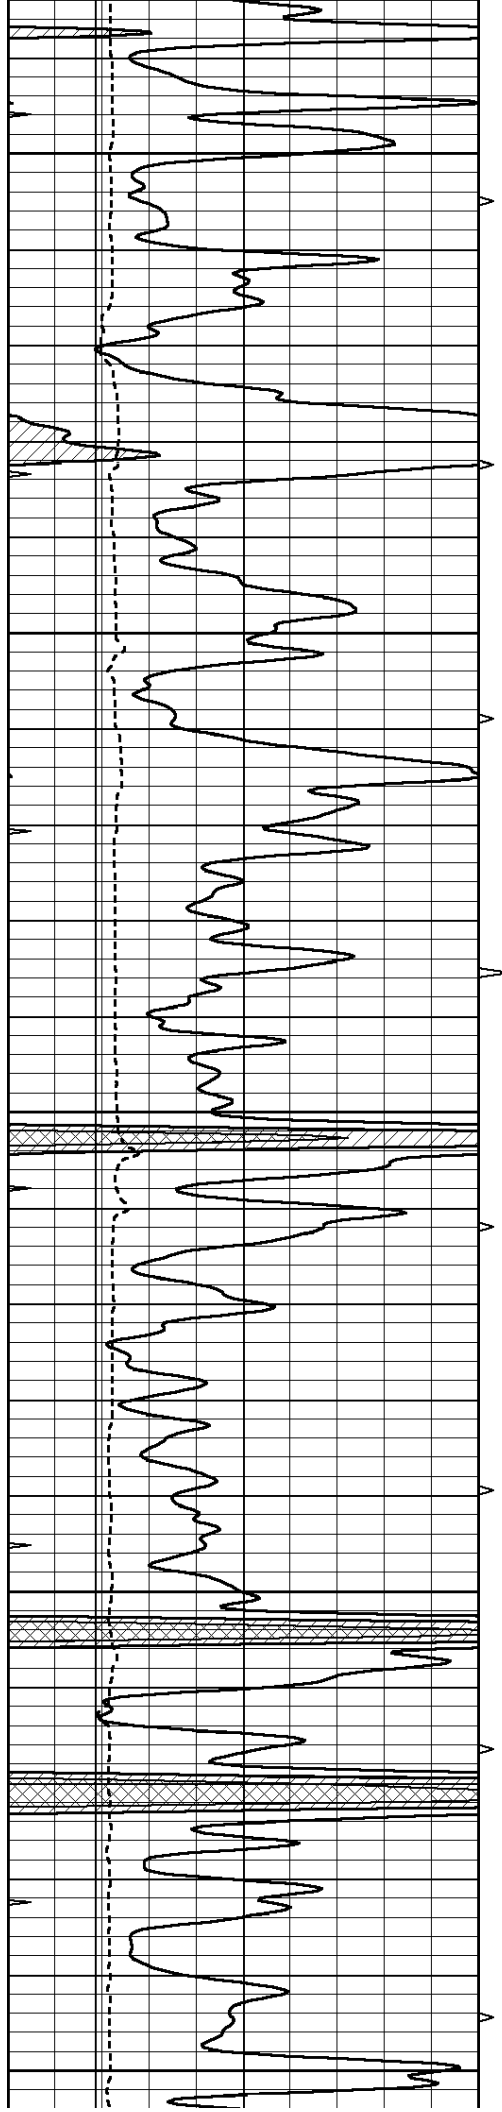


4550


4600

4650

4700

4750

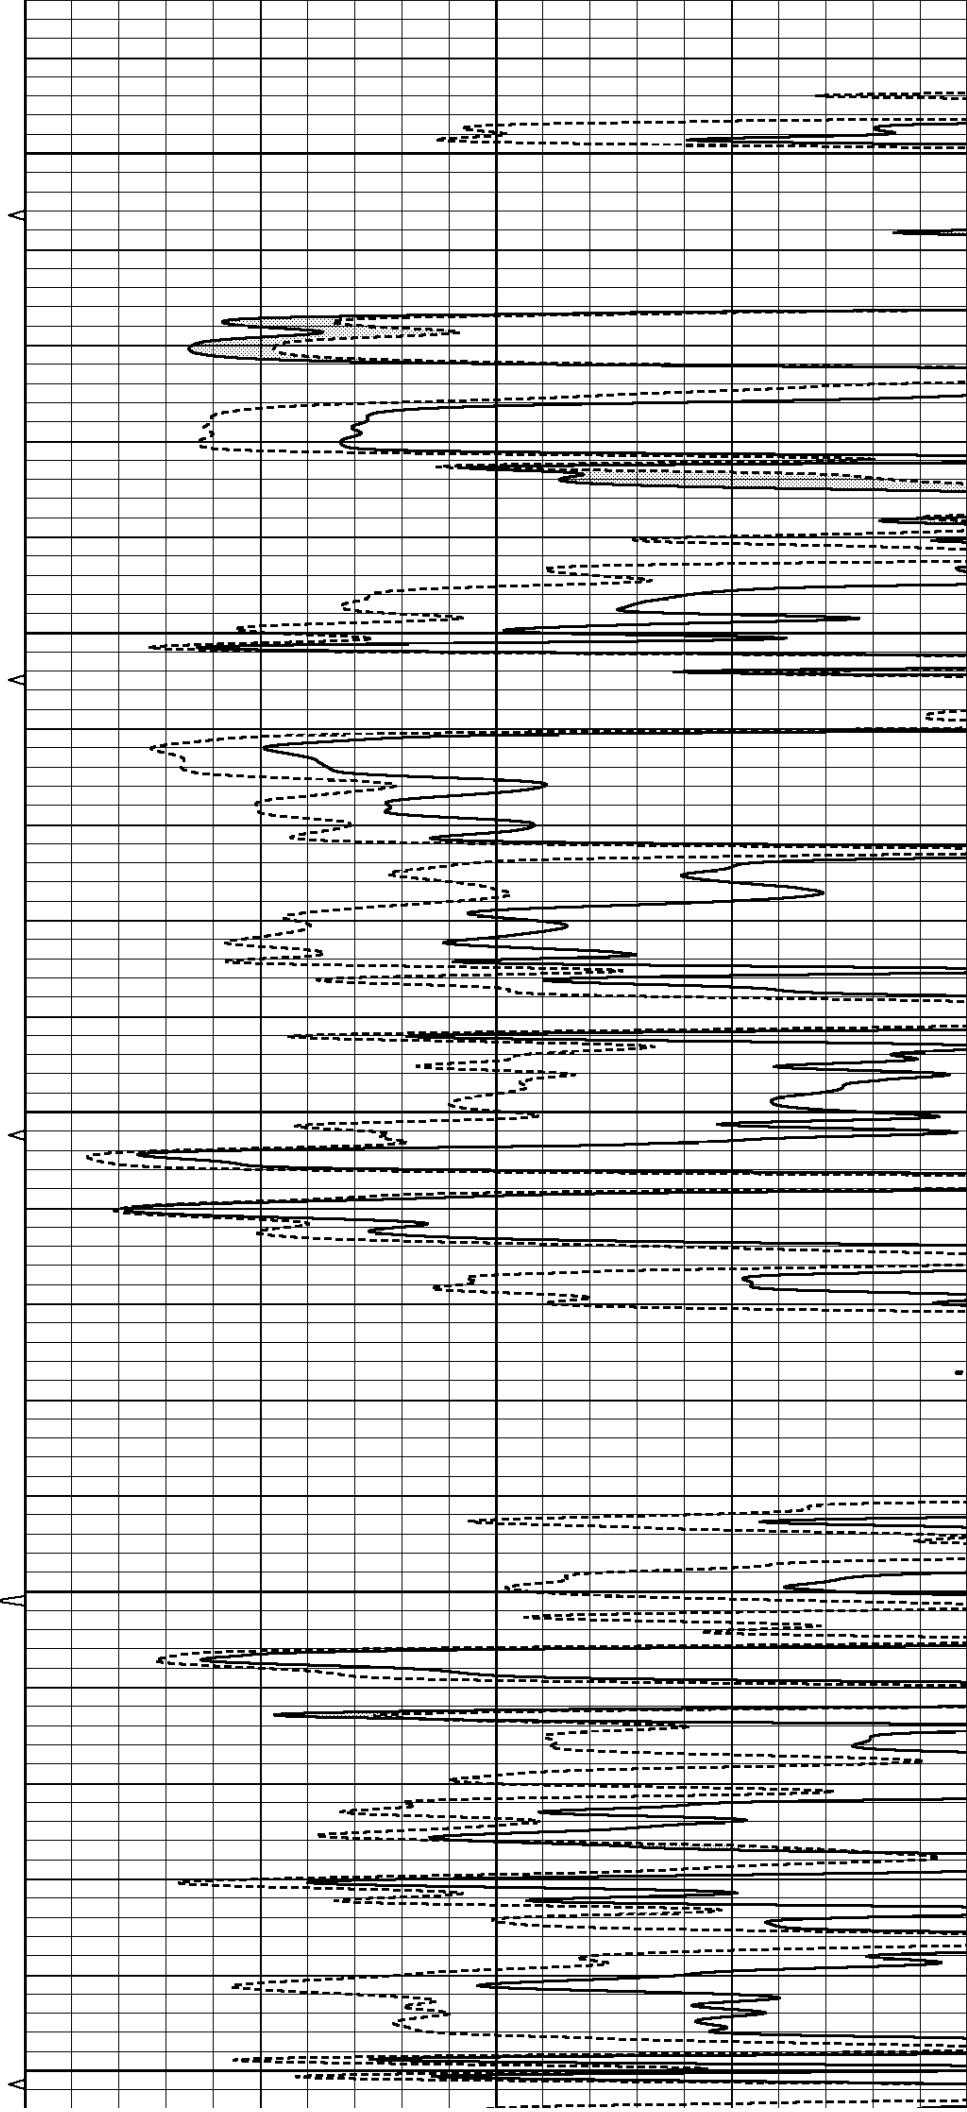

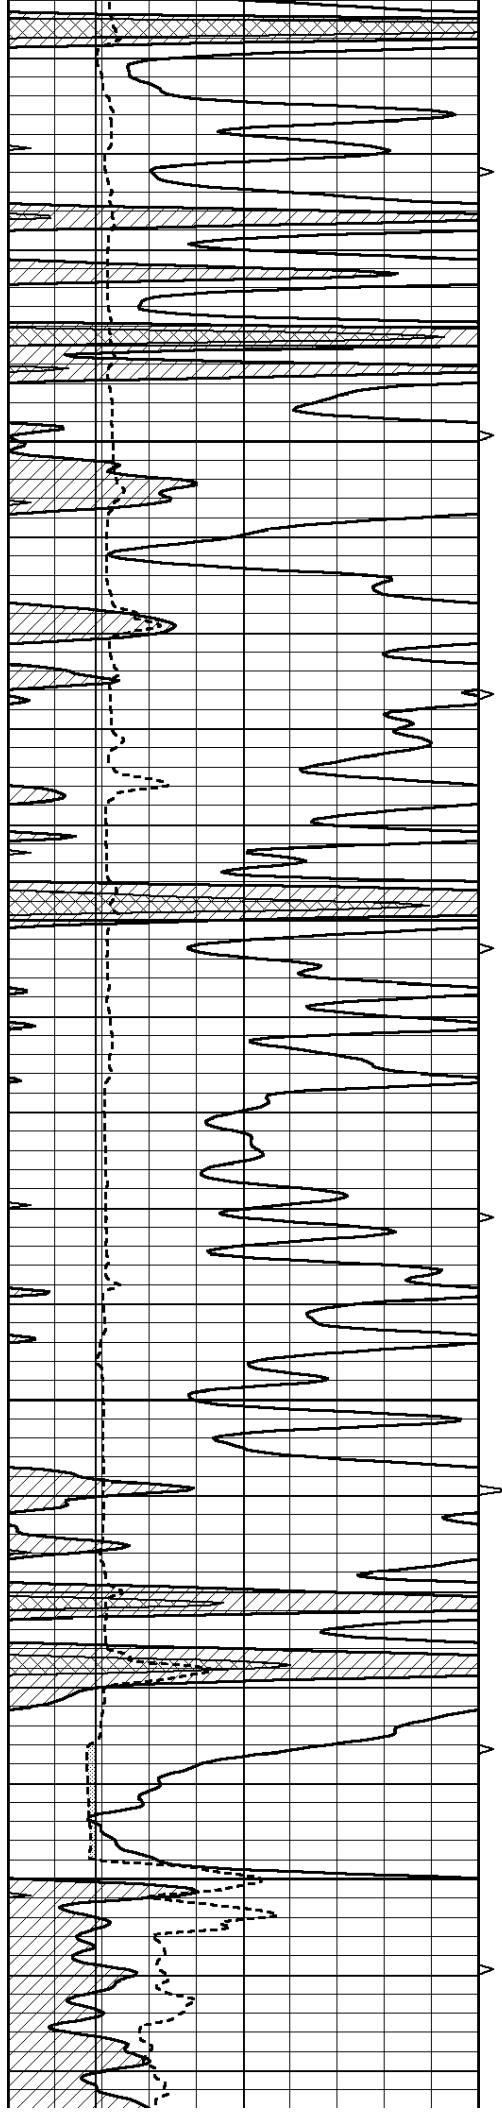



4800

4850

4900

4950

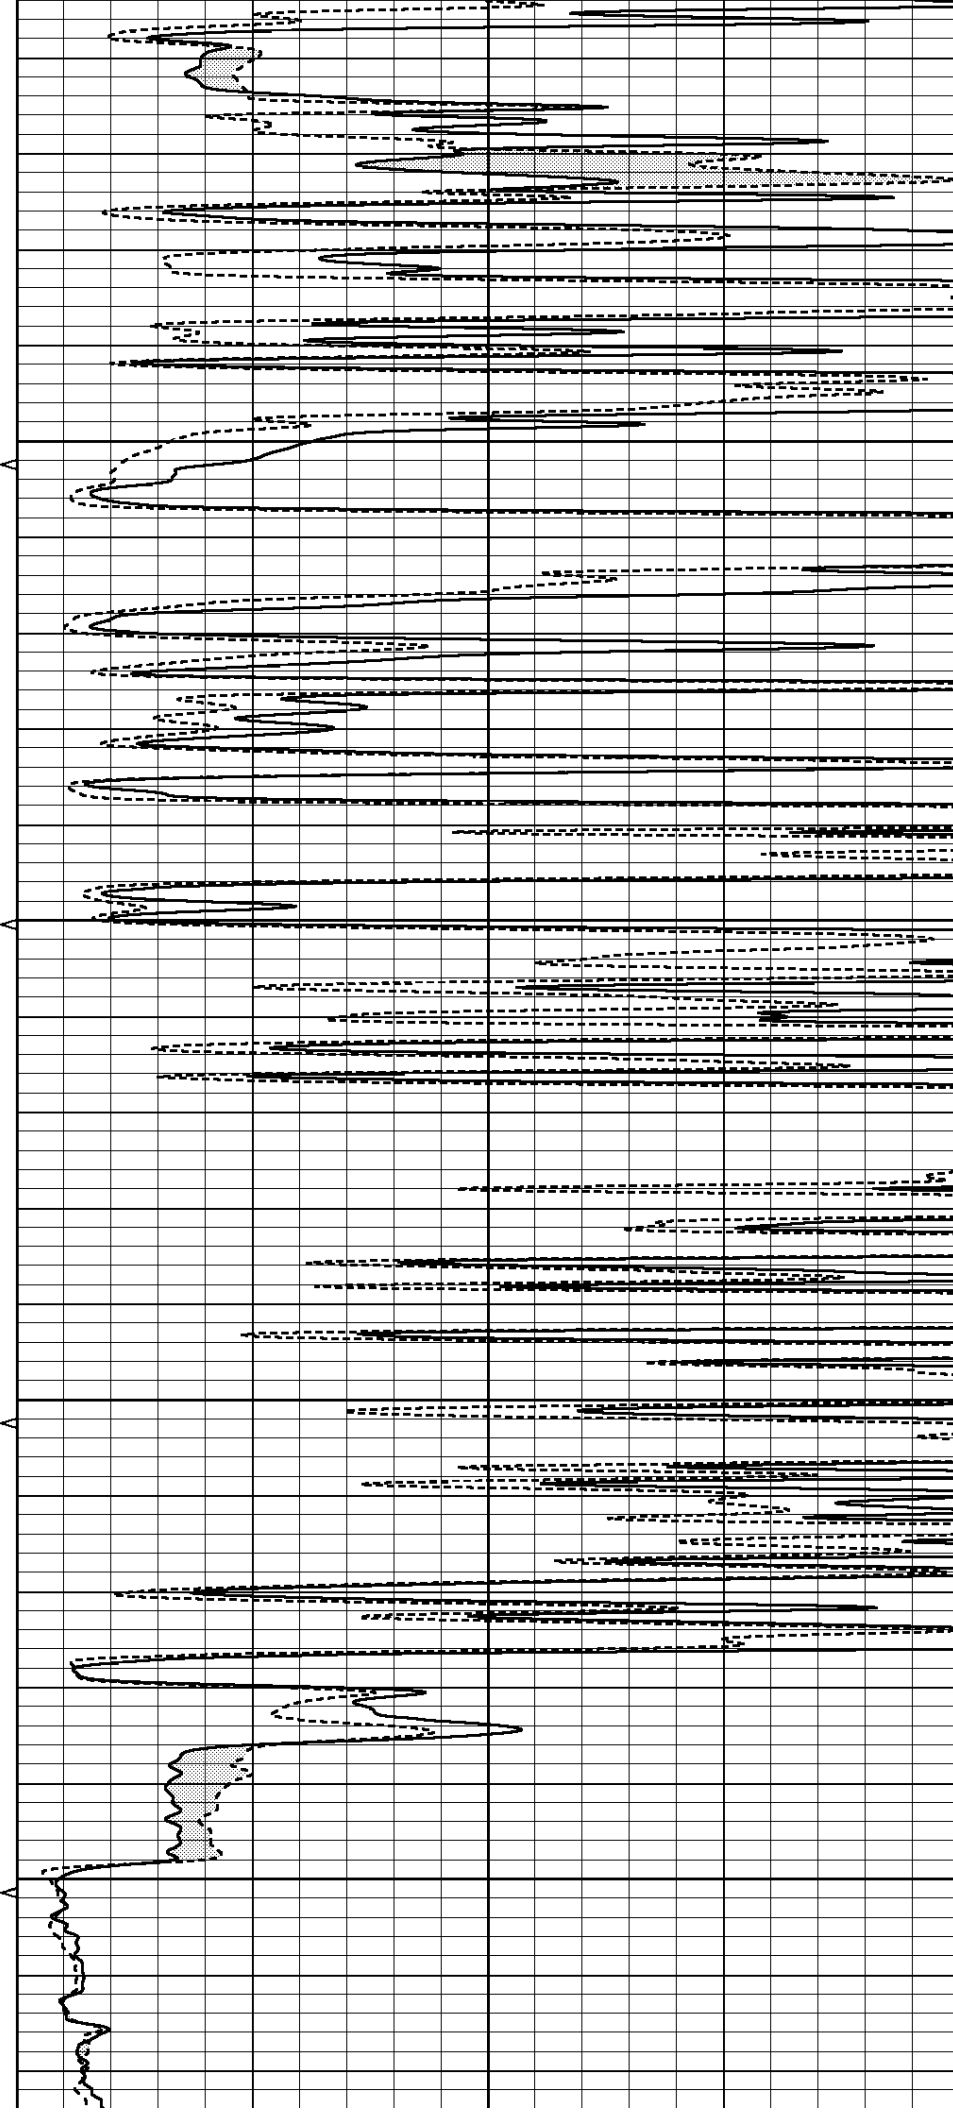

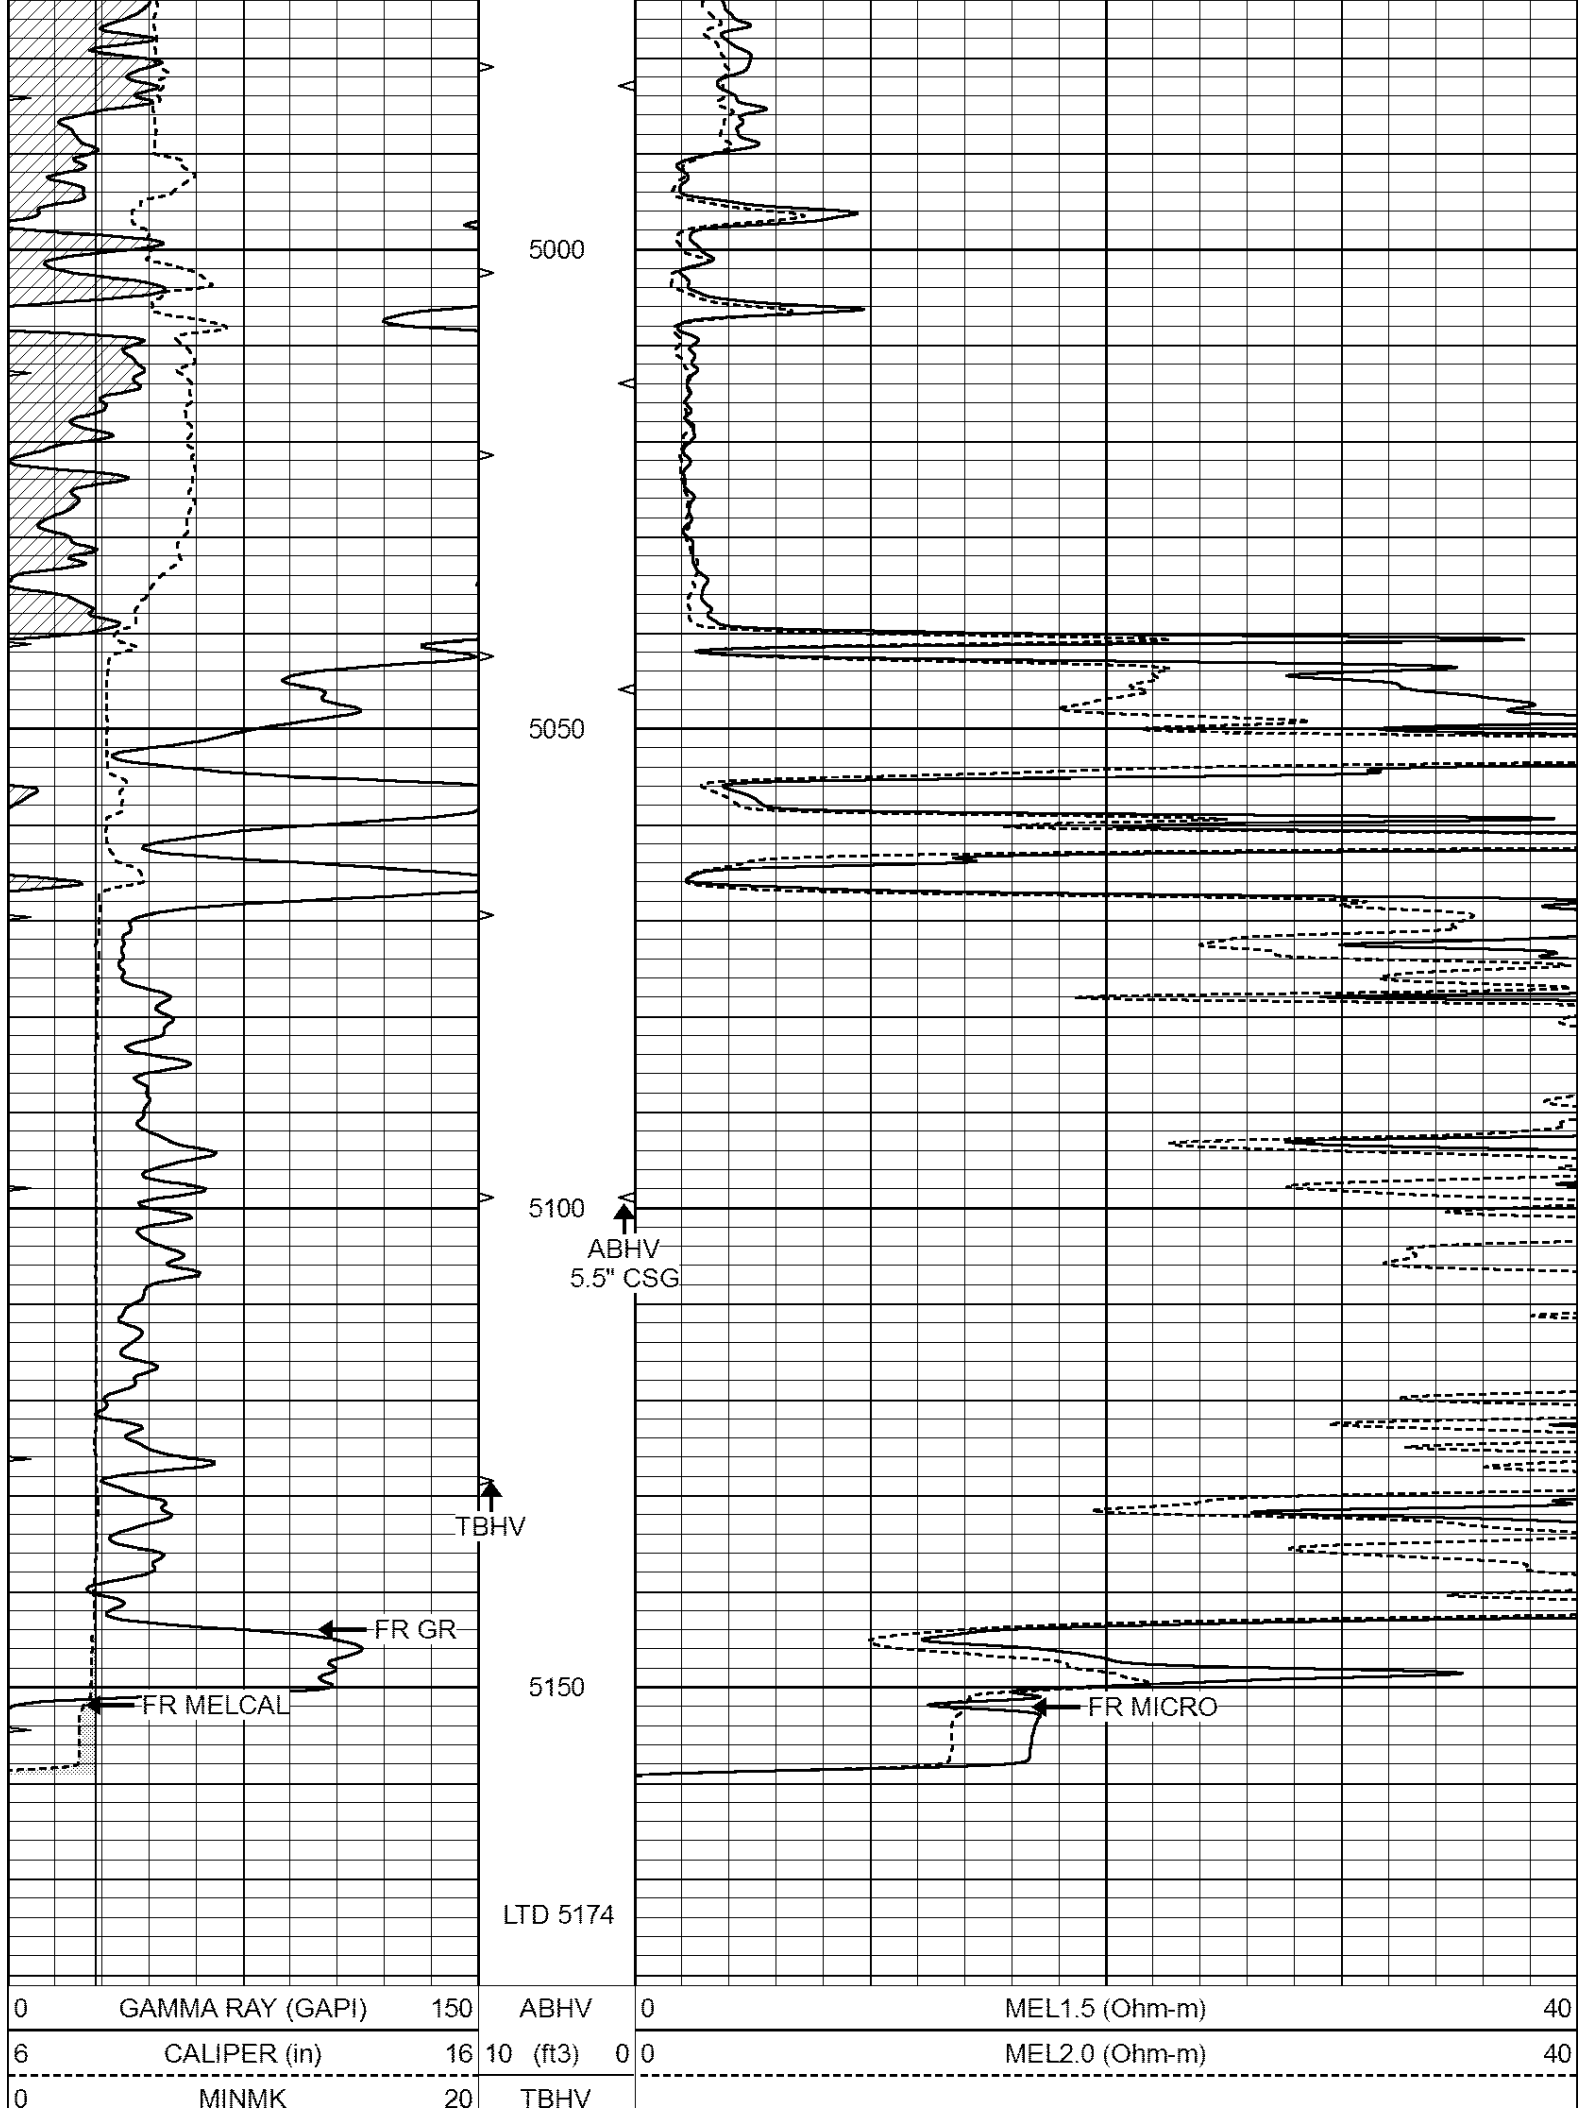




**Casedhole
Solutions**

REPEAT SECTION

Database File: 30523ddn.db
 Dataset Pathname: pass5.1
 Presentation Format: _micro
 Dataset Creation: Fri Sep 25 08:23:00 2015 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

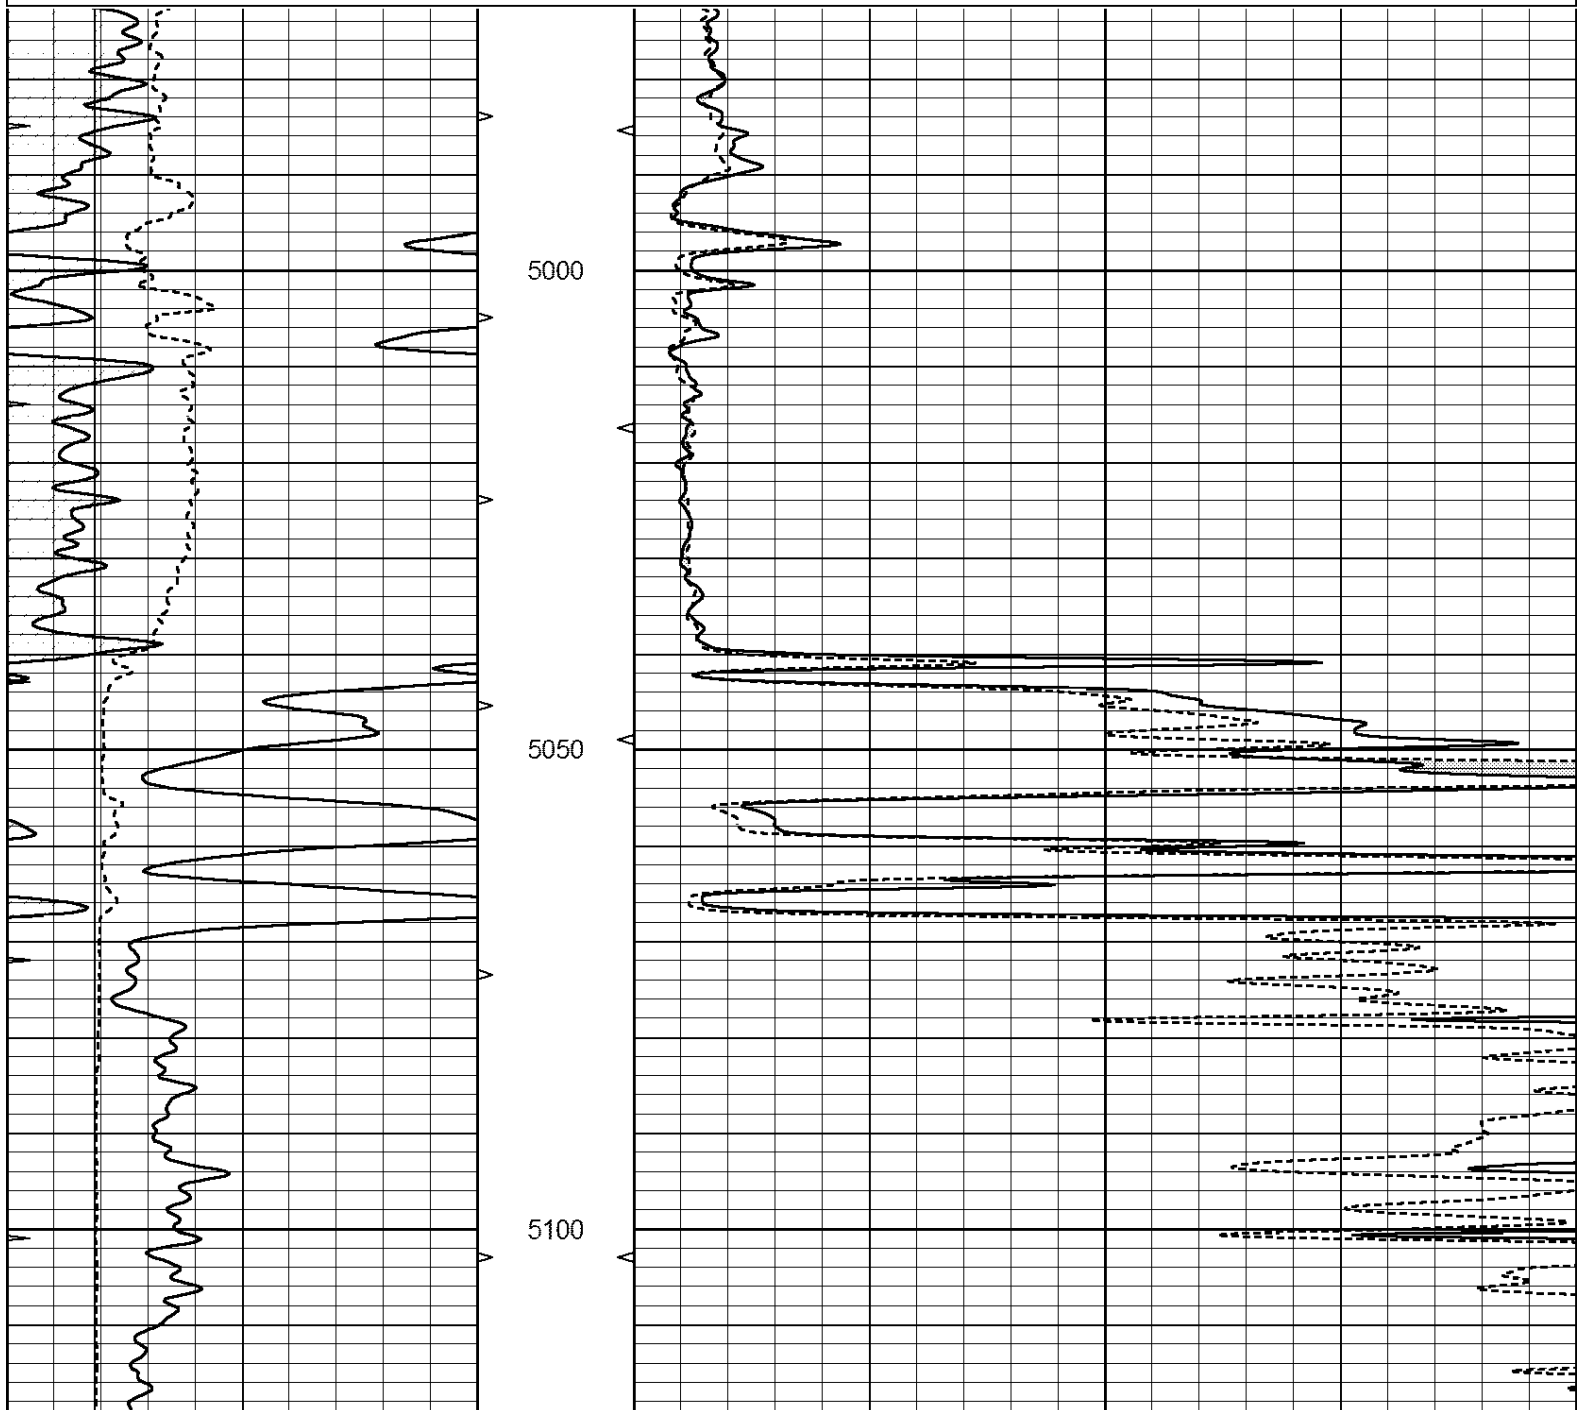

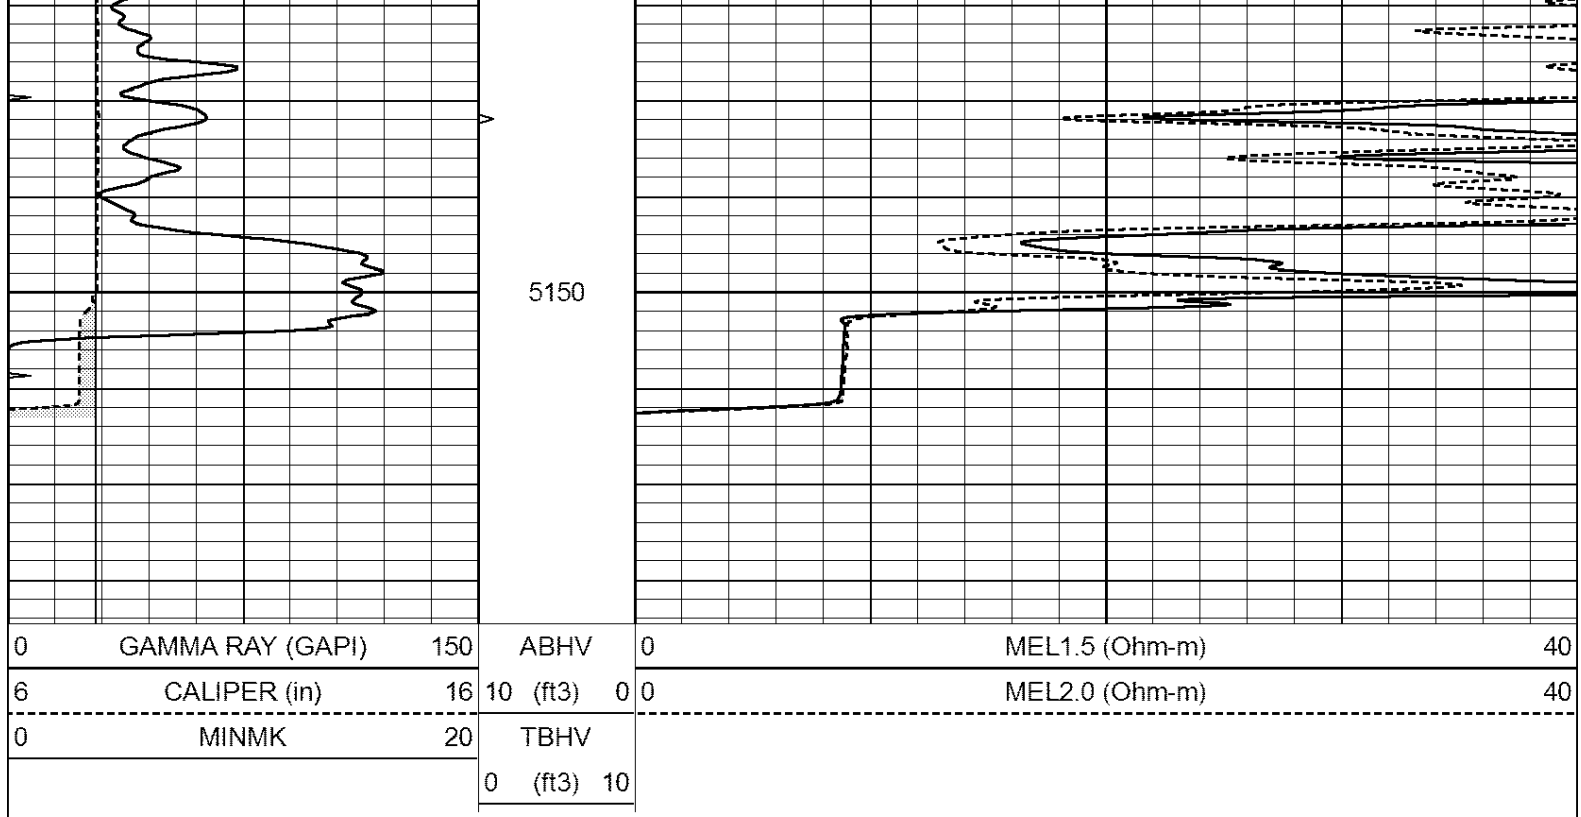

Calibration Report

Database File: 30523ddn.db
 Dataset Pathname: pass5.1
 Dataset Creation: Fri Sep 25 08:23:00 2015 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO6
 Tool Model: PROBE
 Performed: Wed Aug 26 00:34:46 2015

Caliper Calibration: Gain=3.960 Offset=4.901
 References Low Cal High Cal
 7.000 14.000
 Readings 0.555 2.323

1.5" Calibration: Gain=38.075 Offset=-1.000
 References Low Cal High Cal
 0.000 20.000
 Readings 0.004 1.196

2" Calibration: Gain=48.000 Offset=-1.600
 References Low Cal High Cal
 0.000 20.000
 Readings 0.006 0.913

Gamma Ray Calibration Report

Serial Number: GR6
 Tool Model: OPEN
 Performed: Fri Sep 04 01:07:14 2015

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 276.0 cps

Sensitivity:

1.0500

GAP/cps