


15-179-20501-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Sheridan County, Sec. 12 Twp. 7S Rge. 26 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
NW NE NW
Lease Owner F & M Oil Company
Lease Name Heskett Well No. 1
Office Address 505 Union Center, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

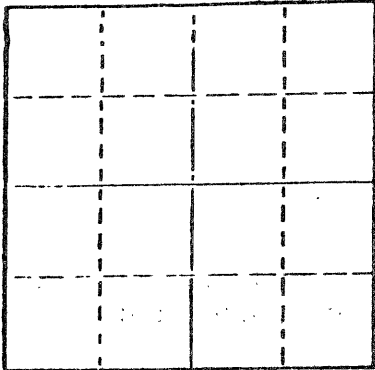

Locate well correctly on above
Section Plat

Date Well completed March 2, 1978
Application for plugging filed (verbally) March 2, 1978
Application for plugging approved (verbally) March 2, 1978
Plugging commenced March 2, 1978
Plugging completed March 2, 1978
Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 13910
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 1st plug at 1000' with 70 sacks
2nd plug at 240' with 20 sacks
Cemented with 50/50 posmix, 6% gel
Plug was down at 1:00 a.m., March 2, 1978

RECEIVED
STATE CORPORATION COMMISSION

MAR 09 1978

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

3-9-78

STATE OF Kansas COUNTY OF Sedgwick ss.

Jack L. Partridge, Ass't. Sec.-Treas. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Jack L. Partridge


801 Union Center, Wichita, Kansas 67202

(Address)

8th day of March 1978

Sandra Richman
Sandra Richman Notary Public

July 21, 1979



CONTRACTOR'S WELL LOG

OPERATOR: F & M Oil Company
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: Heskett #1
 LOCATION: NW NE NW Section 12-7S-26W
 Sheridan County, Kansas
 SPUD DATE: February 23, 1978
 COMPLETION DATE: March 2, 1978

0	73	Surface clay
73	165	Shale & sand
165	1261	Shale
1261	2178	Shale & sand
2178	2211	Anhydrite
2211	2384	Shale
2384	3218	Shale & lime
3218	3740	Lime & shale
3740	3774	Lime
3774	3840	Lime & shale
3840	3910	Lime
	3910	Rotary Total Depth

Spud hole at 11:30 a.m., February 23, 1978. Drilled 273' of 12 1/4" hole. Ran 7 joints of 8-5/8" surface casing. Set at 272' K.B. Cemented with 200 sacks common cement, 3% CaCl, 2% gel. Plug was down at 3:00 p.m., February 23, 1978.

T.D. 3910'. Set first plug at 1000' with 70 sacks, 2nd plug at 240' with 20 sacks. Cemented with 50/50 posmix, 6% gel. State plugger - Gilbert Balthazor. Plug was down at 1:00 a.m., March 2, 1978.

SAMPLE TOPS:

Anhydrite 2178'
 B/Anhydrite 2211'

RECEIVED
 STATE CORPORATION COMMISSION

MAR 09 1978

CONSERVATION DIVISION
 Wichita, Kansas

3-9-78

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Heskett #1, NW NE NW Section 12-7S-26W, Sheridan County, Kansas.

ABERCROMBIE DRILLING, INC.

BY Jack L. Partridge
 Jack L. Partridge,
 Assistant Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 8th day of March, 1978.

My commission expires July 21, 1979.

Sandra Richman
 Sandra Richman, Notary Public

