

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-21084-00-00
Spot: SWSENE Sec/Twnshp/Rge: 36-27S-16W
2970 feet from S Section Line, 990 feet from E Section Line
Lease Name: ROSE Well #: 1
County: KIOWA Total Vertical Depth: 4728 feet

Operator License No.: 5893
Op Name: PRATT WELL SERVICE, INC.
Address: PO BOX 847
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4728	2810	WITH 300 SX CMT
SURF	8.625	408		WITH 500 SX CMT

#153⁶⁶

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/15/2006 2:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND BACK WITH 5 SX CMT. PLUG AT 1100' WITH 50 SX CMT. PLUG AT 420' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 02/15/2006 3:15 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4550' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 1100' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 420' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4614	4628		


INVOICED

DATE 2-28-06
NO. 2006061202

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

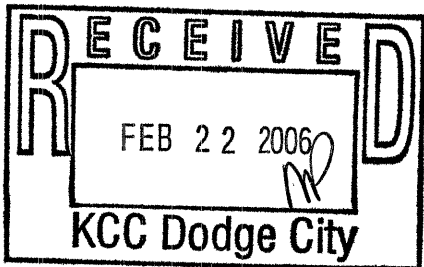

Signed

Stephen J. Gault
(TECHNICIAN)

RECEIVED
FEB 27 2006
KCC WICHITA

Form 23