

# DUAL INDUCTION LOG


|                              |                               |                         |                                                  |
|------------------------------|-------------------------------|-------------------------|--------------------------------------------------|
| Company                      | LOTUS OPERATING COMPANY, LLC. |                         |                                                  |
| Well                         | #1 RON PIESTER                |                         |                                                  |
| Field                        | WILDCAT                       |                         |                                                  |
| County                       | KIOWA                         | State                   | KANSAS                                           |
| Company                      | LOTUS OPERATING COMPANY, LLC. |                         |                                                  |
| Well                         | #1 RON PIESTER                |                         |                                                  |
| Field                        | WILDCAT                       |                         |                                                  |
| County                       | KIOWA                         | State                   | KANSAS                                           |
| Location:                    | API # : 15-097-21828-0000     |                         | Other Services<br>CDL/CNL/PE<br>MEL/SONIC        |
| Permanent Datum              |                               | GROUND LEVEL            | Elevation                                        |
| Log Measured From            |                               | KELLY BUSHING 8' A.G.L. | 2027                                             |
| Drilling Measured From       |                               | KELLY BUSHING           | Elevation<br>K.B. 2035<br>D.F. 2033<br>G.L. 2027 |
| Date                         | 10/16/17                      |                         |                                                  |
| Run Number                   | ONE                           |                         |                                                  |
| Depth Driller                | 4998                          |                         |                                                  |
| Depth Logger                 | 4999                          |                         |                                                  |
| Bottom Logged Interval       | 4997                          |                         |                                                  |
| Top Log Interval             | 00                            |                         |                                                  |
| Casing Driller               | 8 5/8"@264'                   |                         |                                                  |
| Casing Logger                | 264                           |                         |                                                  |
| Bit Size                     | 7 7/8"                        |                         |                                                  |
| Type Fluid in Hole           | CHEMICAL MUD                  | CHLORIDES 7,000 PPM     |                                                  |
| Density / Viscosity          | 9.3/51                        |                         |                                                  |
| pH / Fluid Loss              | 11.5/10.4                     |                         |                                                  |
| Source of Sample             | FLOWLINE                      |                         |                                                  |
| Rim @ Meas. Temp             | .550@70F                      |                         |                                                  |
| Rmf @ Meas. Temp             | .413@70F                      |                         |                                                  |
| Rmc @ Meas. Temp             | .660@70F                      |                         |                                                  |
| Source of Rmf / Rmc          | MEASUREMENT                   |                         |                                                  |
| Rim @ BHT                    | .308@125F                     |                         |                                                  |
| Time Circulation Stopped     | 2.5 HOURS                     |                         |                                                  |
| Time Logger on Bottom        | 5:30 A.M.                     |                         |                                                  |
| Maximum Recorded Temperature | 125F                          |                         |                                                  |
| Equipment Number             | 922339                        |                         |                                                  |
| Location                     | HAYS, KANSAS                  |                         |                                                  |
| Recorded By                  | JEFF LUEBBERS                 |                         |                                                  |
| Witnessed By                 | TIM HELLMAN                   |                         |                                                  |

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

## Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395  
DIRECTIONS  
HAVILAND, KS. 2E. ON HWY 54 TO "BELVIDERE BLKTOP", 6 1/2S., E. INTO

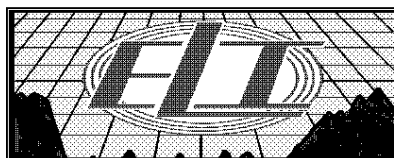

# MAIN SECTION


Database File: 1833pe.db  
 Dataset Pathname: pass4.5  
 Presentation Format: dil2  
 Dataset Creation: Mon Oct 16 07:48:22 2017 by Calc SOC 120430  
 Charted by: Depth in Feet scaled 1:600

|      |                  |     |
|------|------------------|-----|
| 0    | Gamma Ray (GAPI) | 150 |
| -100 | SP (mV)          | 100 |
| 0    | RWA (Ohm-m)      | 1   |



|   |              |    |
|---|--------------|----|
| 0 | RLL3 (Ohm-m) | 50 |
| 0 | RILD (Ohm-m) | 50 |



1000 CILD (mmho/m) 0


|    |                  |     |
|----|------------------|-----|
| 50 | RILD X10 (Ohm-m) | 500 |
| 50 | RLL3 X10 (Ohm-m) | 500 |

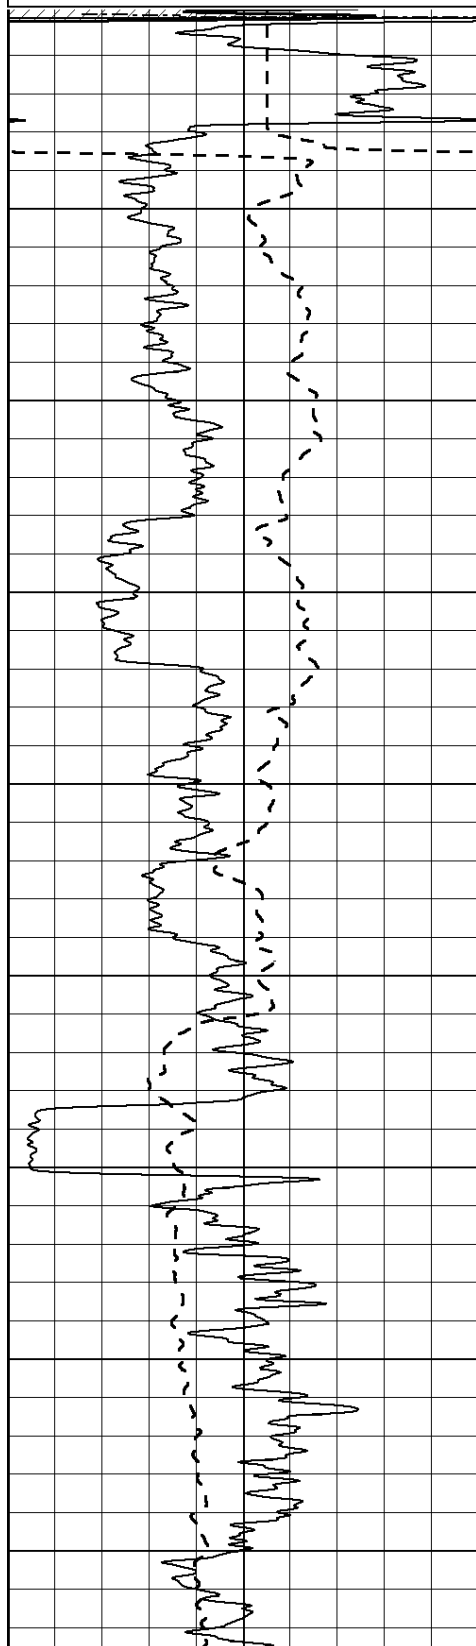

0  
50  
100  
150  
200  
250  
300  
350  
400

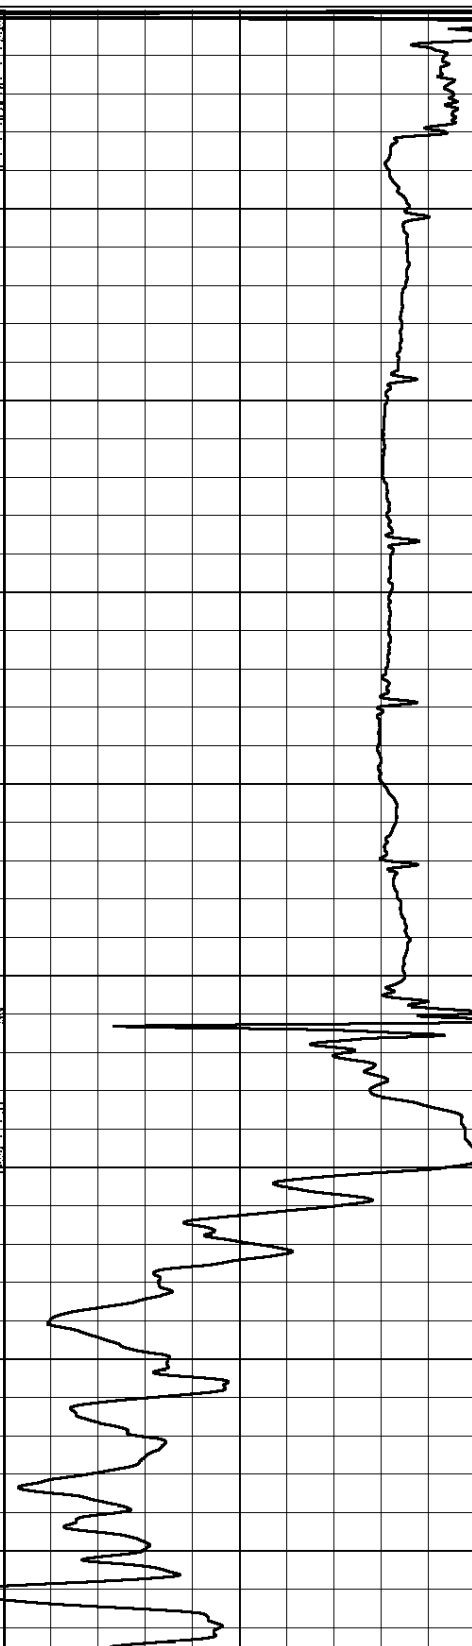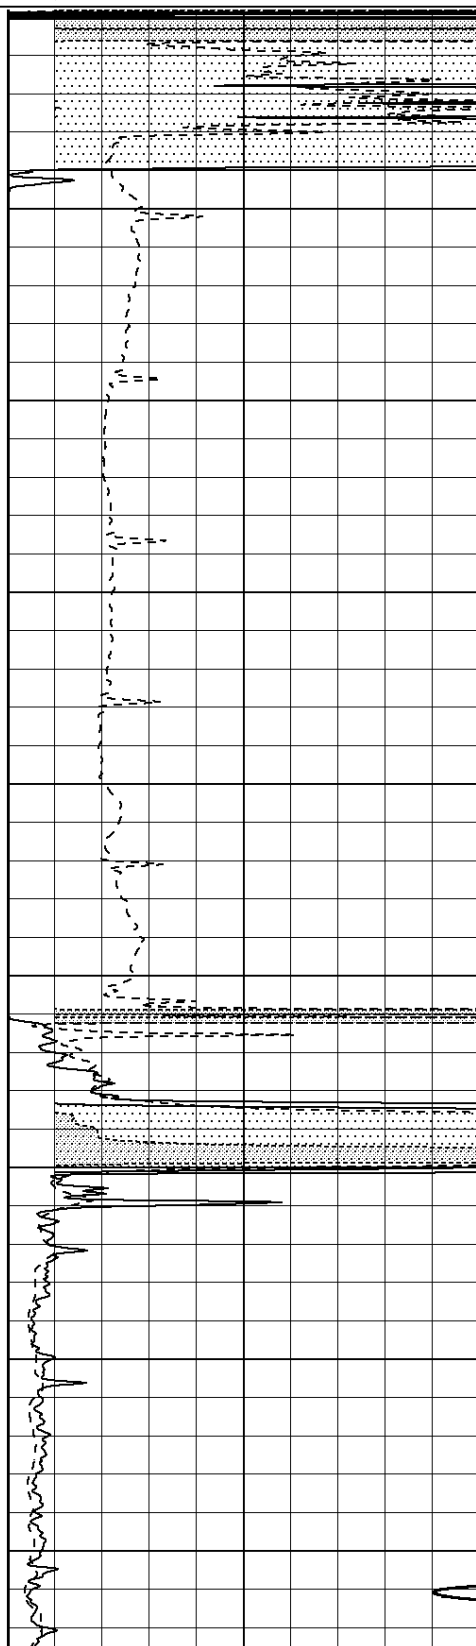

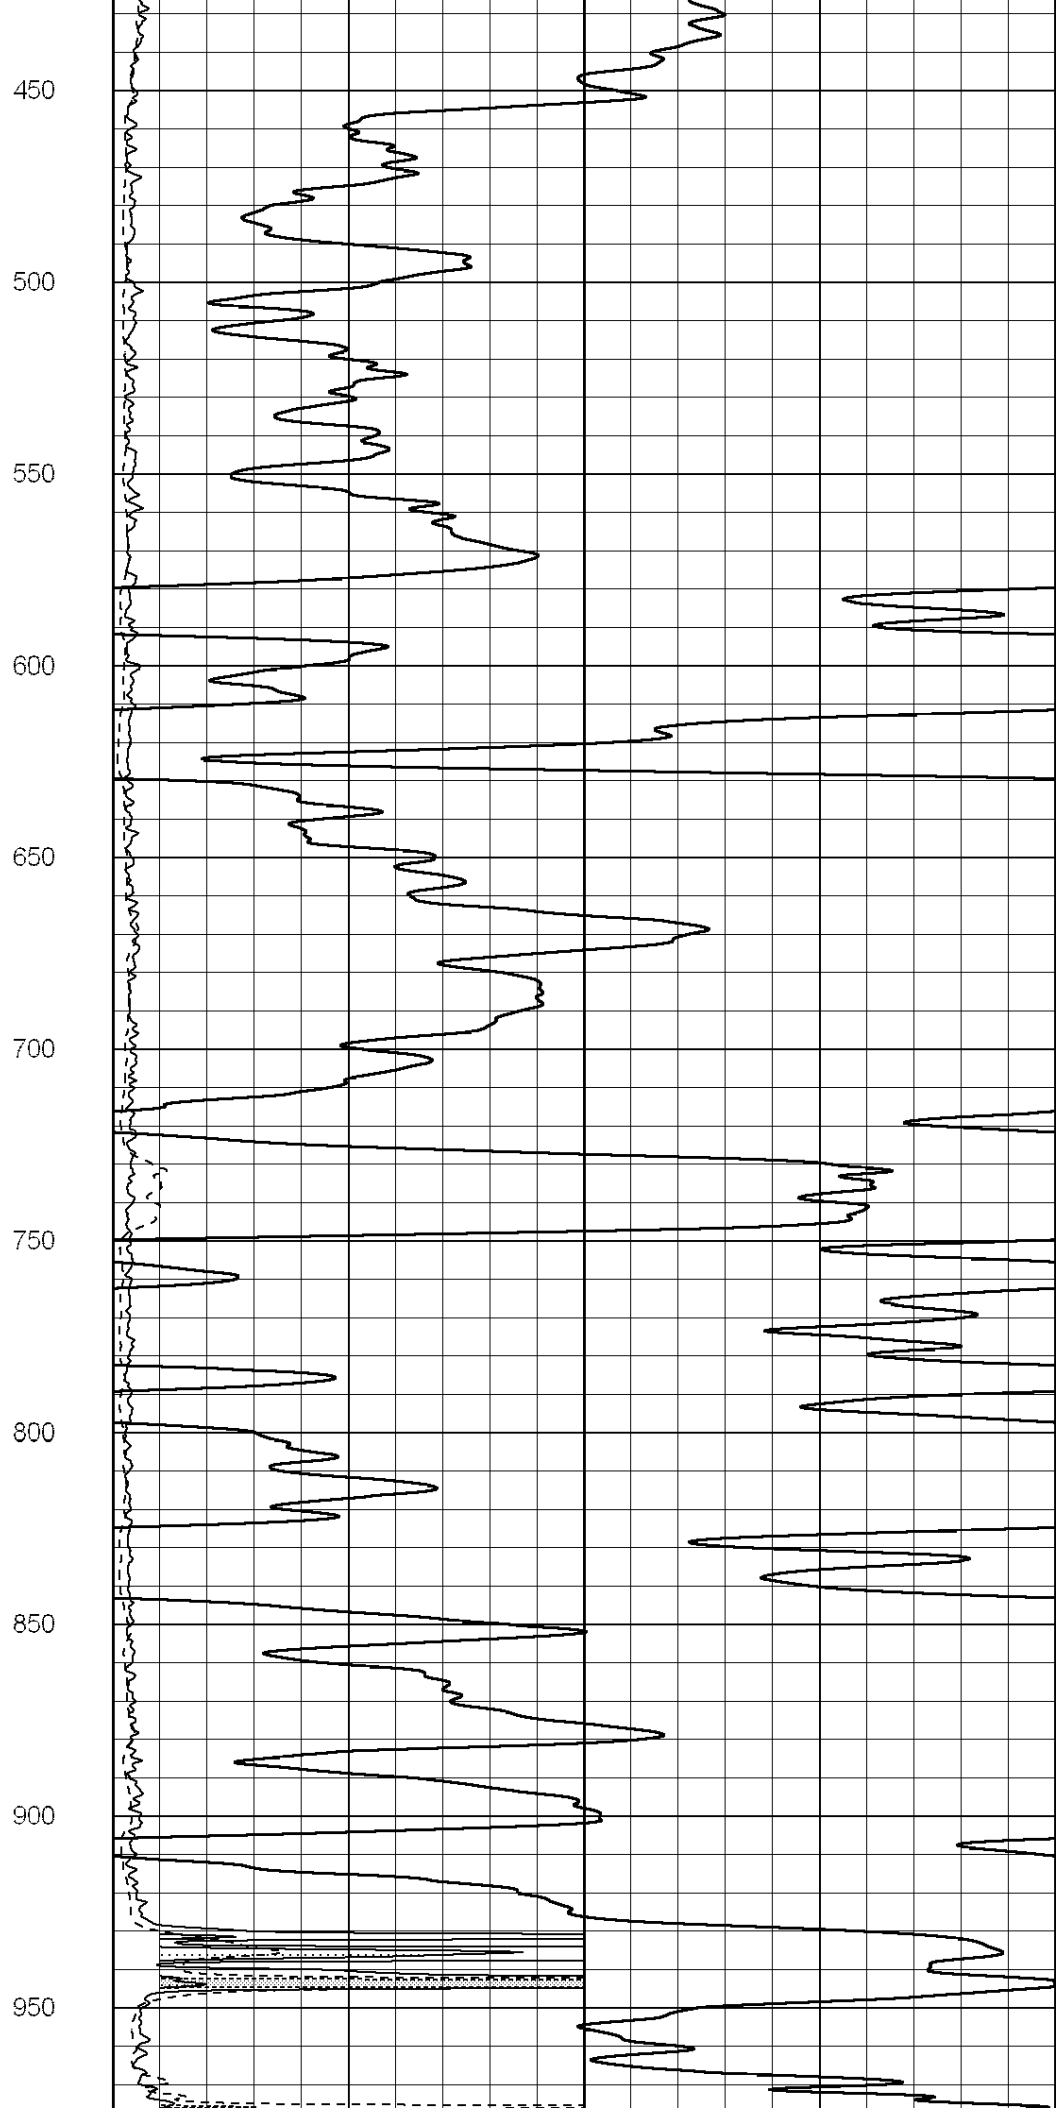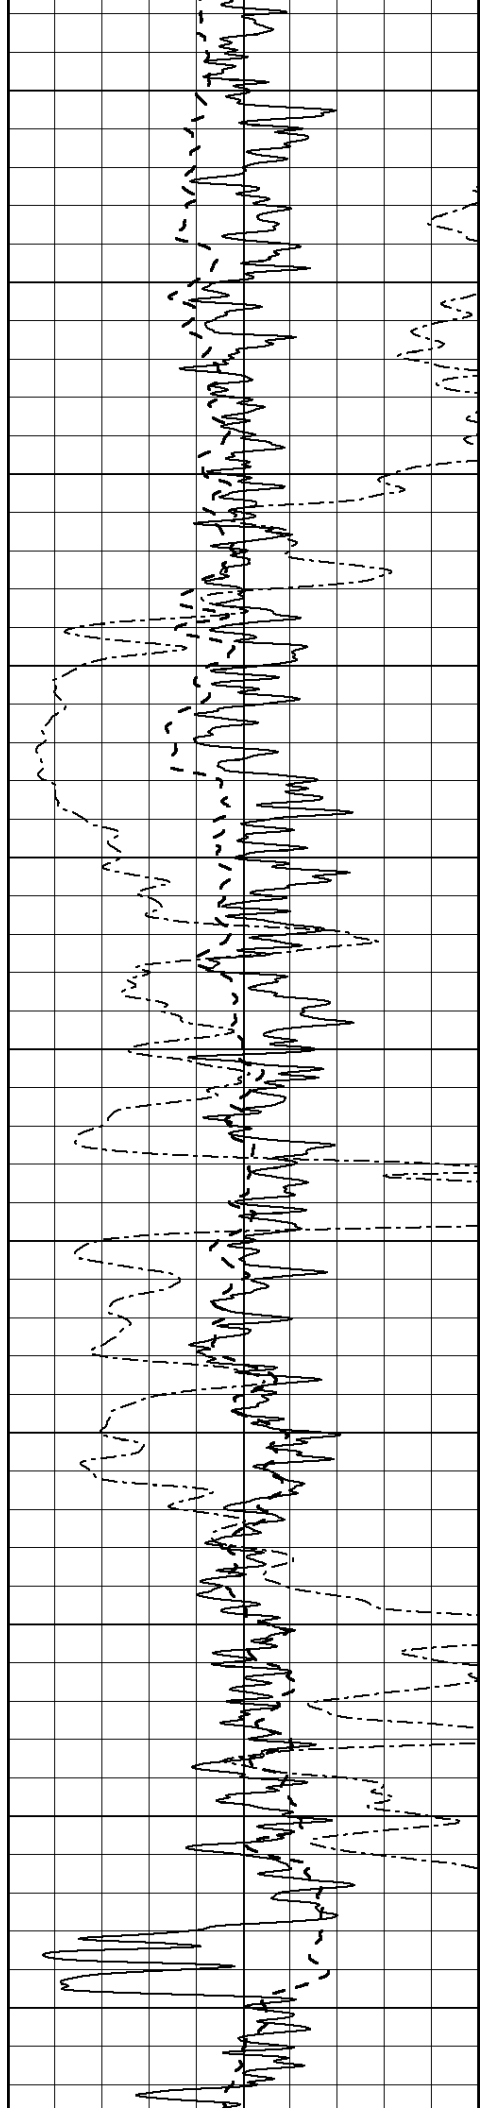

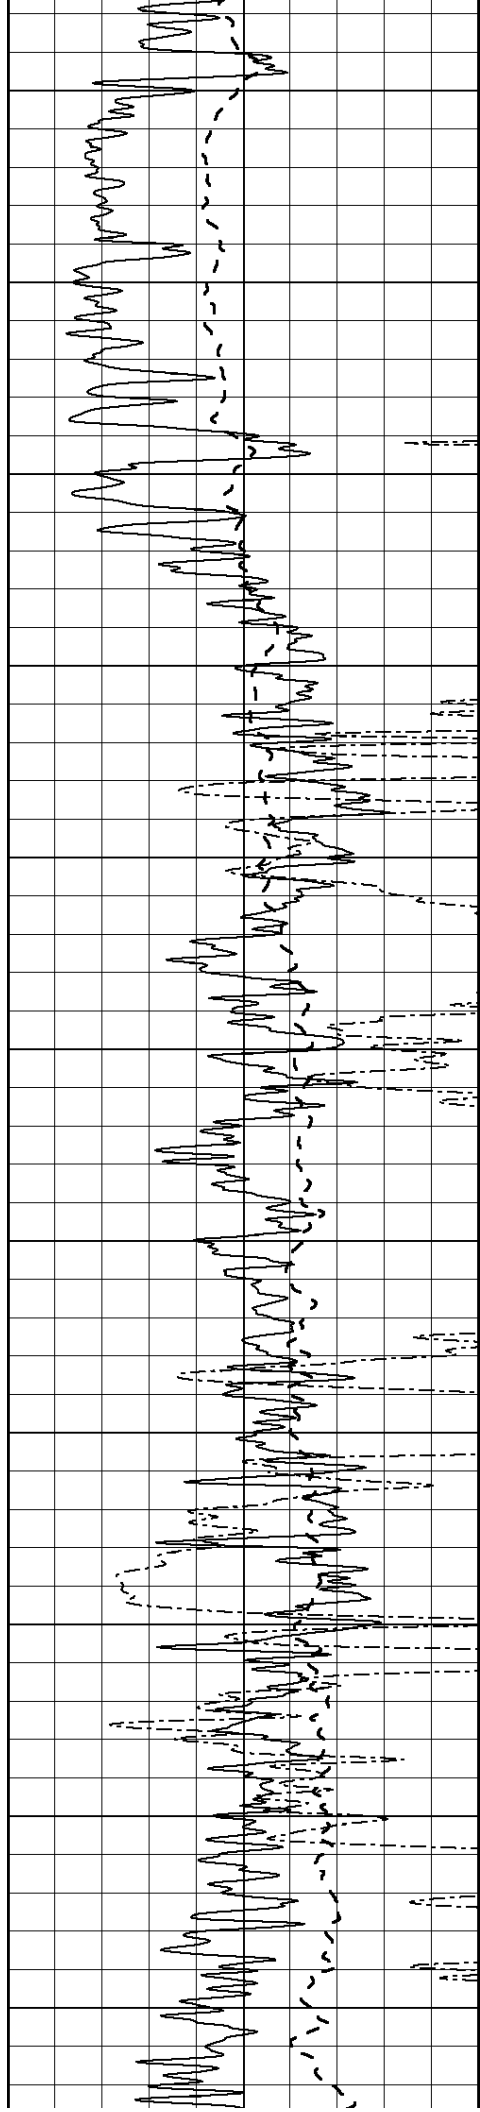

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

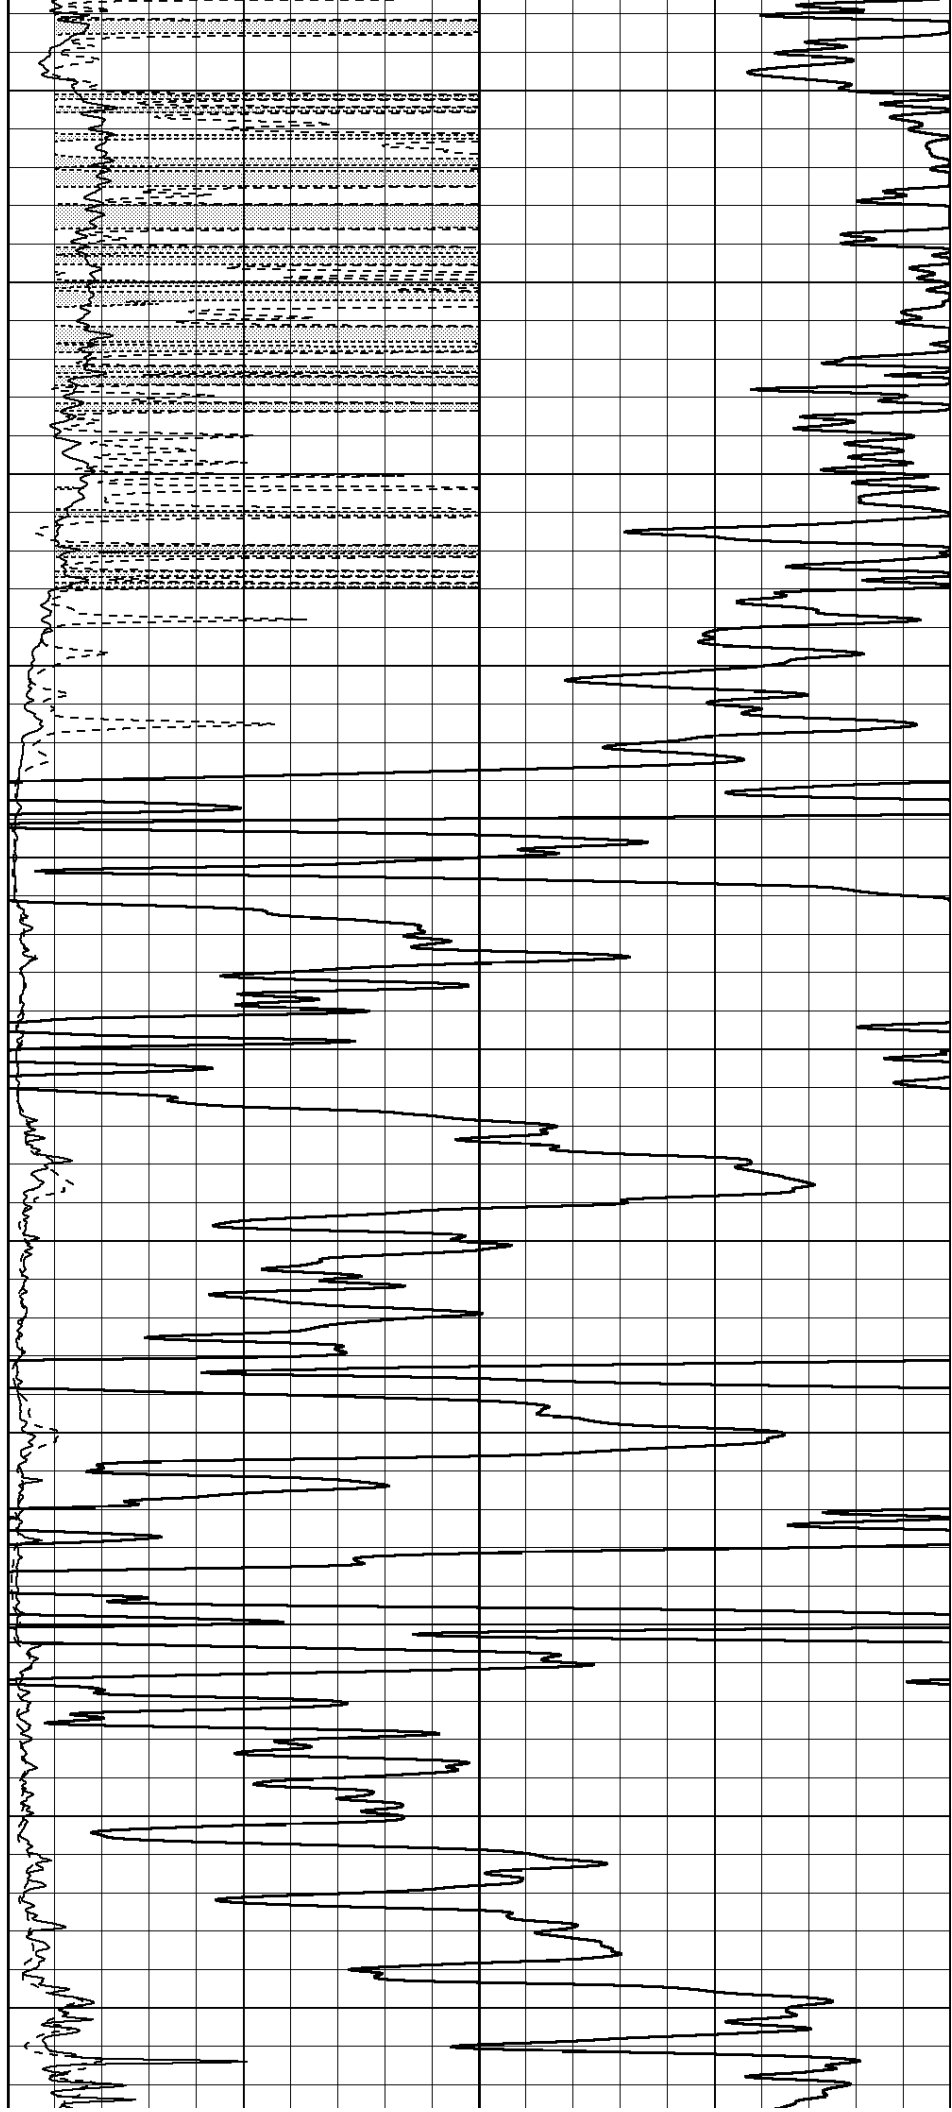

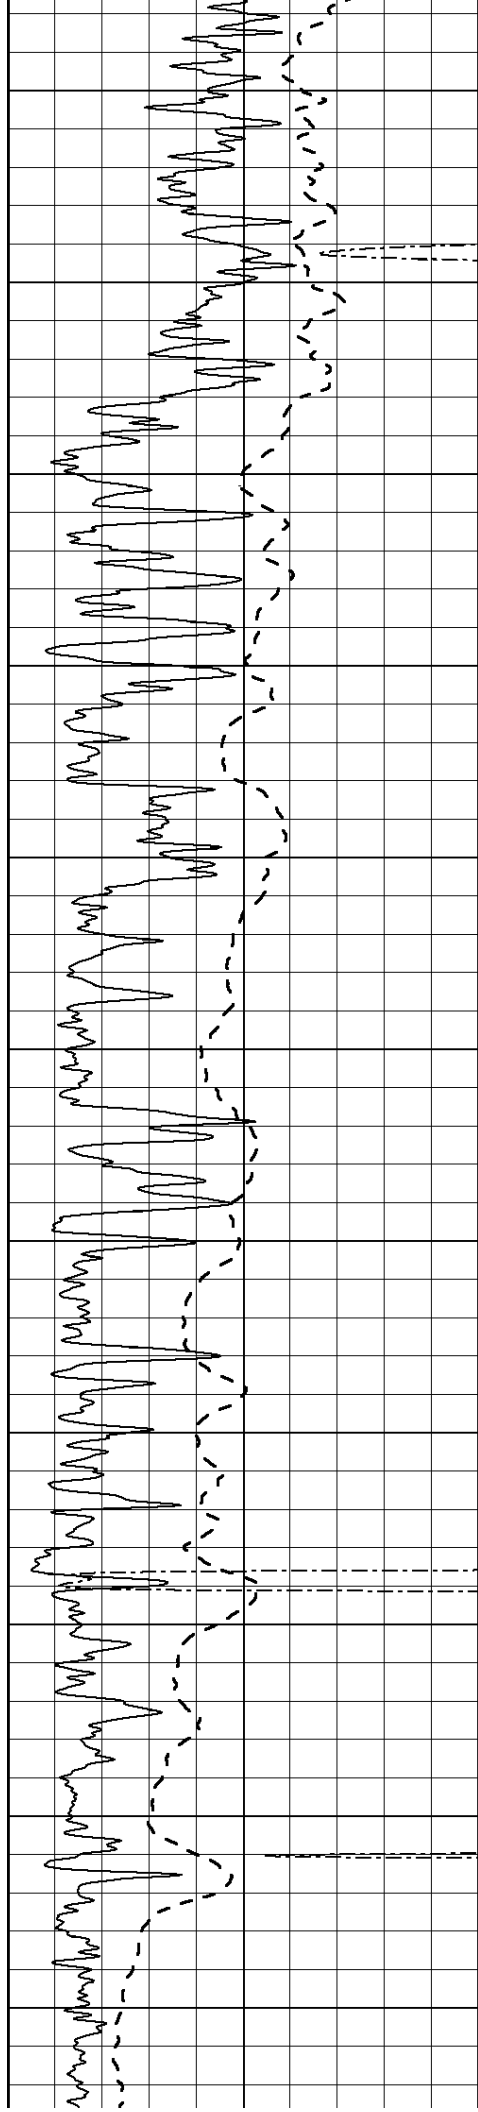

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

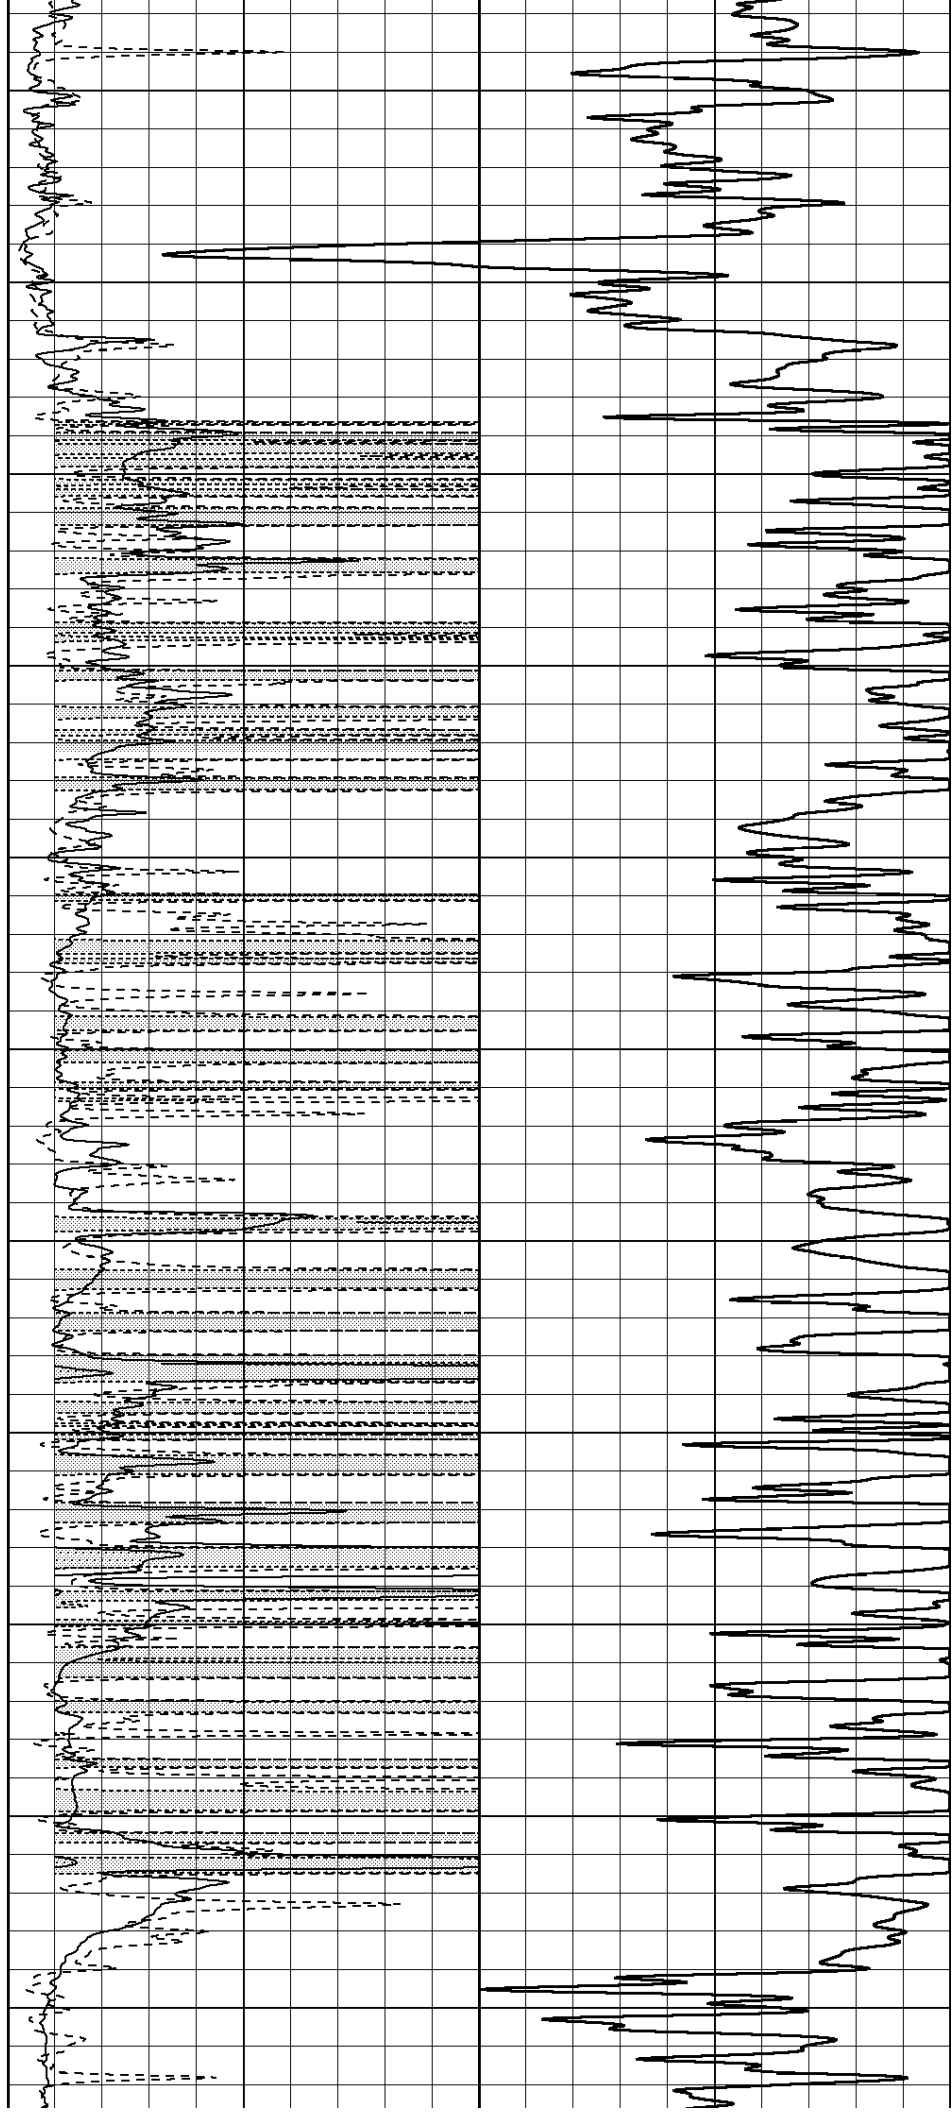

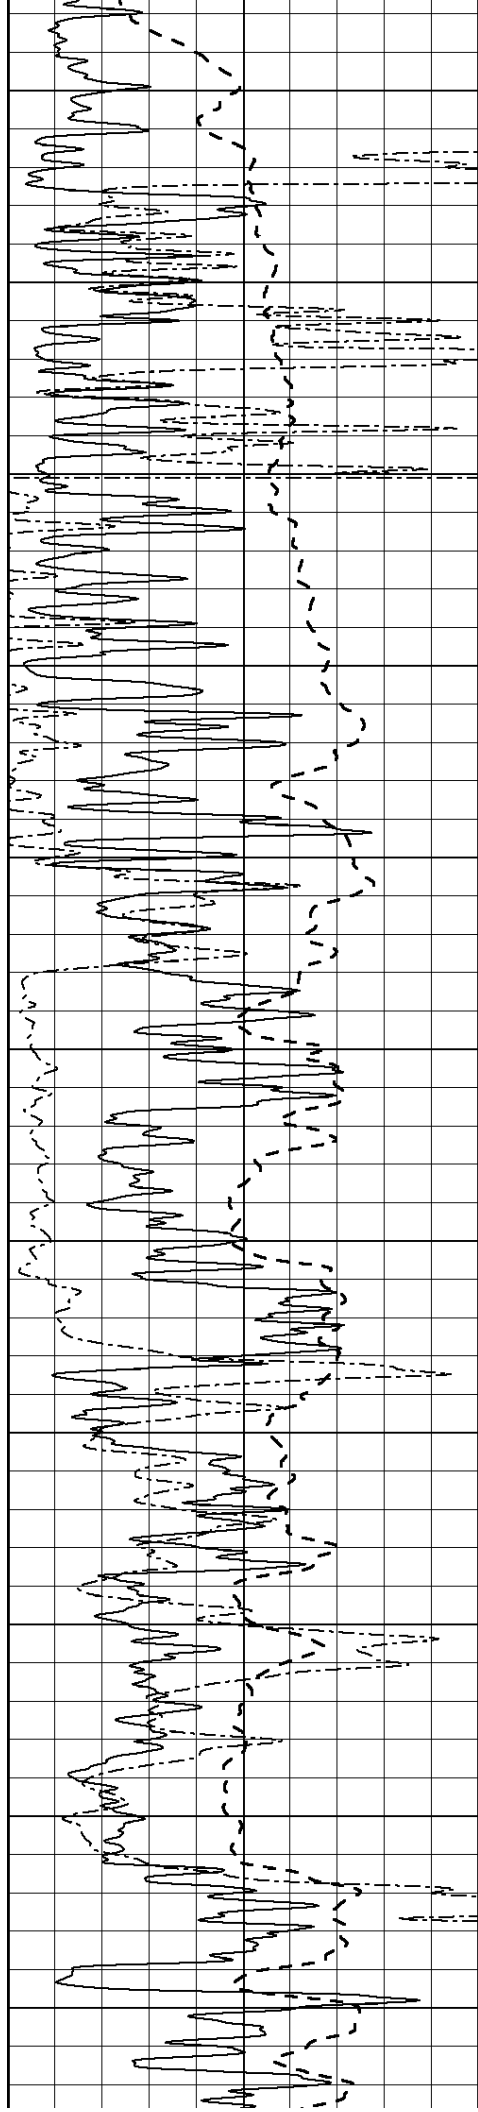

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

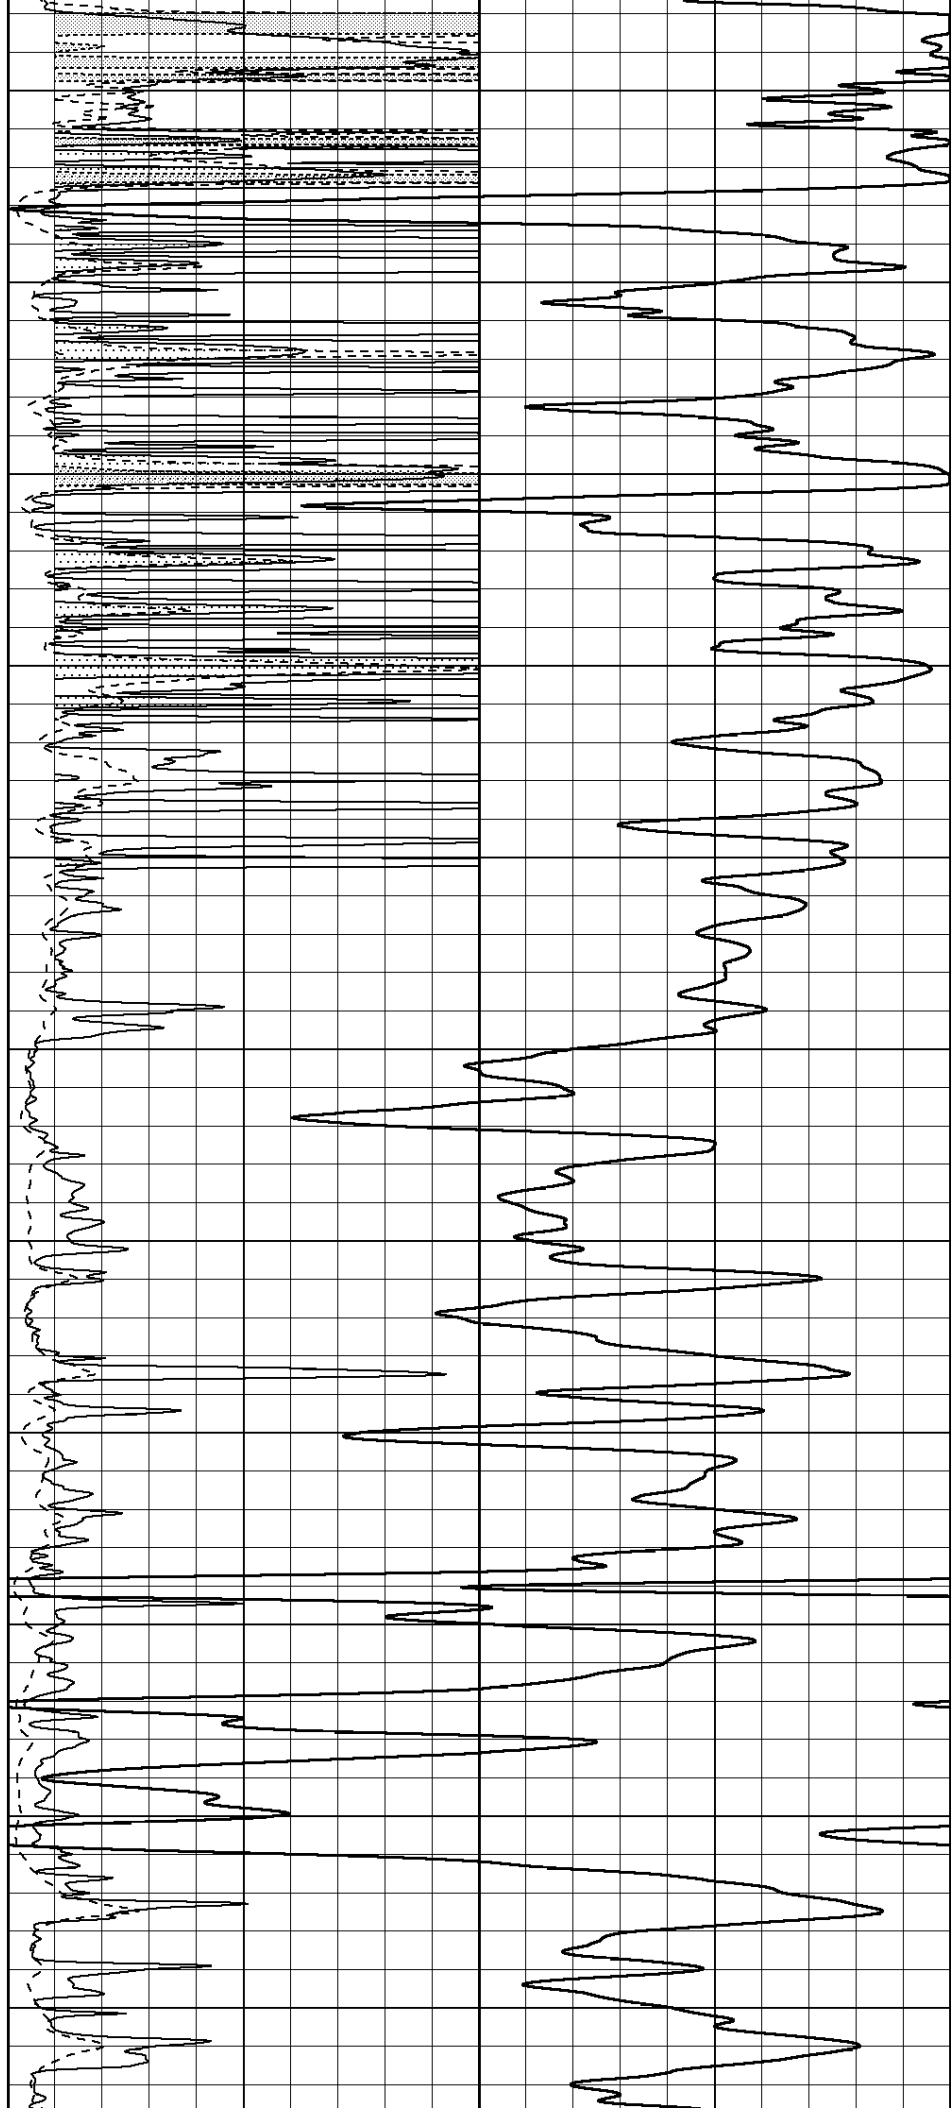

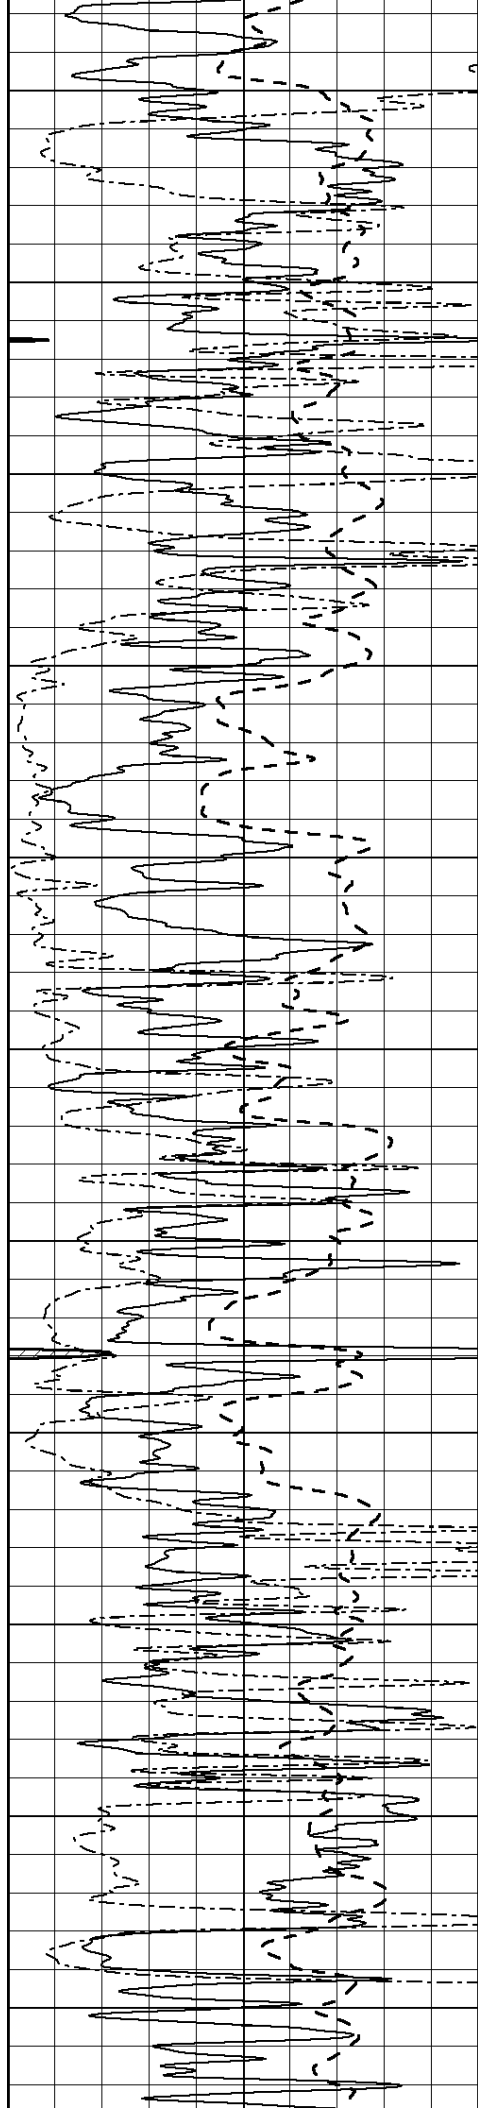

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

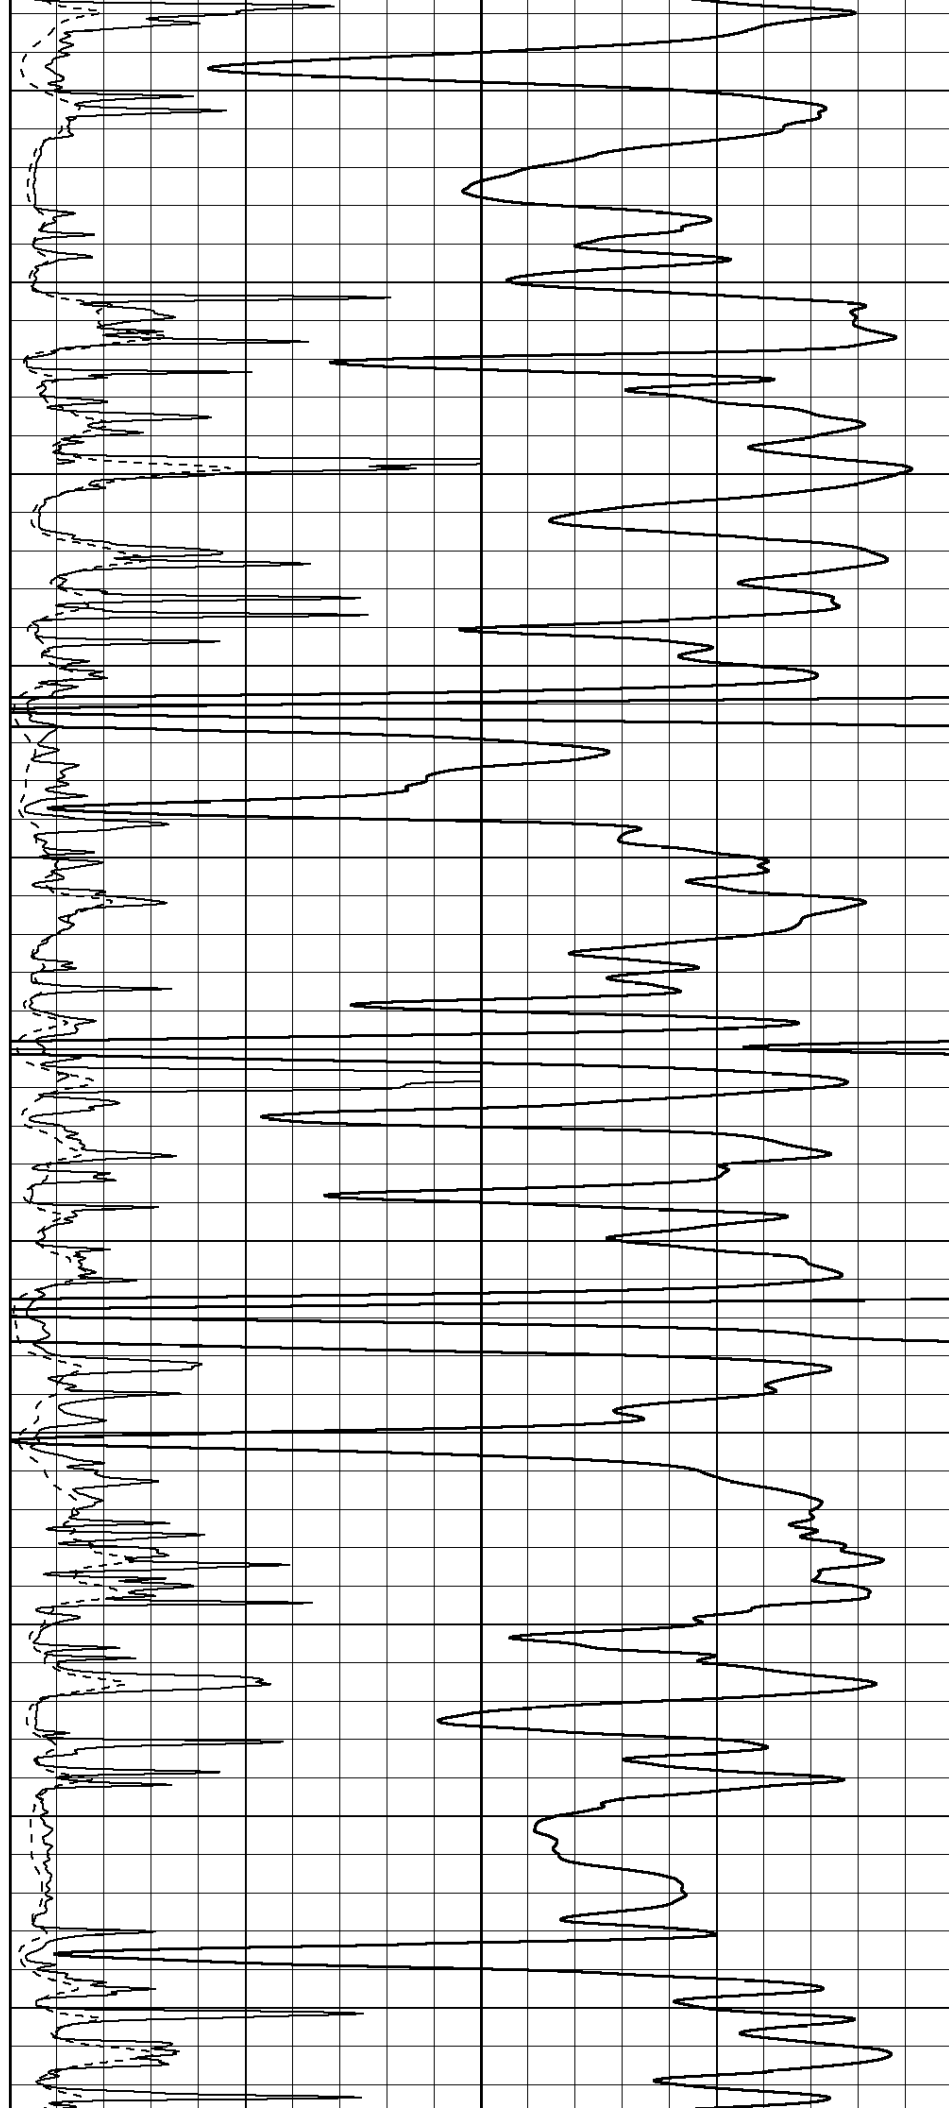

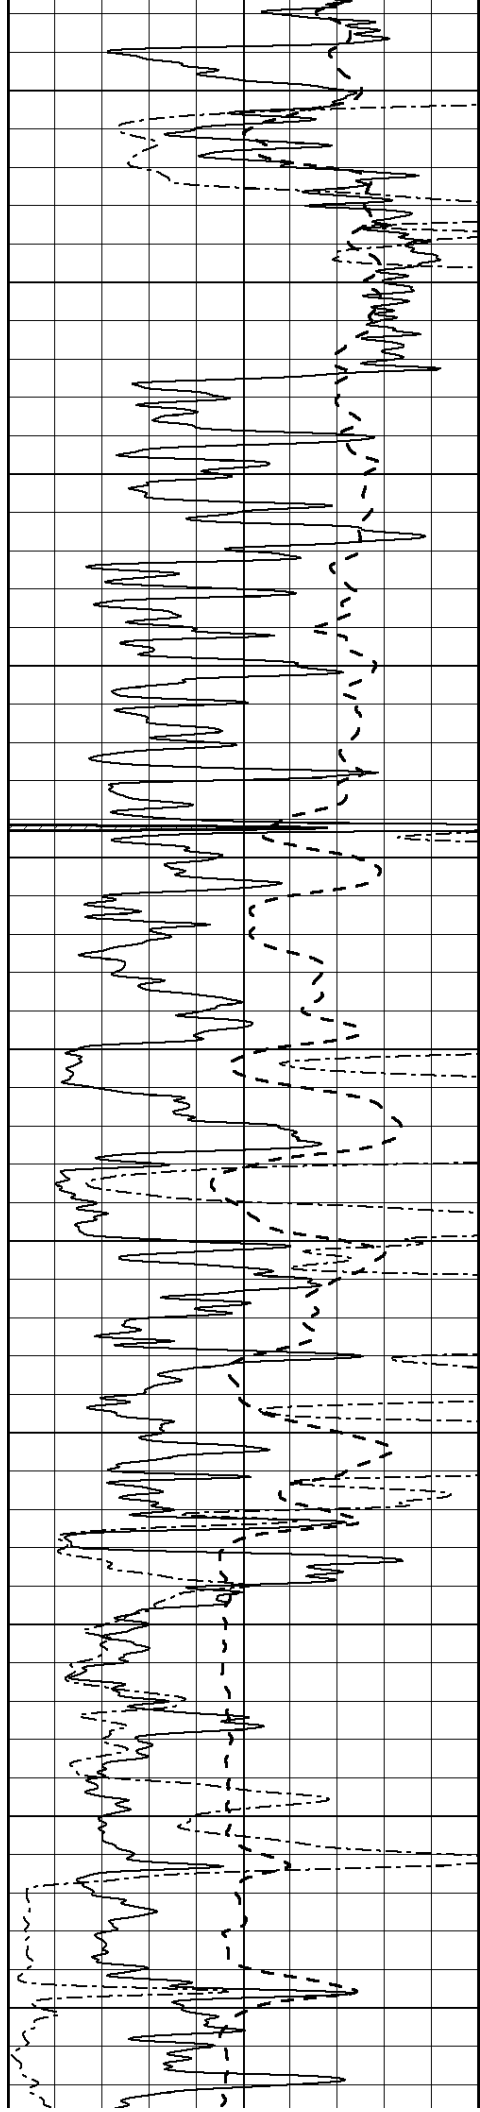

3200

3250

3300

3350

3400

3450


3500

3550


3600

3650

3700

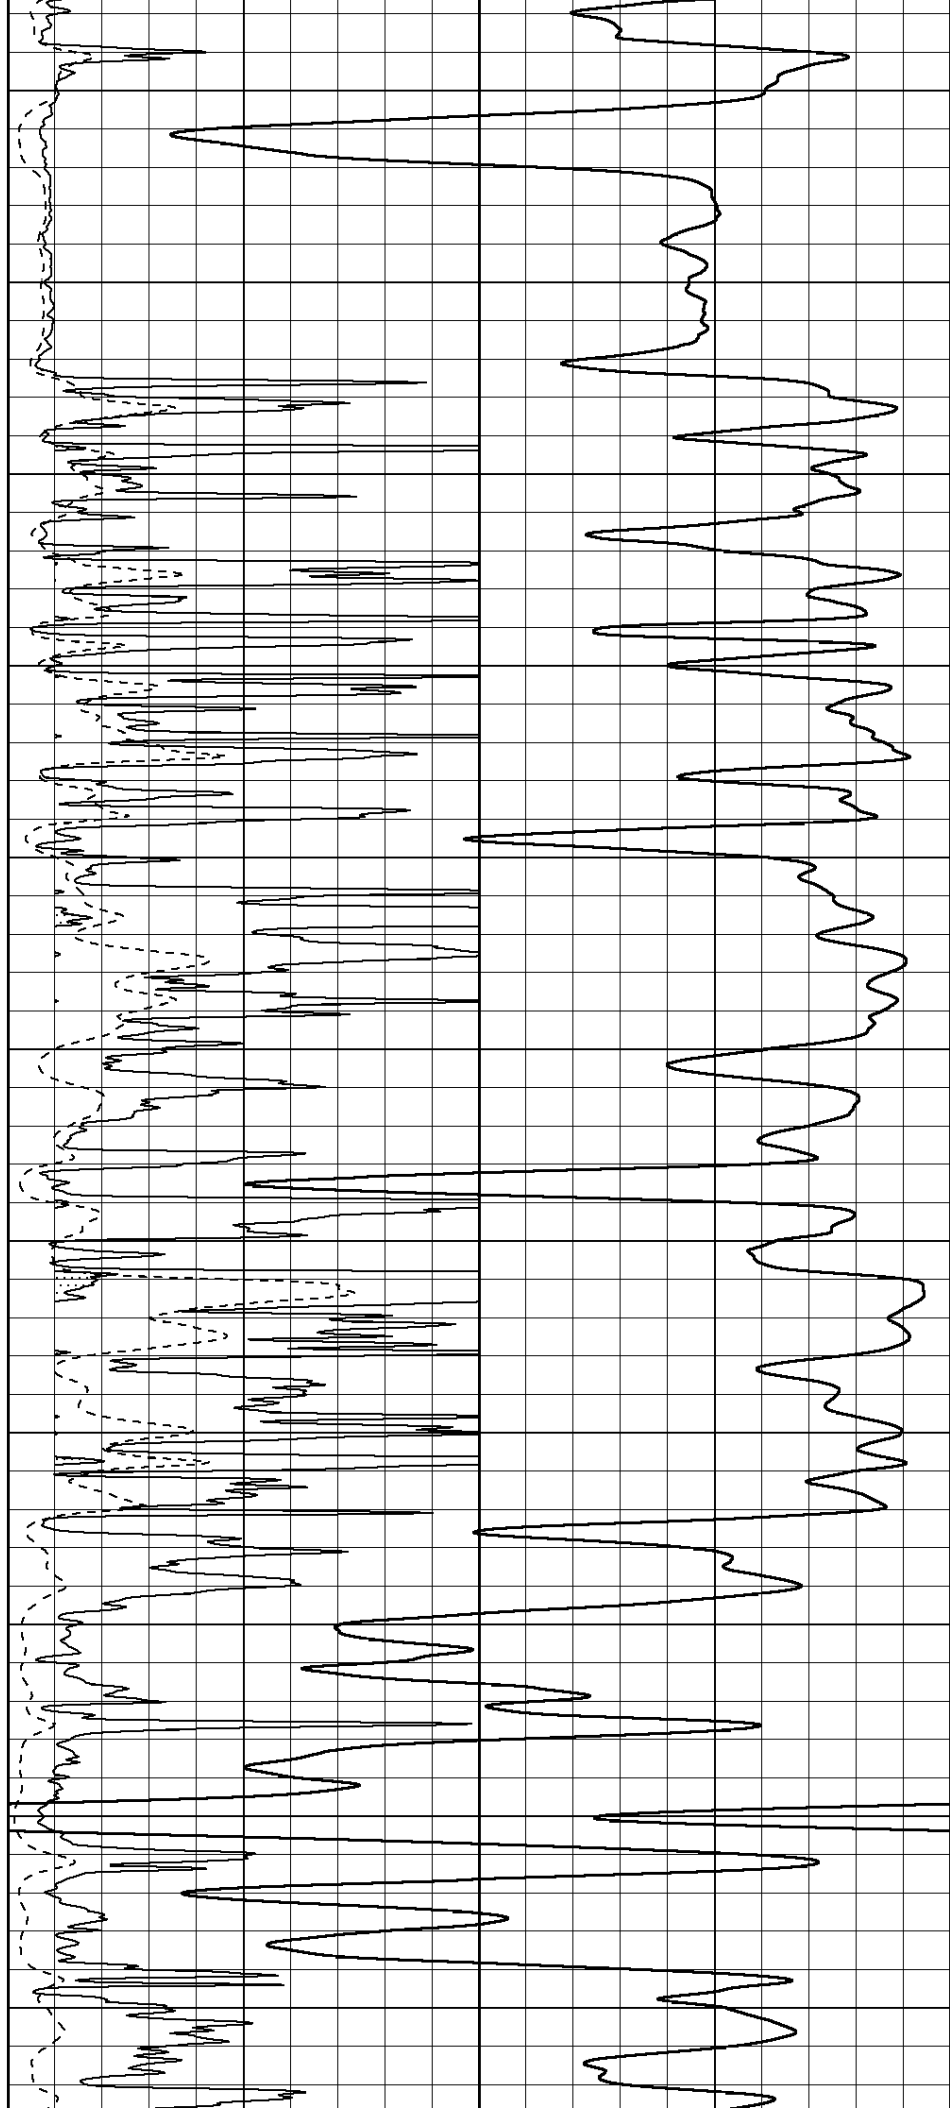



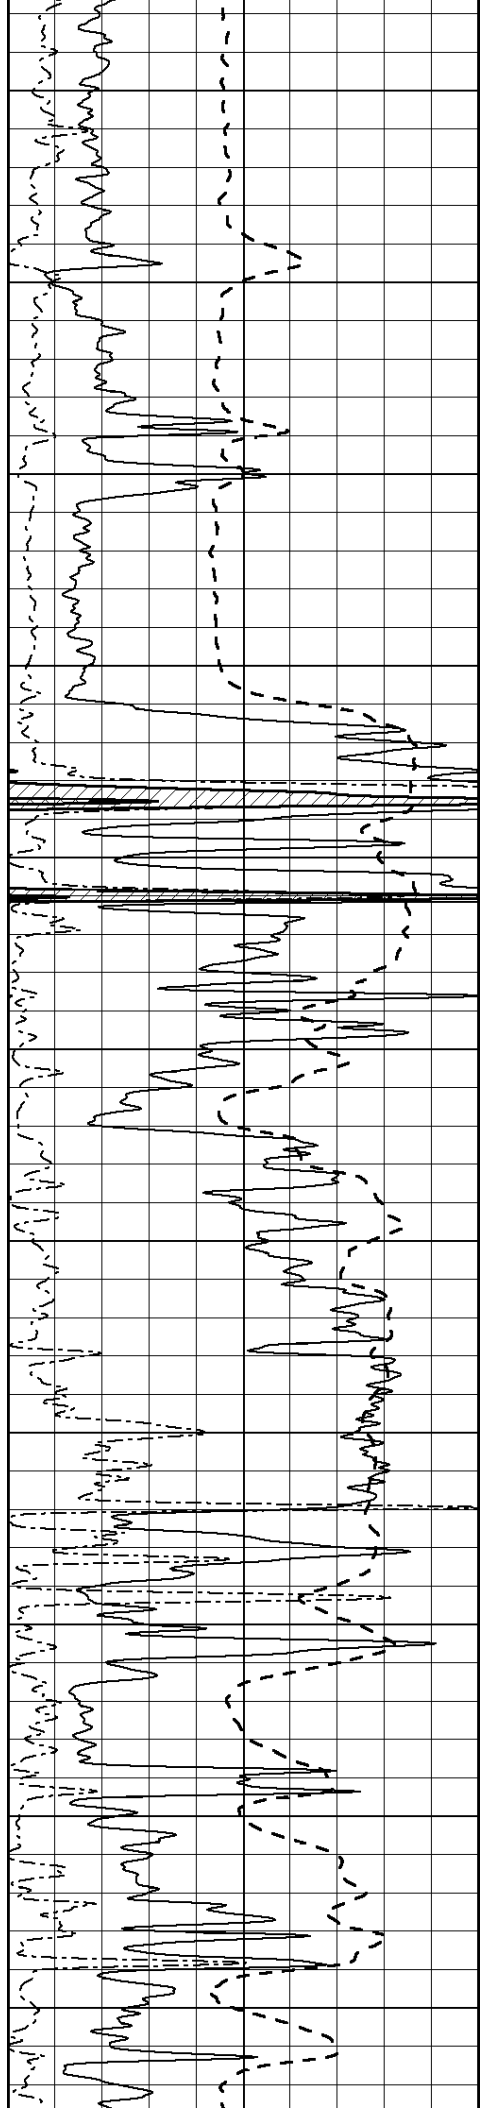

3750

3800

3850

3900

3950

4000


4050


4100

4150

4200

4250

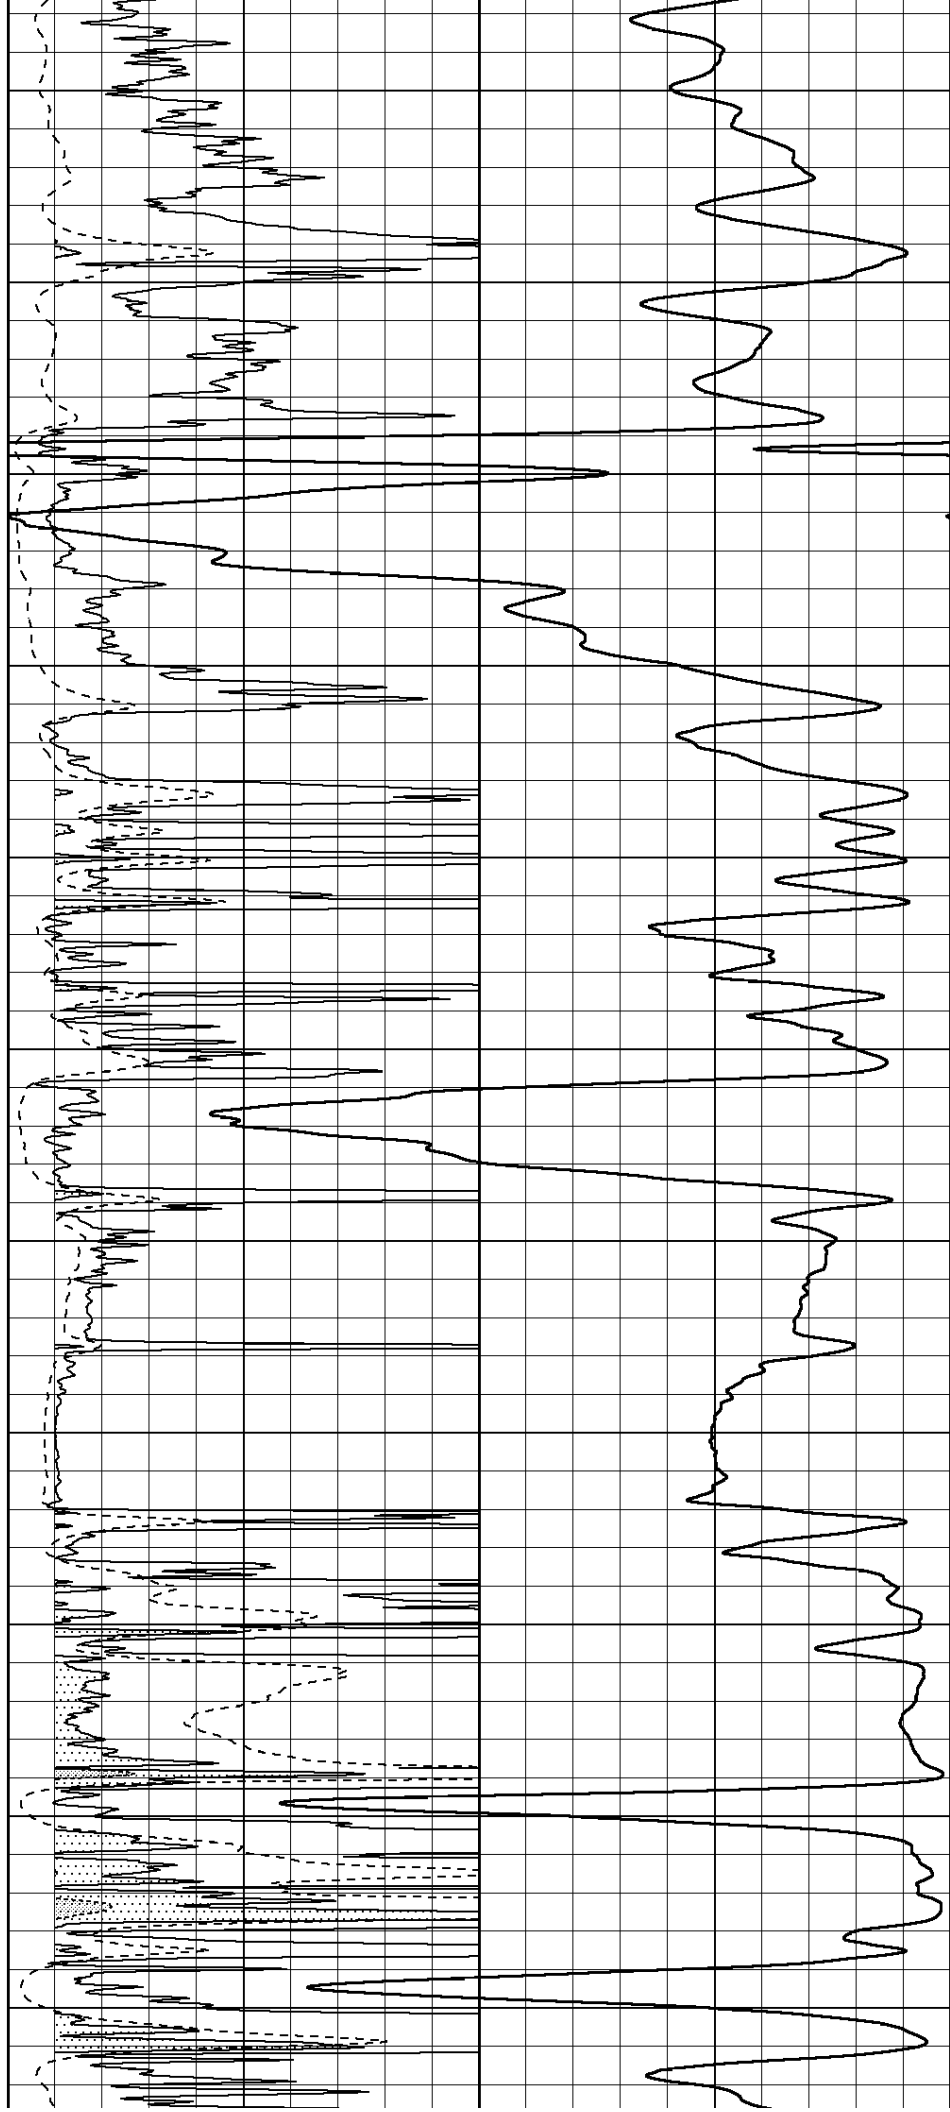

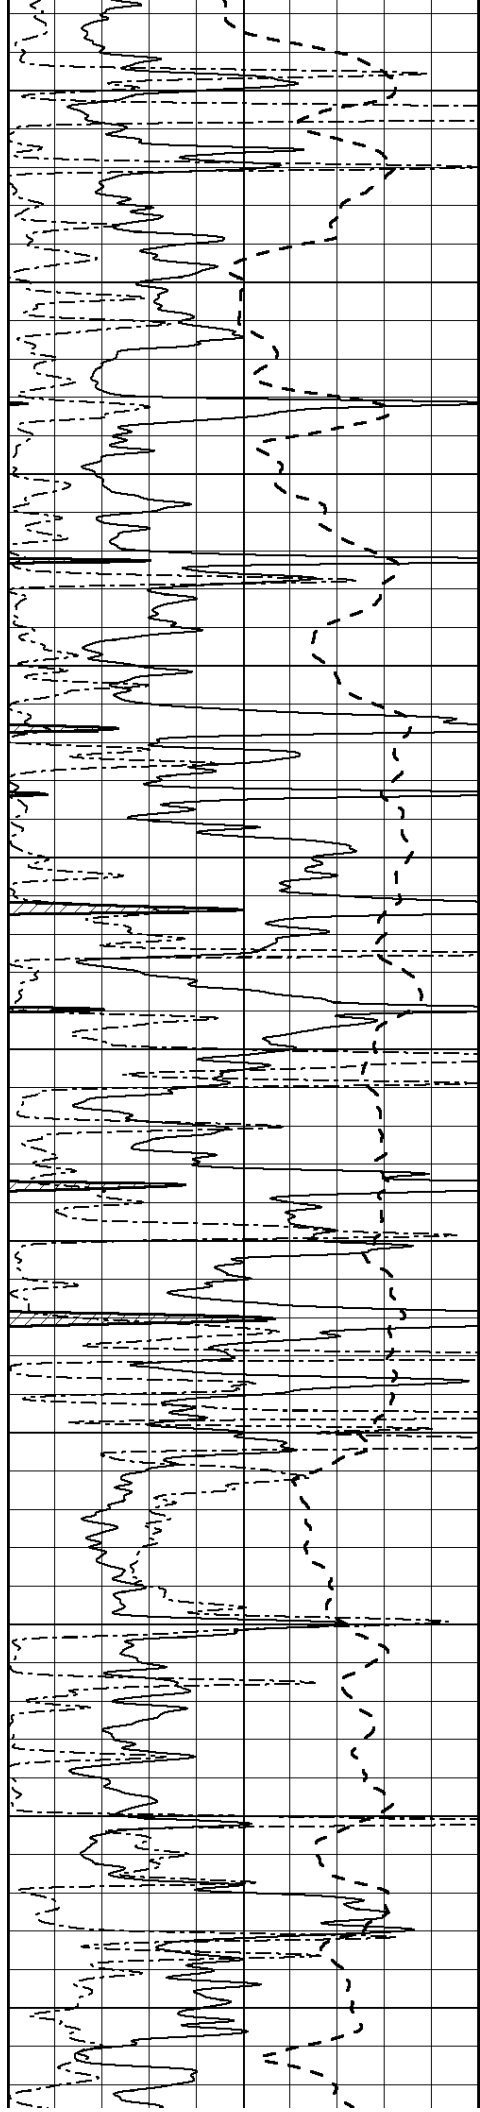

4300

4350

4400

4450

4500

4550



4600




4650

4700

4750





4800

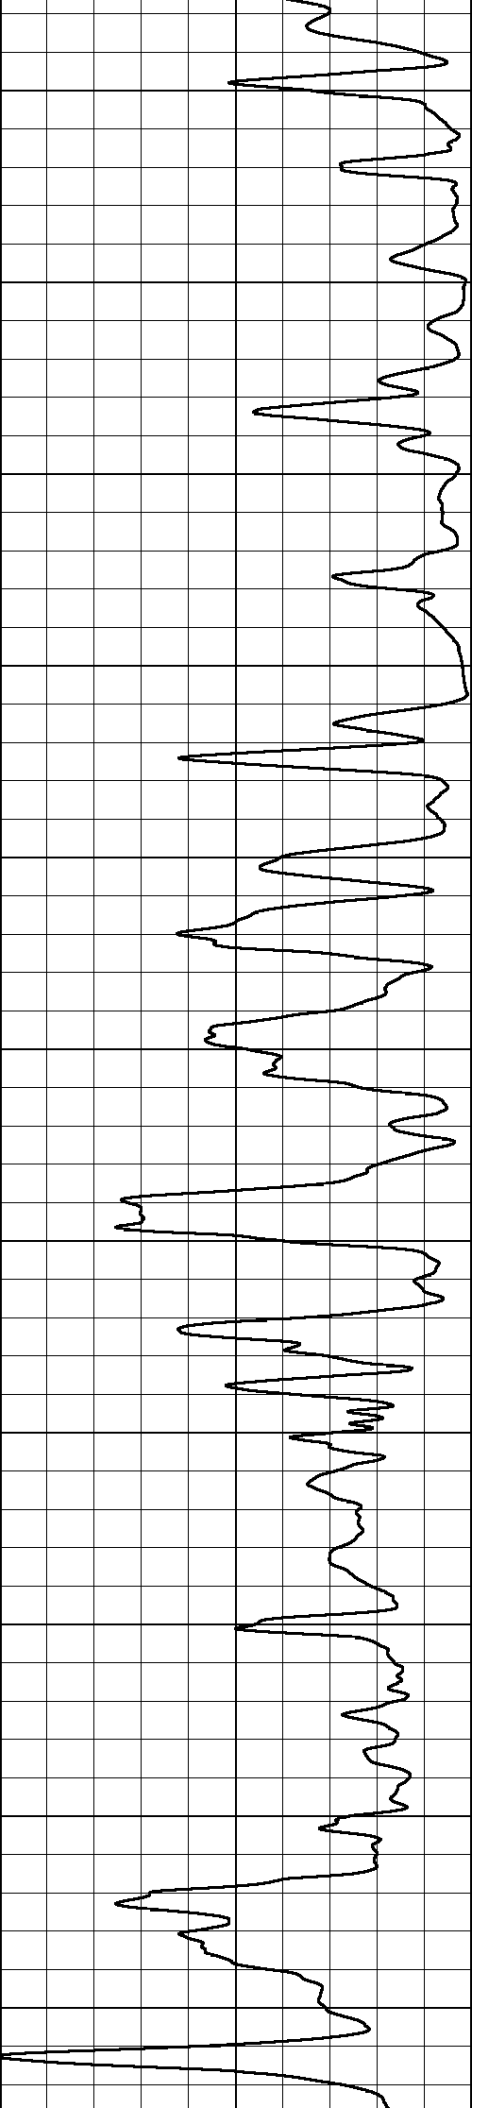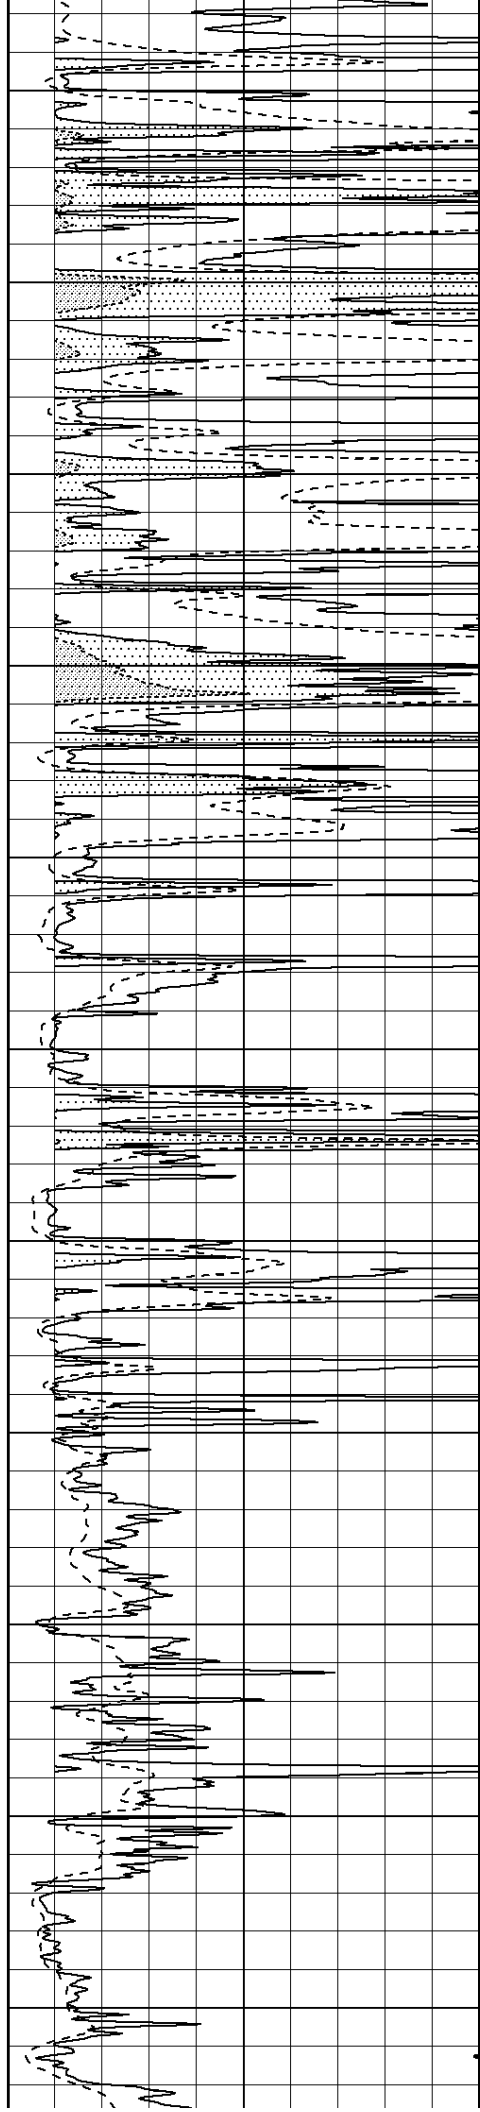


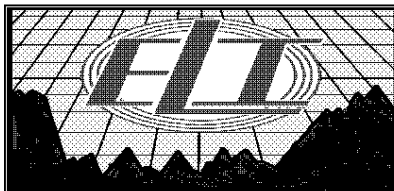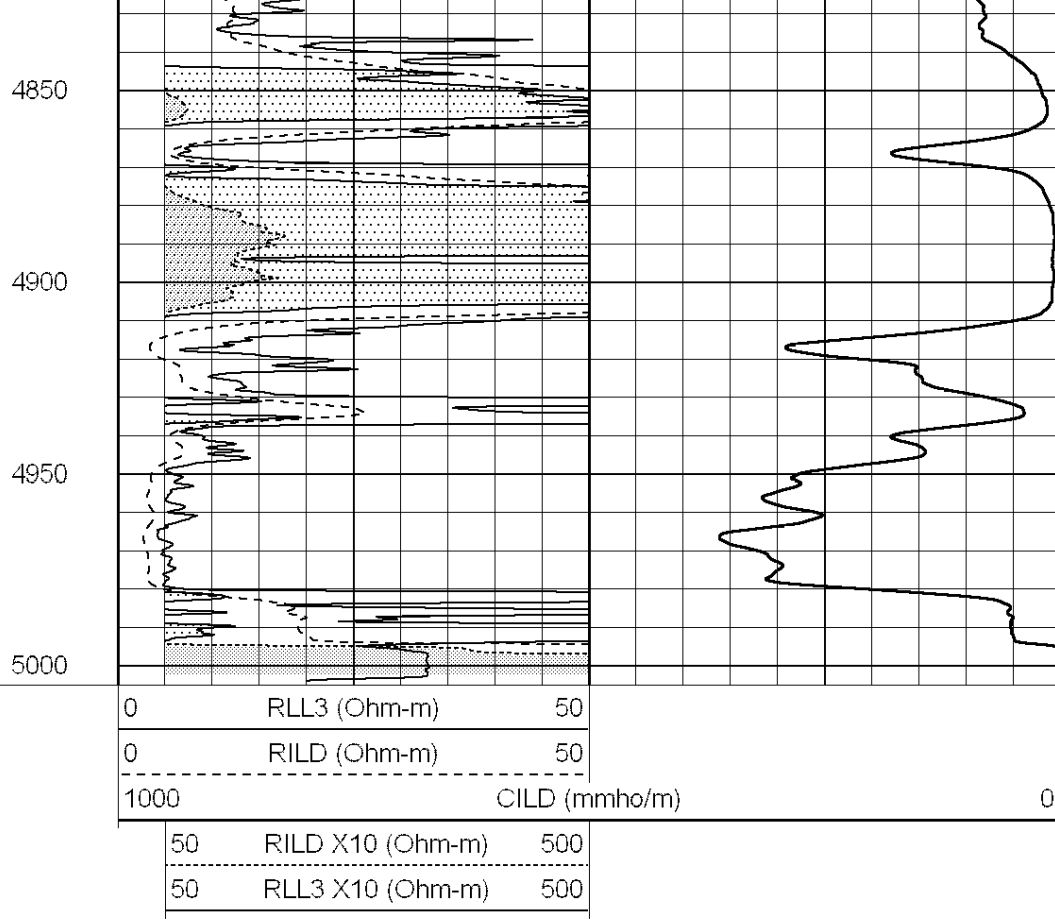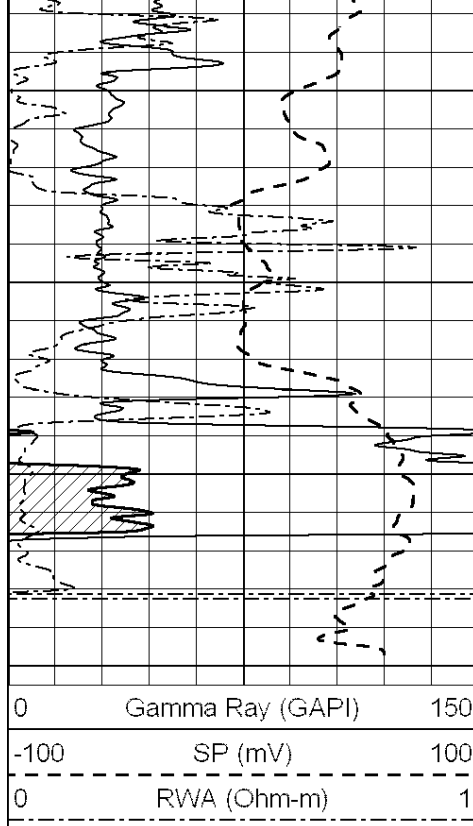

# MAIN SECTION

Database File: 1833pe.db  
 Dataset Pathname: pass4.5  
 Presentation Format: \_dil  
 Dataset Creation: Mon Oct 16 07:48:22 2017 by Calc SOC 120430  
 Charted by: Depth in Feet scaled 1:240

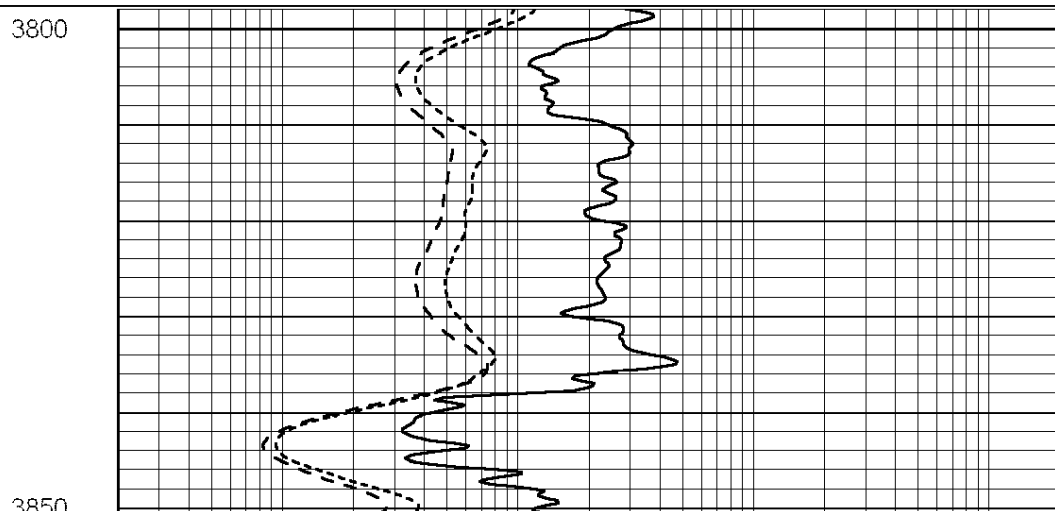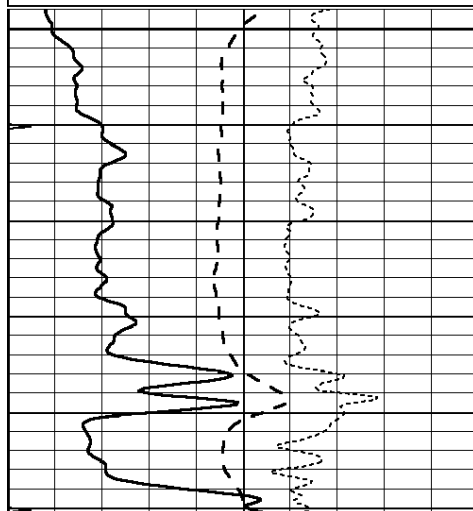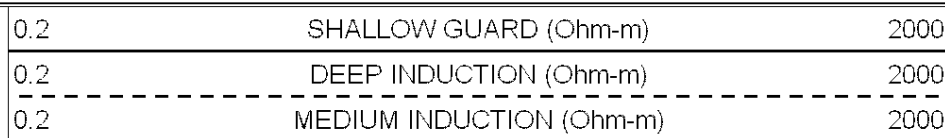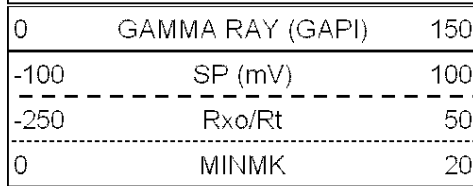

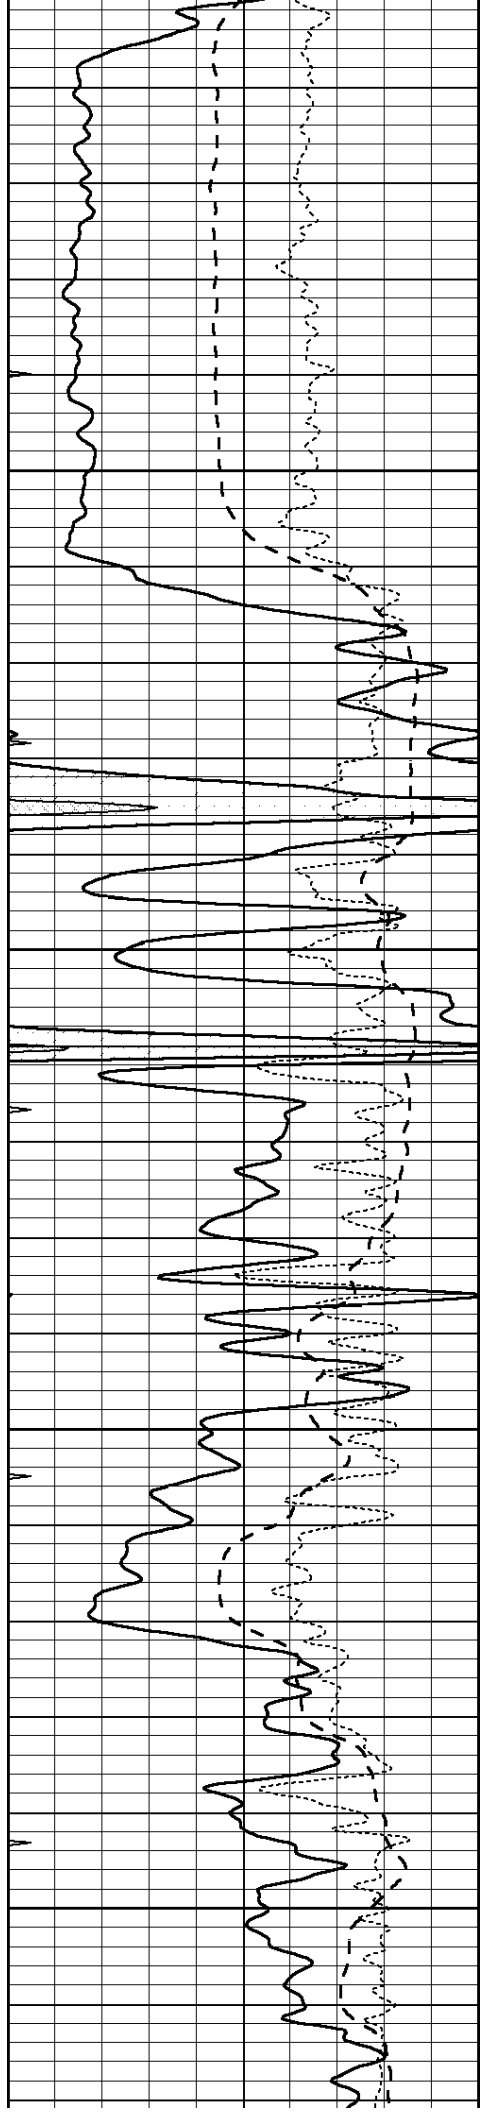



3900

3950

4000

4050

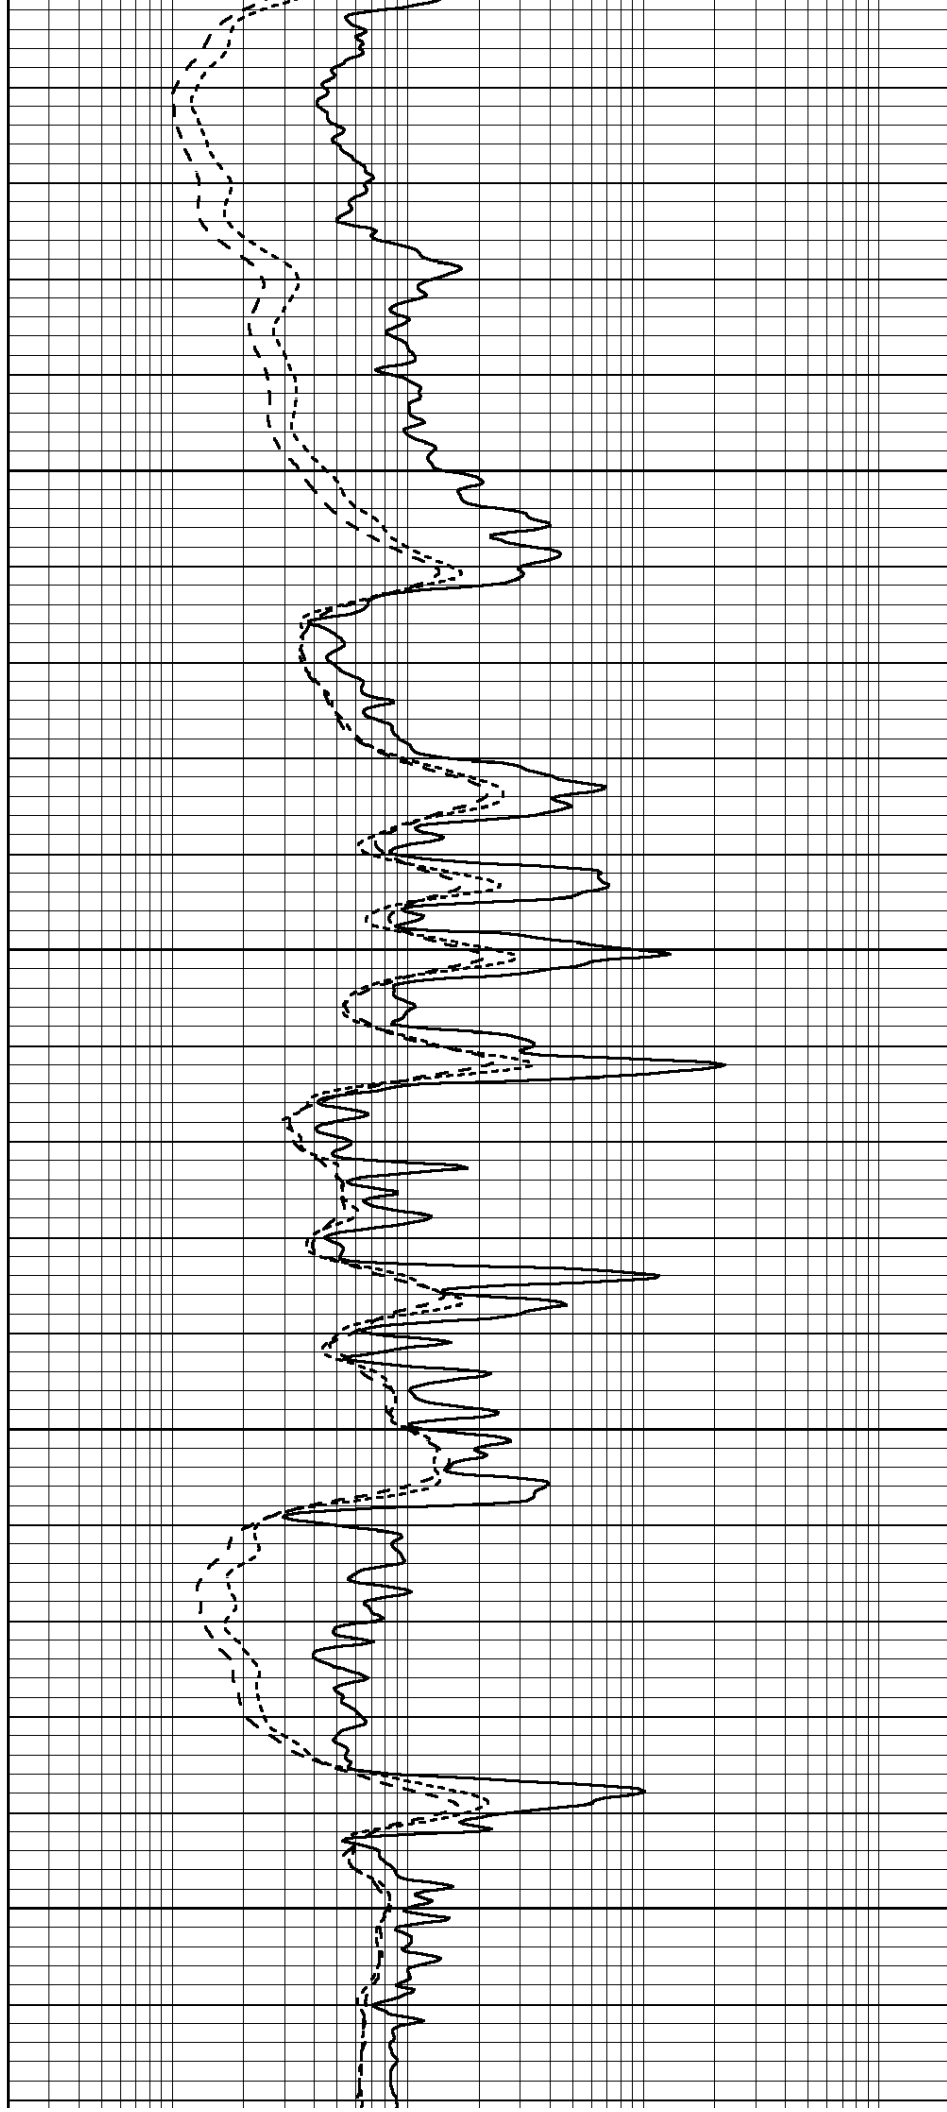

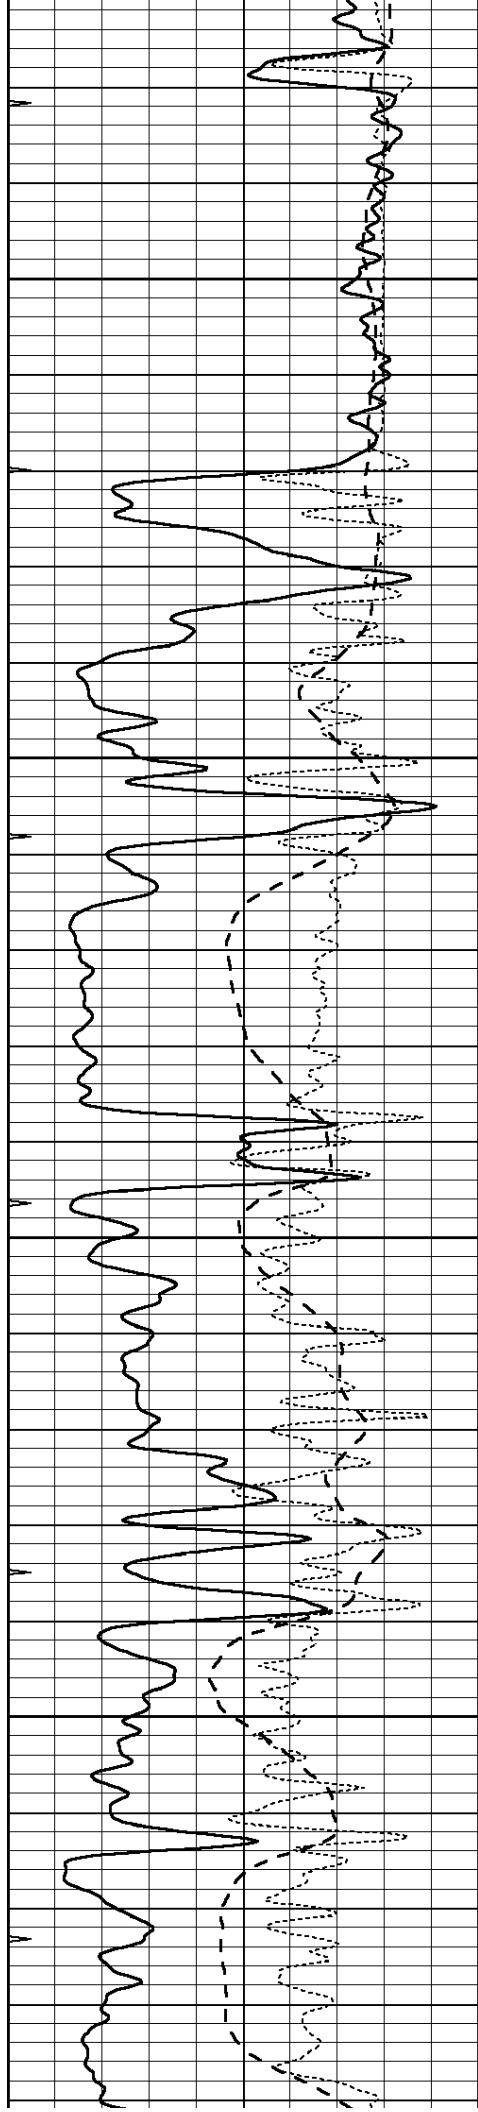



4100

4150

4200

4250

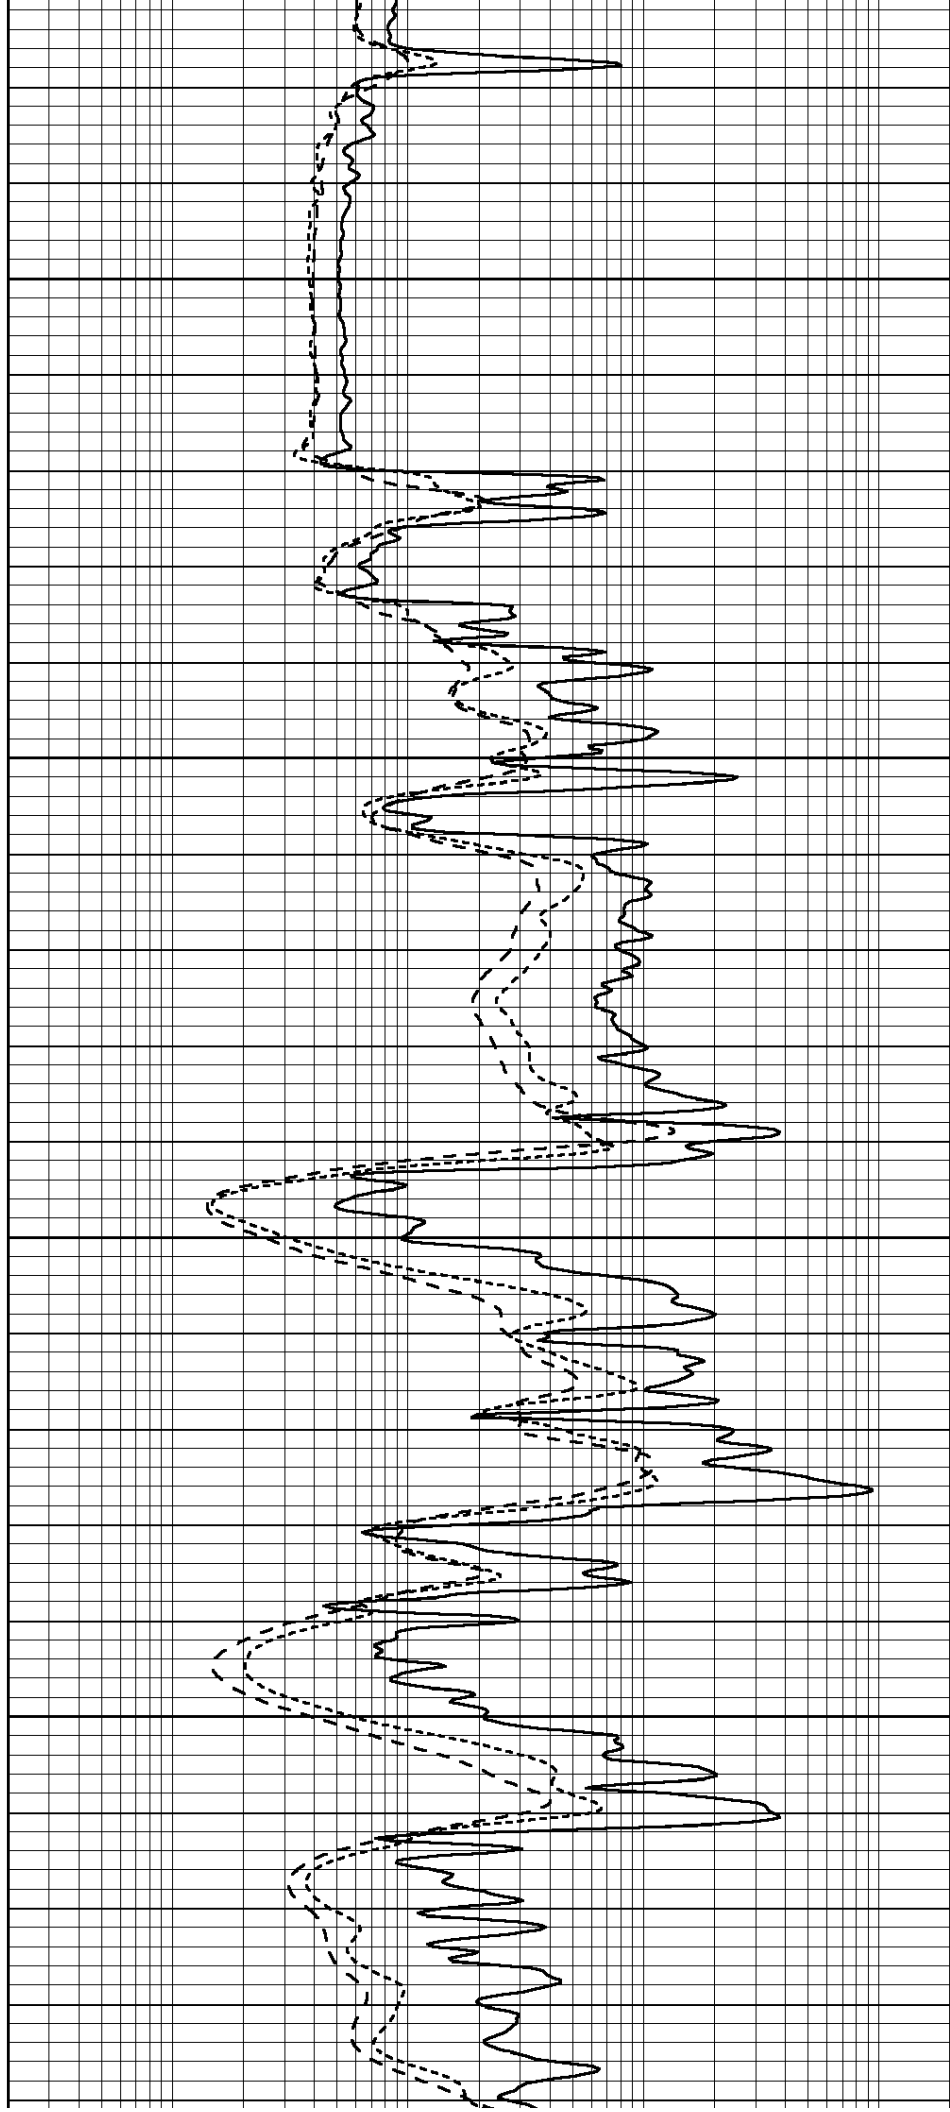

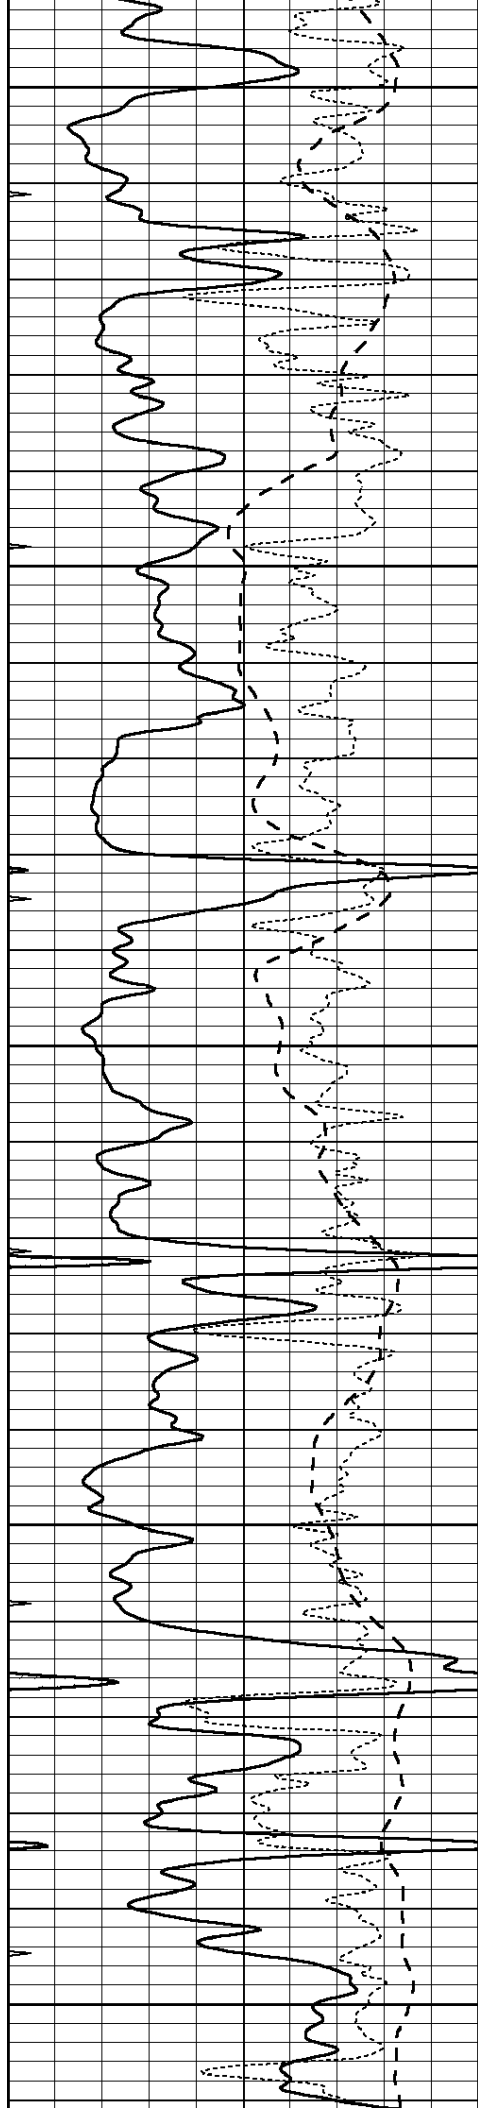


4300


4350

4400

4450

4500

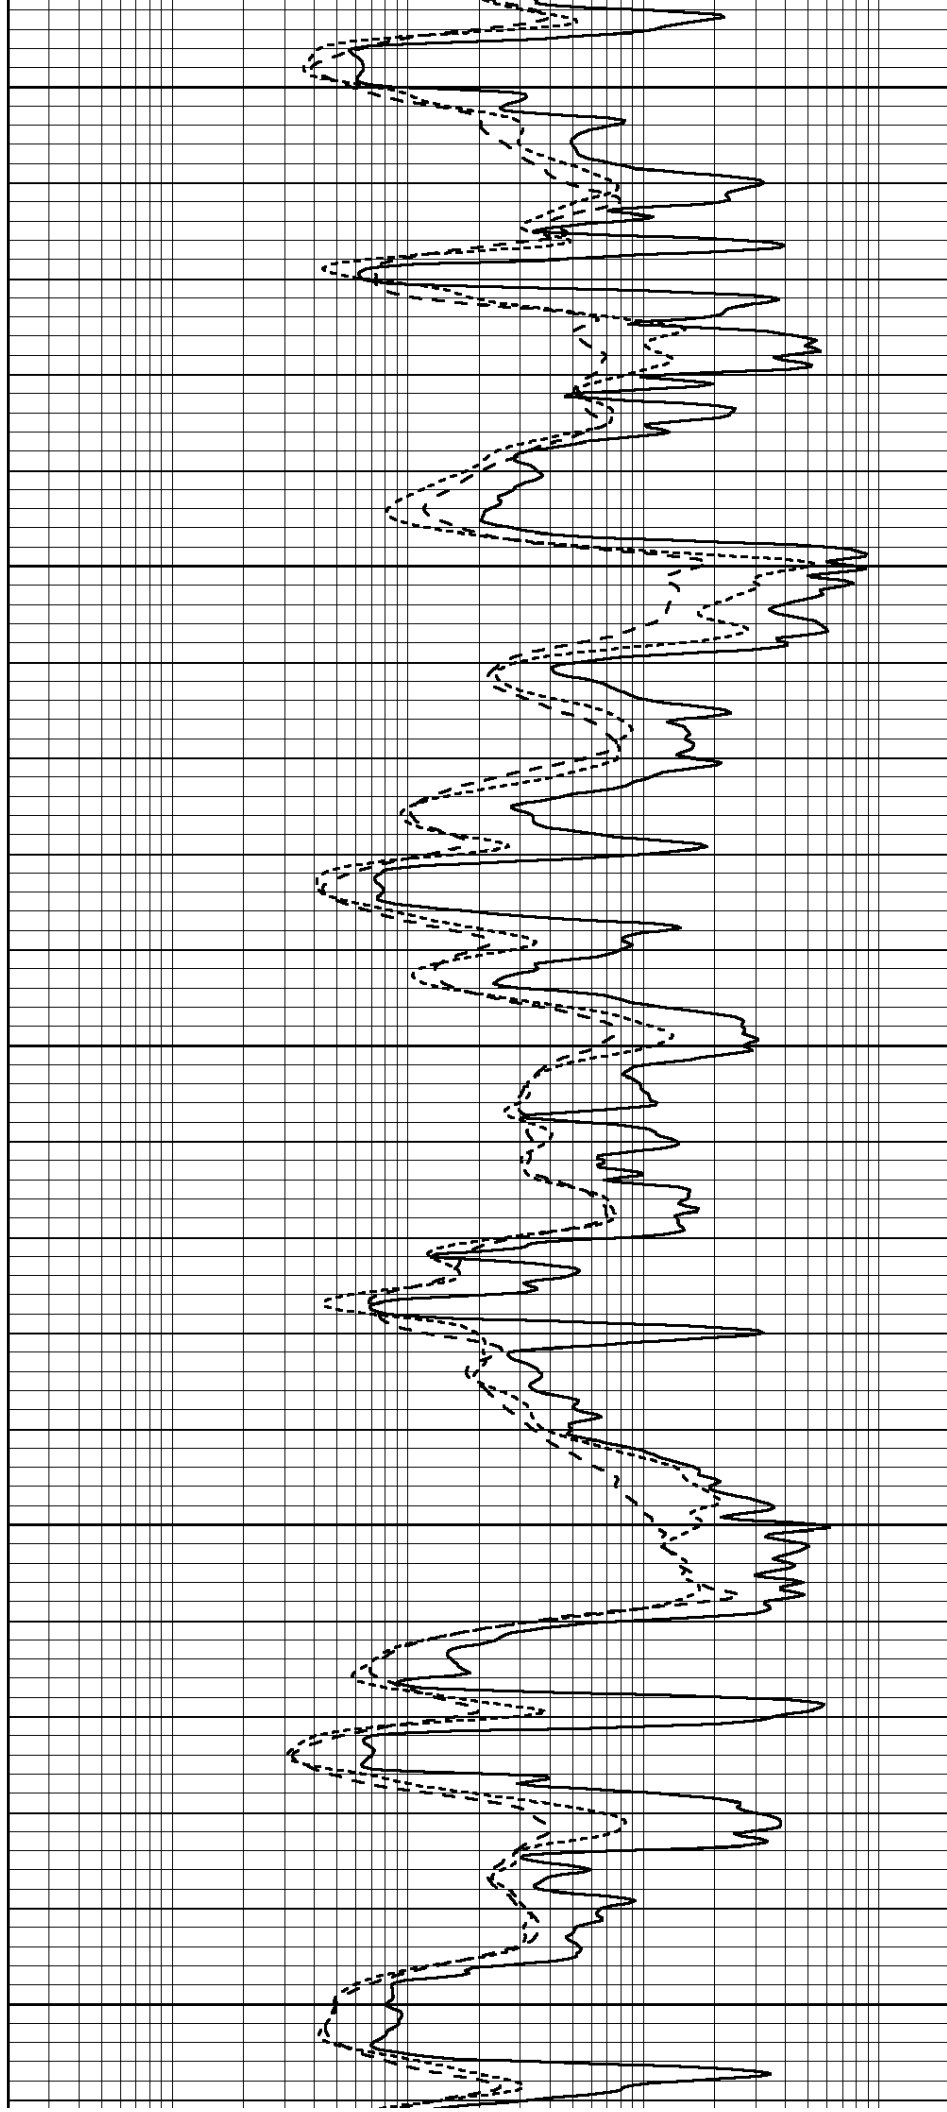

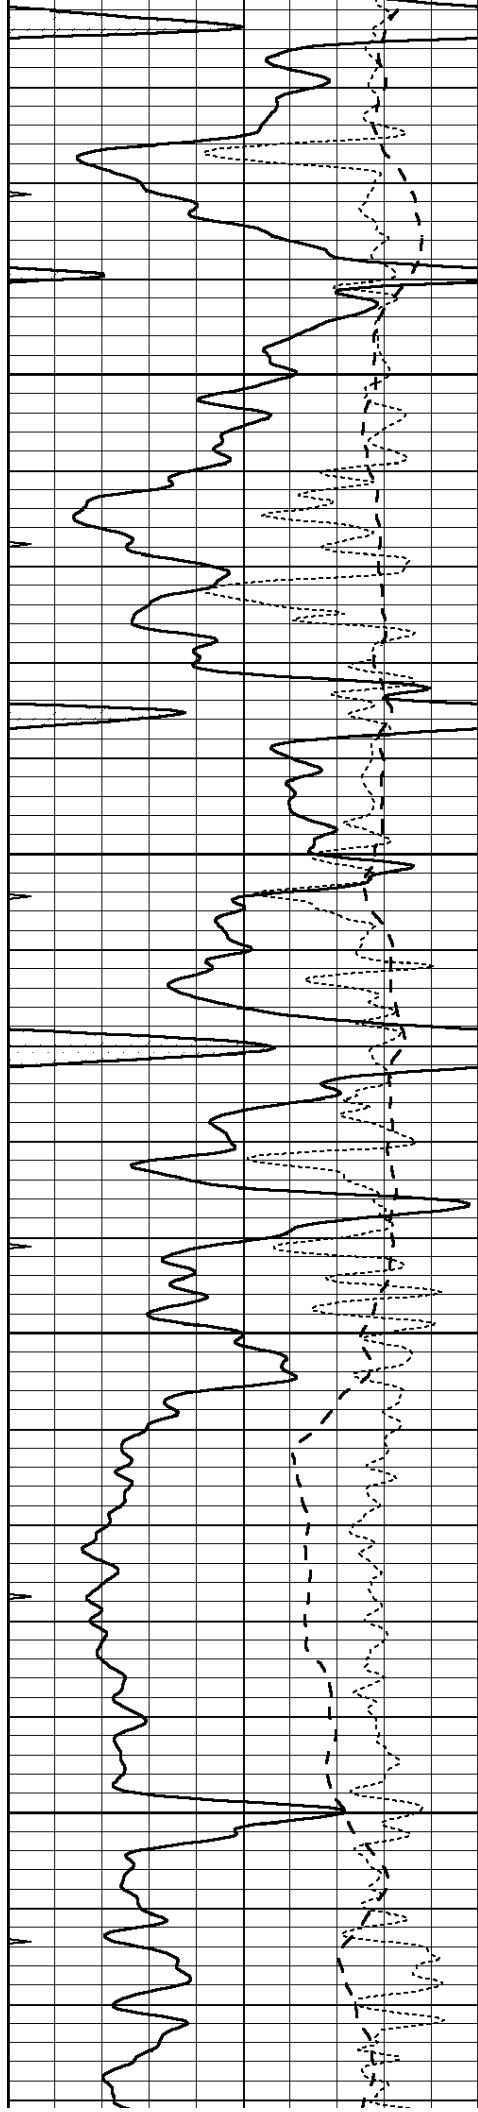



4550

4600

4650

4700

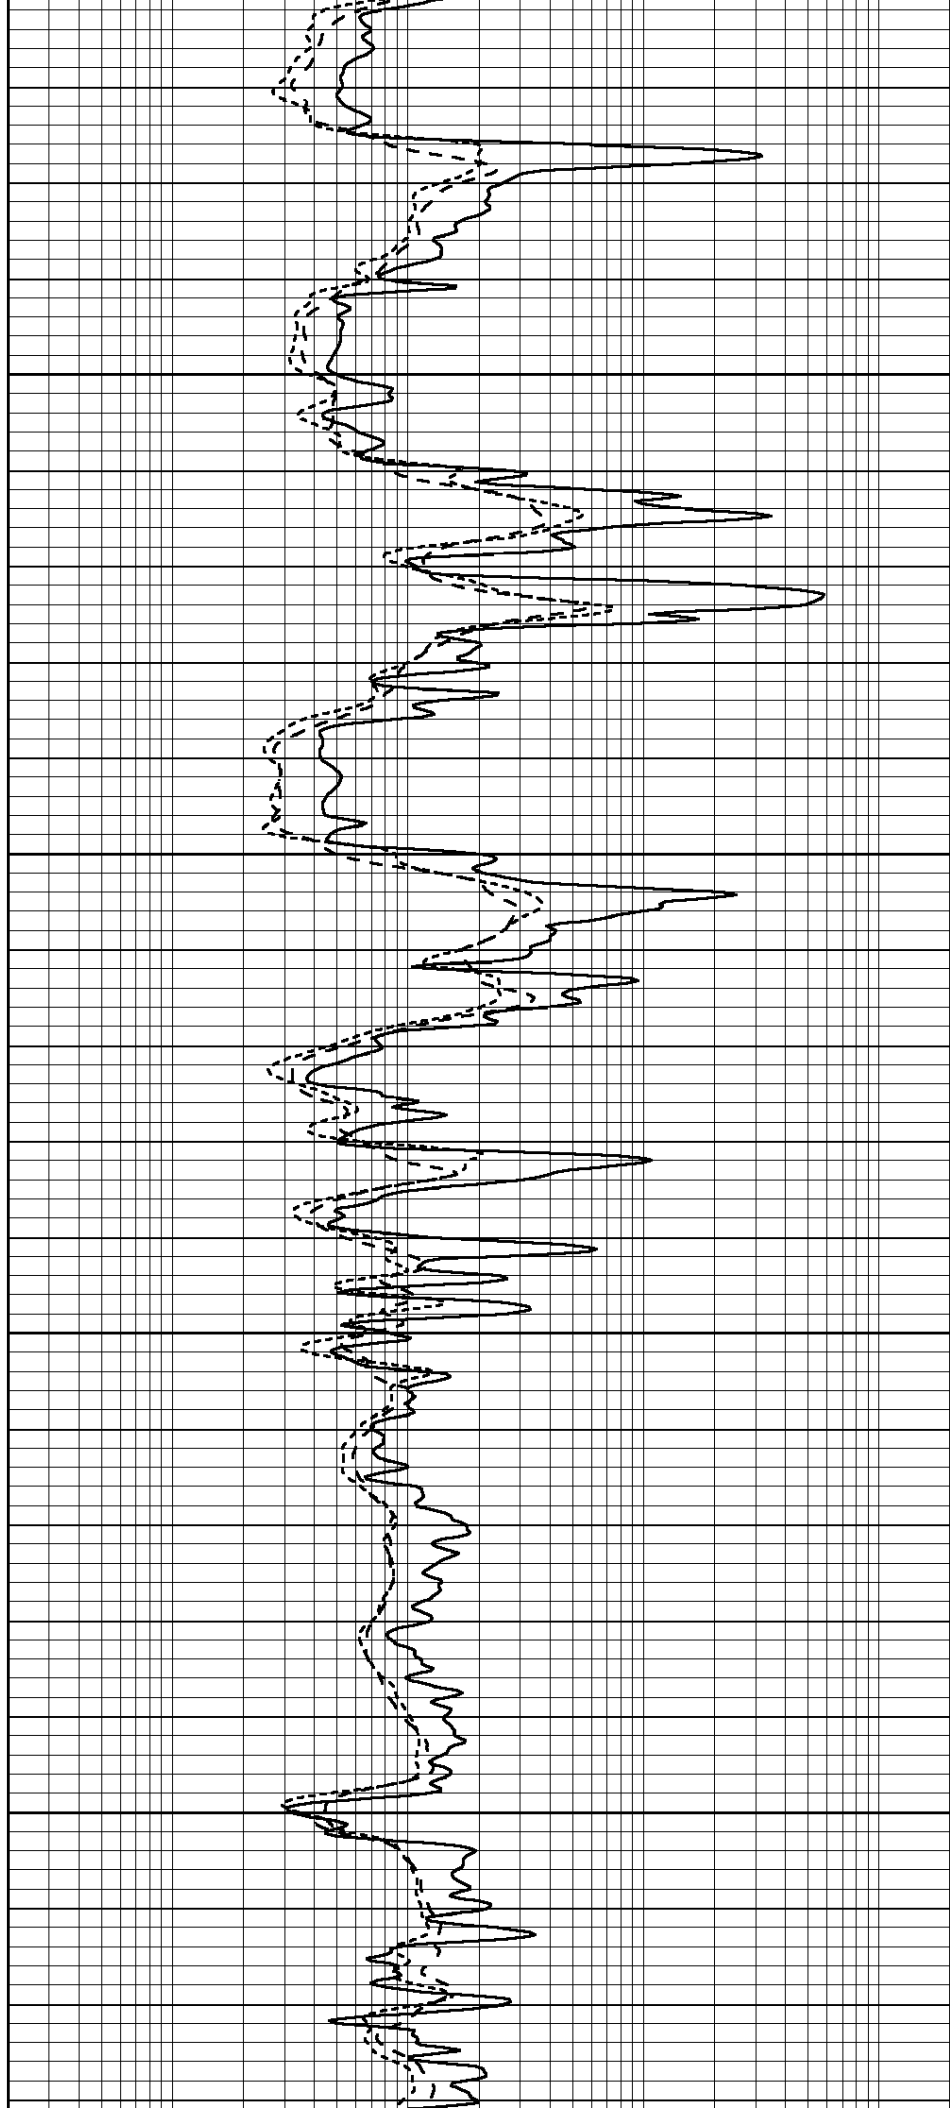

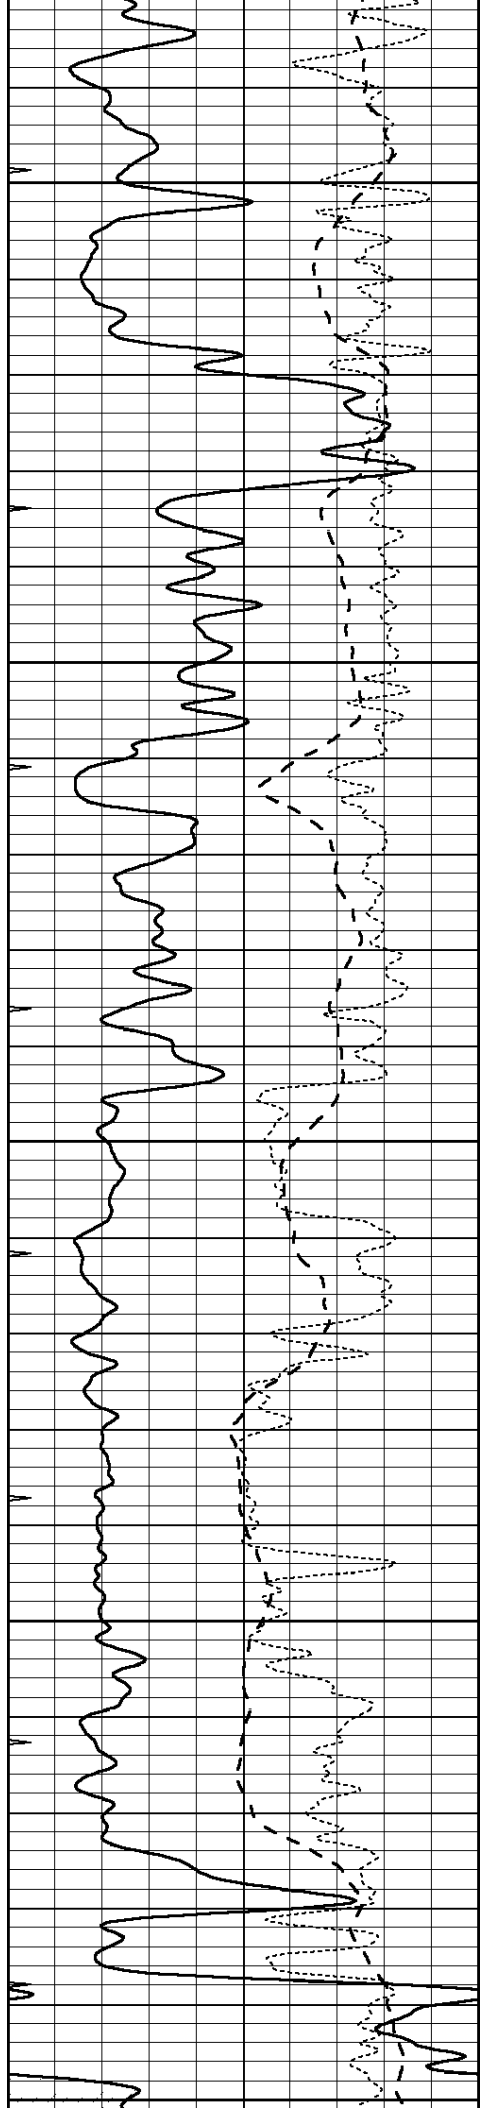


4750

4800


4850

4900

4950

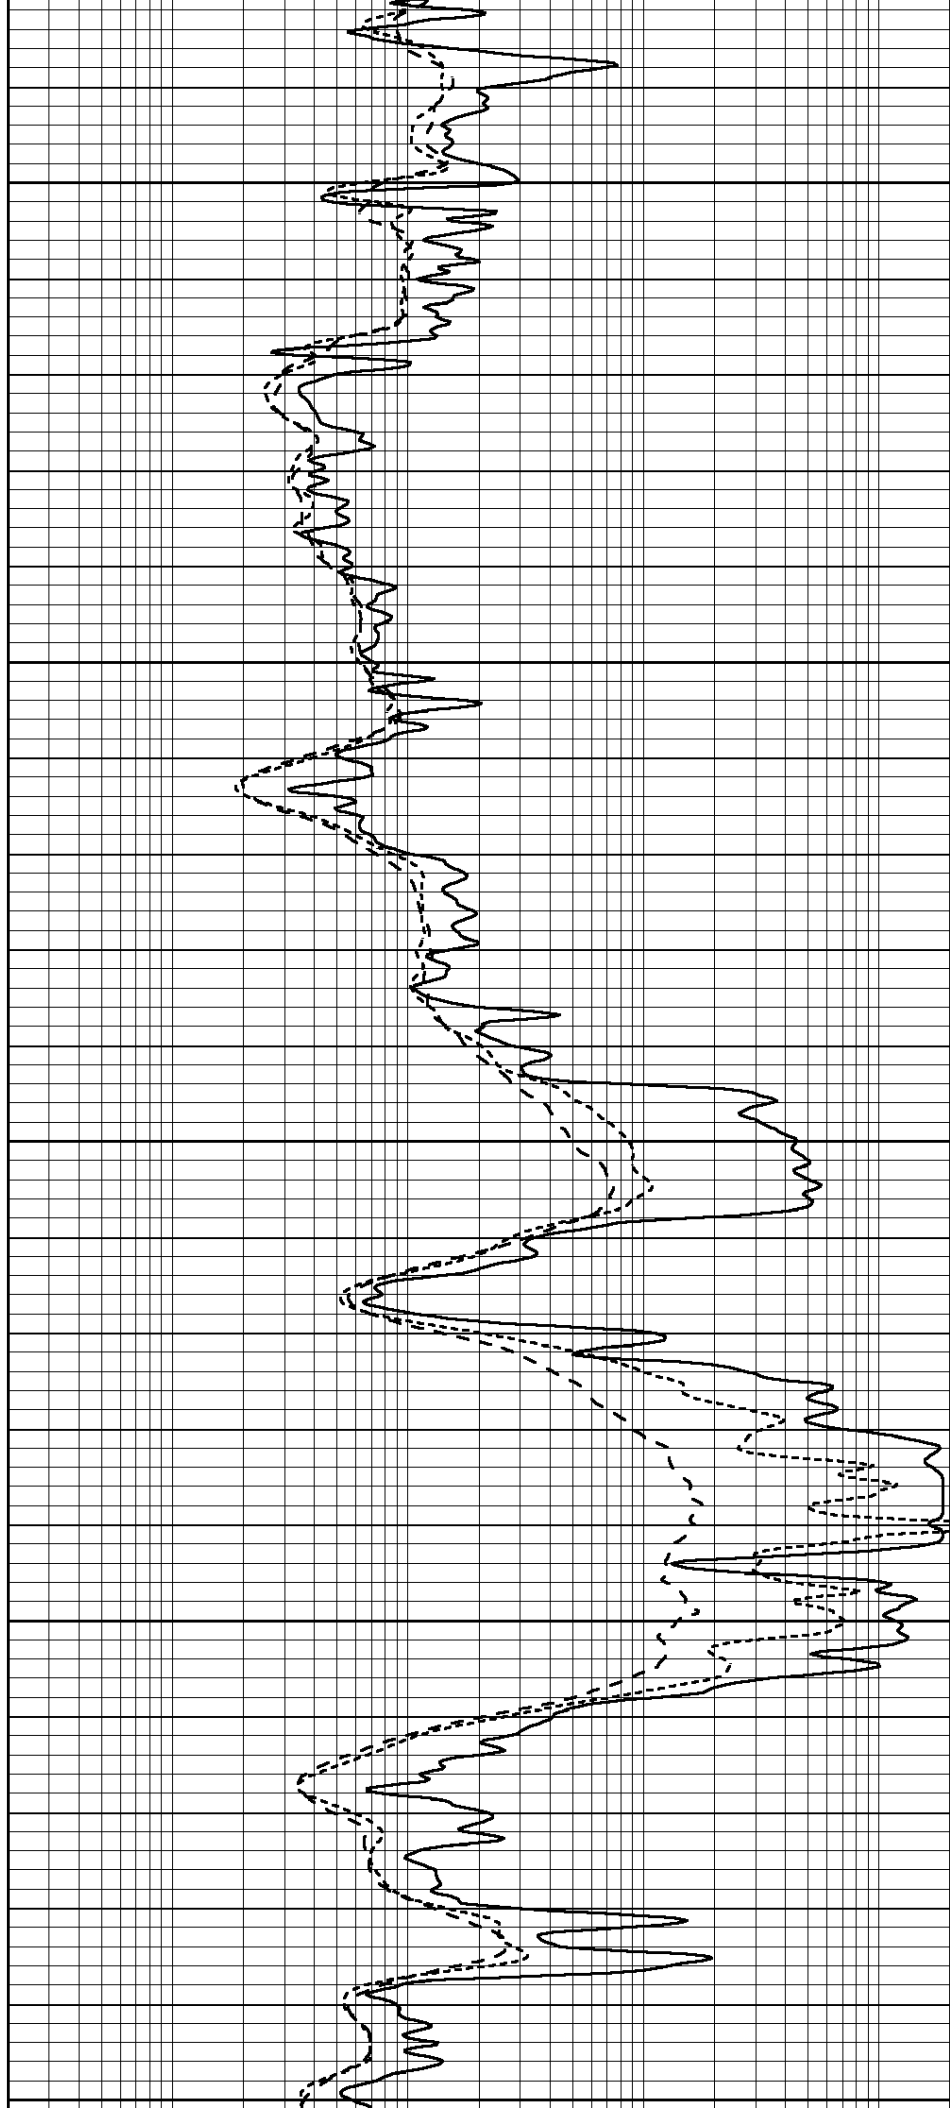




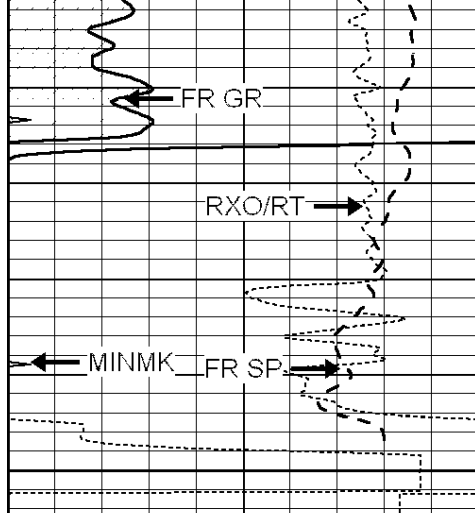


|      |                  |     |
|------|------------------|-----|
| 0    | GAMMA RAY (GAPI) | 150 |
| -100 | SP (mV)          | 100 |
| -250 | Rxo/Rt           | 50  |
| 0    | MINMK            | 20  |

5000

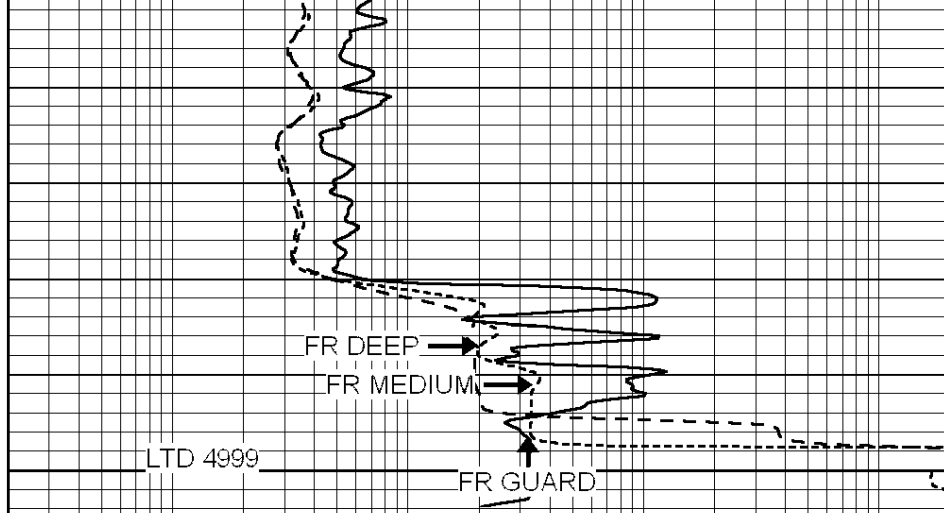

|     |                          |      |
|-----|--------------------------|------|
| 0.2 | SHALLOW GUARD (Ohm-m)    | 2000 |
| 0.2 | DEEP INDUCTION (Ohm-m)   | 2000 |
| 0.2 | MEDIUM INDUCTION (Ohm-m) | 2000 |

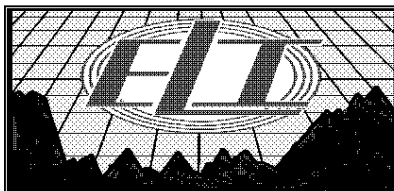


# REPEAT SECTION

Database File: 1833pe.db  
 Dataset Pathname: pass3.6  
 Presentation Format: \_dil  
 Dataset Creation: Mon Oct 16 05:59:54 2017 by Calc SOC 120430  
 Charted by: Depth in Feet scaled 1:240


|      |                  |     |
|------|------------------|-----|
| 0    | GAMMA RAY (GAPI) | 150 |
| -100 | SP (mV)          | 100 |
| -250 | Rxo/Rt           | 50  |
| 0    | MINMK            | 20  |


|     |                          |      |
|-----|--------------------------|------|
| 0.2 | SHALLOW GUARD (Ohm-m)    | 2000 |
| 0.2 | DEEP INDUCTION (Ohm-m)   | 2000 |
| 0.2 | MEDIUM INDUCTION (Ohm-m) | 2000 |

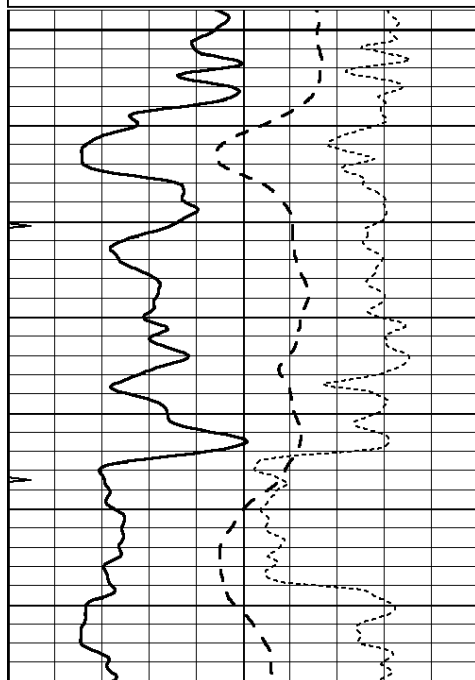

4800

4850

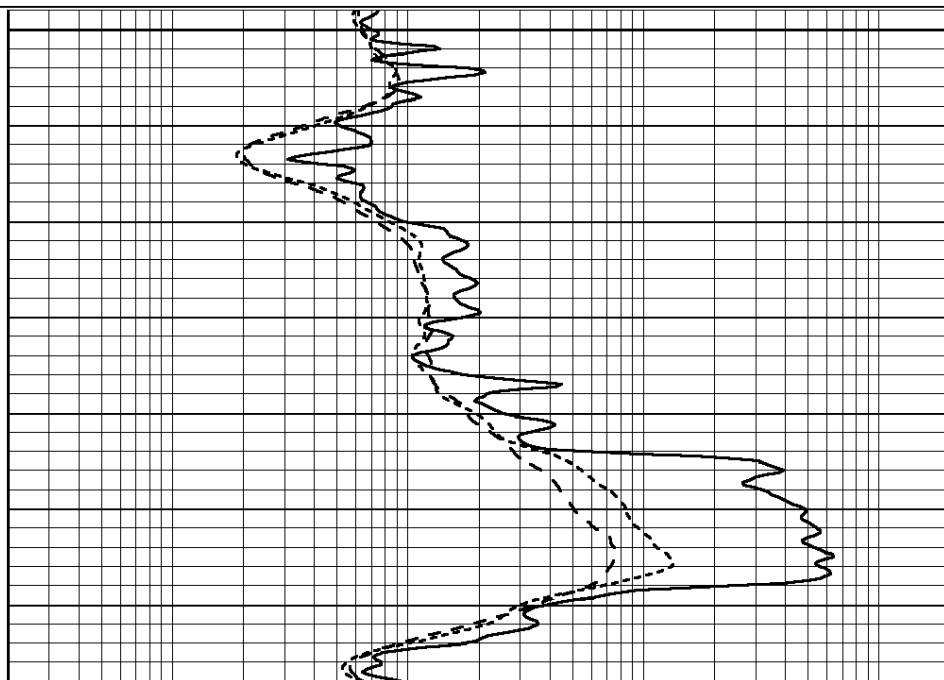

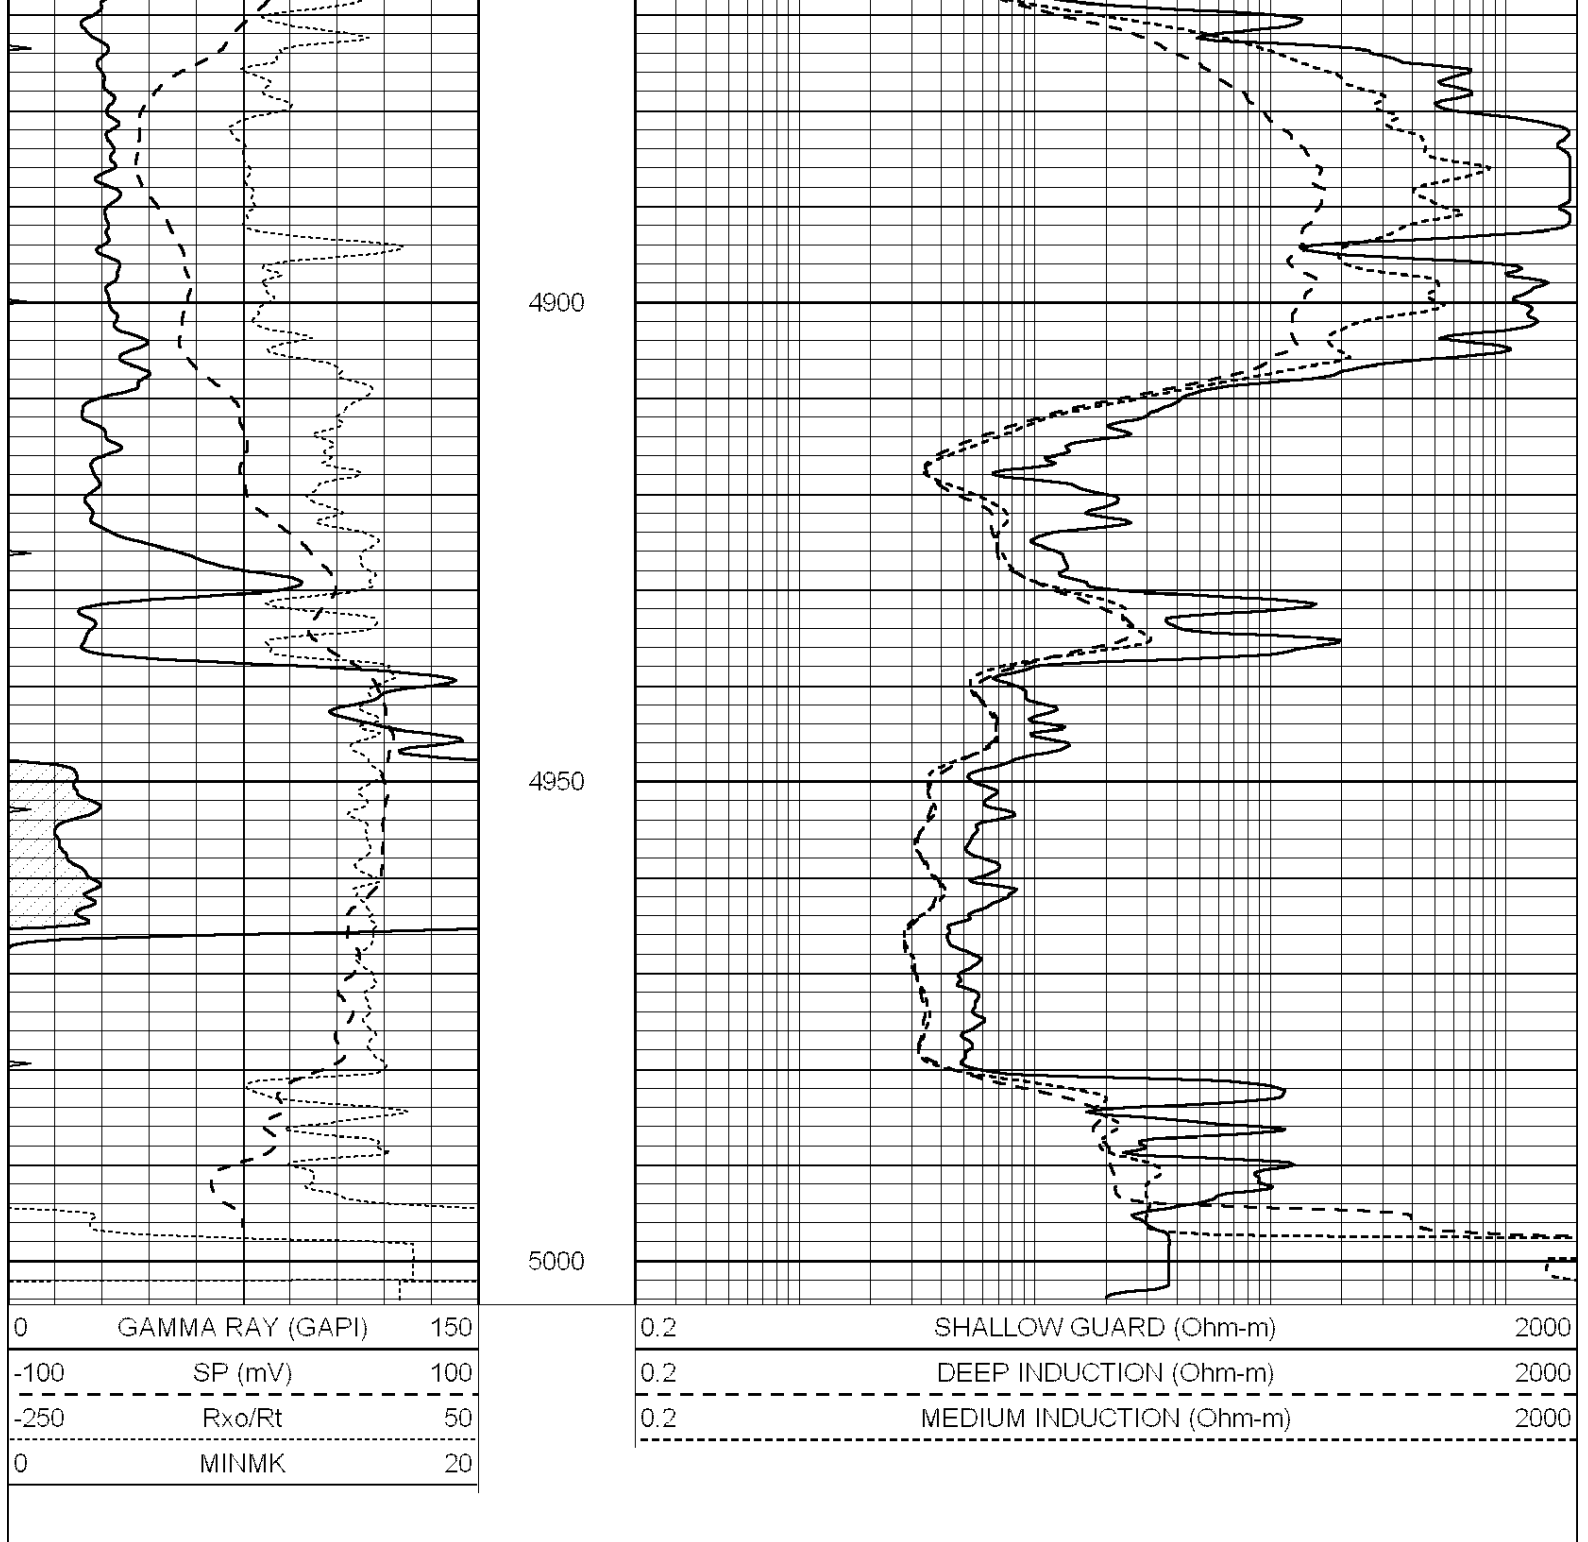

### Calibration Report

Database File: 1598ddn.db  
Dataset Pathname: pass4  
Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

### Dual Induction Calibration Report

Serial-Model: PROBE7-DILG  
Surface Cal Performed: Wed Aug 30 00:06:33 2017  
Downhole Cal Performed: Mon Jul 28 12:02:56 2008  
After Survey Verification Performed: Mon Jul 28 12:02:56 2008

#### Surface Calibration

#### Readings

#### References

#### Results

Loop:

Air

Loop

Air

Loop

m

b

|           |        |       |   |       |         |        |         |         |
|-----------|--------|-------|---|-------|---------|--------|---------|---------|
| Deep      | -0.014 | 0.629 | V | 0.000 | 400.000 | mmho/m | 620.000 | 0.000   |
| Medium    | 0.039  | 0.728 | V | 0.000 | 464.000 | mmho/m | 675.000 | -44.000 |
| Internal: | Zero   | Cal   |   | Zero  | Cal     |        | m       | b       |
| Deep      | 0.011  | 0.610 | V | 0.000 | 400.000 | mmho/m | 667.135 | -7.256  |
| Medium    | 0.005  | 0.712 | V | 0.000 | 464.000 | mmho/m | 655.677 | -3.102  |

|                      |          |        |        |            |          |        |         |       |
|----------------------|----------|--------|--------|------------|----------|--------|---------|-------|
| Downhole Calibration |          |        |        |            |          |        |         |       |
|                      | Readings |        |        | References |          |        | Results |       |
|                      | Zero     | Cal    |        | Zero       | Cal      |        | m'      | b'    |
| Deep                 | 0.000    | 0.000  | mmho/m | 14.508     | 388.384  | mmho/m | 1.000   | 0.000 |
| Medium               | 0.000    | 0.000  | mmho/m | 166.367    | 504.400  | mmho/m | 1.000   | 0.000 |
| LL3                  |          | 7.500  | V      |            | 1400.000 | Ohm-m  |         |       |
|                      |          | 0.000  | V      |            | 20.000   | Ohm-m  |         |       |
|                      |          | -7.200 | V      |            | 4000.000 | mmho-m |         |       |

|                           |          |       |        |         |       |        |         |       |
|---------------------------|----------|-------|--------|---------|-------|--------|---------|-------|
| After Survey Verification |          |       |        |         |       |        |         |       |
|                           | Readings |       |        | Targets |       |        | Results |       |
|                           | Zero     | Cal   |        | Zero    | Cal   |        | m'      | b'    |
| Deep                      | 0.000    | 0.000 | mmho/m | 0.000   | 0.000 | mmho/m | 0.000   | 0.000 |
| Medium                    | 0.000    | 0.000 | mmho/m | 0.000   | 0.000 | mmho/m | 0.000   | 0.000 |
| LL3                       |          | 1.000 | Ohm-m  |         | 1.000 | Ohm-m  |         |       |
|                           |          | 0.000 | Ohm-m  |         | 0.000 | Ohm-m  |         |       |
|                           |          | 1.000 | mmho-m |         | 1.000 | mmho-m |         |       |

|                                  |  |  |            |  |  |  |  |  |
|----------------------------------|--|--|------------|--|--|--|--|--|
| Litho Density Calibration Report |  |  |            |  |  |  |  |  |
| Serial: 002                      |  |  | Model: PRB |  |  |  |  |  |

|                    |            |             |          |                                    |  |  |         |      |
|--------------------|------------|-------------|----------|------------------------------------|--|--|---------|------|
| Master Calibration |            |             |          | Performed Mon Aug 21 11:27:42 2017 |  |  |         |      |
|                    | Background | Magnesium   | Aluminum | Sandstone                          |  |  |         |      |
| Window 1           | 837.1      | 10632.5     | 2945.1   | 12110.1                            |  |  |         | cps  |
| Window 2           | 772.0      | 9117.4      | 2570.1   | 10197.3                            |  |  |         | cps  |
| Window 3           | 631.7      | 4669.0      | 1481.9   | 5042.9                             |  |  |         | cps  |
| Window 4           | 187.0      | 187.5       | 185.9    | 189.9                              |  |  |         | cps  |
| Long Space         | 0.0        | 8345.4      | 1798.1   | 9425.3                             |  |  |         | cps  |
| Short Space        | 1.1        | 1927.9      | 1285.9   | 2050.2                             |  |  |         | cps  |
| Rho                |            | 1.7100      | 2.5960   | 1.3800                             |  |  |         | g/cc |
| Pe                 |            | 0.0000      | 2.5700   | 1.5500                             |  |  |         |      |
| Rib Angle          | : 45.2     | Rib Slope   | : 1.008  | Density/Spine Ratio                |  |  | : 0.558 |      |
| Spine Angle        | : 75.2     | Spine Slope | : 3.790  | Spine Intercept                    |  |  | : -19.6 |      |

|                            |     |        |        |                                    |  |  |  |      |
|----------------------------|-----|--------|--------|------------------------------------|--|--|--|------|
| Before Survey Verification |     |        |        | Performed Wed Dec 31 18:00:00 1969 |  |  |  |      |
| Window 1                   | 0.0 | 0.0    | 0.0    | 0.0                                |  |  |  | cps  |
| Window 2                   | 0.0 | 0.0    | 0.0    | 0.0                                |  |  |  | cps  |
| Window 3                   | 0.0 | 0.0    | 0.0    | 0.0                                |  |  |  | cps  |
| Window 4                   | 0.0 | 0.0    | 0.0    | 0.0                                |  |  |  | cps  |
| Long Space                 | 0.0 | 0.0    | 0.0    | 0.0                                |  |  |  | cps  |
| Short Space                | 0.0 | 0.0    | 0.0    | 0.0                                |  |  |  | cps  |
| Measured Rho               |     | 0.0000 | 0.0000 | 0.0000                             |  |  |  | g/cc |
| Measured Correction        |     | 0.0000 | 0.0000 | 0.0000                             |  |  |  | g/cc |
| Measured Pe                |     |        | 0.0000 | 0.0000                             |  |  |  |      |

|                           |  |  |  |                                    |  |  |  |  |
|---------------------------|--|--|--|------------------------------------|--|--|--|--|
| After Survey Verification |  |  |  | Performed Wed Dec 31 18:00:00 1969 |  |  |  |  |
|---------------------------|--|--|--|------------------------------------|--|--|--|--|

|                     |     |        |        |        |      |
|---------------------|-----|--------|--------|--------|------|
| Window 1            | 0.0 | 0.0    | 0.0    | 0.0    | cps  |
| Window 2            | 0.0 | 0.0    | 0.0    | 0.0    | cps  |
| Window 3            | 0.0 | 0.0    | 0.0    | 0.0    | cps  |
| Window 4            | 0.0 | 0.0    | 0.0    | 0.0    | cps  |
| Long Space          | 0.0 | 0.0    | 0.0    | 0.0    | cps  |
| Short Space         | 0.0 | 0.0    | 0.0    | 0.0    | cps  |
| Measured Rho        |     | 0.0000 | 0.0000 | 0.0000 | g/cc |
| Measured Correction |     | 0.0000 | 0.0000 | 0.0000 | g/cc |
| Measured Pe         |     |        | 0.0000 | 0.0000 |      |

|  |
|--|
|  |
|--|

Compensated Neutron Calibration Report

|                |        |
|----------------|--------|
| Serial Number: | 070808 |
| Tool Model:    | Probe  |

|                         |          |          |        |  |
|-------------------------|----------|----------|--------|--|
| PRE-SURVEY VERIFICATION |          |          |        |  |
| Detector                | Readings | Measured | Target |  |
| Short Space             | cps      |          |        |  |
| Long Space              | cps      | pu       | pu     |  |

|                          |          |          |        |  |
|--------------------------|----------|----------|--------|--|
| POST-SURVEY VERIFICATION |          |          |        |  |
| Detector                 | Readings | Measured | Target |  |
| Short Space              | cps      |          |        |  |
| Long Space               | cps      | pu       | pu     |  |

Gamma Ray Calibration Report

|                     |                          |          |
|---------------------|--------------------------|----------|
| Serial Number:      | 070558                   |          |
| Tool Model:         | OPEN_GR                  |          |
| Performed:          | Wed May 31 00:09:32 2017 |          |
| Calibrator Value:   | 1.0                      | GAPI     |
| Background Reading: | 0.0                      | cps      |
| Calibrator Reading: | 1.0                      | cps      |
| Sensitivity:        | 0.2800                   | GAPI/cps |