

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22309-00-00
Spot: N2SWSW Sec/Twnshp/Rge: 4-30S-13W
976 feet from S Section Line, 4634 feet from E Section Line
Lease Name: LAMBERT D-2 Well #: 1-4
County: BARBER Total Vertical Depth: 4764 feet

Operator License No.: 5056
Op Name: HOLL, F.G., COMPANY L.L.C.
Address: 9431 E CENTRAL, SUITE 100
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
COND	13.38	150		WITH 140 SX CMT
PROD	4.5	4747	3400	WITH 275 SX CMT
SURF	8.625	1144		WITH 425 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/17/2006 9:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: TERRY BAIRD Company: F.G. HOLL Phone: (316) 686-8481

Proposed Plugging Method: SAND BACK WITH 4 SX CMT. PLUG AT 1150' WITH 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/17/2006 10:30 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4400' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH CASING. 1ST PLUG AT 1150' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4549	4555		
4543	4545		
4538	4540		
4534	4536		
4449	4468		

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICE.

Plugged through: CSG

INVOICED
DATE 2-28-06
INV. NO 2006061195

District: 01

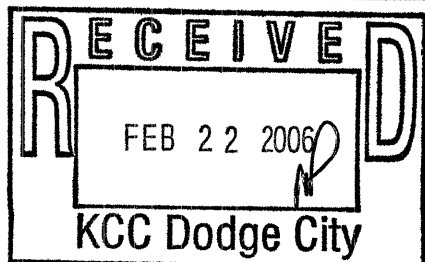

Signed

Stephen J. Goff
(TECHNICIAN)

RECEIVED
FEB 27 2006
KCC WICHITA

Form CP-23