

TO:  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION - PLUGGING  
 130 SOUTH MARKET, SUITE 2078  
 WICHITA, KANSAS 67202

API Well Number: 15-007-20761-00-02/01  
 Spot: N2SWSW Sec/Twnshp/Rge: 28-31S-12W  
1060 feet from S Section Line, 660 feet from W Section Line  
 Lease Name: GRESS OWWO Well #: 1  
 County: BARBER Total Vertical Depth: 4330 feet

Operator License No.: 33168  
 Op Name: WOOLSEY OPERATING COMPANY, LL  
 Address: 125 N. MARKET, SUITE 1000  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2550		WITH 2 SX CMT
CIBP		4160		WITH 2 SX CMT
PROD	4.5	4329	2200	WITH 200 SX CMT
SURF	8.625	335		WITH 300 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 01/30/2006 9:30 AM  
 Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION  
 Proposal Rcvd. from: JOHN SWINFORD Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: CIBP @ 4160' WITH 2 SX CMT. CIBP @ 2550' & 2 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
 Date/Time Plugging Completed: 01/30/2006 10:15 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 4160' & PUT 2 SX CMT ON TOP OF CIBP. SET ANOTHER CIBP @ 2550' & PUT 2 SX CMT ON TOP OF CIBP. SPOT PLUGS THROUGH 2 3/8" TUBING. 1ST PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 360' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4214	4244		
3933	3938		
2600	2611		

RECEIVED  
 FEB 06 2006  
 KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

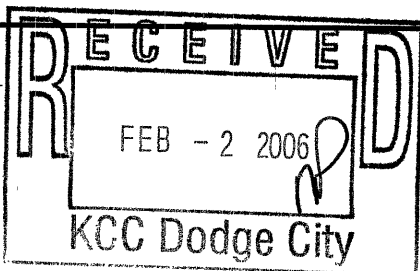

Signed

*Stephen J. Pfeifer*  
 (TECHNICIAN)

INVOICED  
 DATE 2-7-06  
 INV. NO. 2006061084

*[Handwritten signature]*