

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-075-20322-00-00  
Spot: SE Sec/Twnshp/Rge: 20-24S-40W  
1320 feet from S Section Line, 1320 feet from E Section Line  
Lease Name: JOHNSON Well #: 1-A  
County: HAMILTON Total Vertical Depth: 2410 feet

Operator License No.: 32334  
Op Name: CHESAPEAKE OPERATING, INC.  
Address: PO BOX 18496 6200 N WESTERN AVE.  
OKLAHOMA CITY, OK 73154

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	2409	0	WITH 700 SX CMT
SURF	8.625	542		WITH 400 SX CMT

\$ 78,33

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 02/09/2006 9:00 AM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed Plugging Method: PUMP 25 SX CMT WITH 300# HULLS. PUMP CMT TO SURFACE. PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 02/09/2006 12:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 25 SX CMT WITH 300# HULLS. PUMP 115 SX CMT TO SURFACE. PRESSURE TO 500#. HELD. PUMP 5 SX CMT DOWN 4 1/2" X 8 5/8" ANNULUS. PRESSURE TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
2340	2348		

**INVOICED**


DATE 2-23-06

INV. NO. 2006061173

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

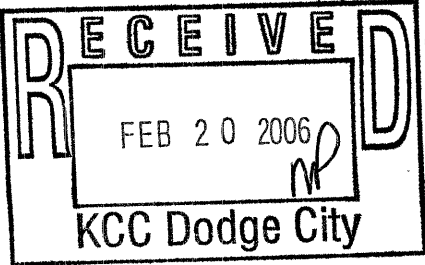

Signed [Signature]  
(TECHNICIAN)

RECEIVED  
FEB 23 2006  
KCC WICHITA

Form CS-205