

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22262-00-00
Spot: SESE Sec/Twnshp/Rge: 31-33S-13W
660 feet from S Section Line, 710 feet from E Section Line
Lease Name: BAIER Well #: 2
County: BARBER Total Vertical Depth: 4952 feet

Operator License No.: 33168
Op Name: WOOLSEY OPERATING COMPANY, LL
Address: 125 N. MARKET, SUITE 1000
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4750		WITH 2 SX CMT
PROD	4.5	4838	2900	WITH 155 SX CMT
SURF	8.625	388		WITH 275 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 02/23/2006 9:00 AM
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
Proposal Rcvd. from: JOHN SWINFORD Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: CIBP @ 4788' WITH 2 SX CMT. PLUG AT 830' WITH 300# HULLS - 10 SX GEL - 50 SX CMT. PLUG AT 400' WITH 50 SX CMT. PLUG AT 40-0' WITH 15 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/23/2006 9:55 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SET CIBP @ 4750' WITH 2 SX CMT. SPOTTED PLUGS THROUGH TUBING. 1ST PLUG AT 842' WITH 300# HULLS - 10 SX GEL - 50 SX CMT. 2ND PLUG AT 406' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 15 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4838	4952	OH	

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

INVOICED
DATE 3-7-06
INV. NO 2006061233

District: 01

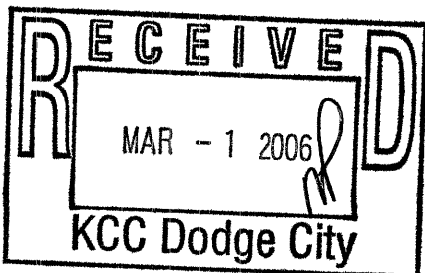

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED
MAR 06 2006
KCC WICHITA

For [Signature]