



Weatherford[®]

MICRORESISTIVITY LOG

COMPANY **O'BRIEN ENERGY RESOURCES CORP.**

WELL **MARY #1-1**

FIELD **GRANGER CREEK**

PROVINCE/COUNTY **CLARK**

COUNTRY/STATE **U.S.A. / KANSAS**

LOCATION **2277' FNL & 2262' FEL**

SEC 1 **TWP 31S RGE 22W** Other Services **MAI/MFE**

Latitude **MDN/MPD**

Longitude **MDN/MPD**

API Number **15-025-21588**

Permanent Datum GL, Elevation **2252 feet**

Log Measured From **KB** Elevations: **KB 2265.00**

Drilling Measured From **KB @ 13 FEET** **DF 2263.00**

Date **19-DEC-2015** **GL 2252.00**

Run Number **ONE**

Service Order **4558-137748401**

Depth Driller **6500.00** feet

Depth Logger **6502.00** feet

First Reading **6469.00** feet

Last Reading **4000.00** feet

Casing Driller **644.00** feet

Casing Logger **647.00** feet

Bit Size **7.875** inches

Hole Fluid Type **CHEMICAL**

Density / Viscosity **9.45 lb/USg 48.00 CP**

PH / Fluid Loss **9.50 9.20 ml/30Min**

Sample Source **FLOWLINE**

Rm @ Measured Temp **0.70 @ 75.0 ohm-m**

Rmf @ Measured Temp **0.56 @ 75.0 ohm-m**

Rmc @ Measured Temp **0.84 @ 75.0 ohm-m**

Source Rmf / Rmc **CALC CALC**

Rm @ BHT **0.44 @ 119.0 ohm-m**

Time Since Circulation **5 HOURS**

Max Recorded Temp **119.00** deg F

Equipment / Base **13096 OKC**

Recorded By **ADAM SILL**

Witnessed By **ROGER PEARSON**

Witnessed By **PETE DEBENHAM**

BOREHOLE RECORD

Last Edited: 19-DEC-2015 18:42


| Bit Size inches | Depth From feet | Depth To feet |
|--------------------|--------------------|------------------|
| 7.875 | 644.00 | 6500.00 |

CASING RECORD


| Type | Size inches | Depth From feet | Shoe Depth feet | Weight pounds/ft |
|---------|----------------|--------------------|--------------------|---------------------|
| SURFACE | 8.625 | 0.00 | 644.00 | 24.00 |


REMARKS


- SOFTWARE ISSUE: WLS 15.03.5939.
- RUN ONE: MCG, MML, MDN, MPD, MFE, MAI RUN IN COMBINATION.
 - HARDWARE: DUAL BOWSPRING USED ON MDN.
 - 0.5 INCH STANDOFF USED ON MFE.
 - 0.5 INCH STANDOFF USED ON MAI.
- 2.71 G/CC LIMESTONE DENSITY MATRIX USED TO CALCULATE POROSITY.
- BOREHOLE RUGOSITY, TIGHT PULLS, AND WASHOUTS WILL AFFECT DATA QUALITY.
- ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.
- TOTAL HOLE VOLUME FROM TD TO SURFACE CASING: 2352 CU.FT.
- ANNULAR HOLE VOLUME WITH 4.5 INCH PRODUCTION CASING FROM TD TO 4000 FEET: 563 CU.FT.
- RIG: DIJKE #9

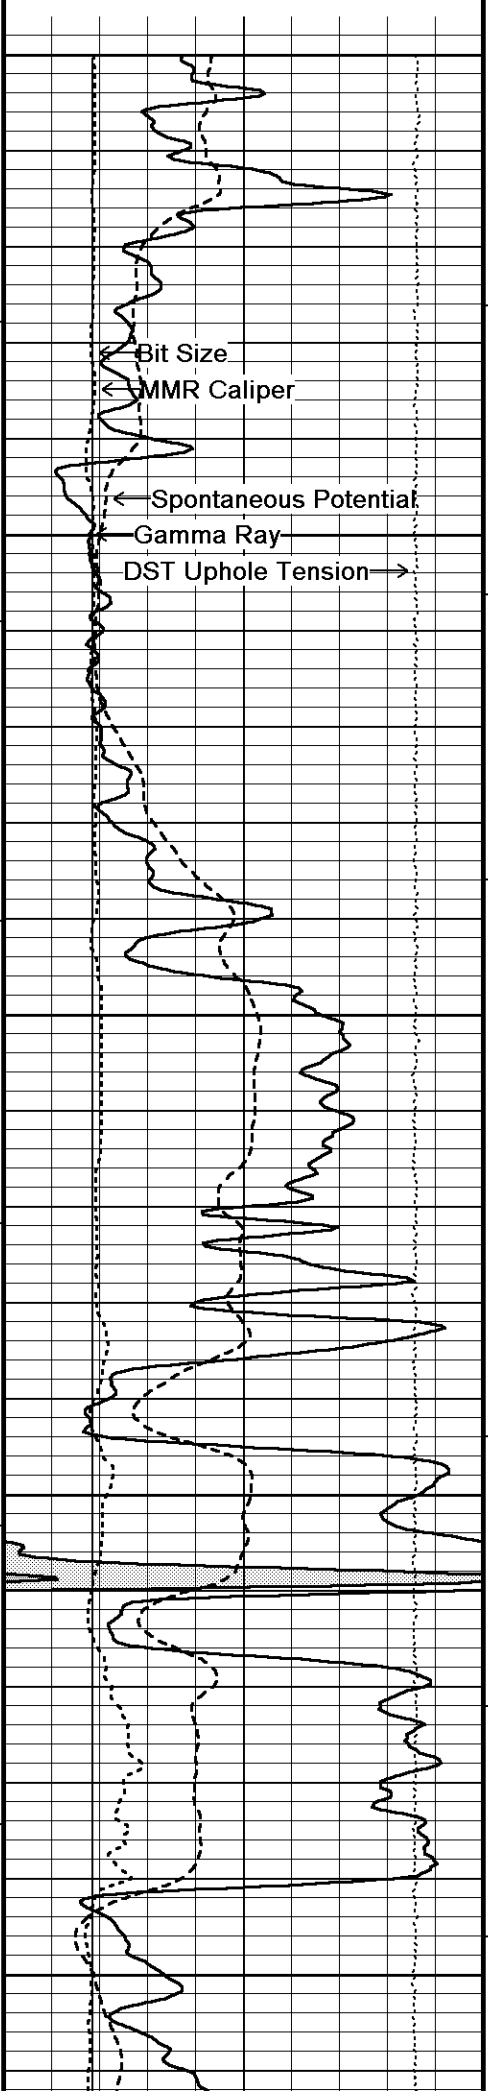




4000
98°
4050
98°
4100
800
98°
4150
99°
4200

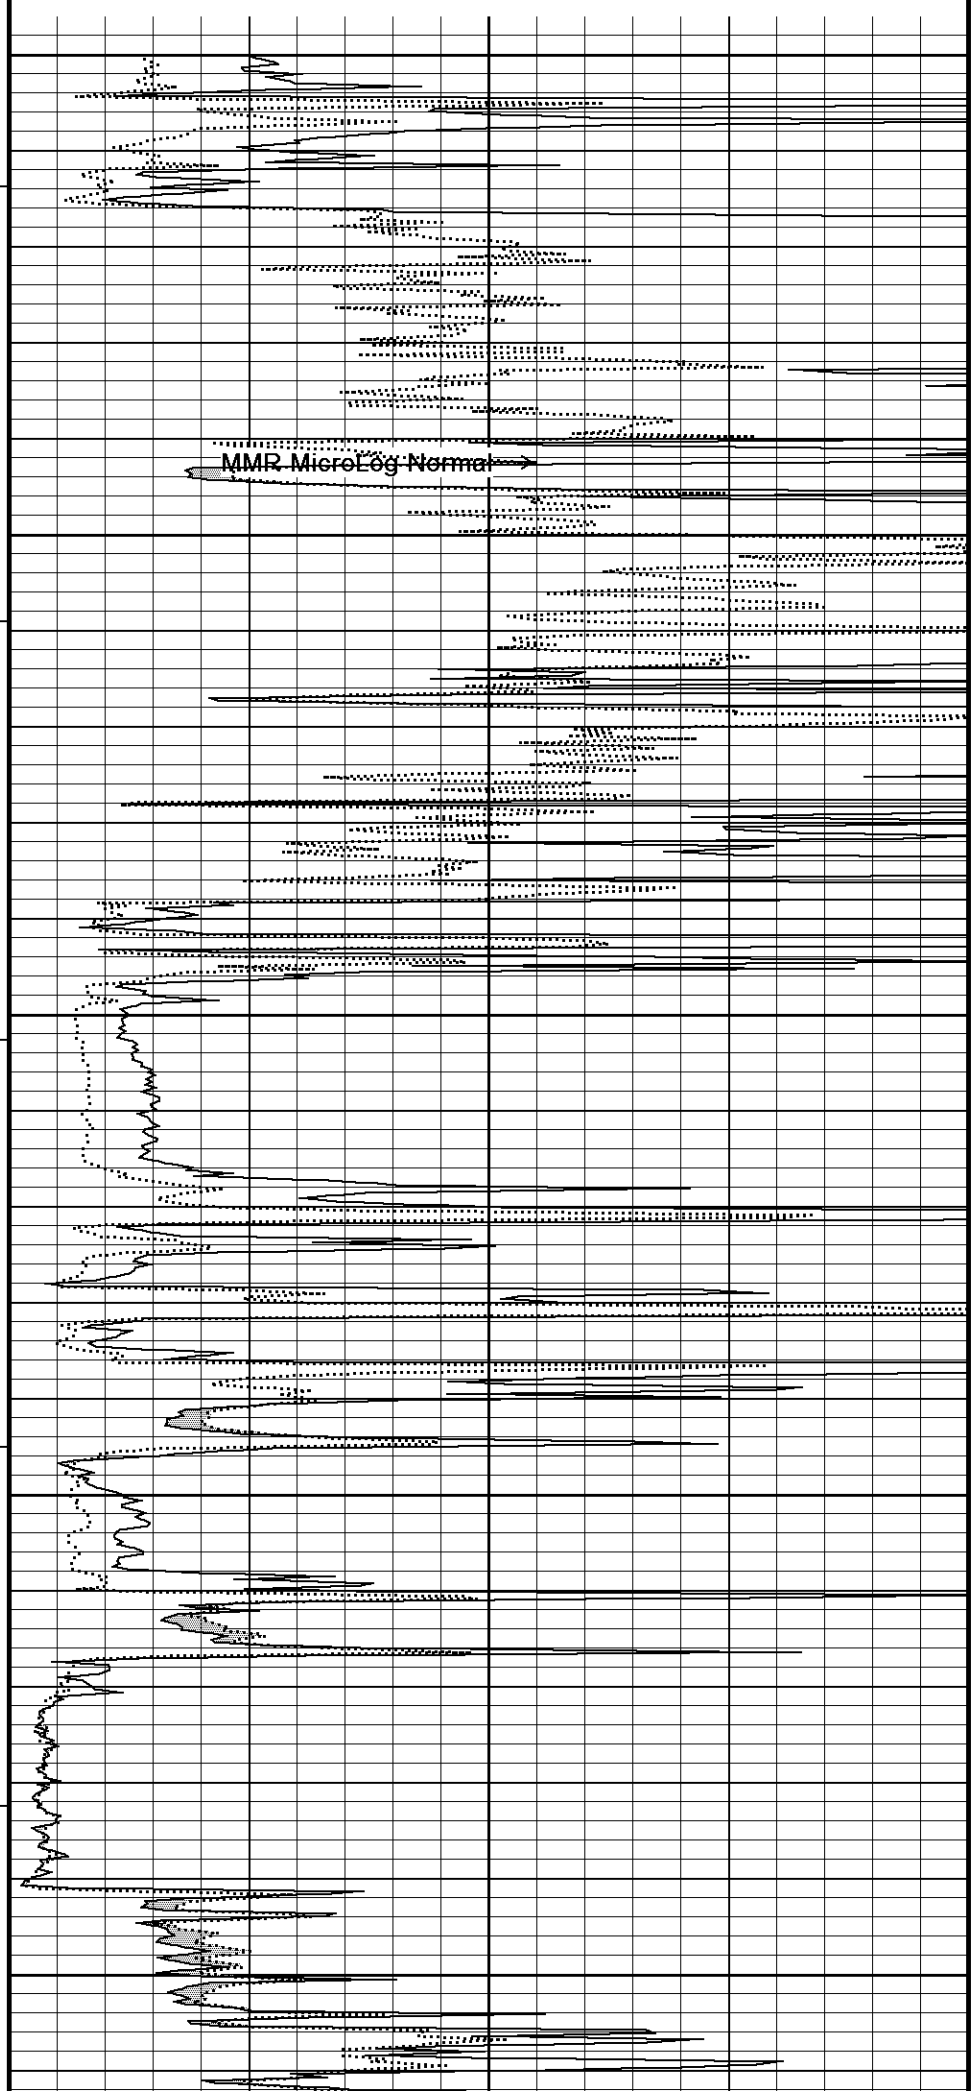


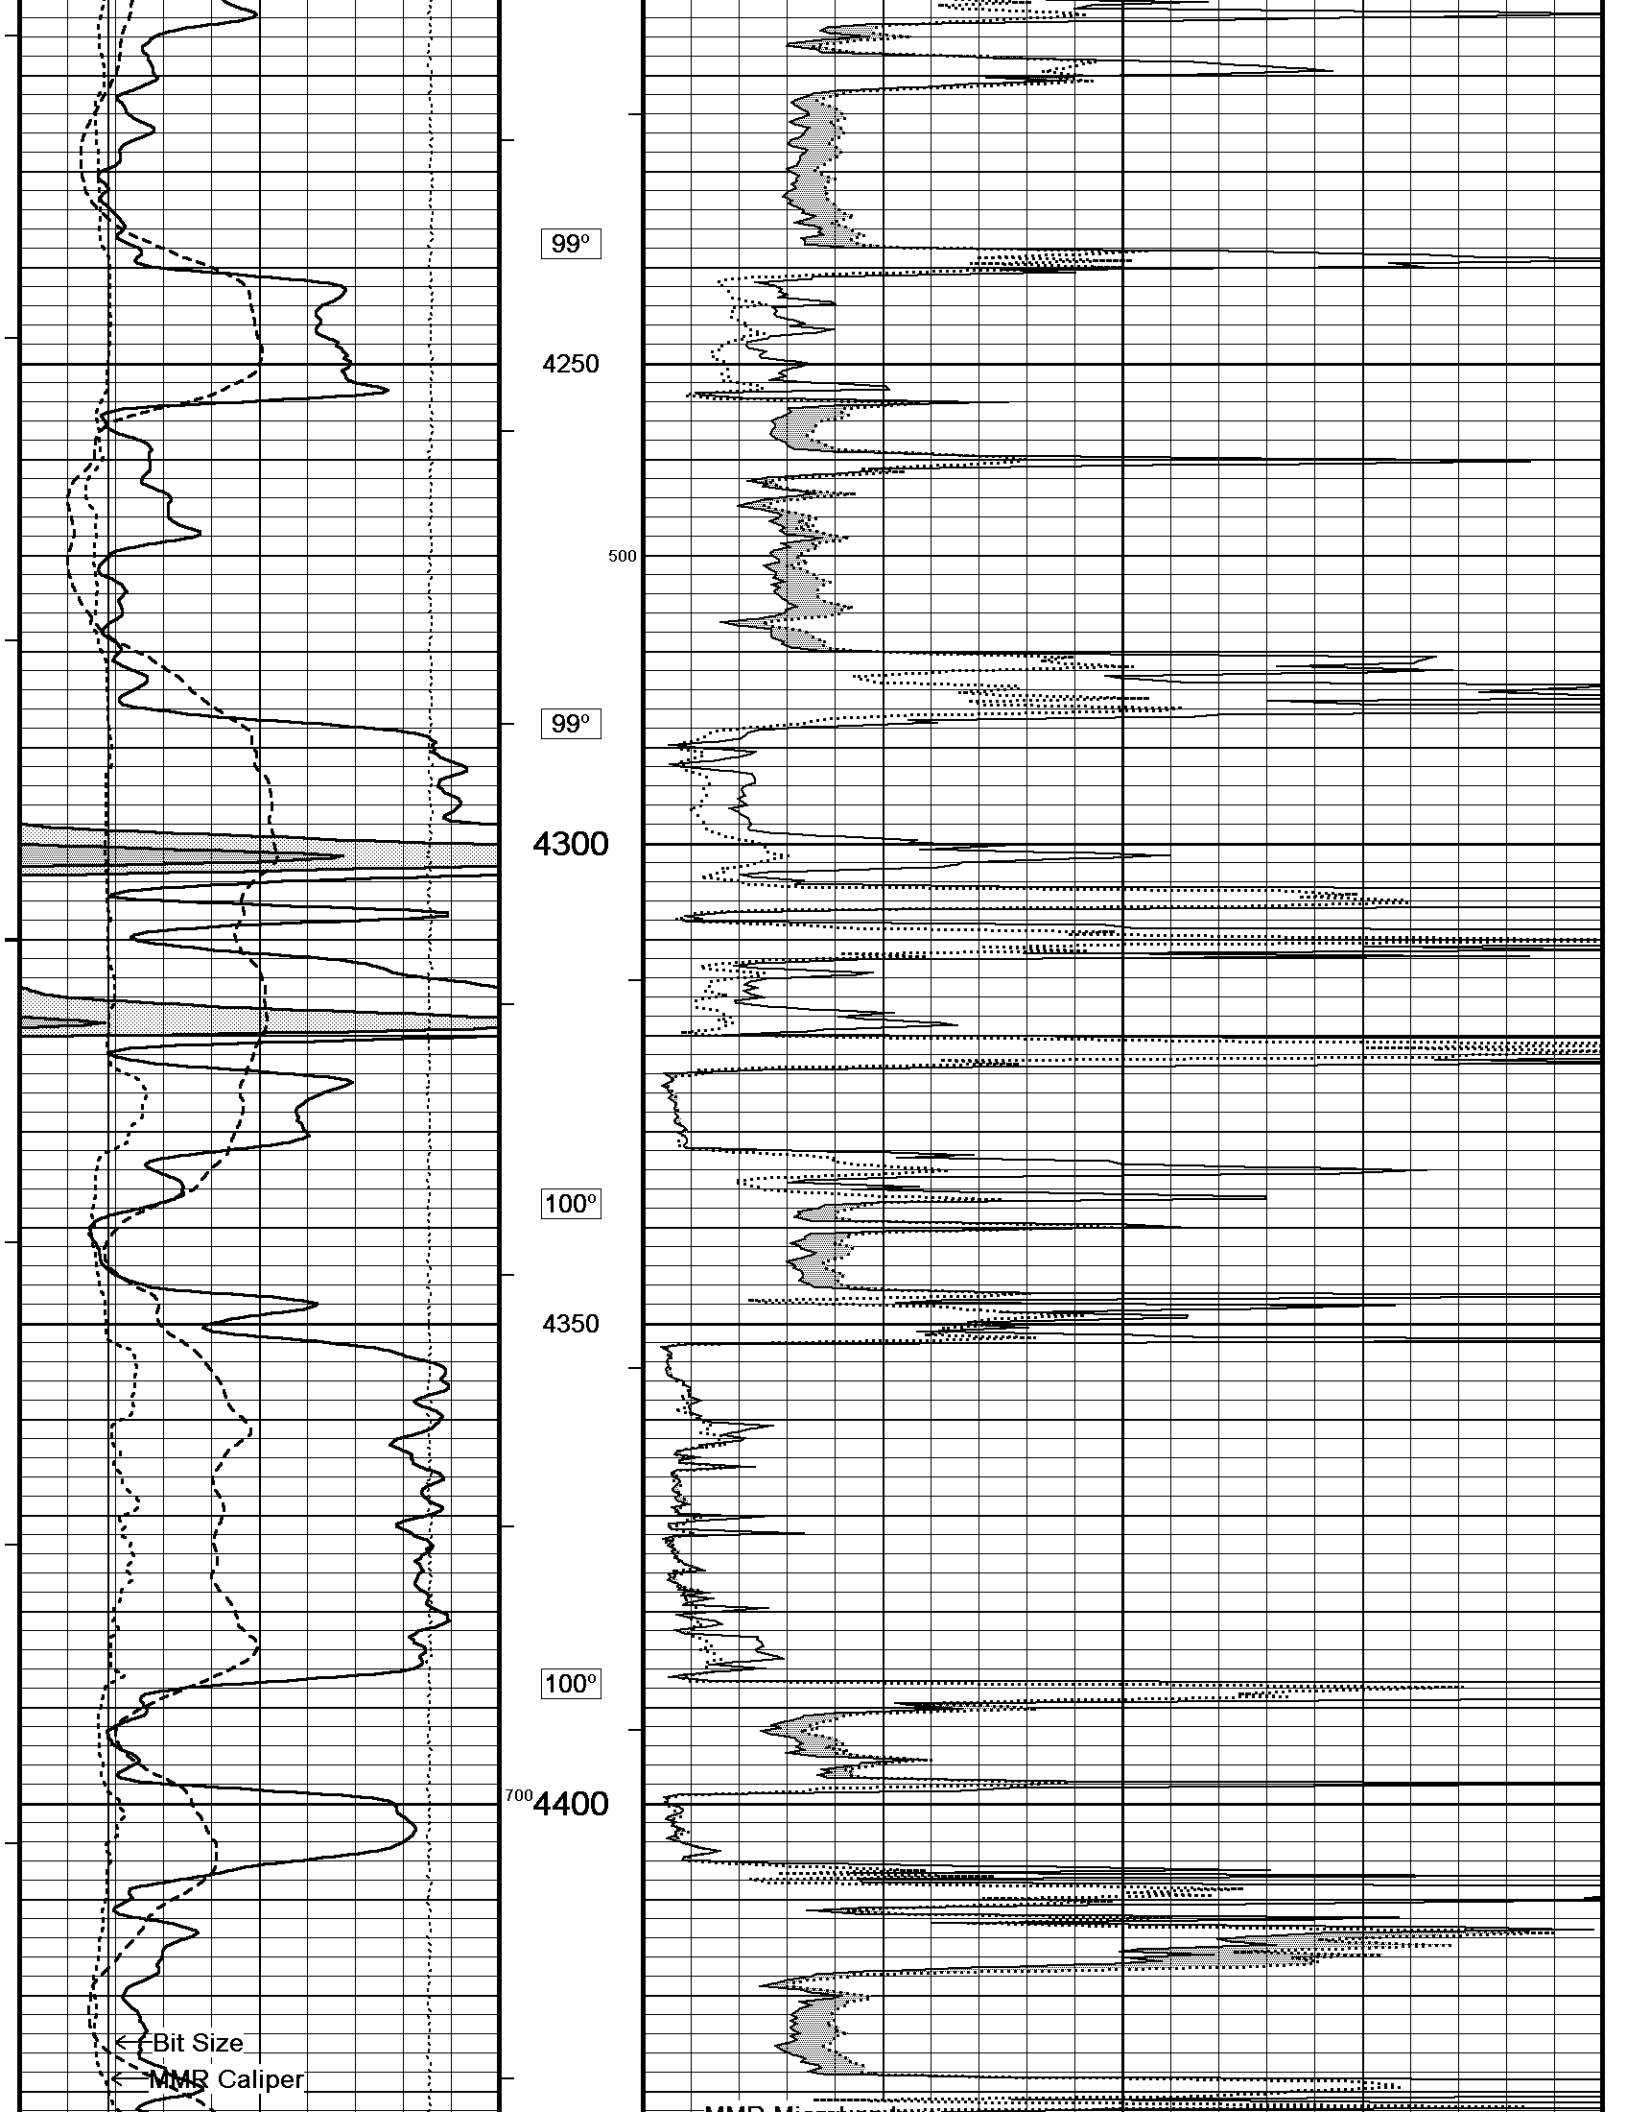


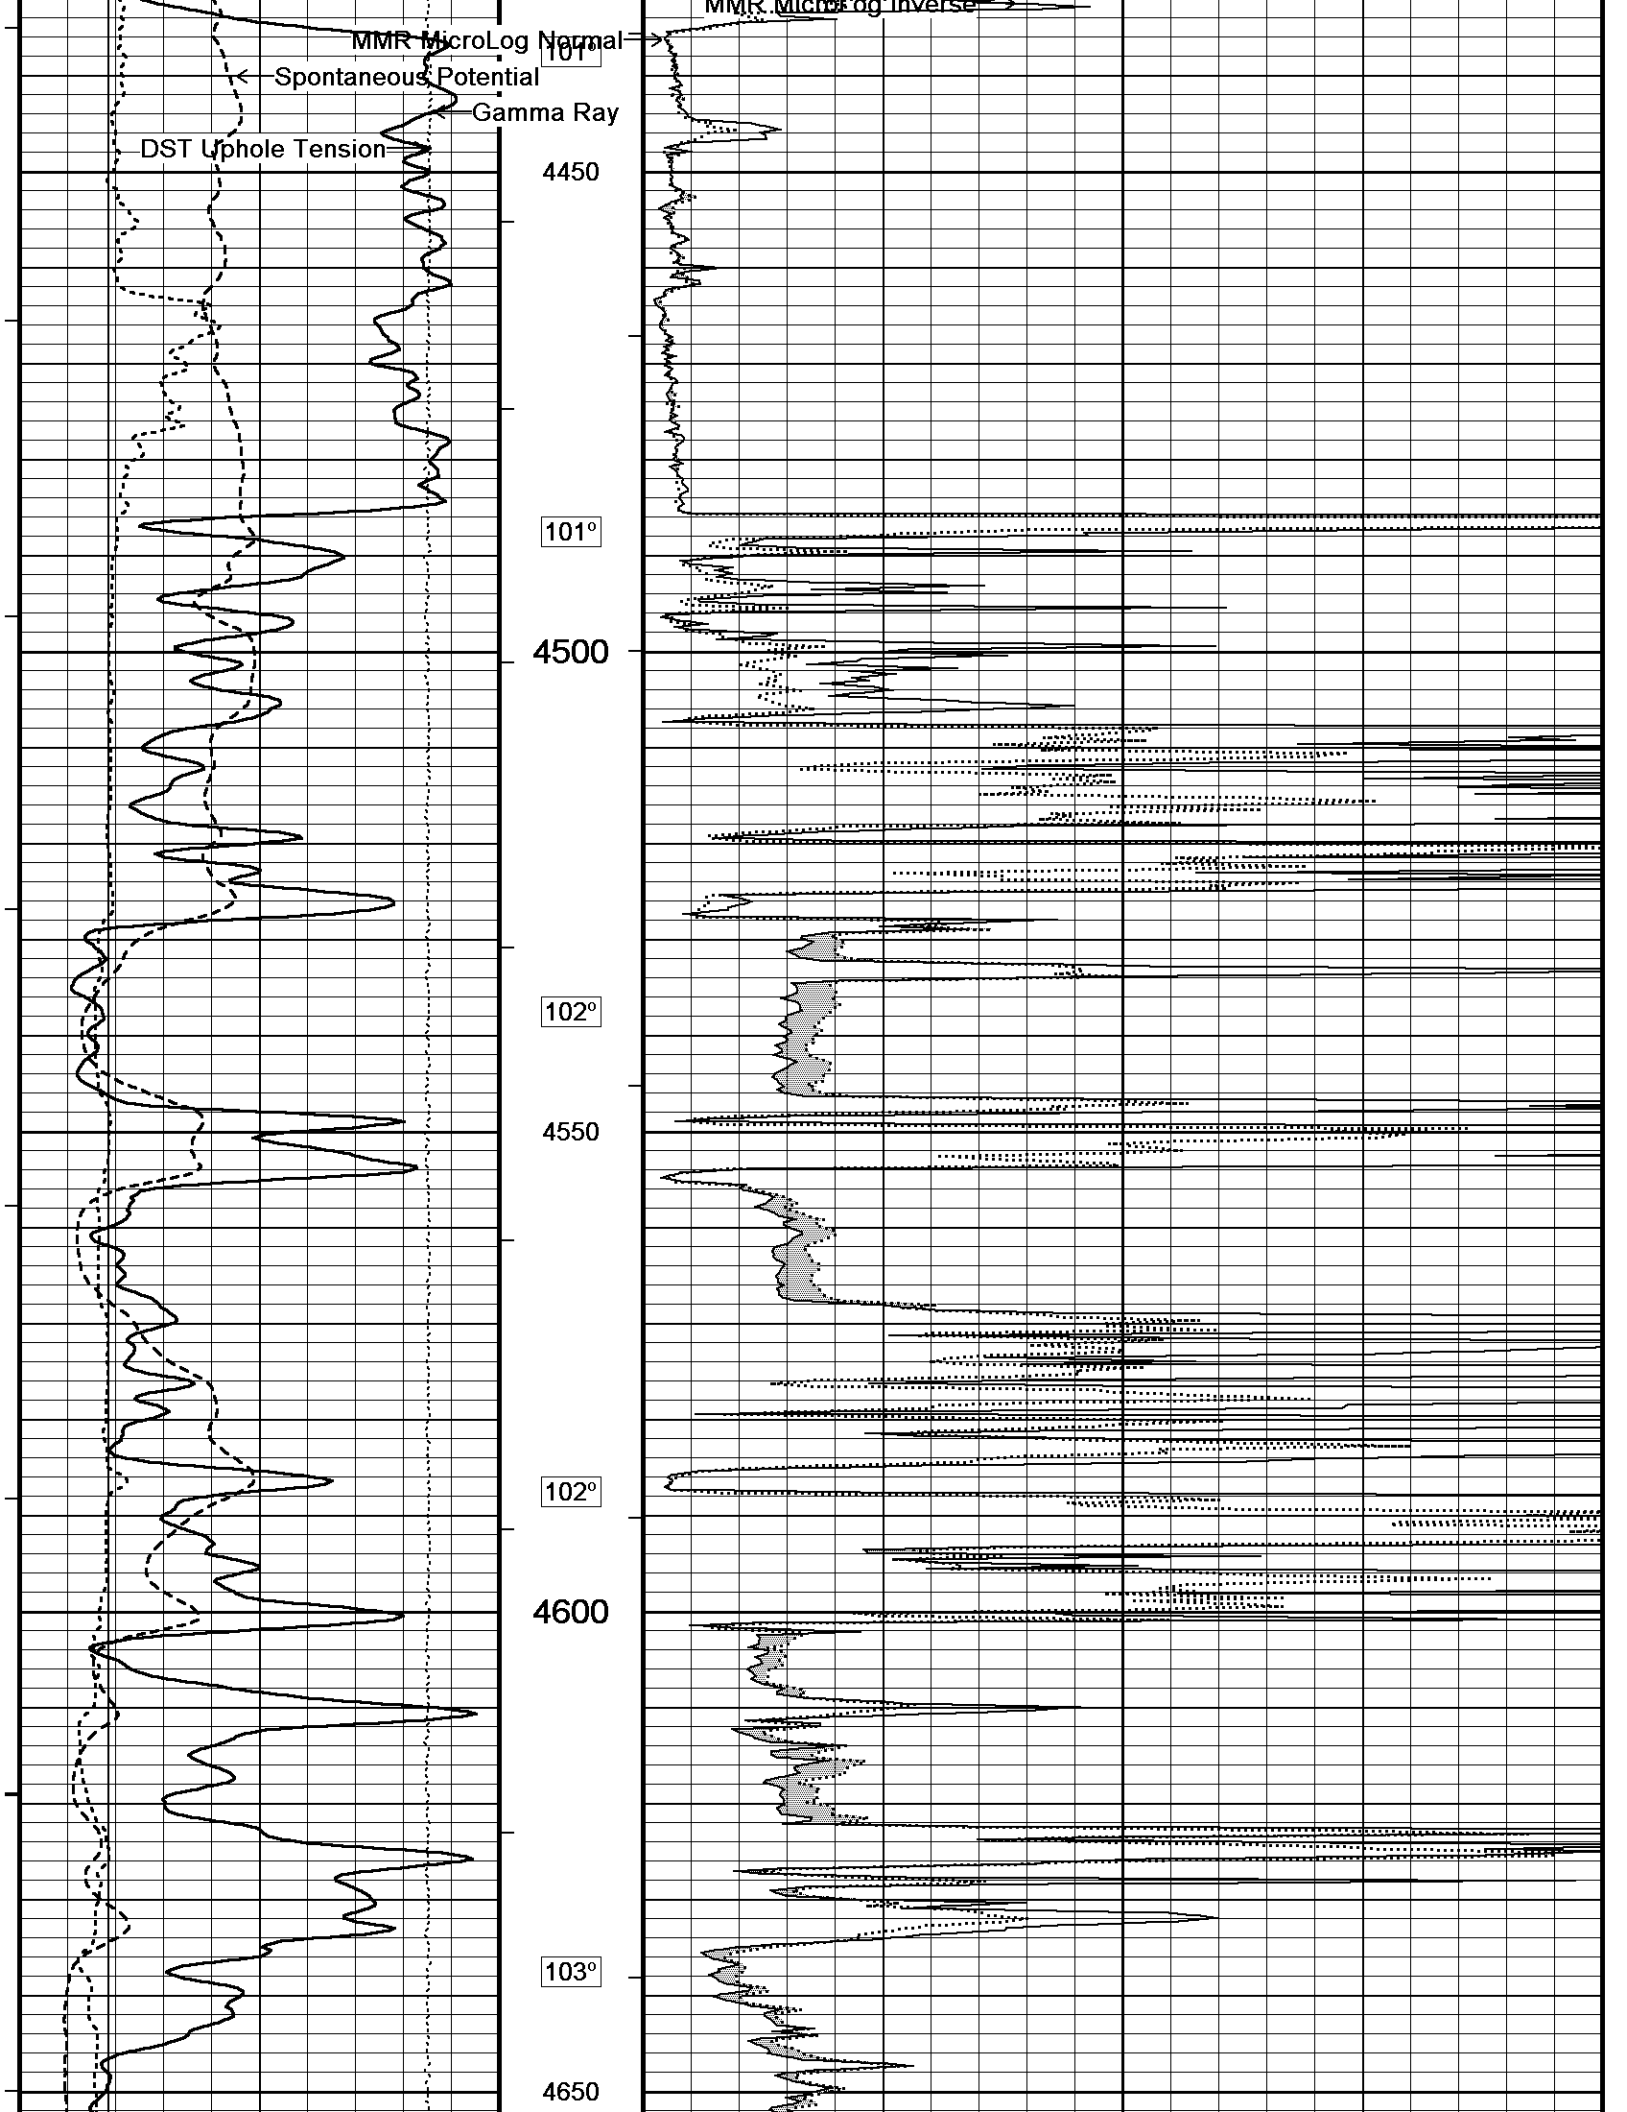



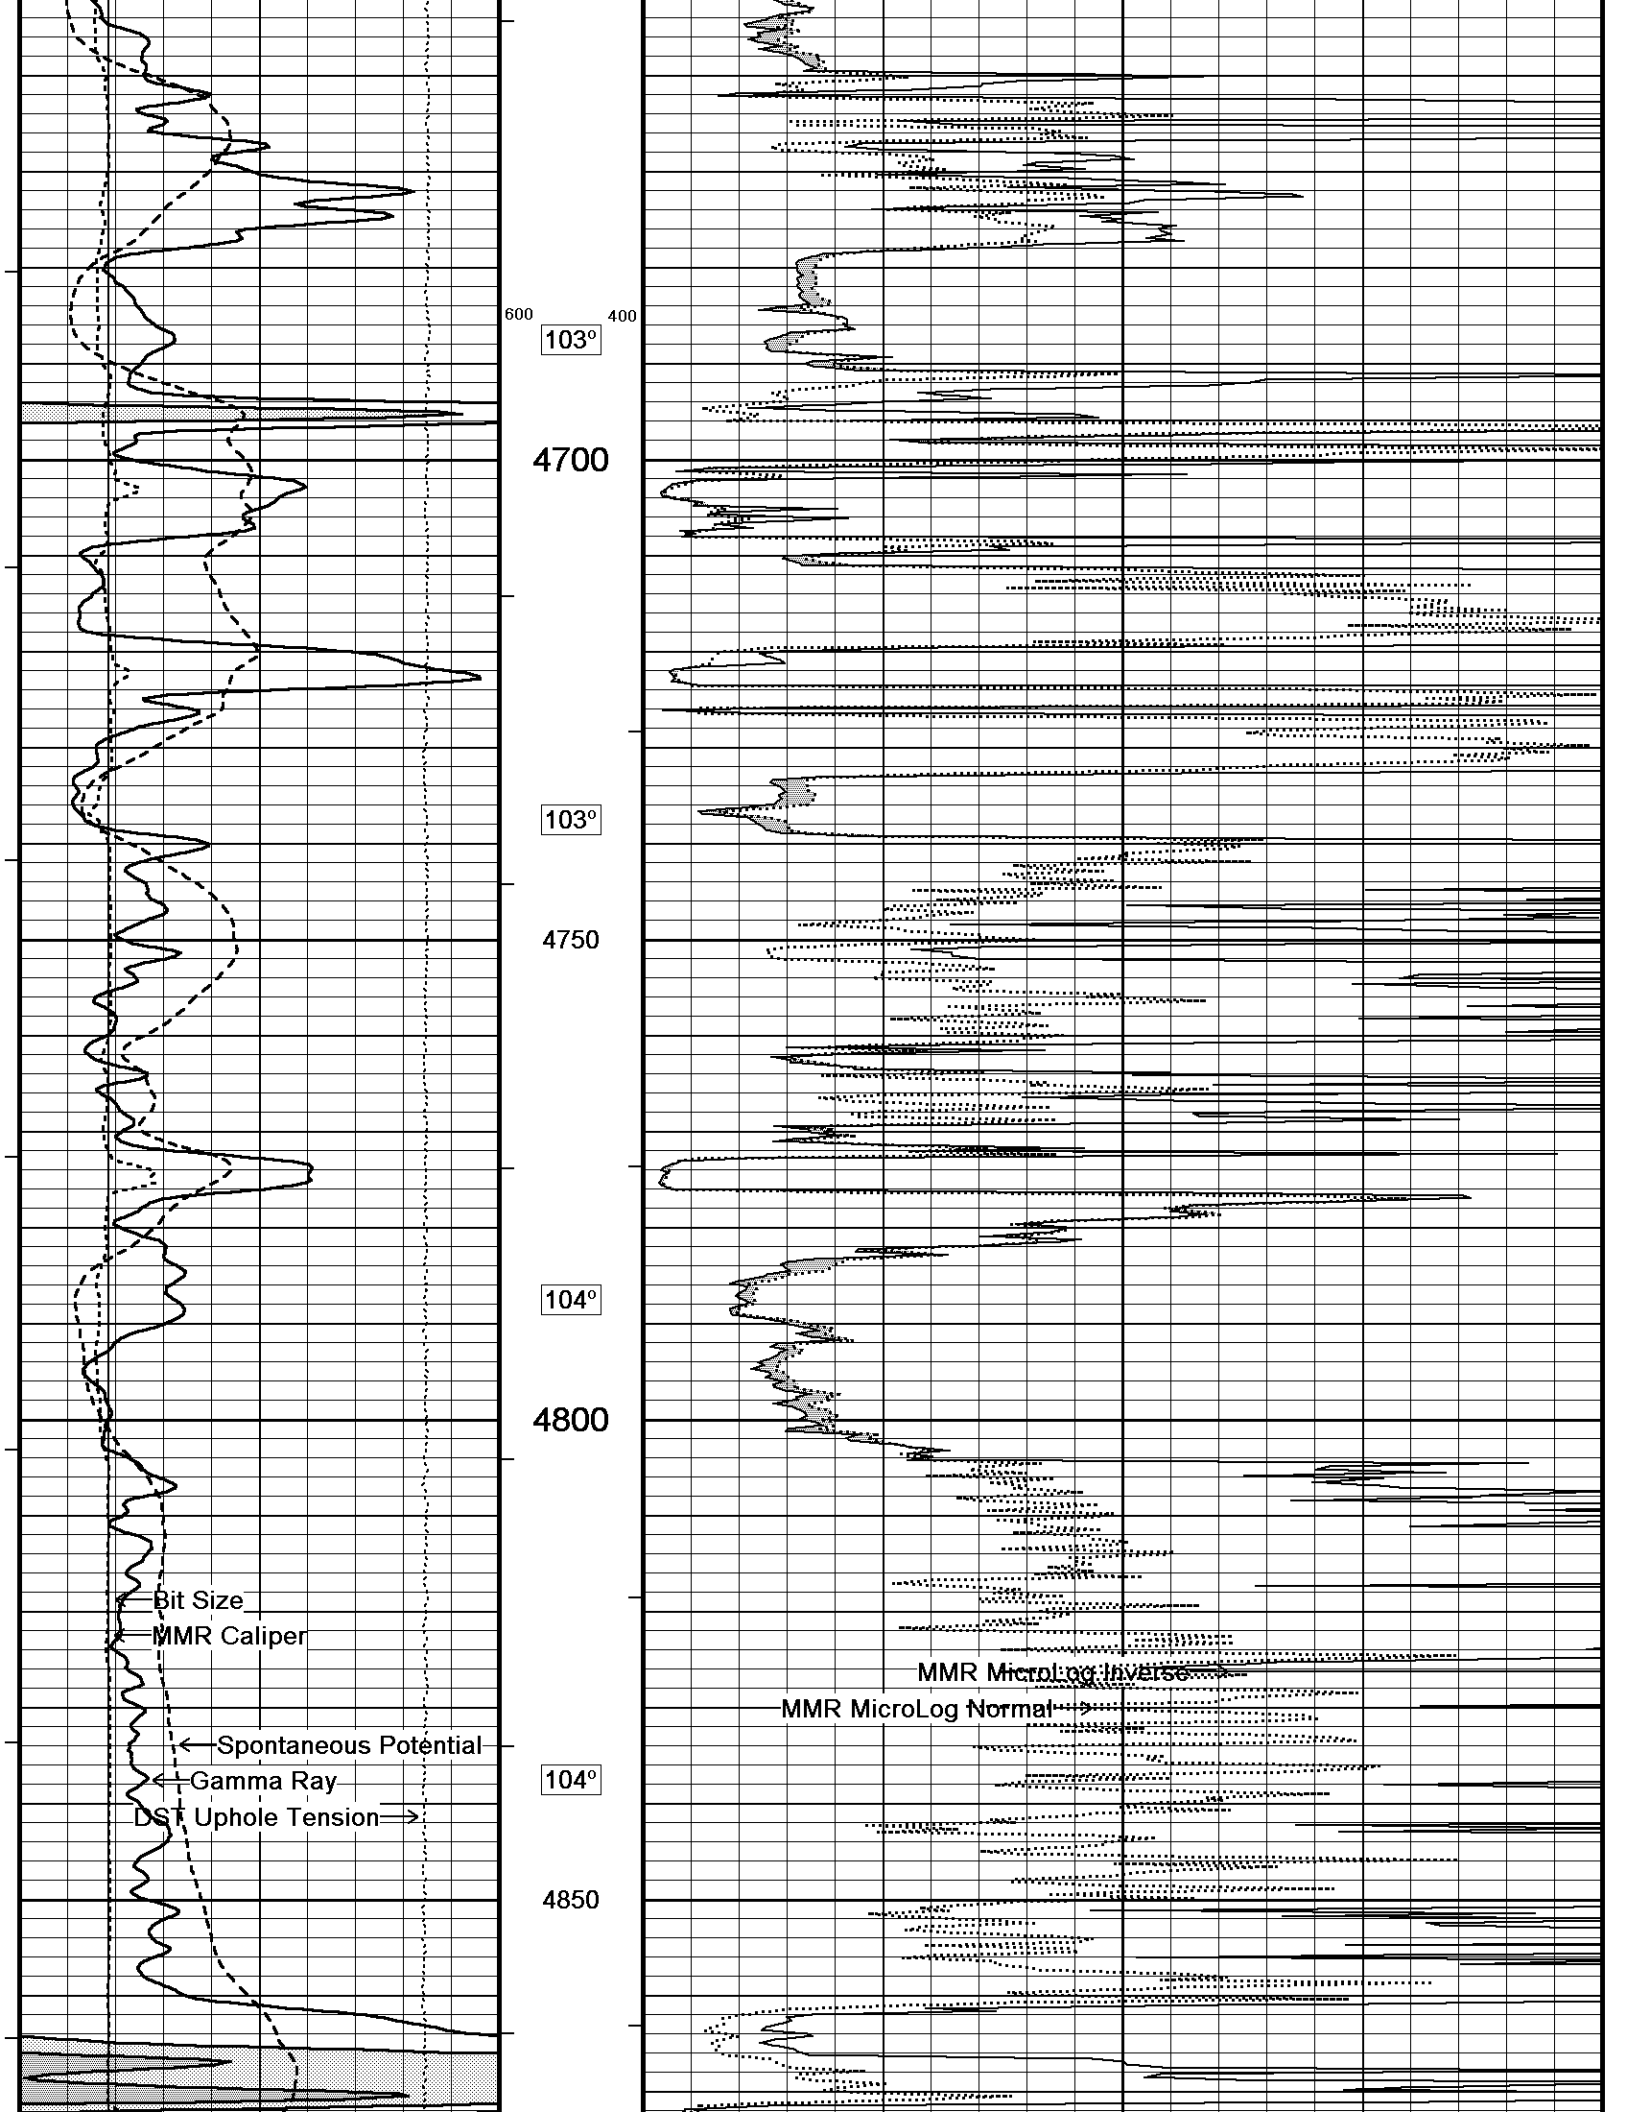


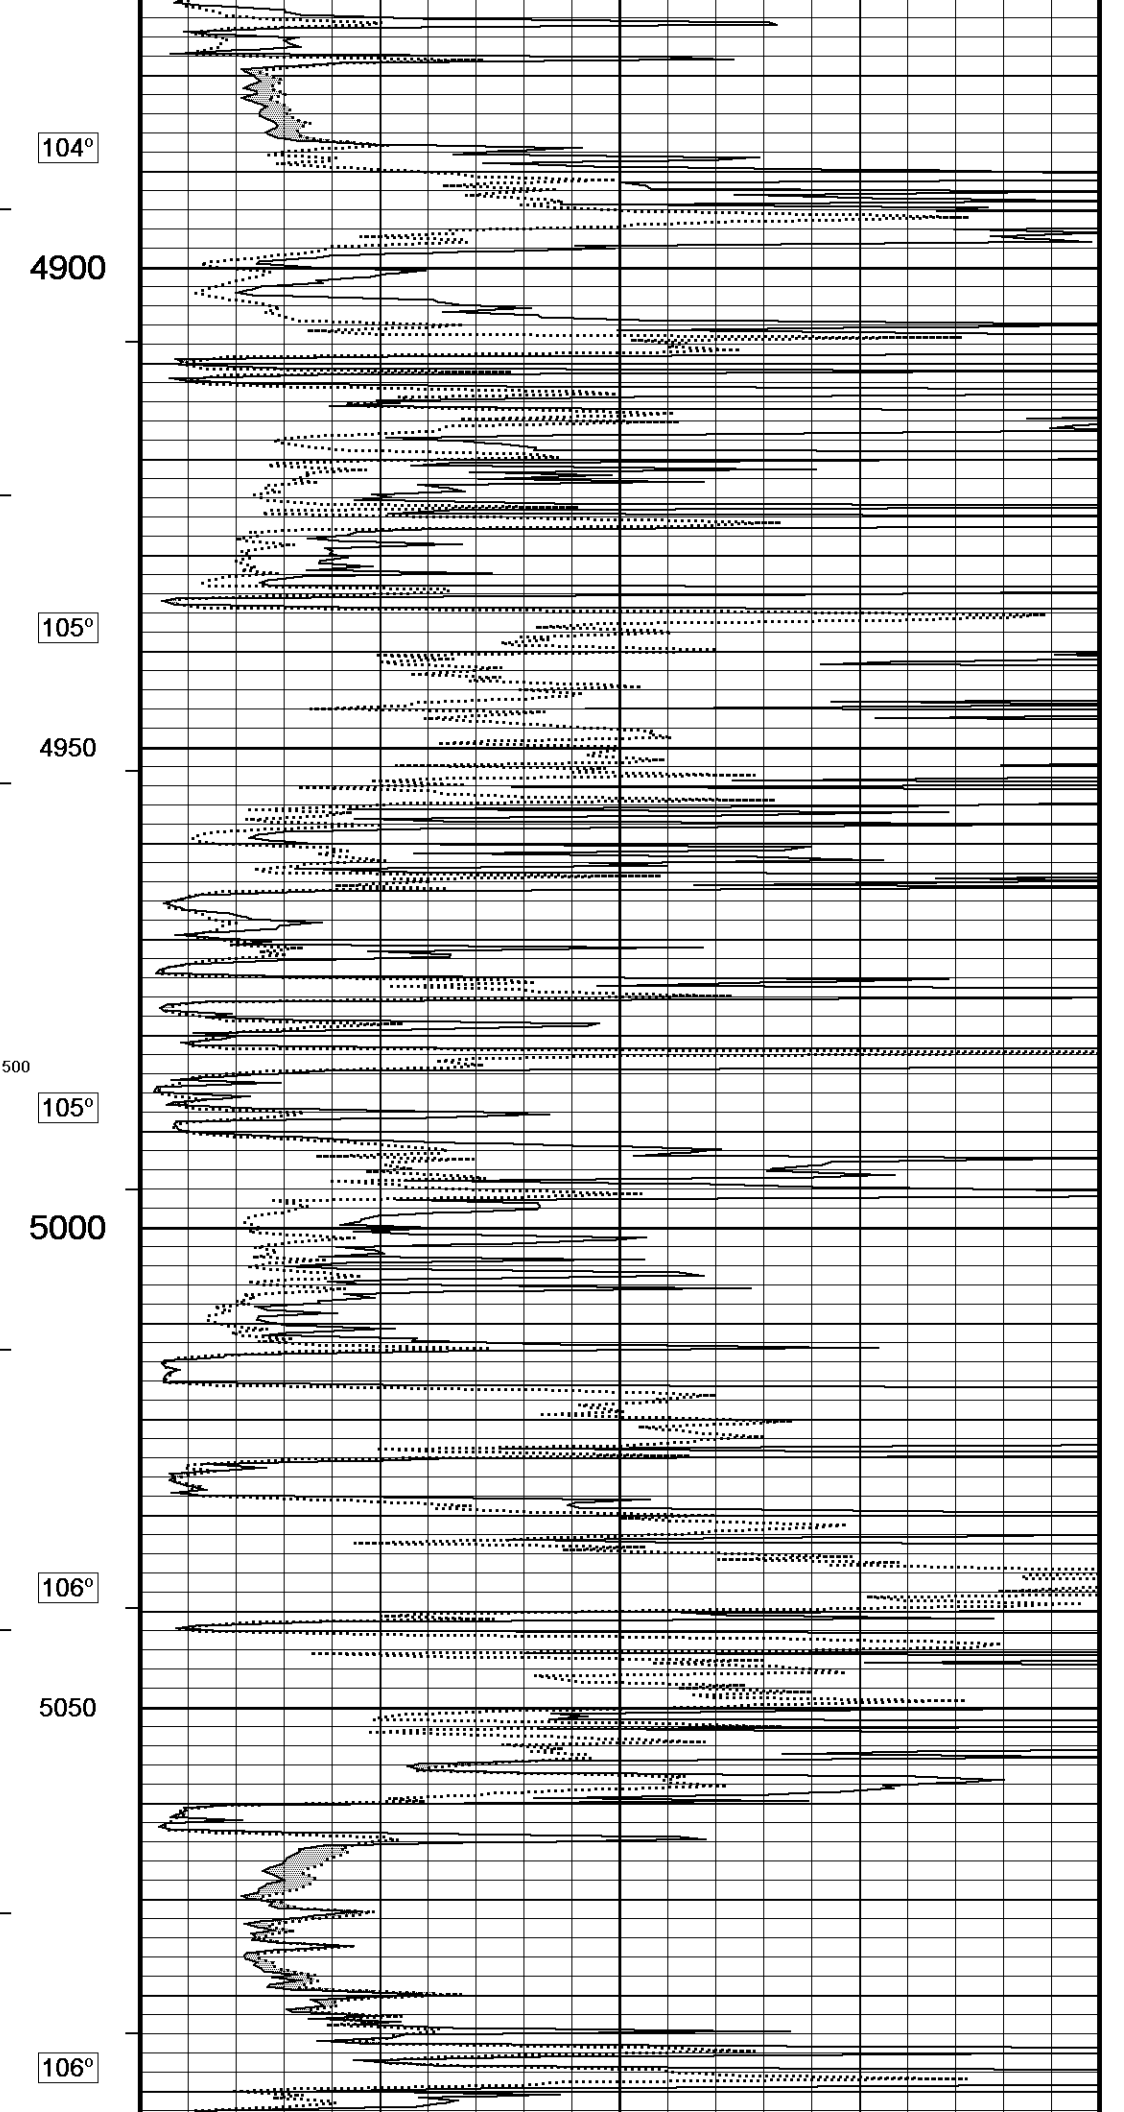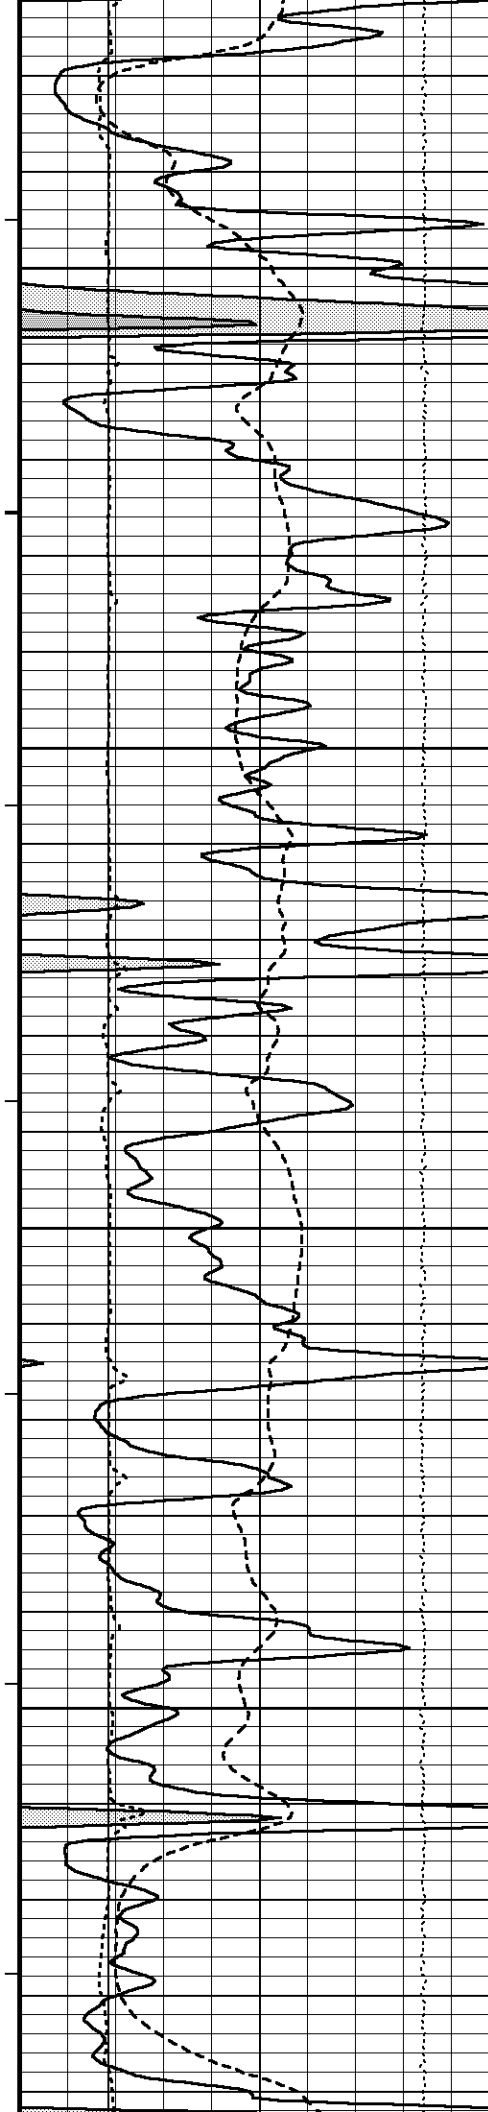


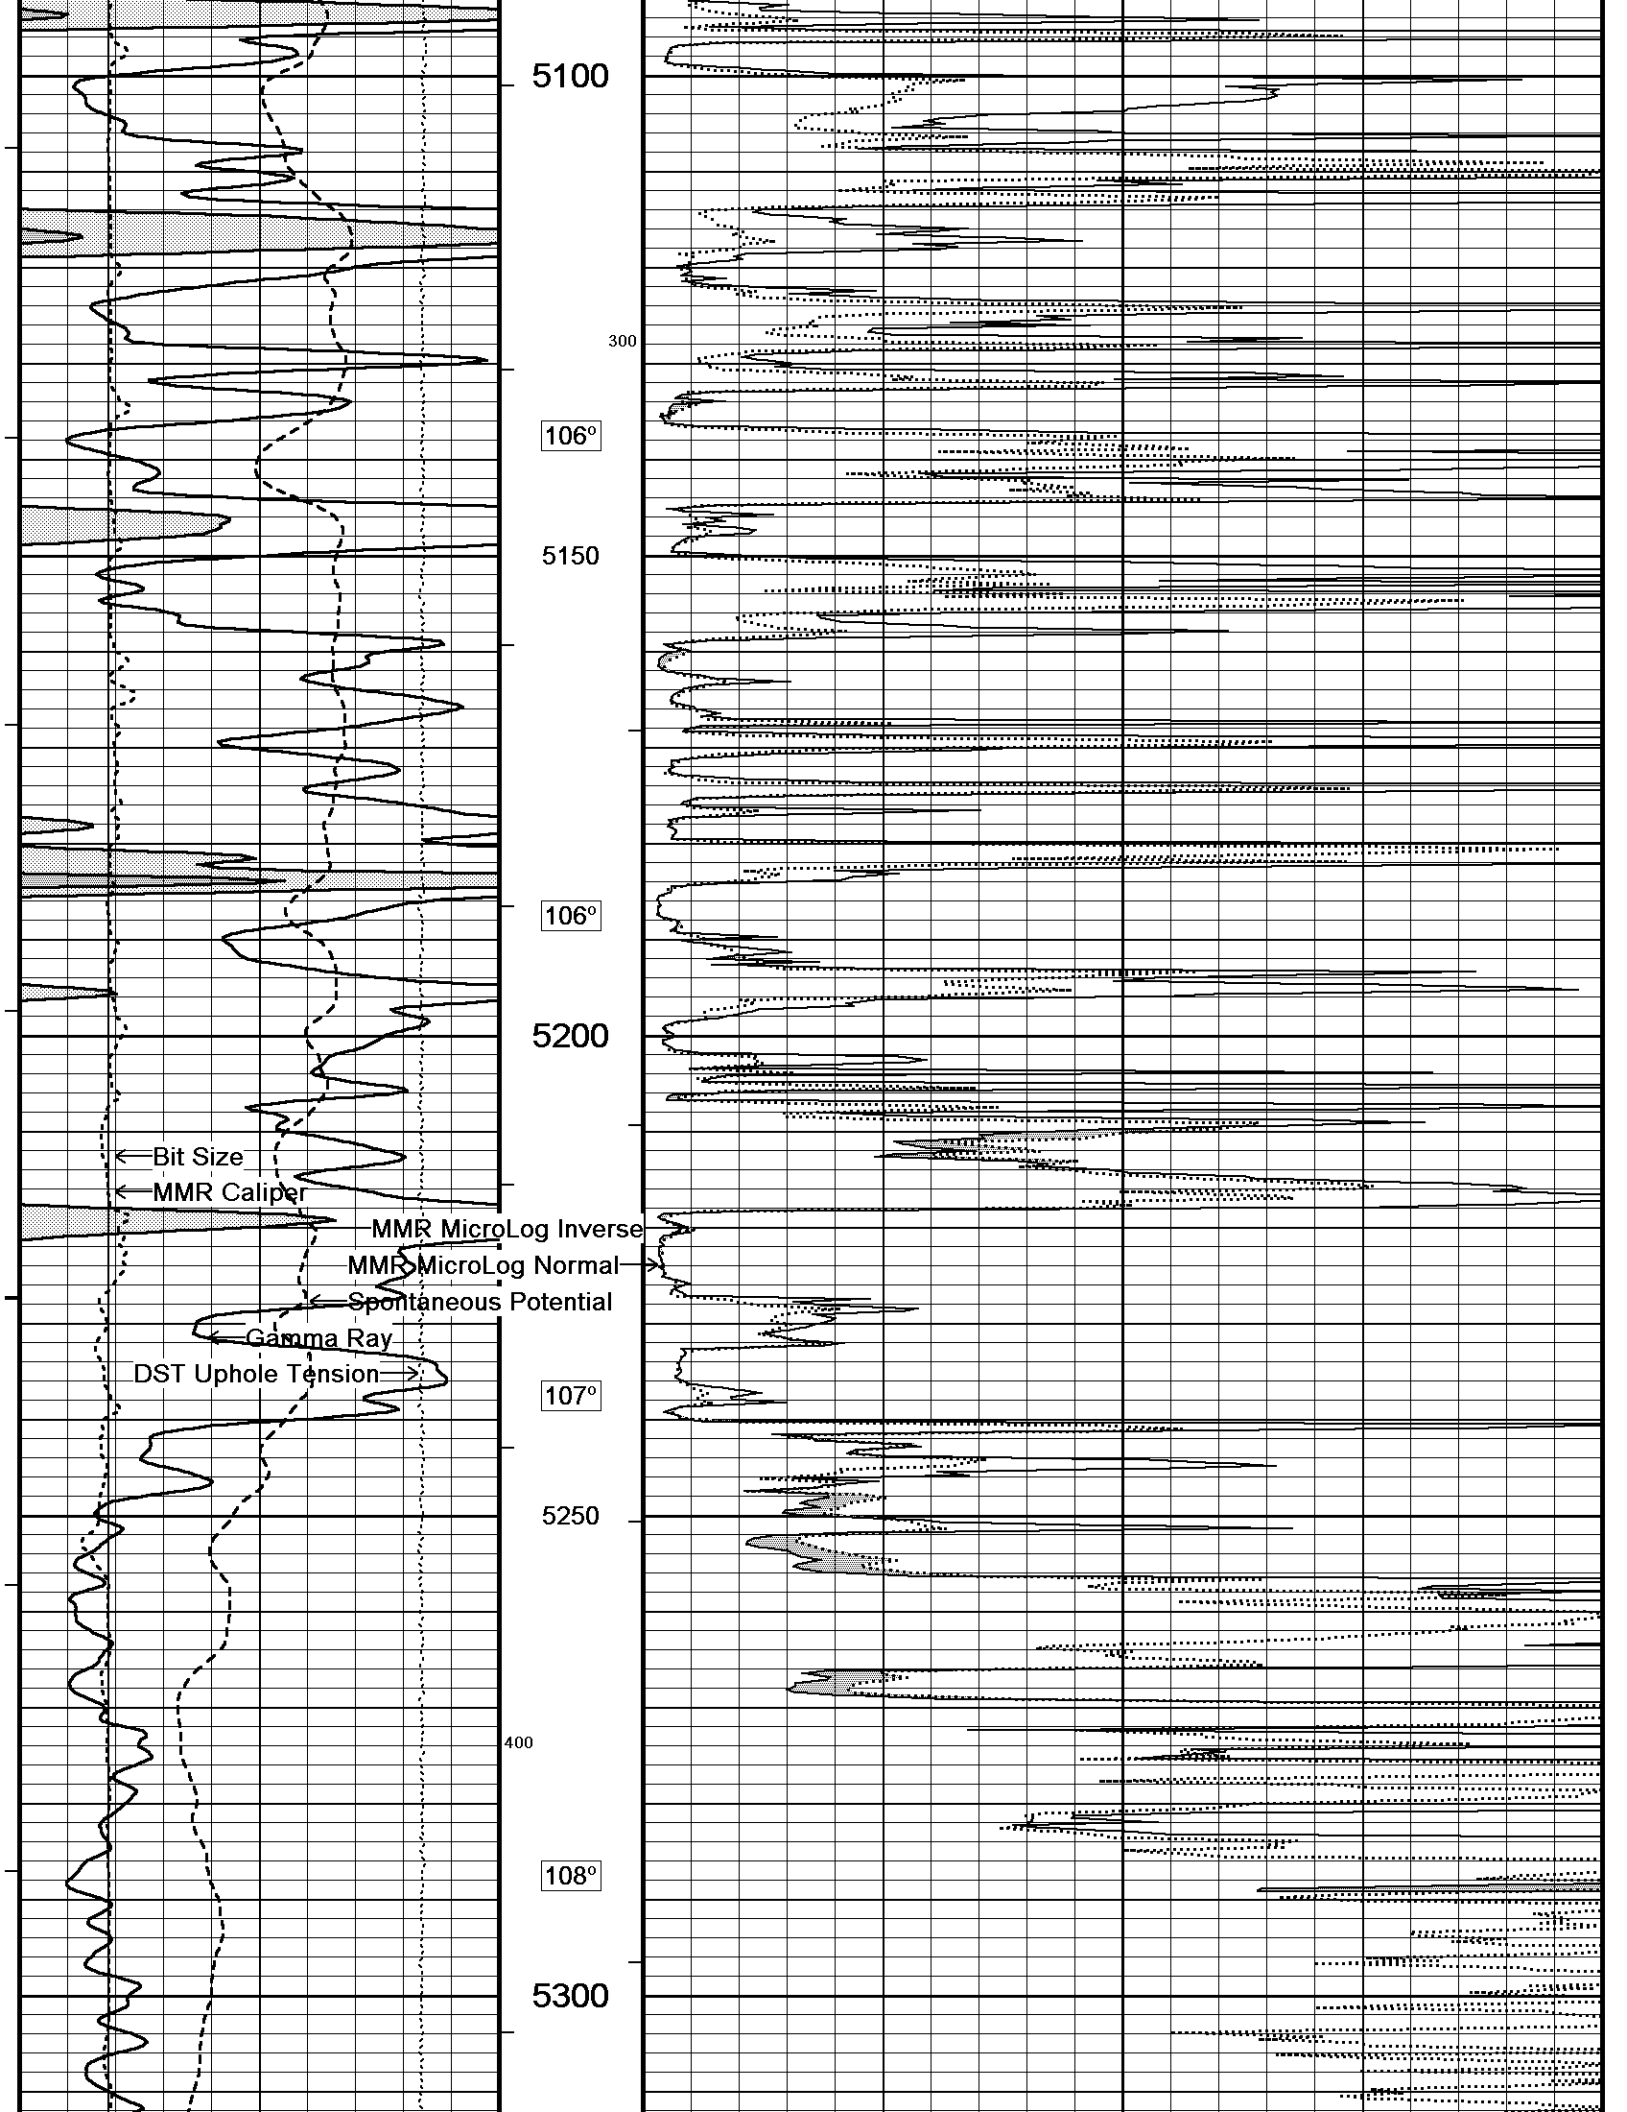





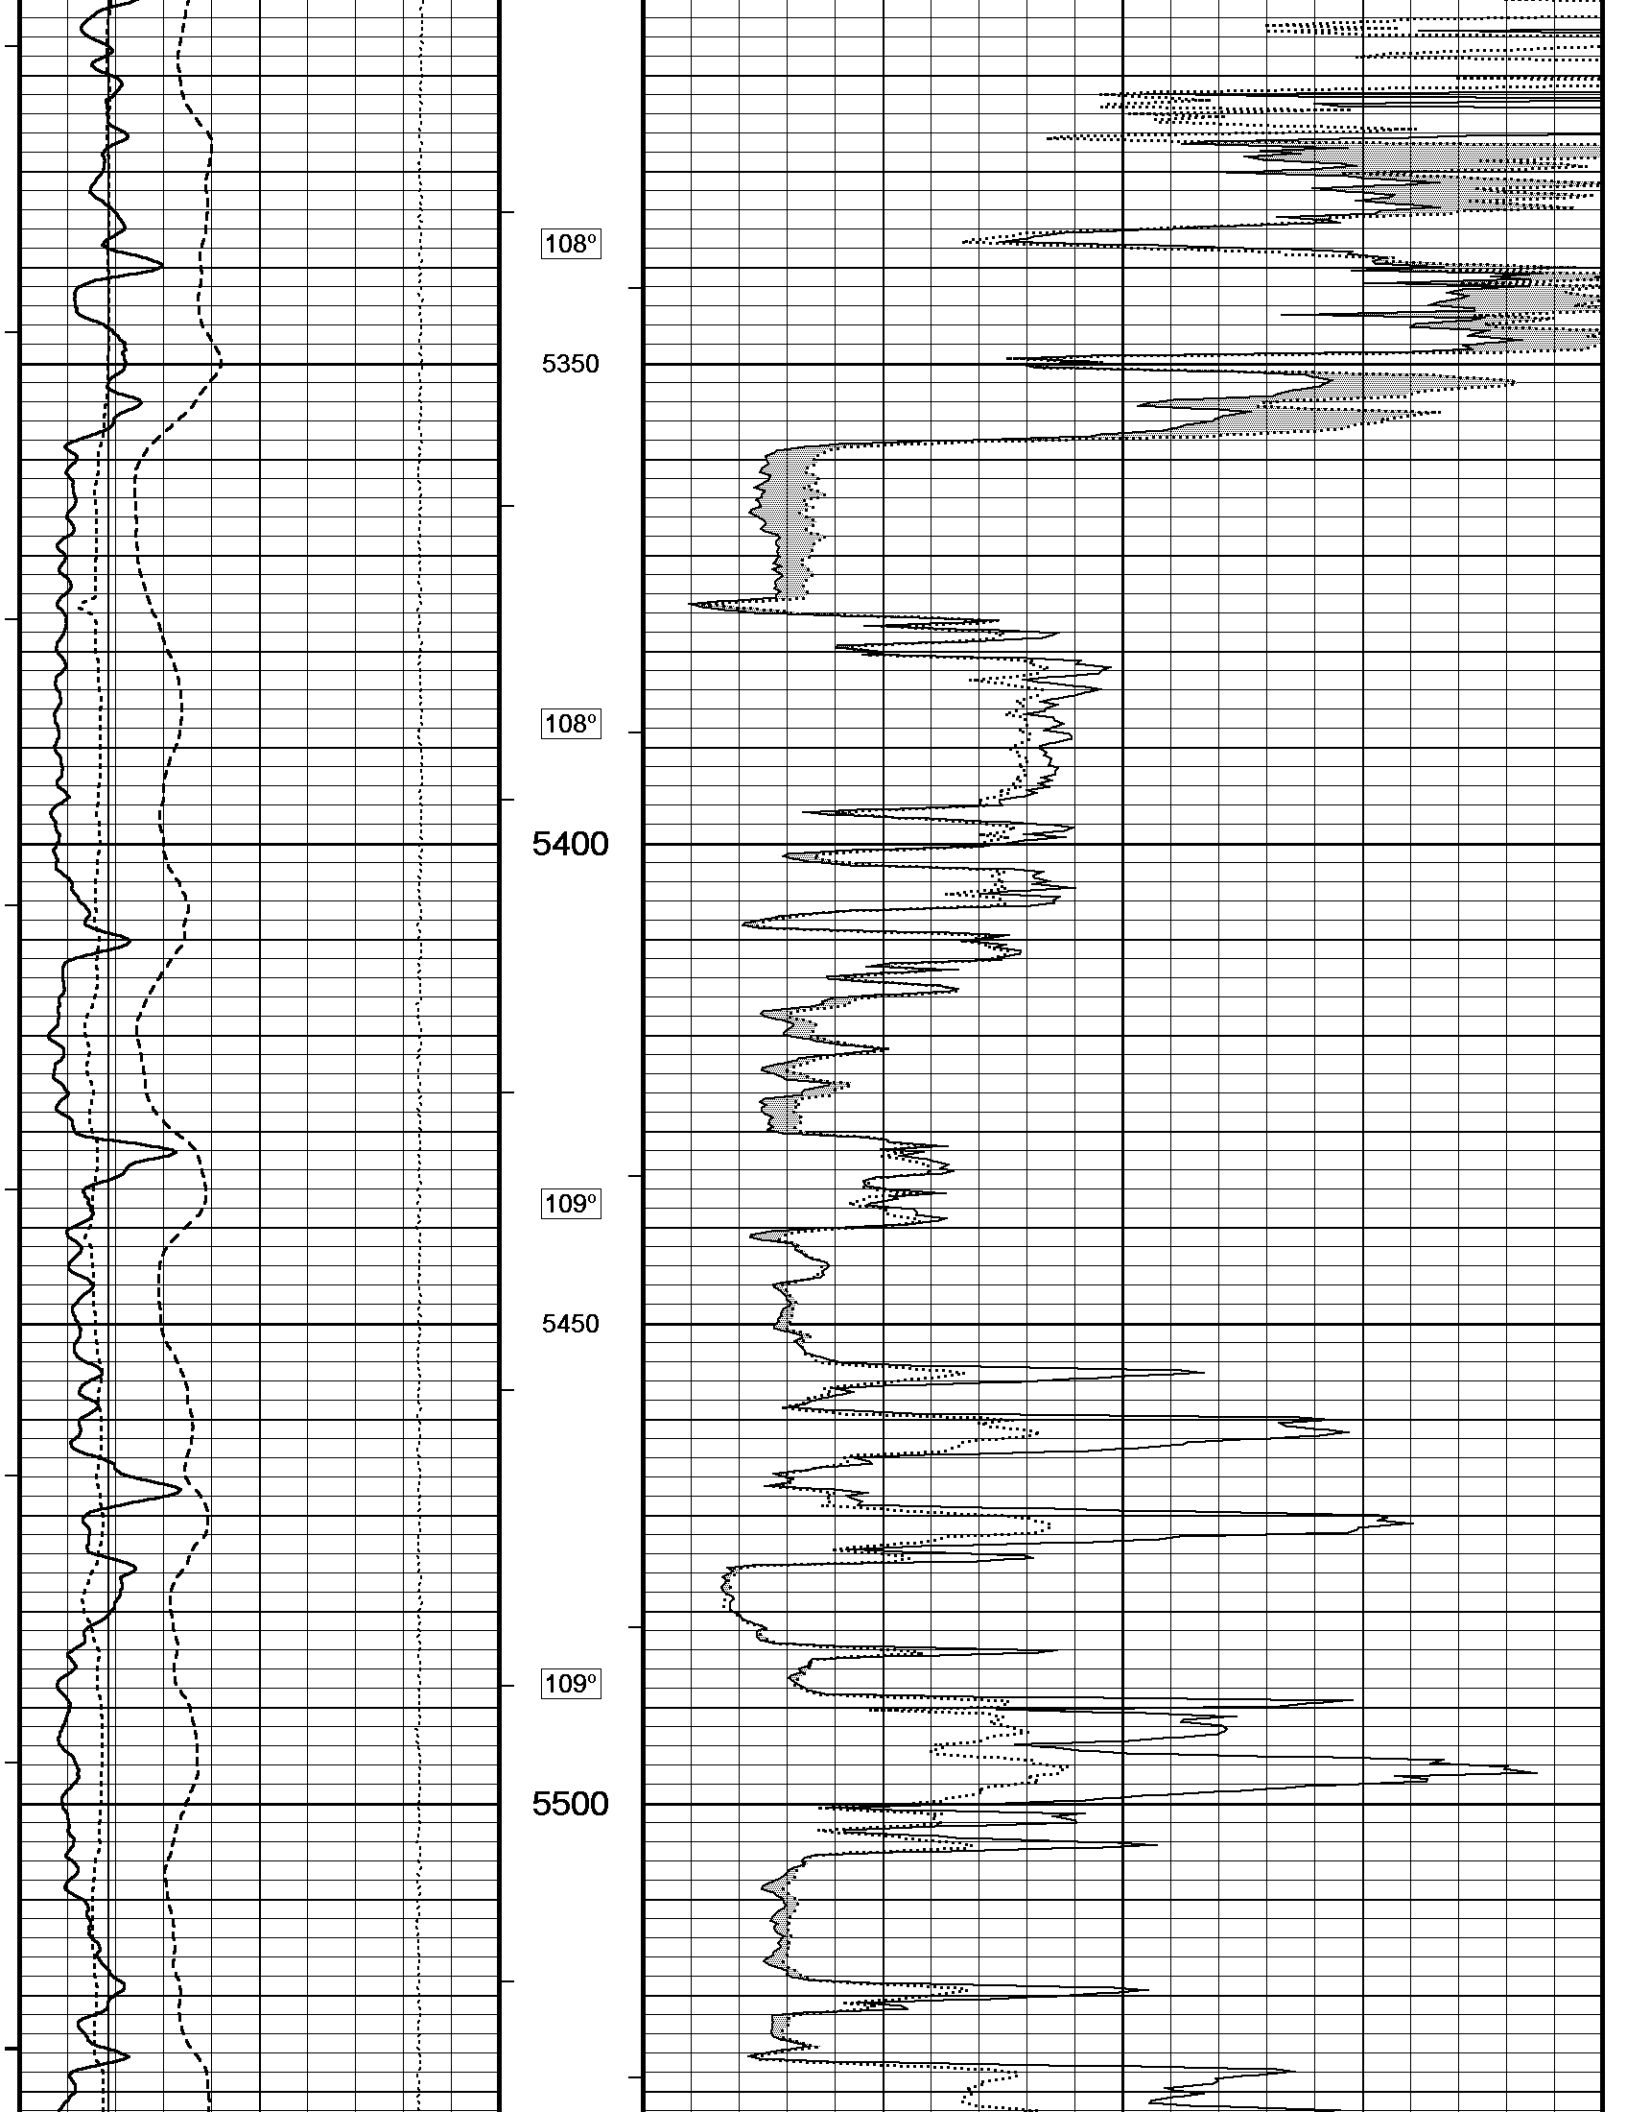


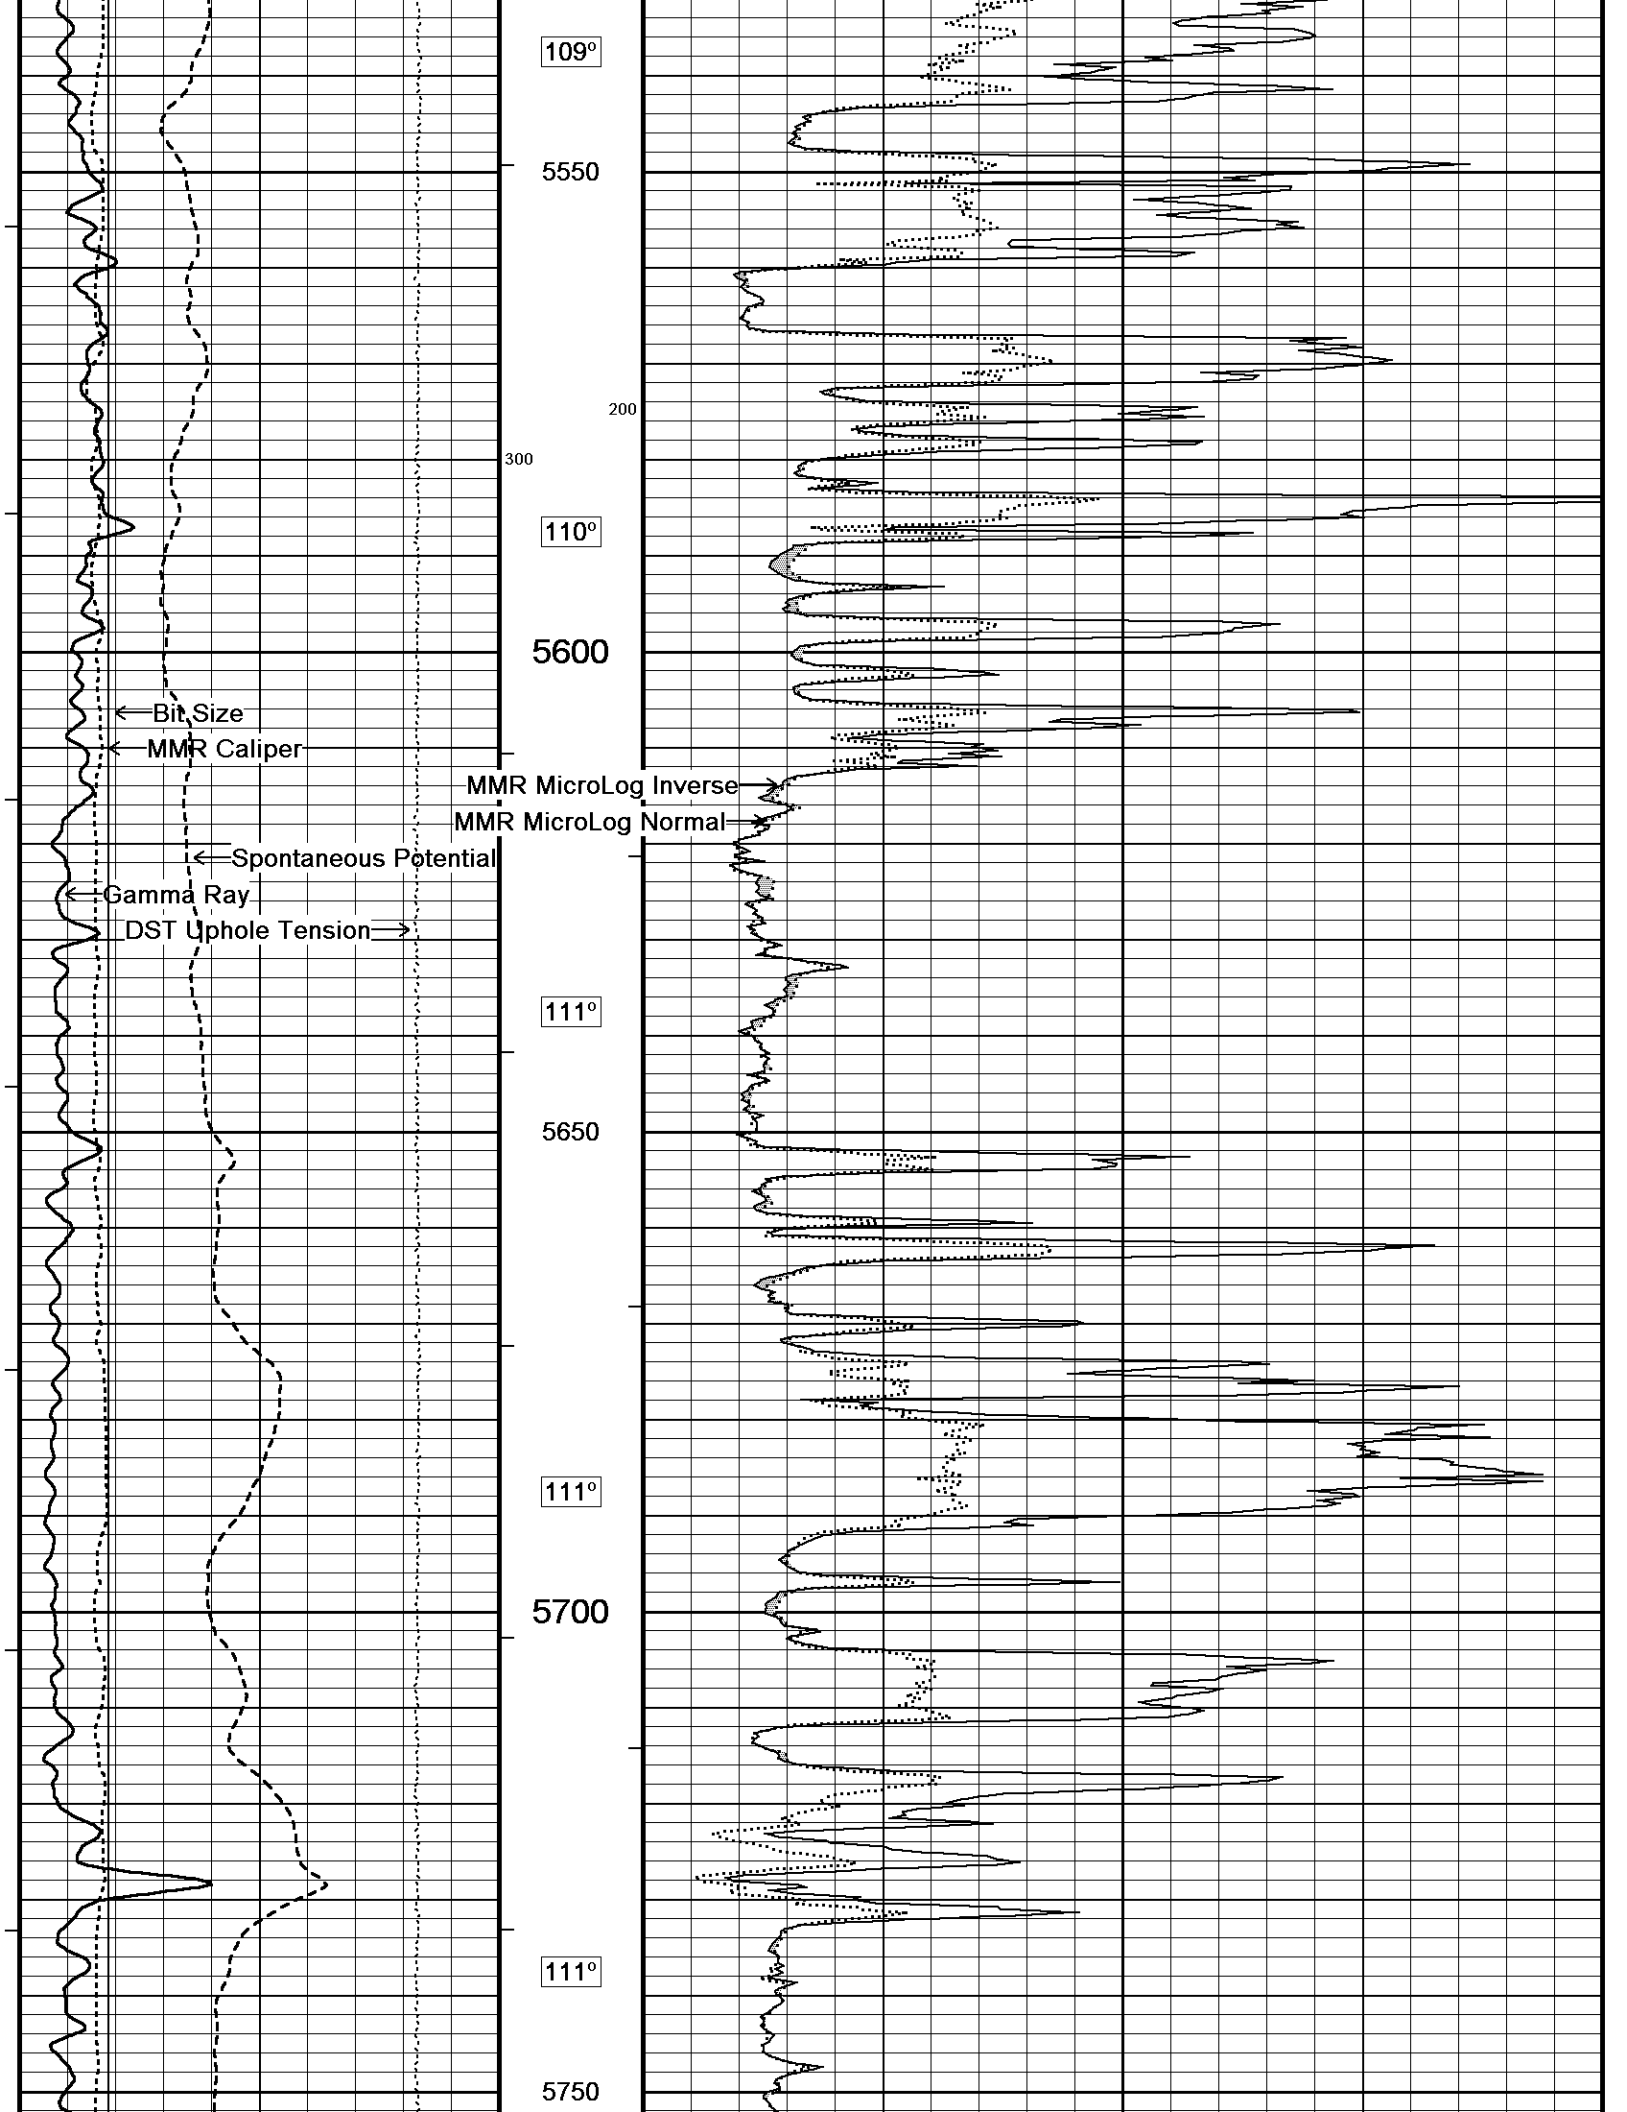


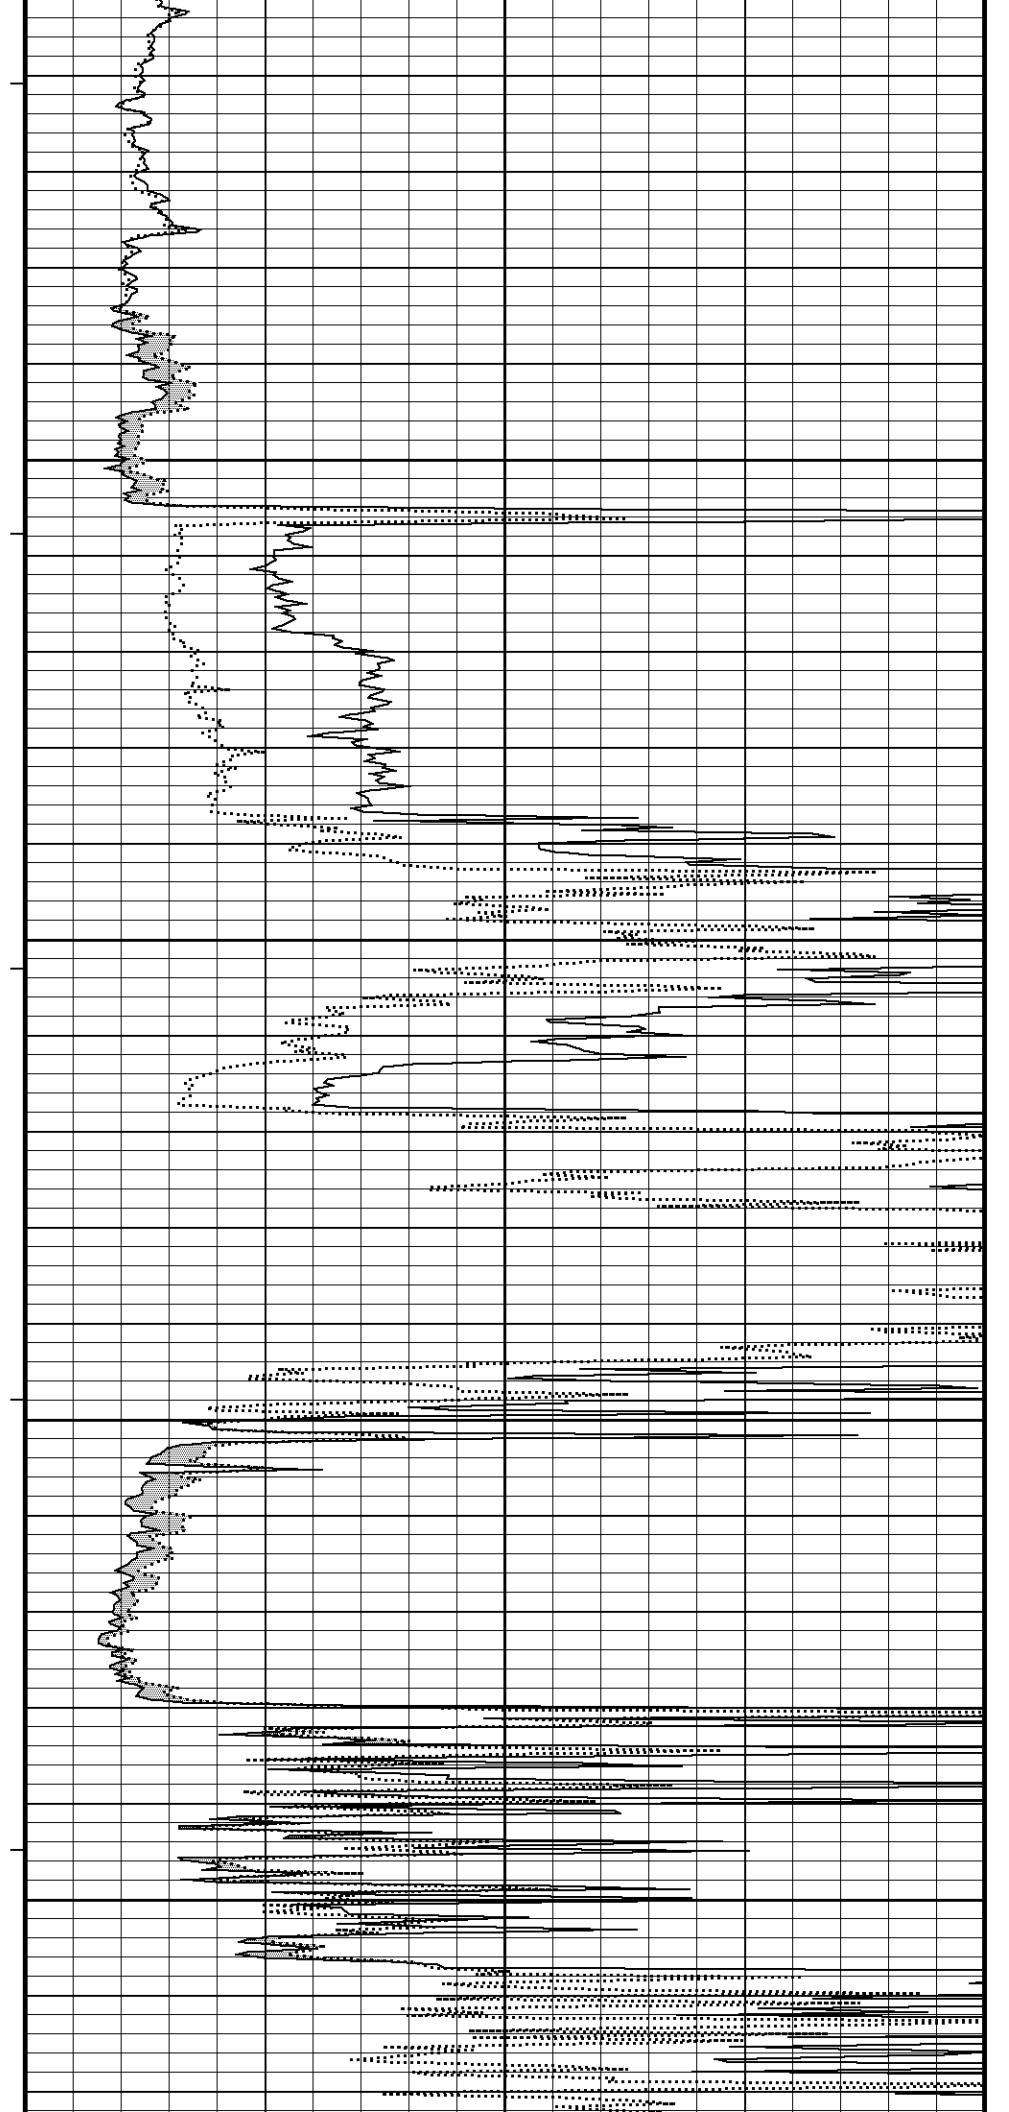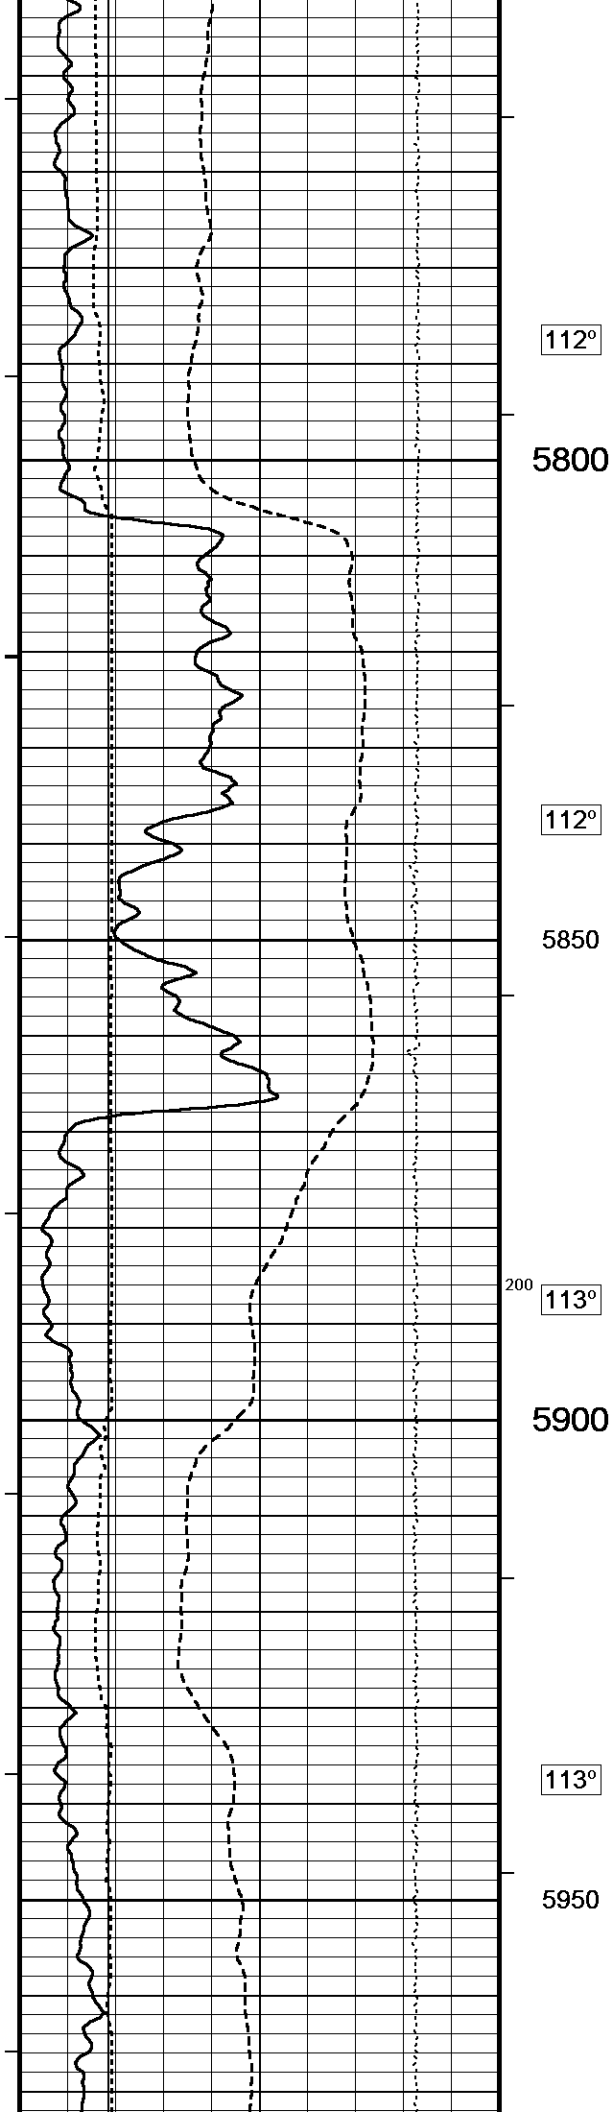

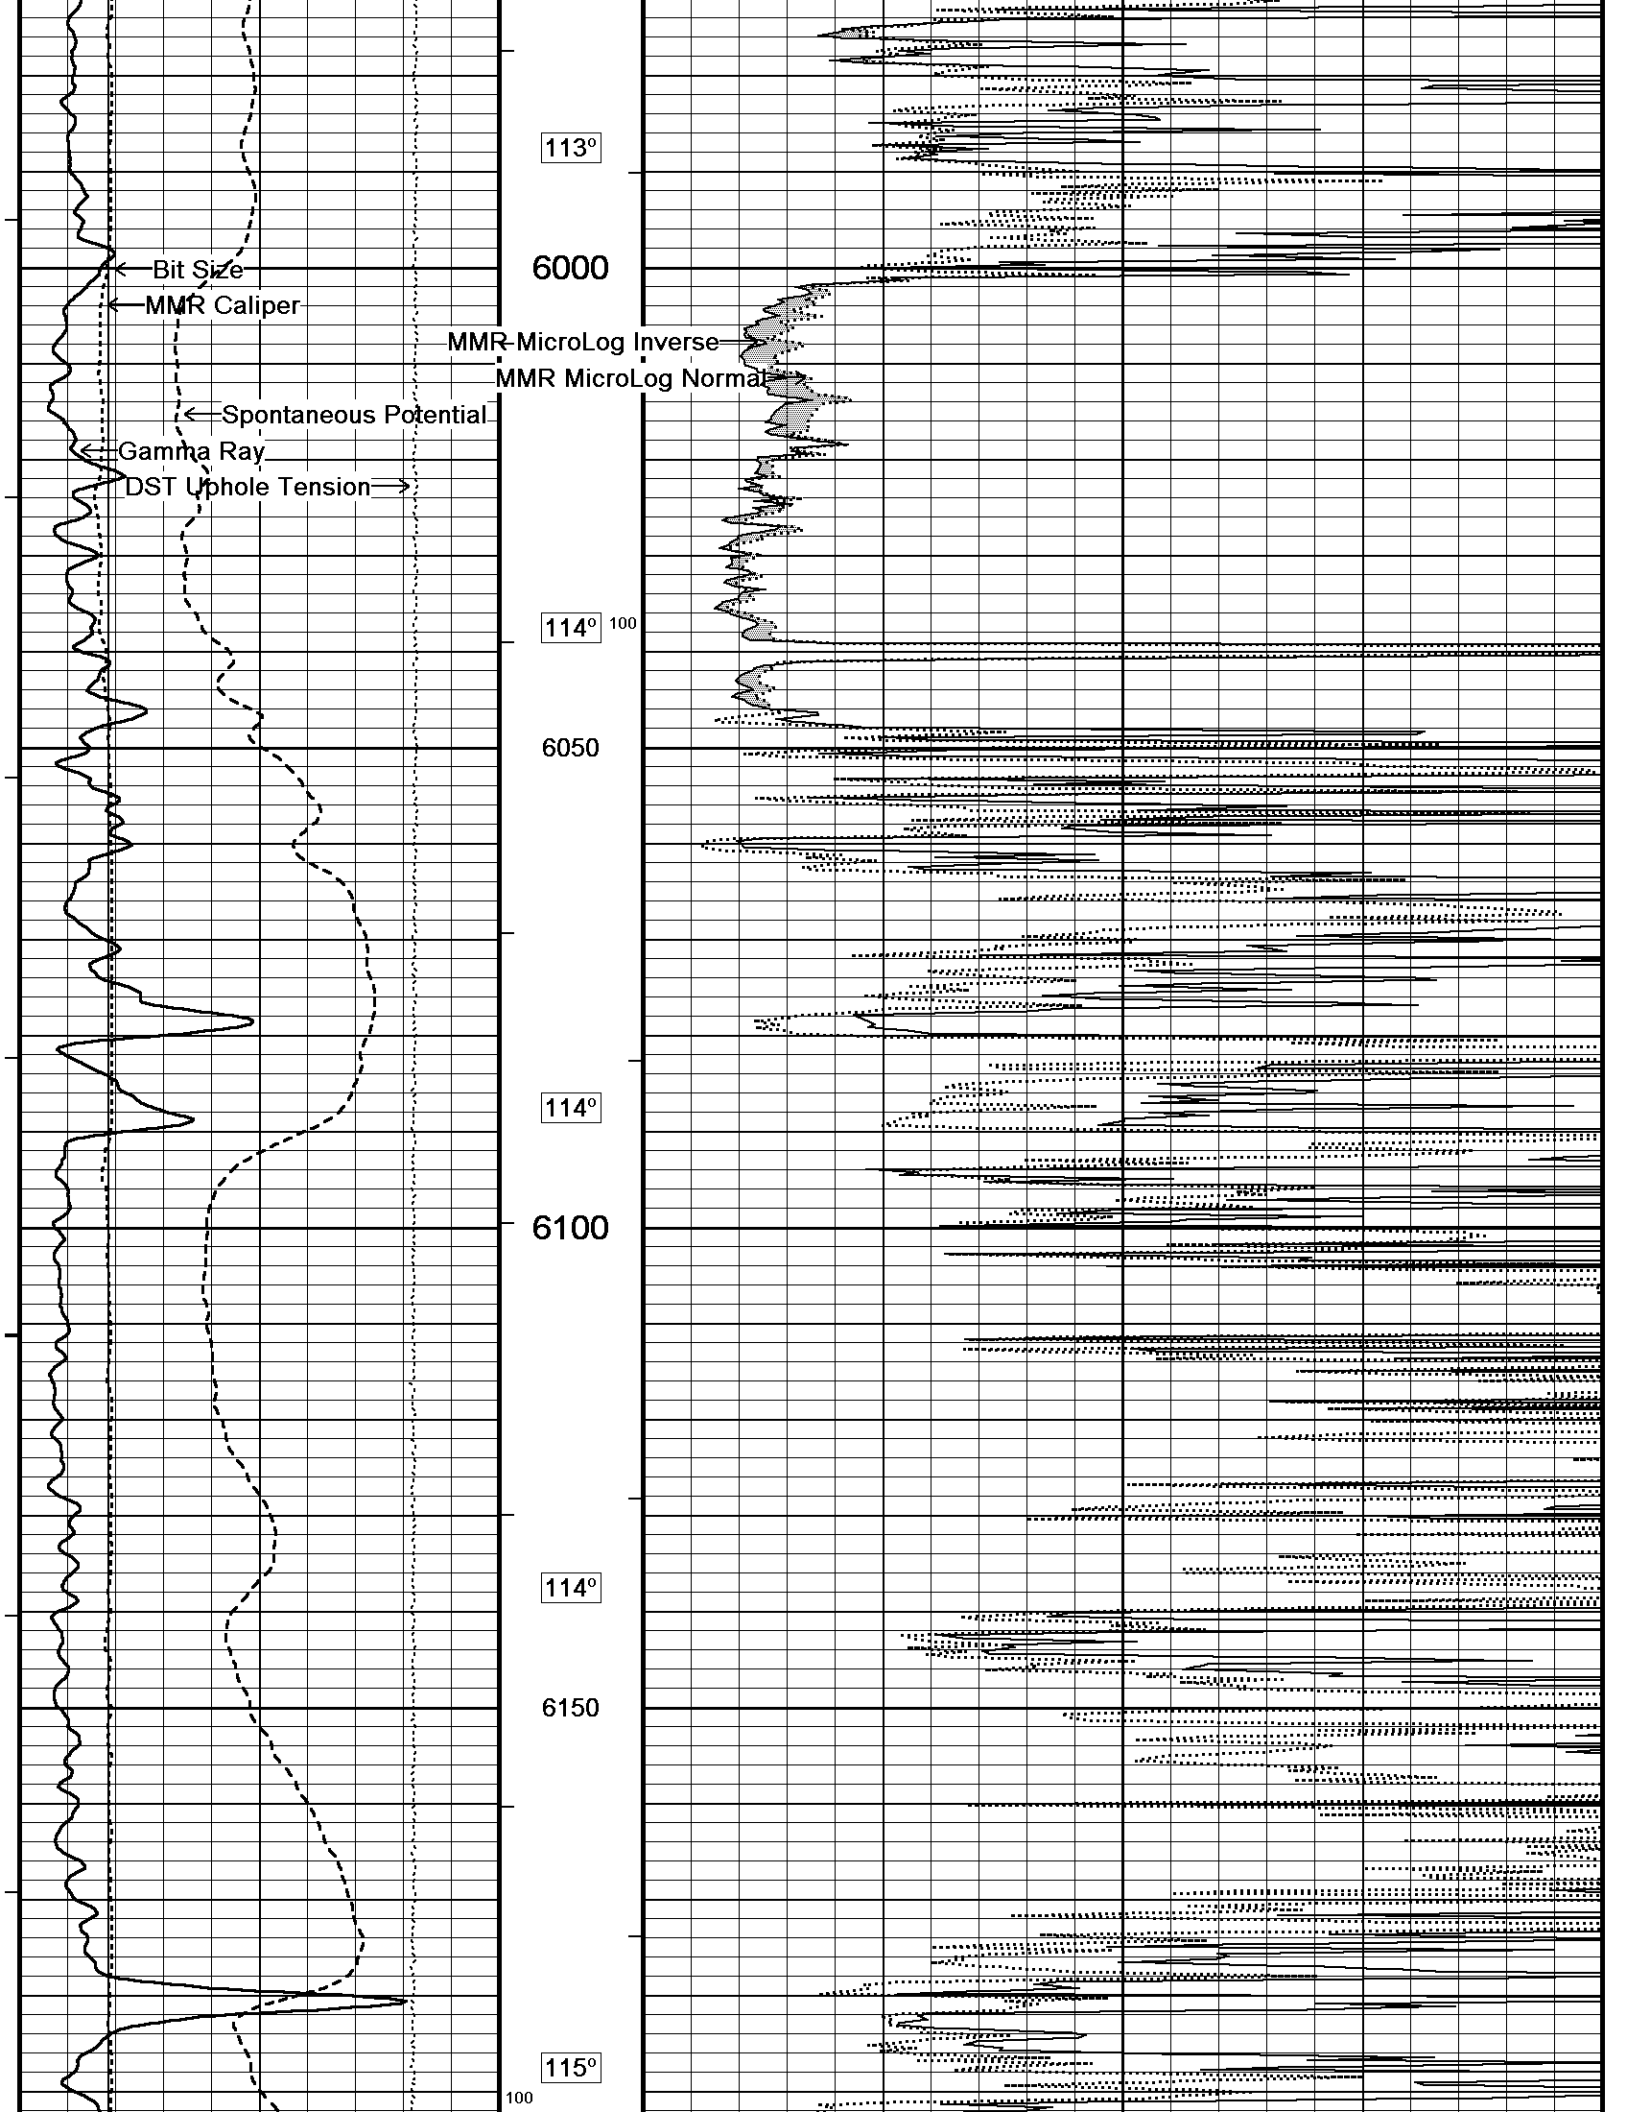

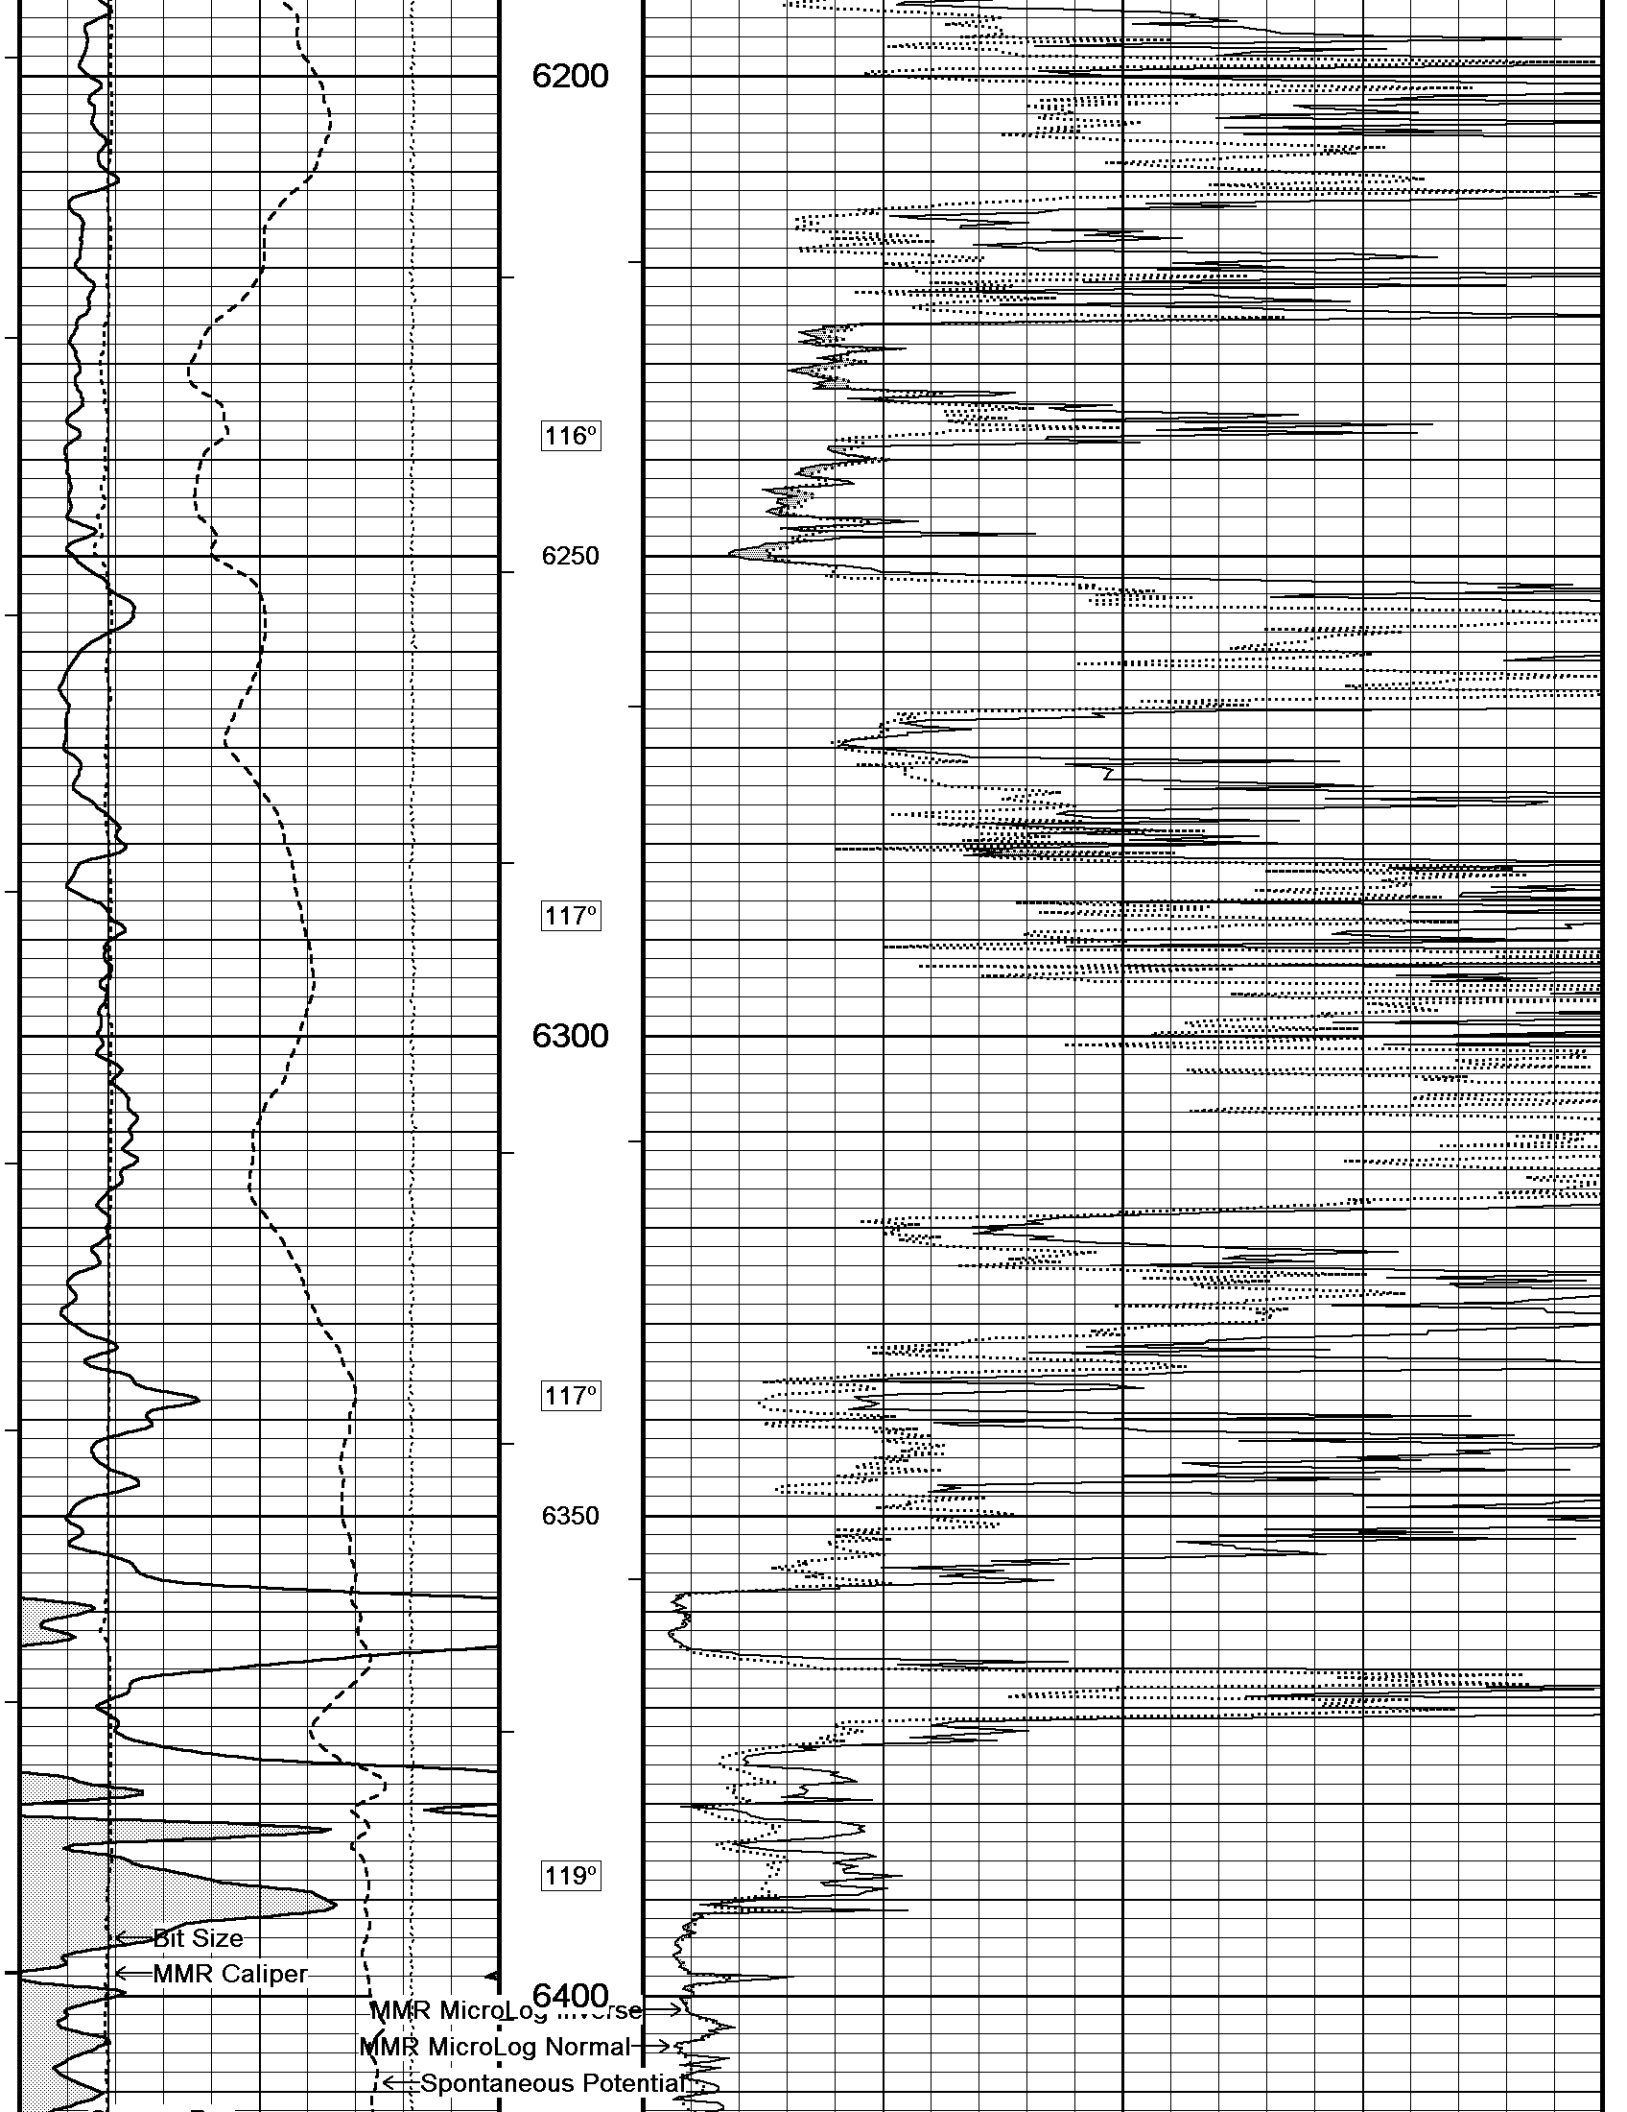

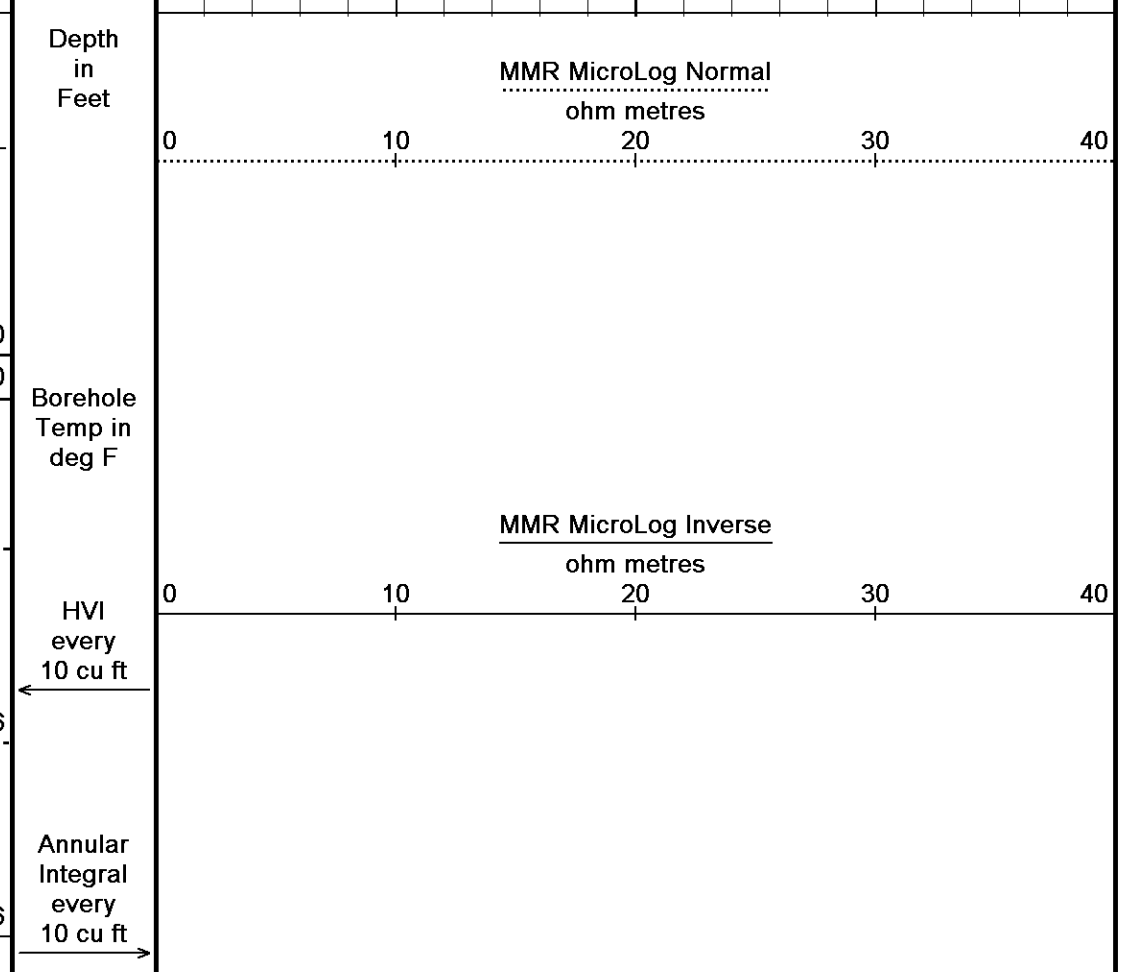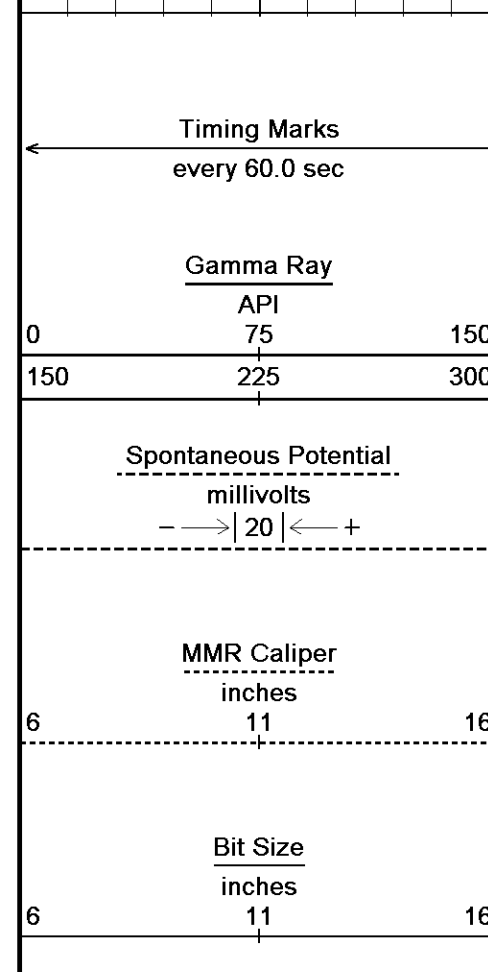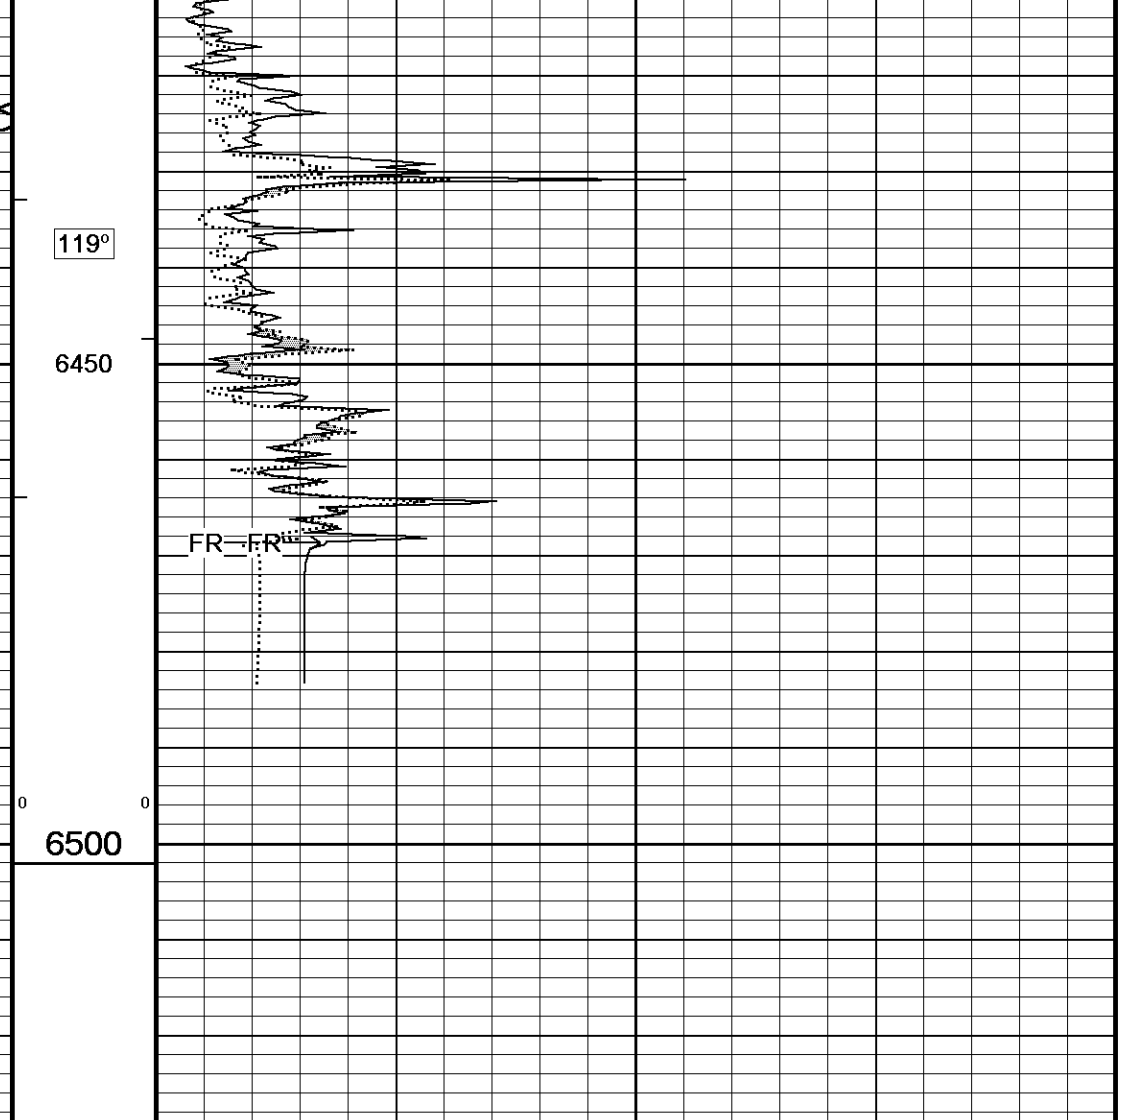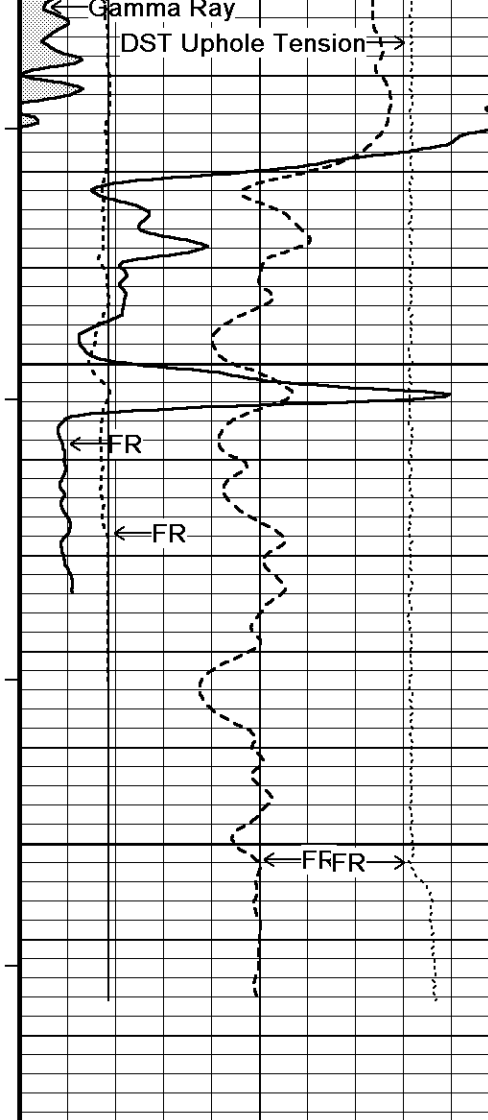




Replay
Scale
1:240


Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-DEC-2015 03:10
 Filename: C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Main.dta
 Recorded on 19-DEC-2015 22:36
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939





↑ 5 INCH MAIN ↑


↓ REPEAT SECTION ↓

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-DEC-2015 03:10
 Filename: C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Repeat.dta
 Recorded on 19-DEC-2015 22:13
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

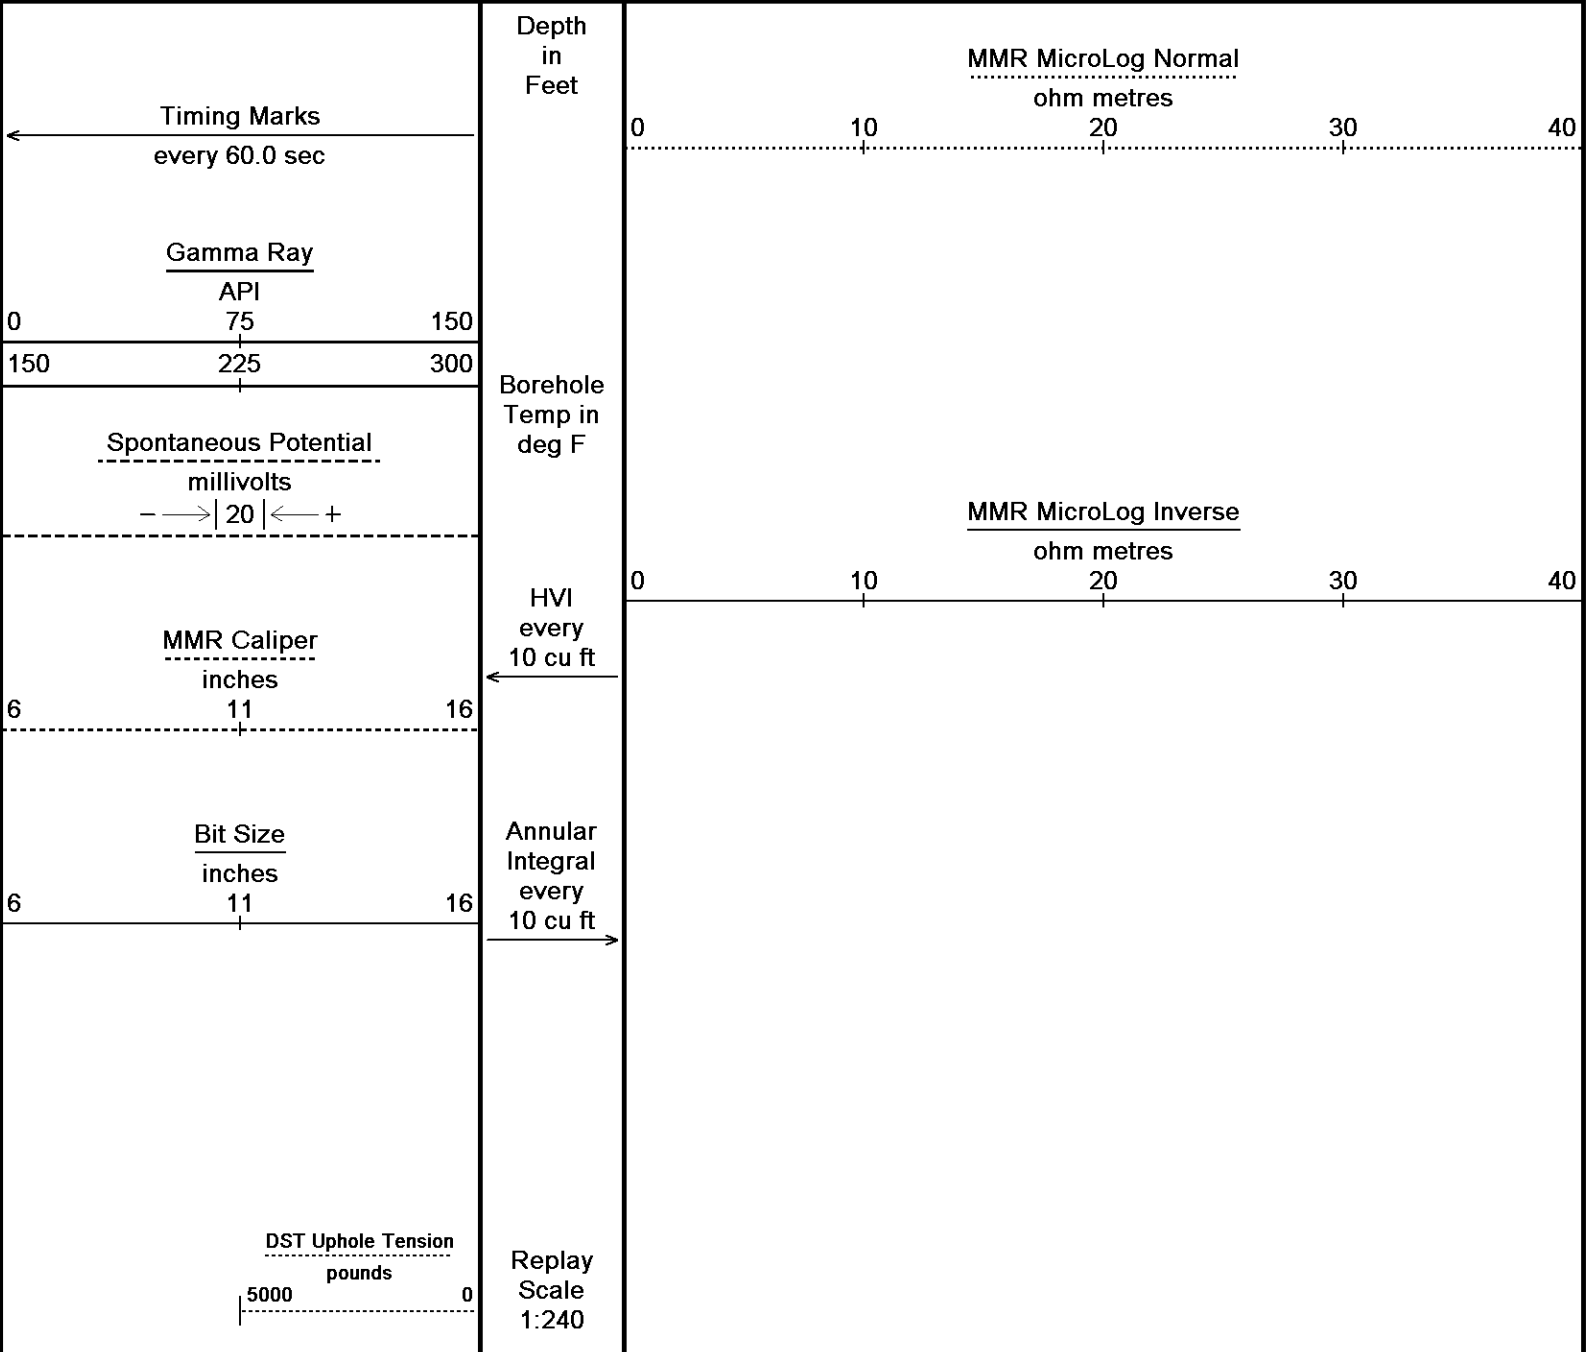

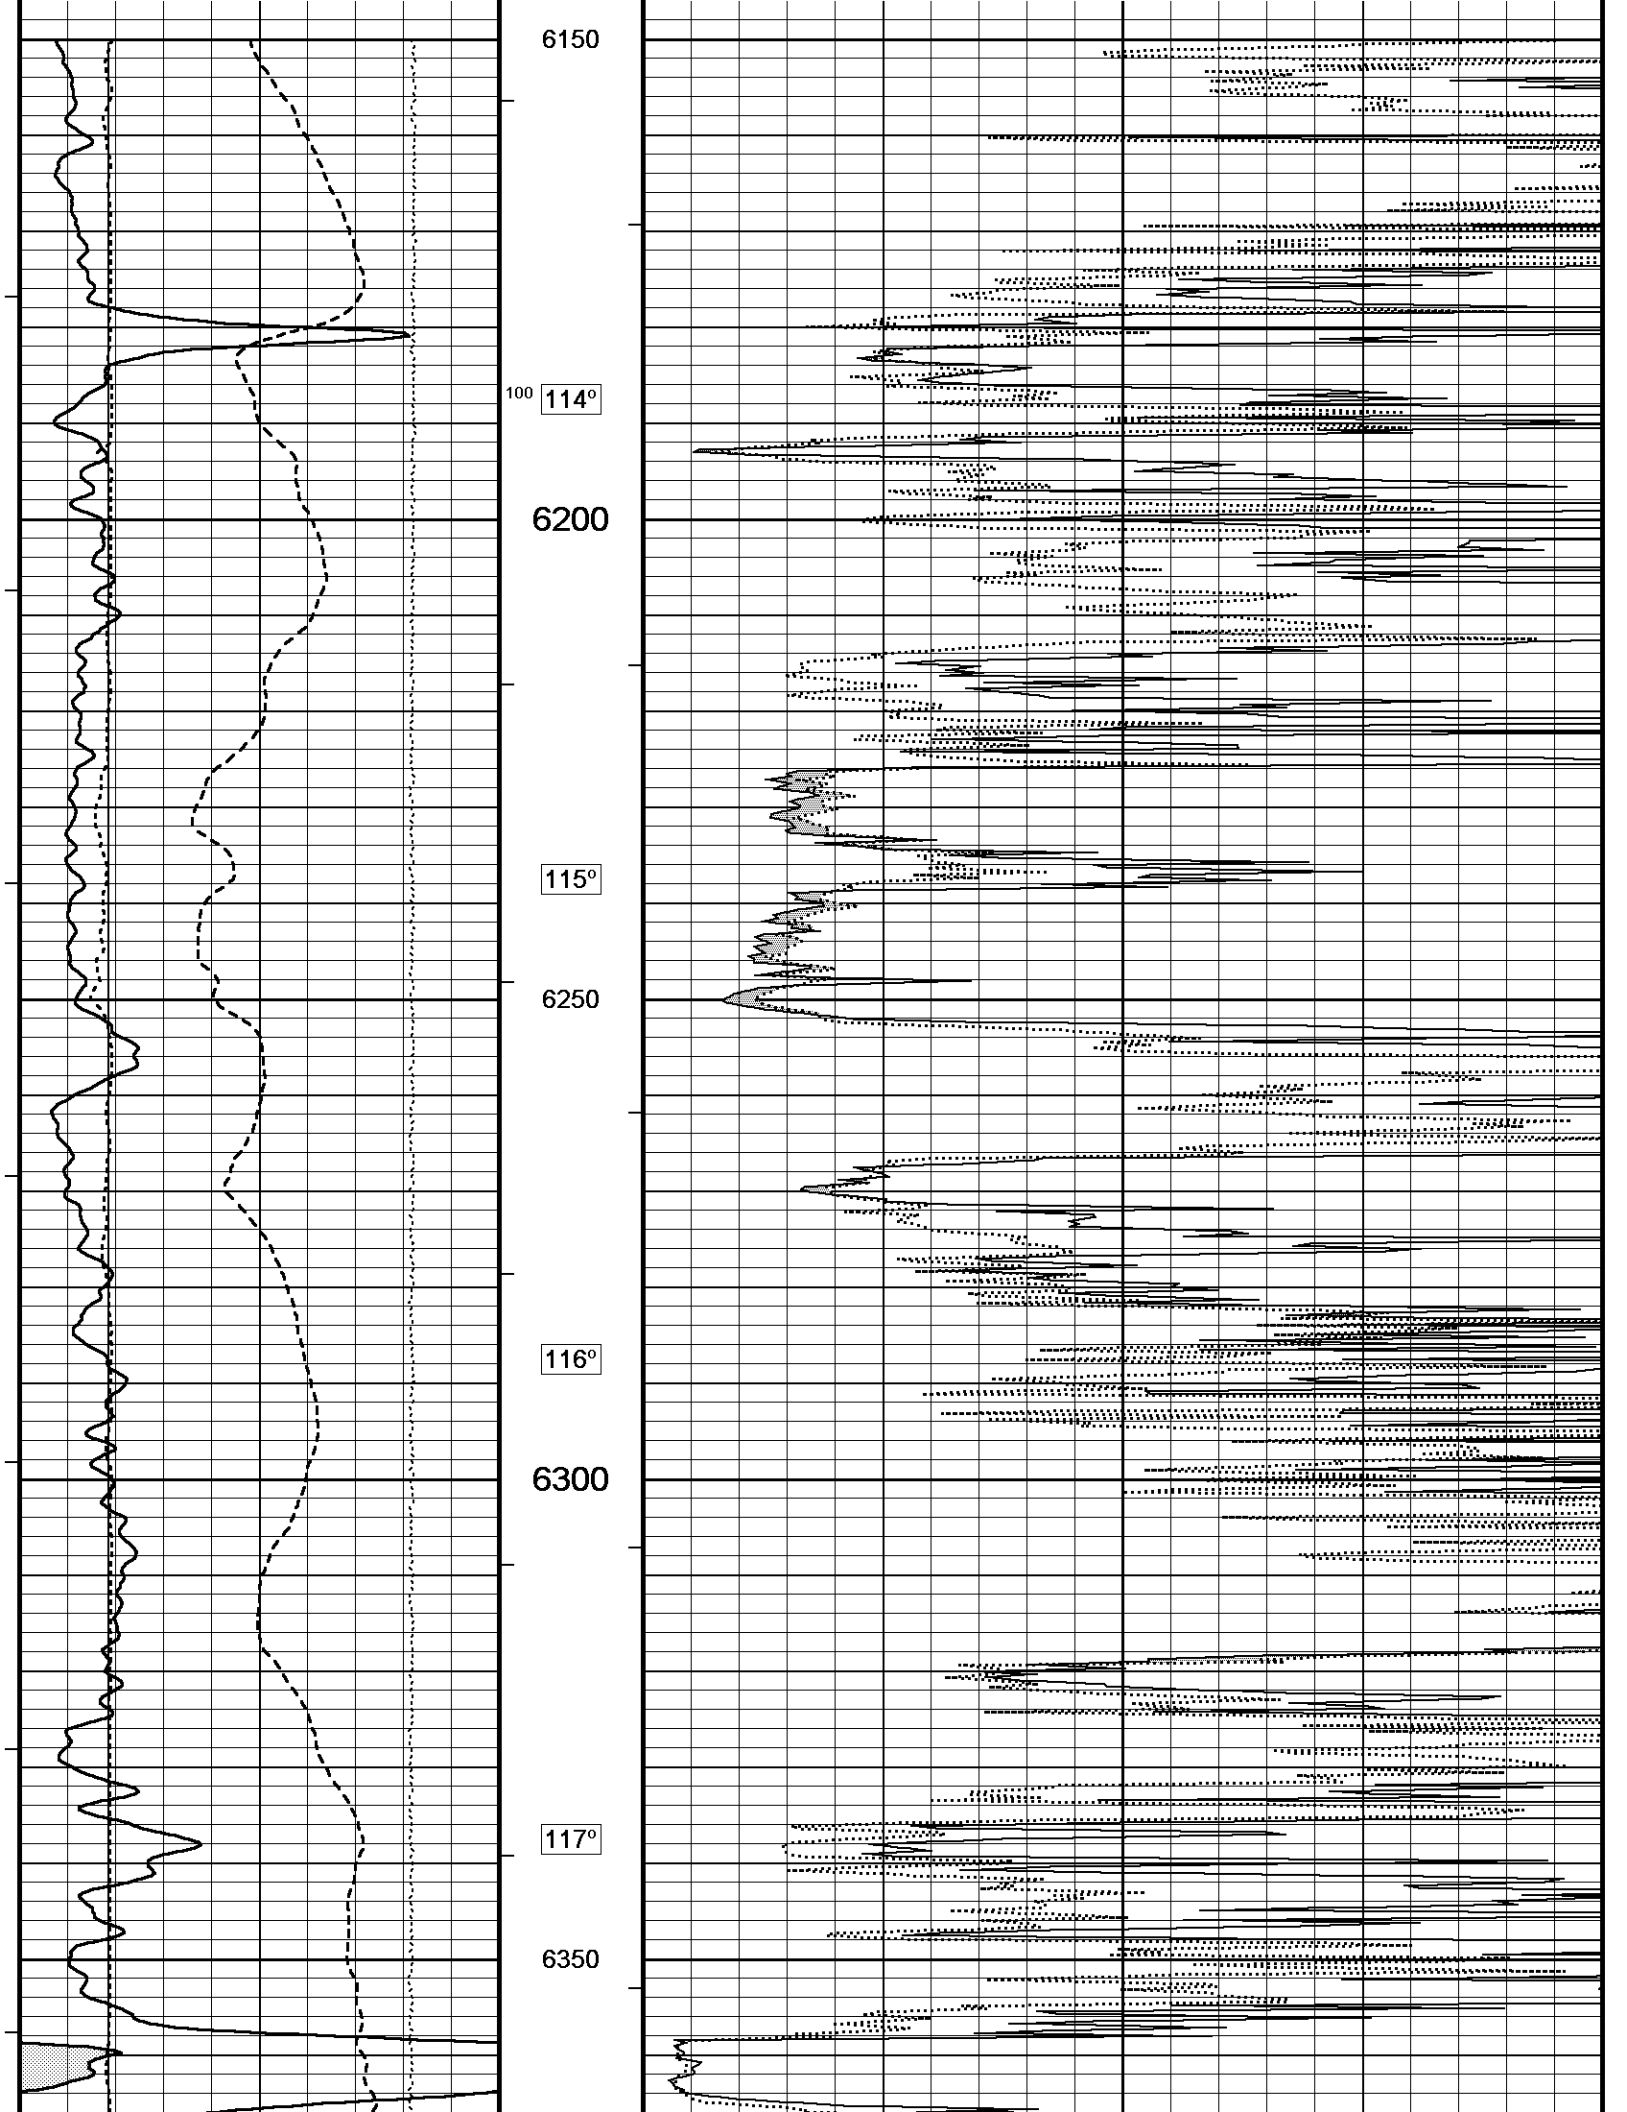

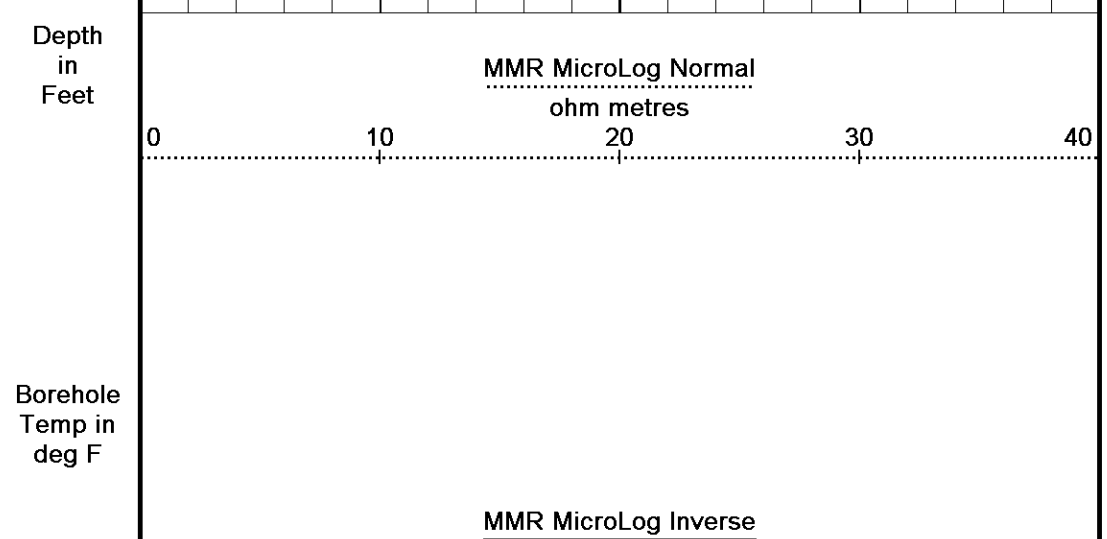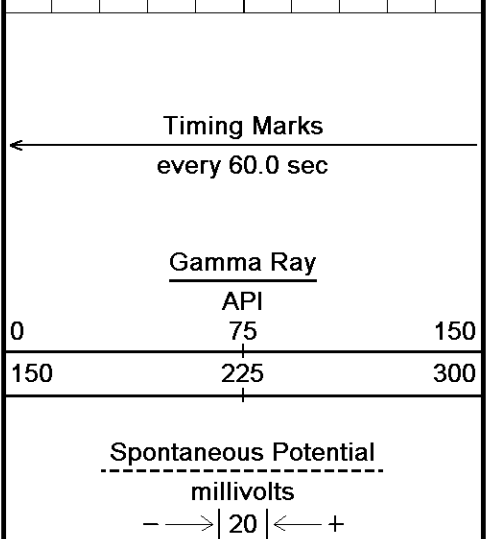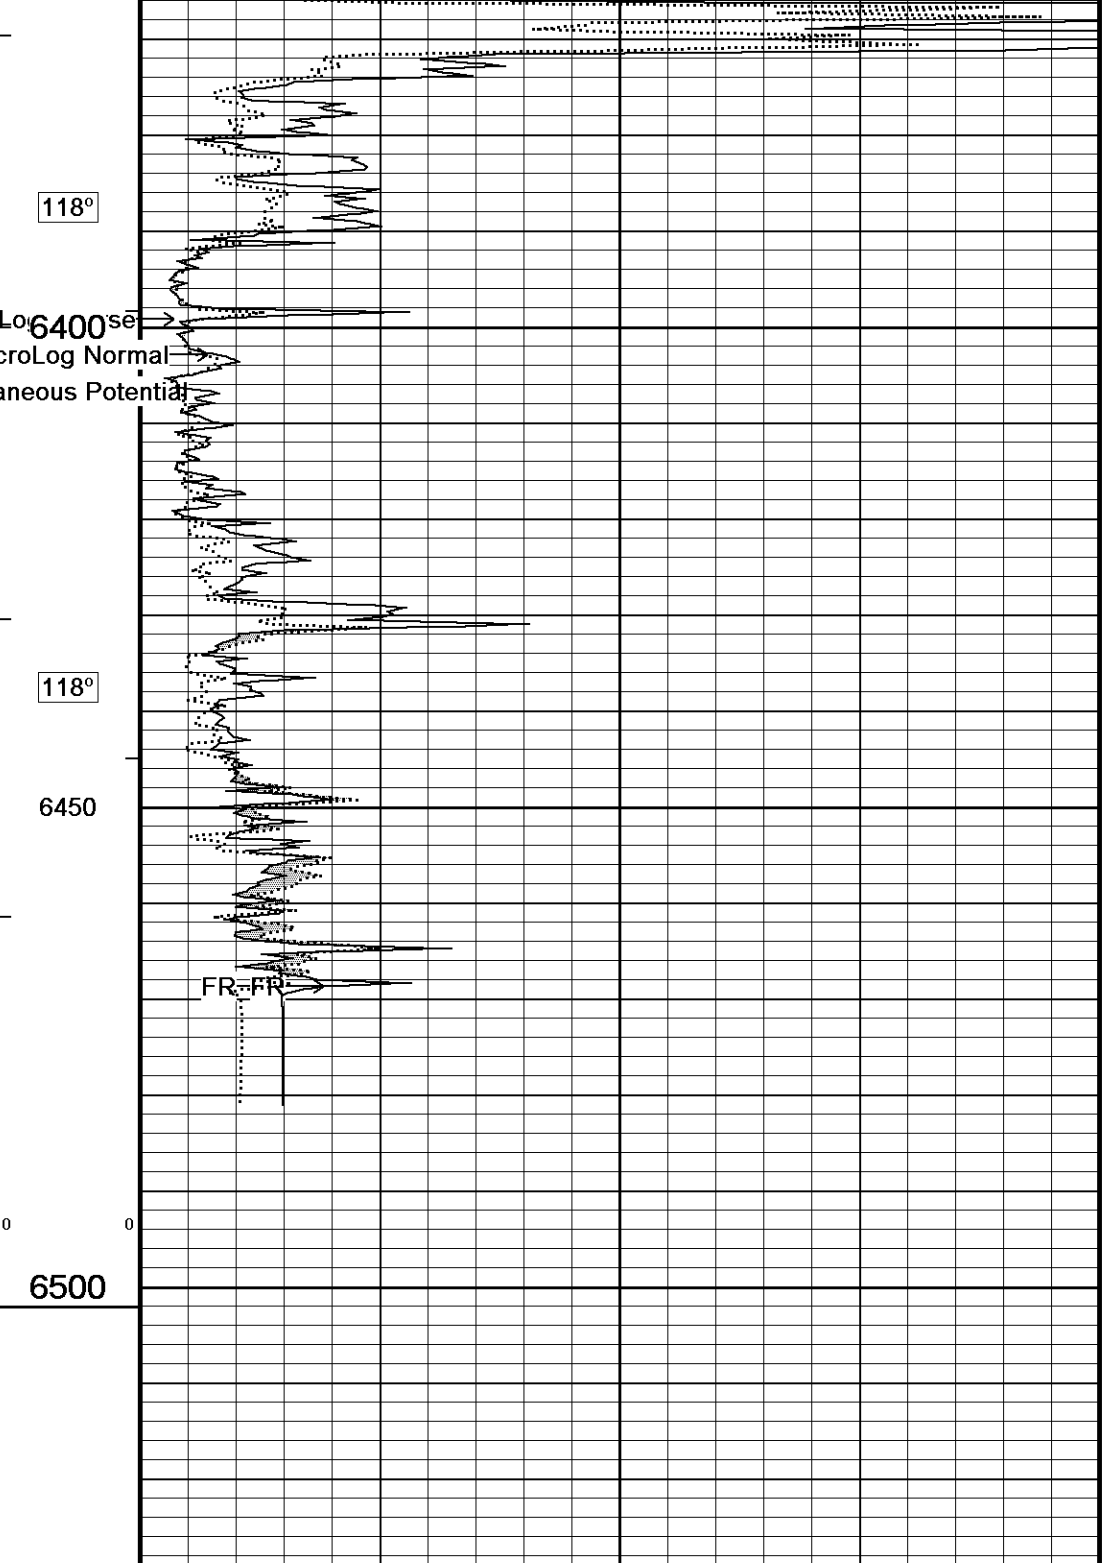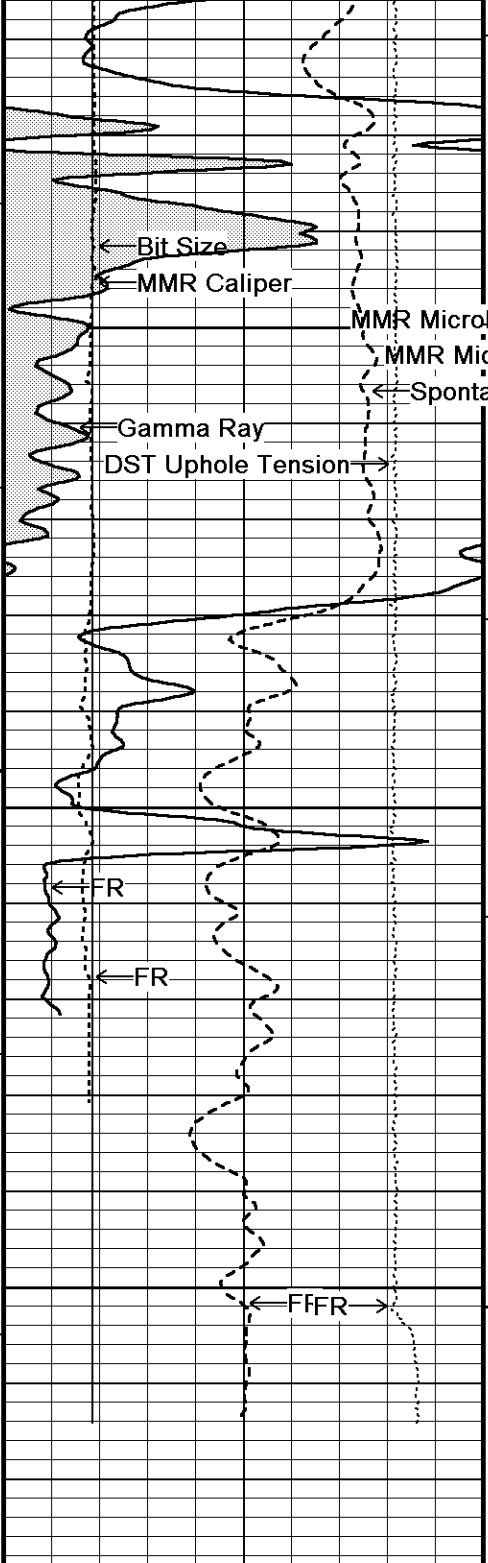

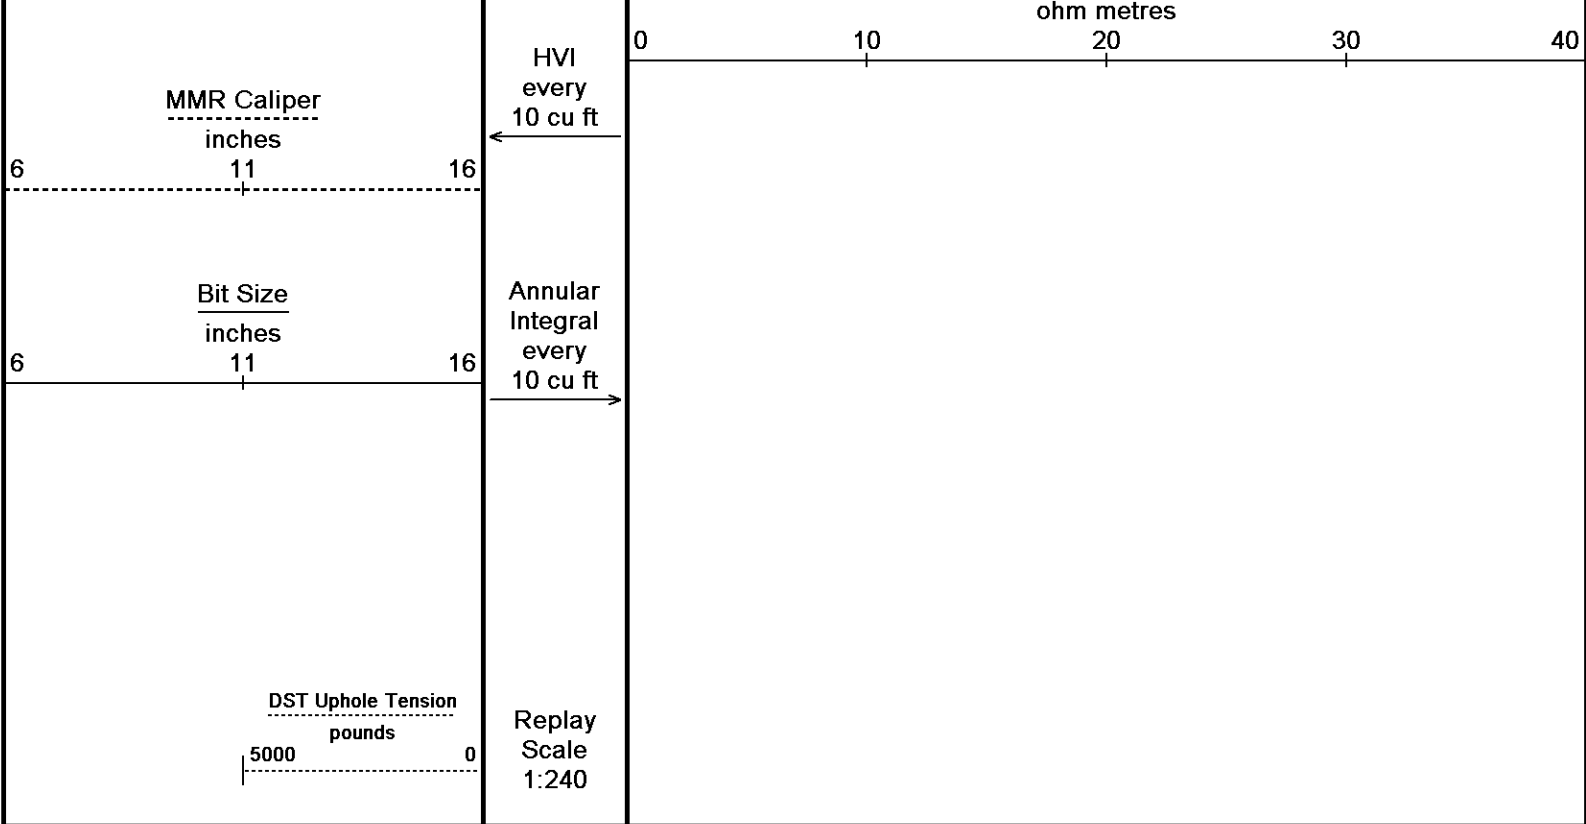



Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-DEC-2015 03:10
 Filename: C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Repeat.dta
 Recorded on 19-DEC-2015 22:13
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

↑ REPEAT SECTION ↑

↓ 10 INCH HIGH RESOLUTION UPPER SECTION ↓

Depth Based Data - Maximum Sampling Increment 2.5cm
 Plotted on 20-DEC-2015 03:10
 Filename: C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Hi-Res Upper.dta
 Recorded on 19-DEC-2015 21:11
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

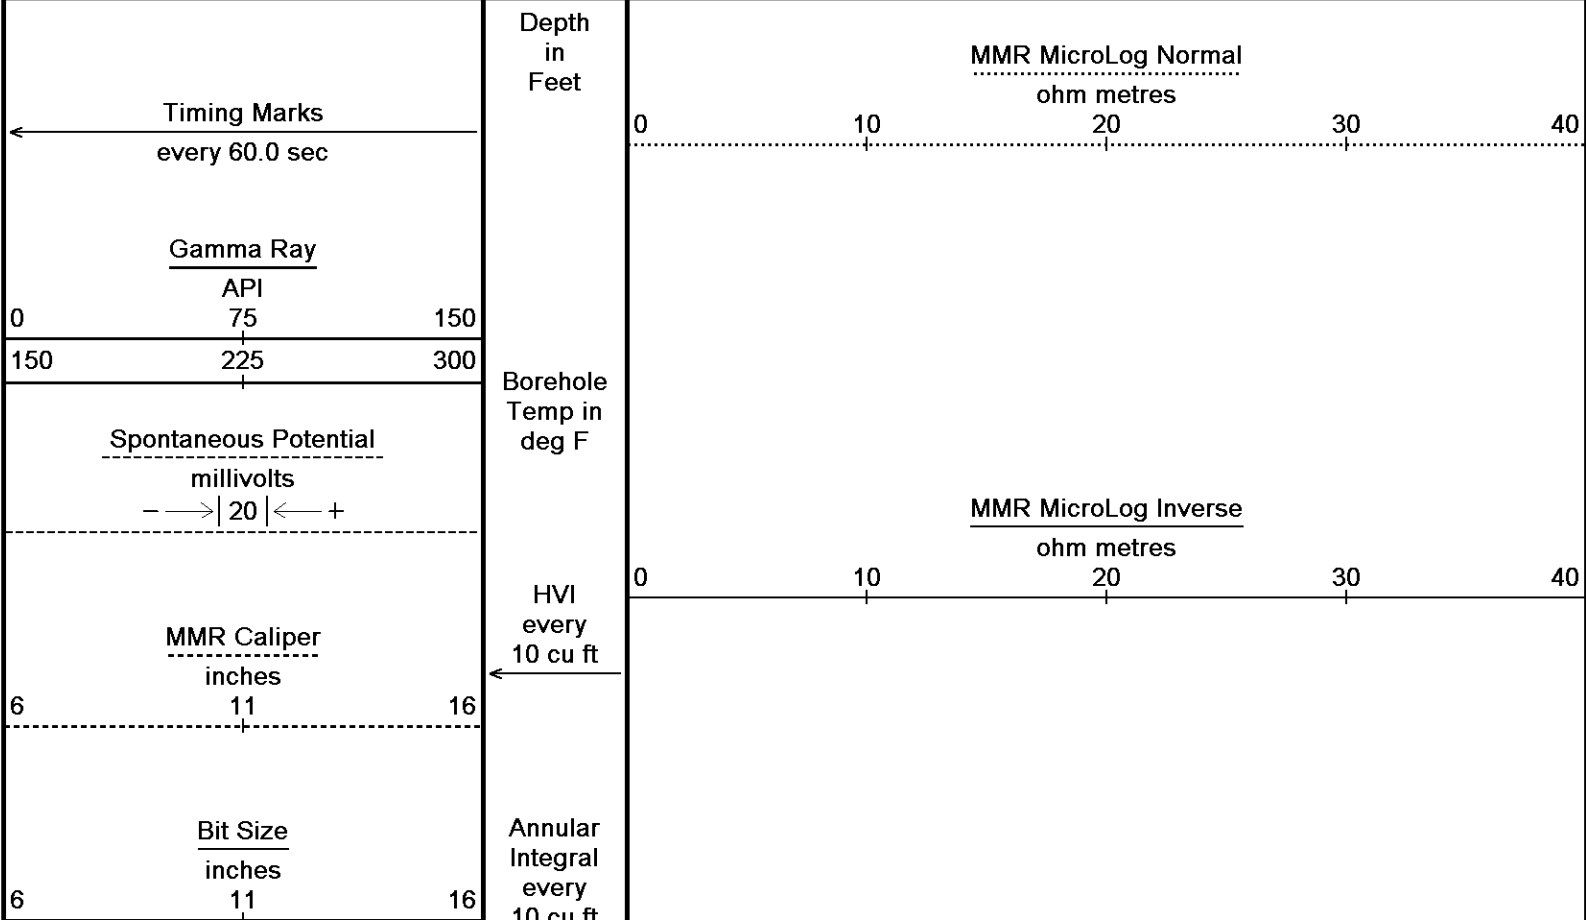

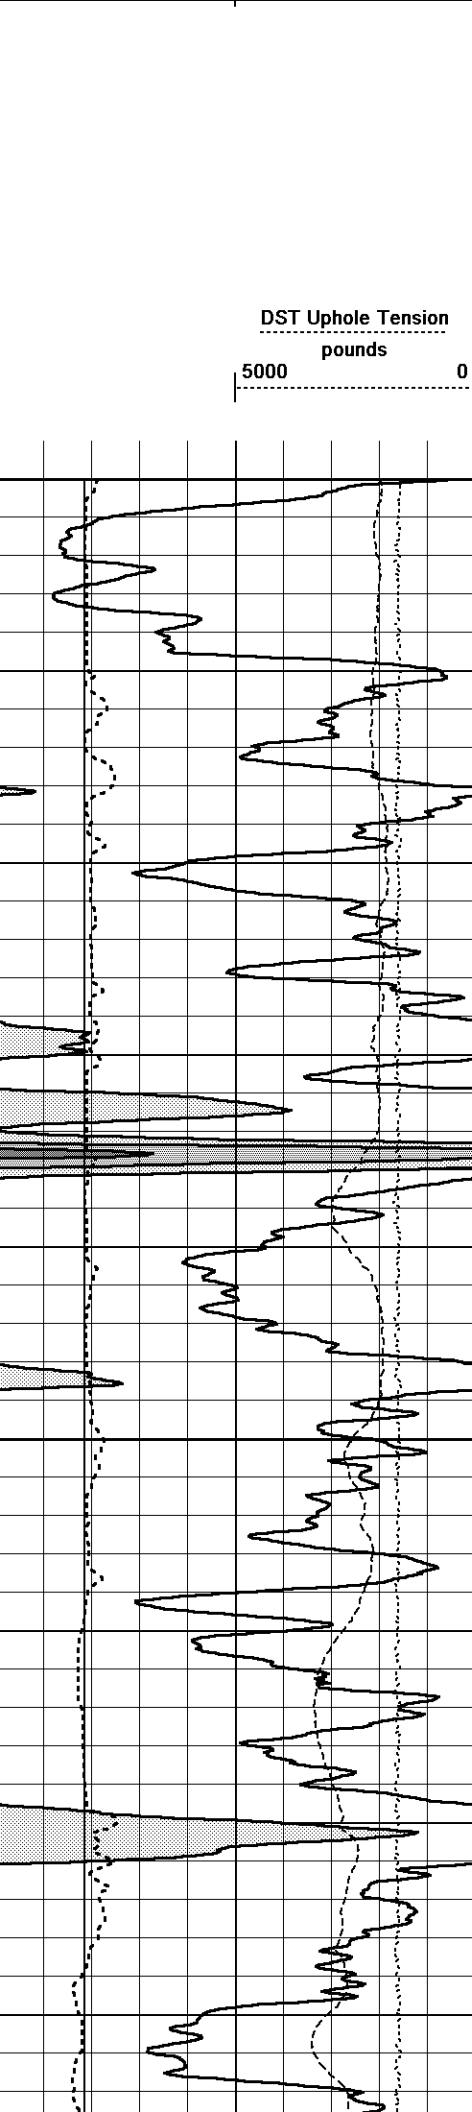


10 cu ft


Replay
Scale
1:120

5150

105°

5200

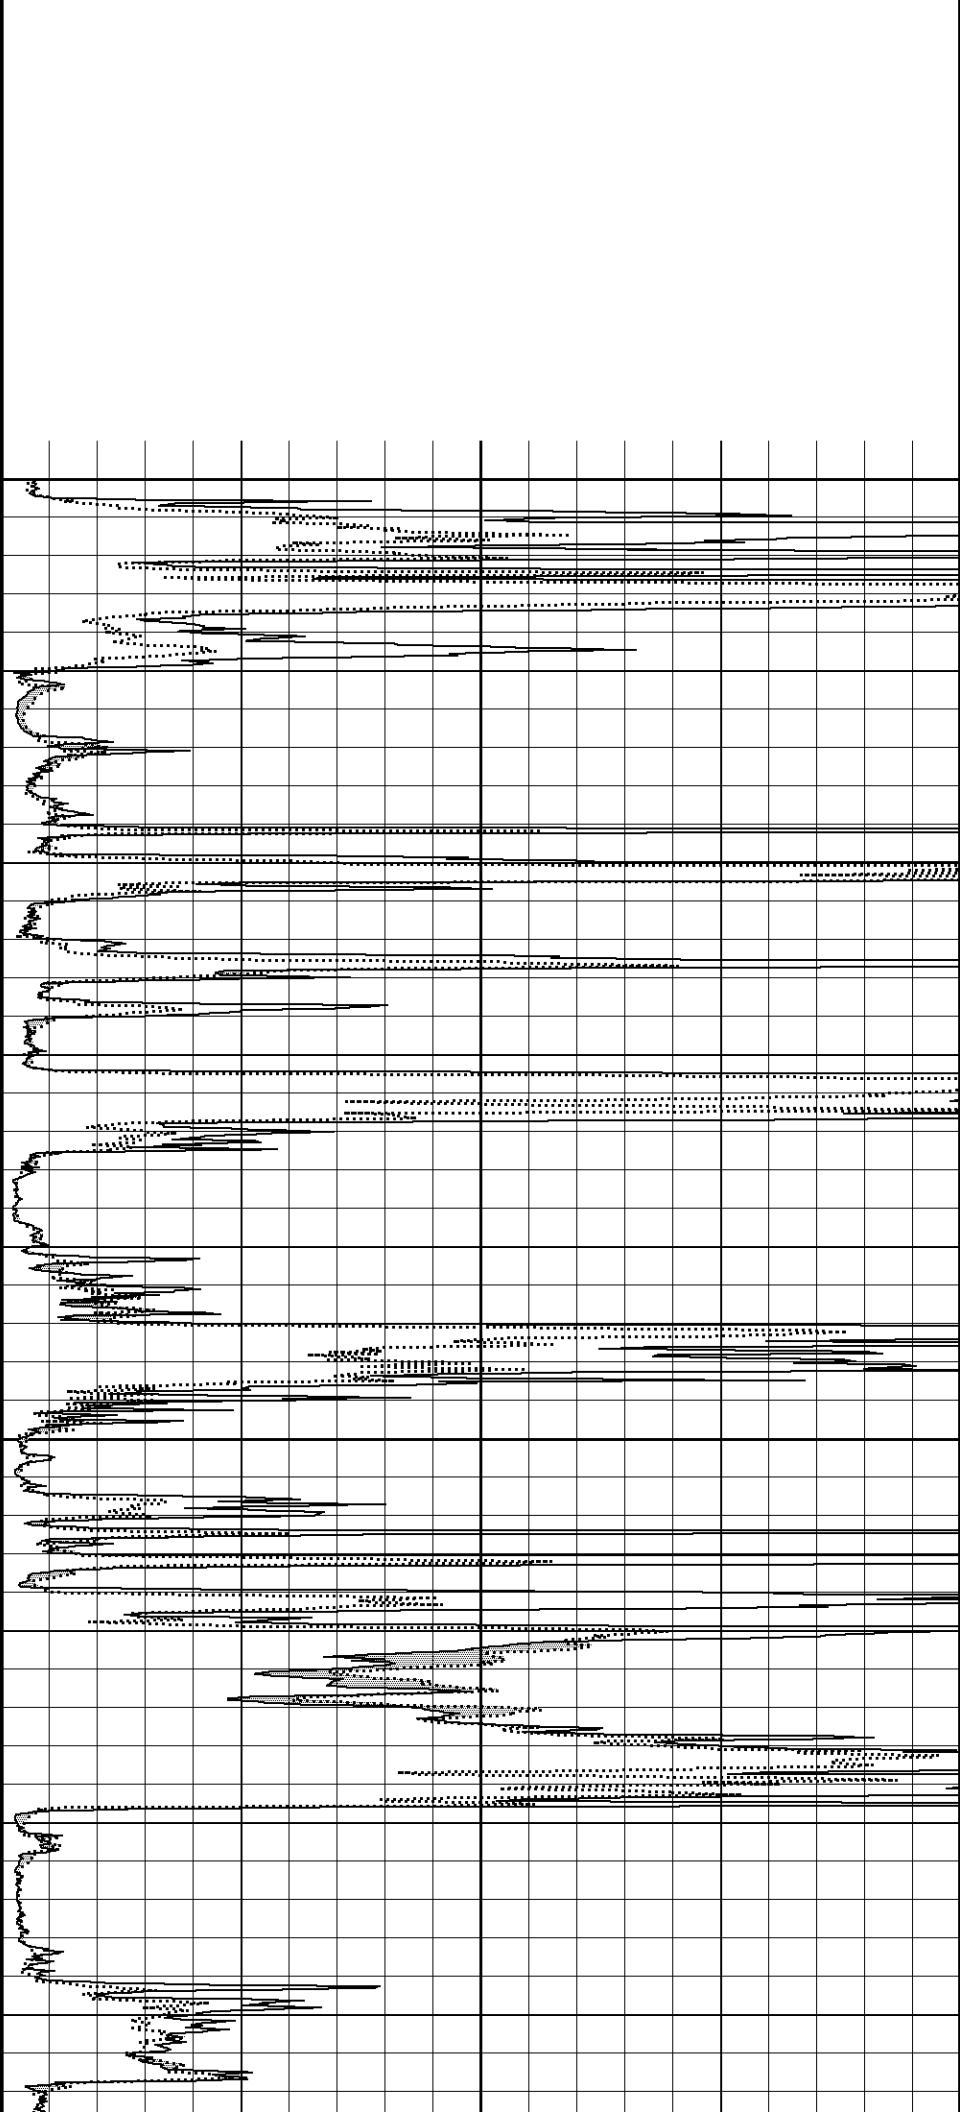


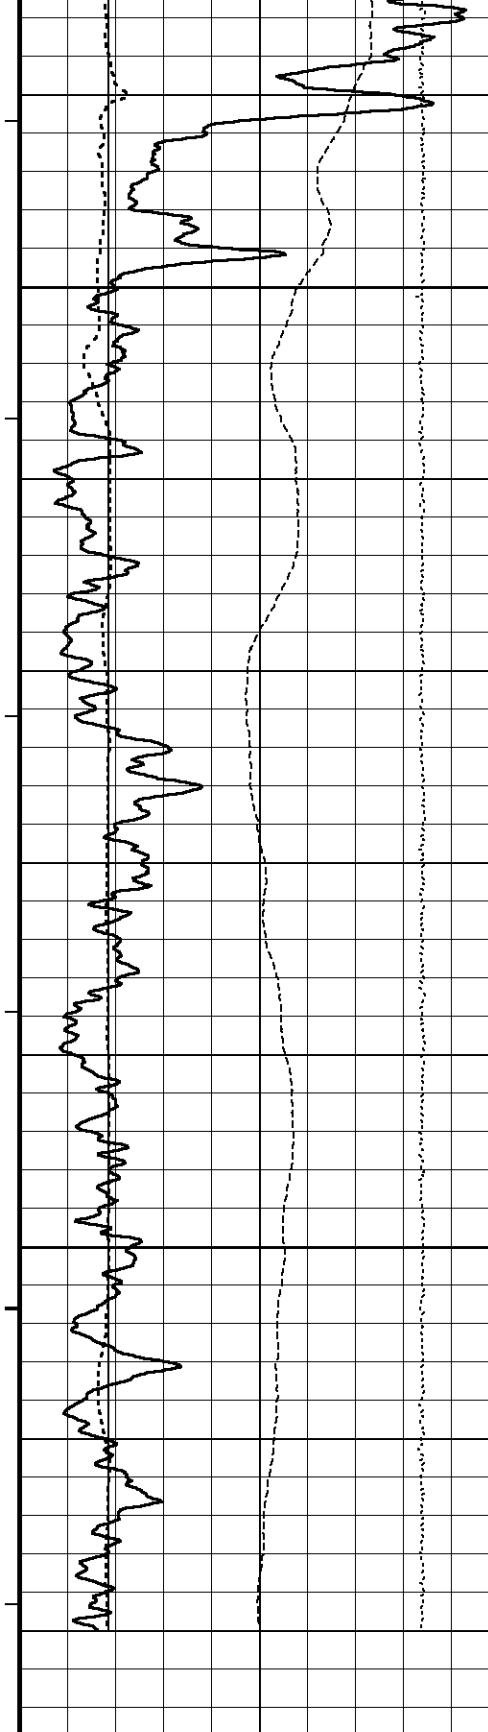

Timing Marks
every 60.0 sec

Gamma Ray


| | | |
|-----|-----|-----|
| 0 | 75 | 150 |
| 150 | 225 | 300 |

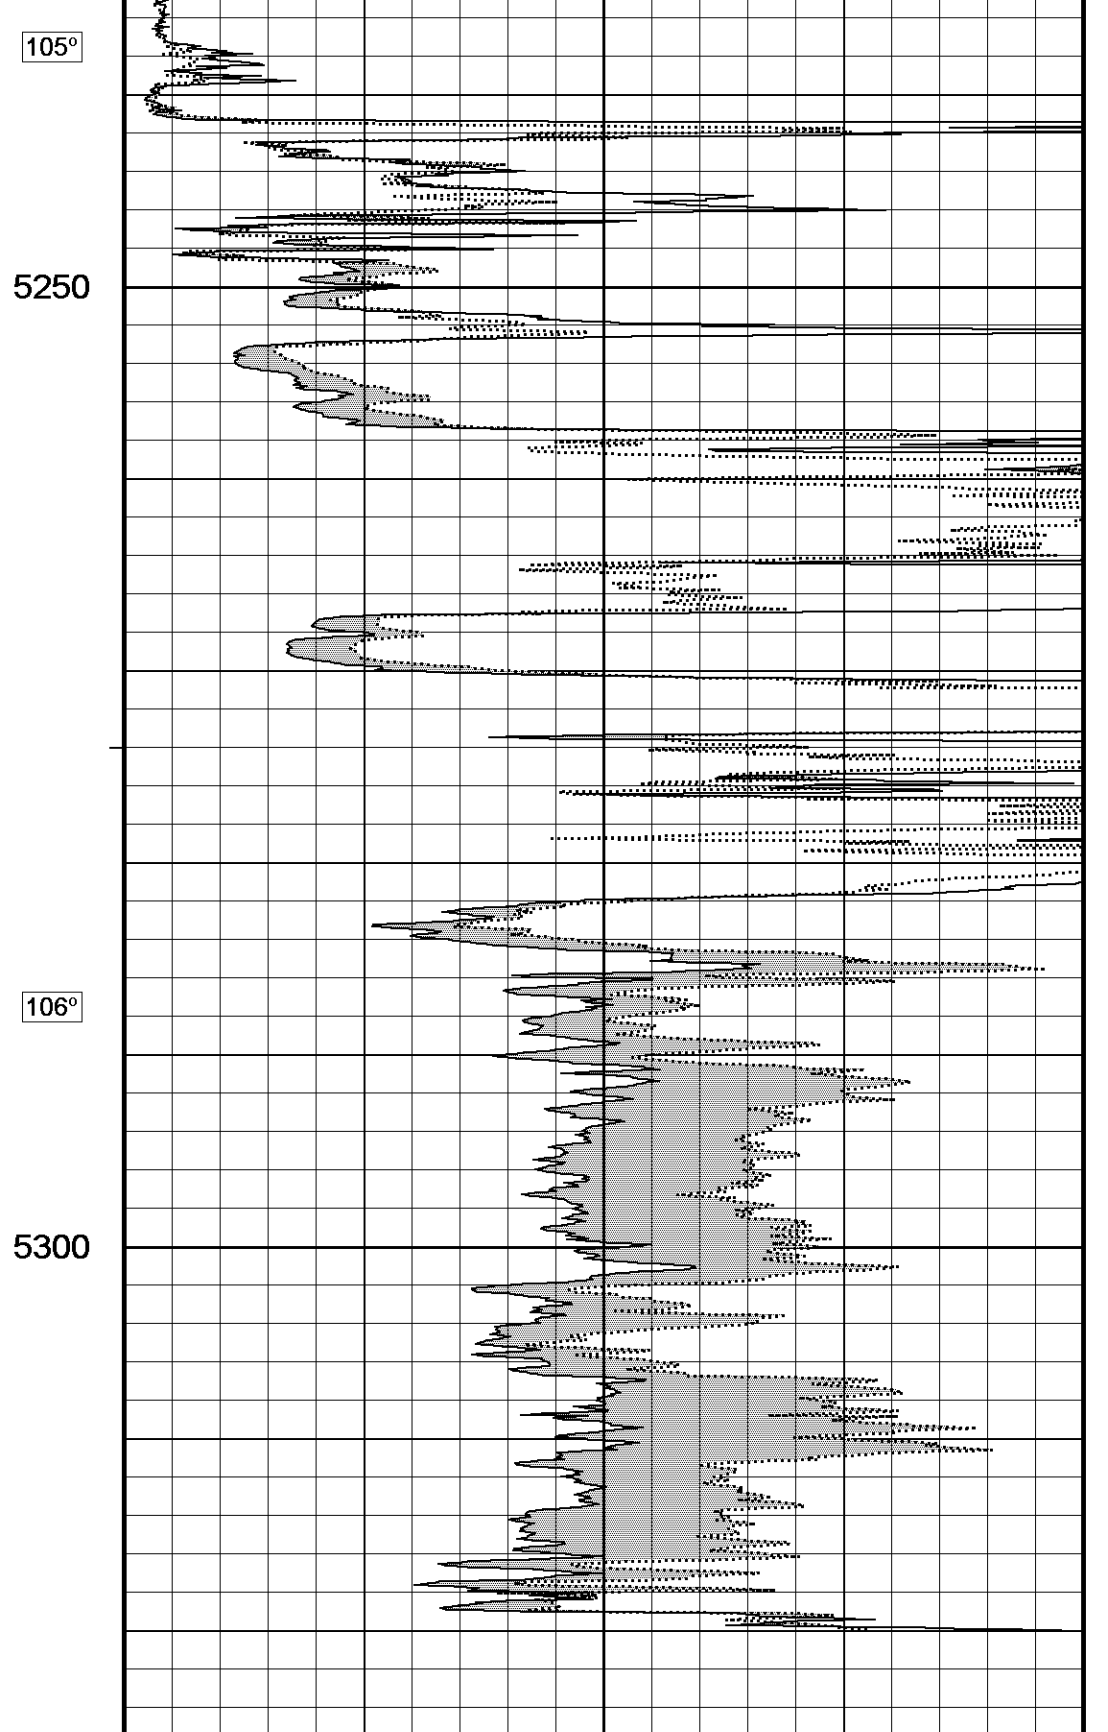

Depth in
Feet

MMR MicroLog Normal
ohm metres

| | | | | |
|---|----|----|----|----|
| 0 | 10 | 20 | 30 | 40 |
|---|----|----|----|----|

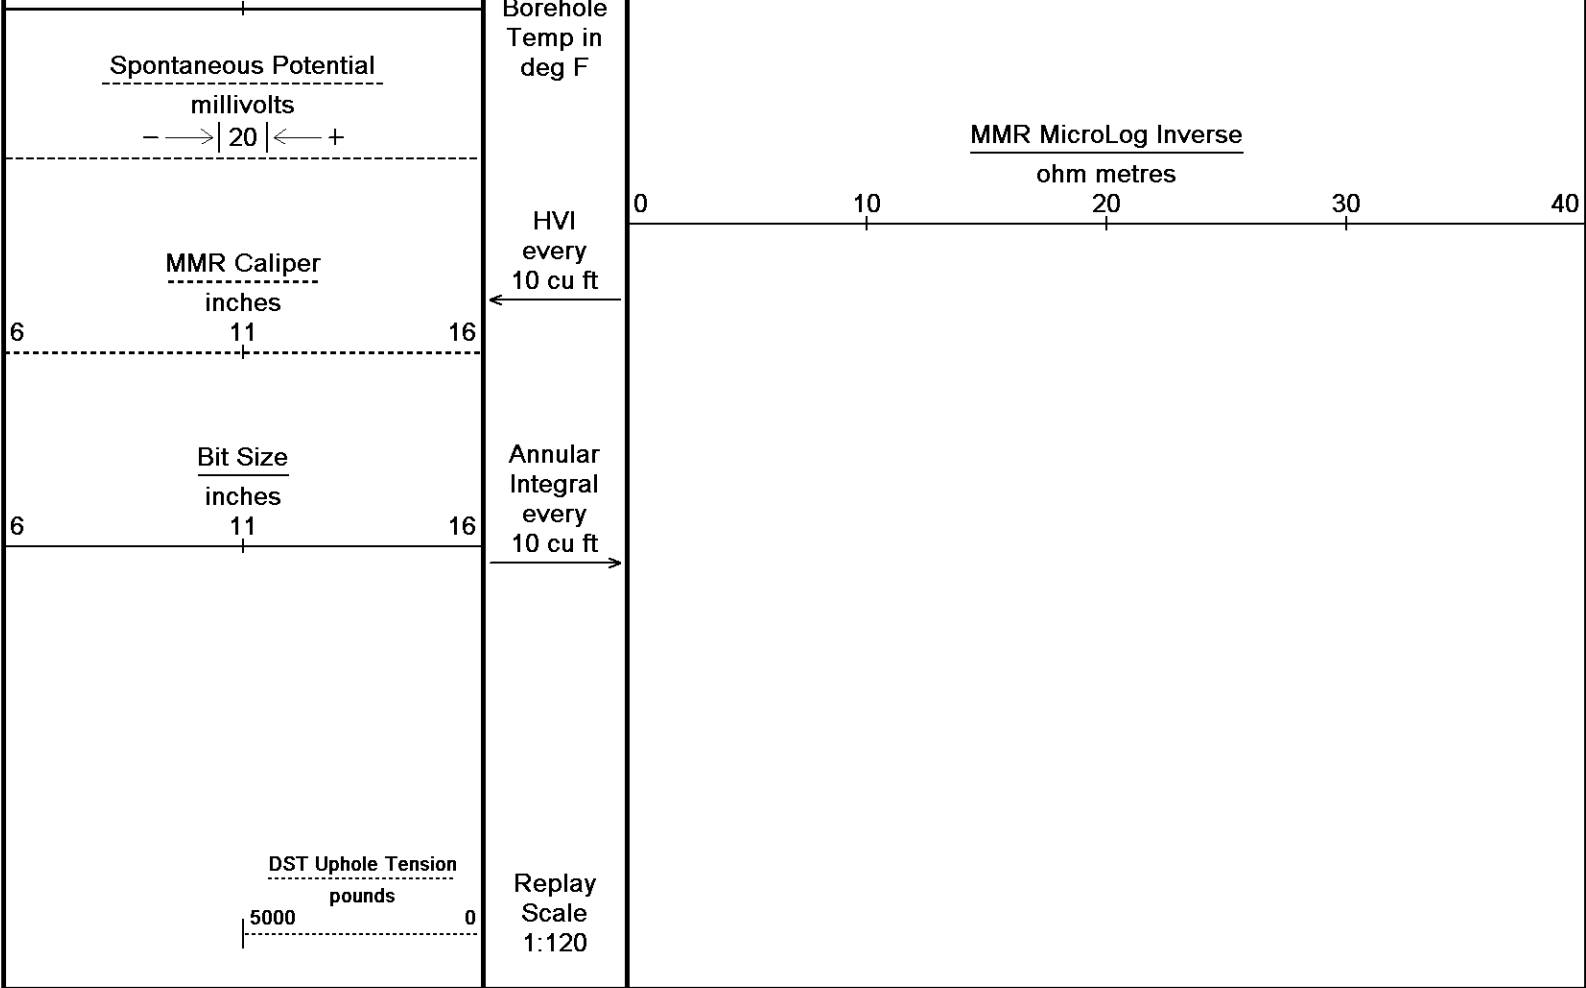


Depth Based Data - Maximum Sampling Increment 2.5cm Plotted on 20-DEC-2015 03:10
 Filename: C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Hi-Res Upper.dta Recorded on 19-DEC-2015 21:11
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

↑ **10 INCH HIGH RESOLUTION UPPER SECTION** ↑

↓ **10 INCH HIGH RESOLUTION LOWER SECTION** ↓

Depth Based Data - Maximum Sampling Increment 2.5cm Plotted on 20-DEC-2015 03:10
 Filename: C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Hi-Res Lower.dta Recorded on 19-DEC-2015 21:43
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

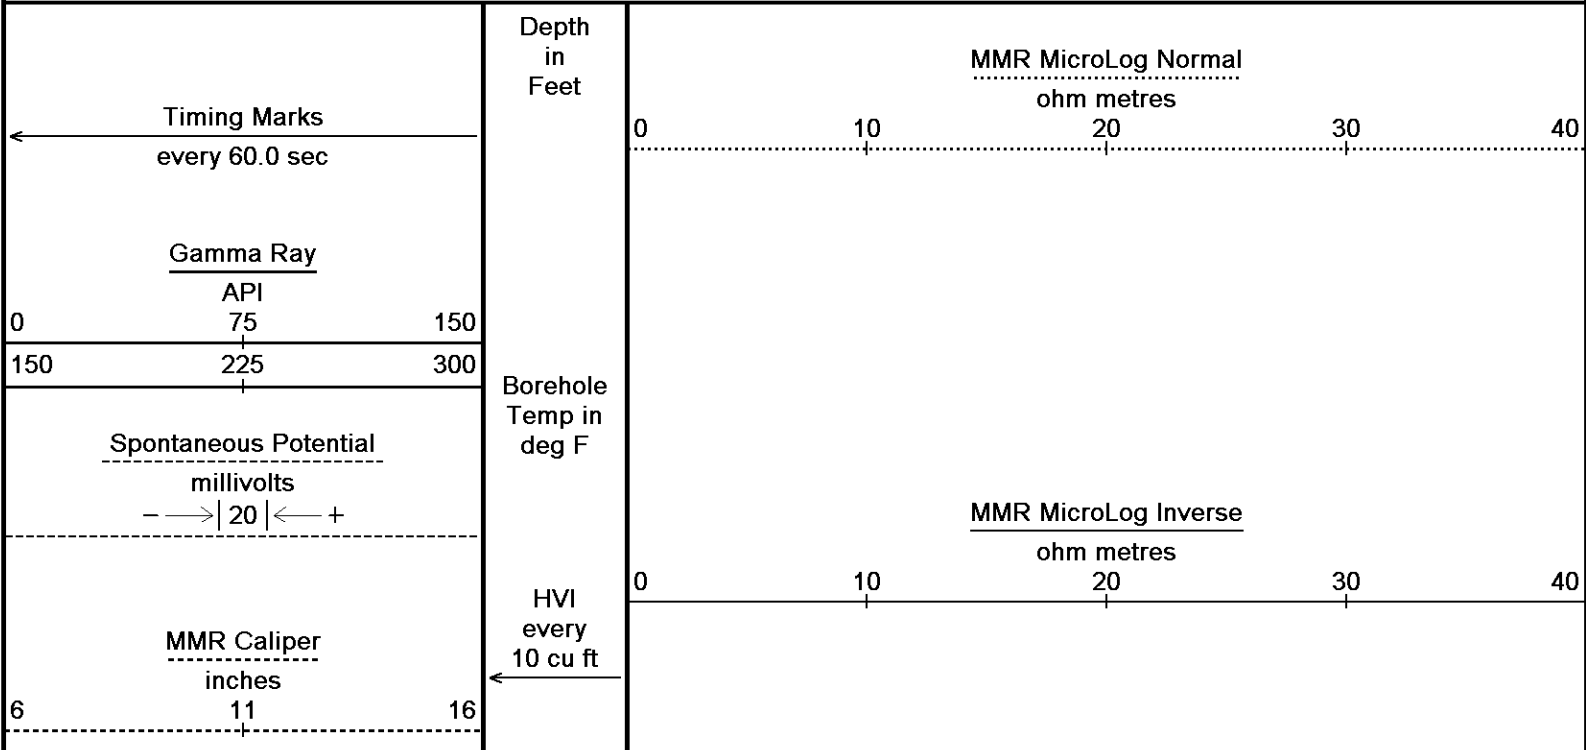

Bit Size
inches
11

Annular
Integral
every
10 cu ft

6 16

DST Uphole Tension
pounds

5000 0



Replay
Scale
1:120


5980

6000

111°



6050

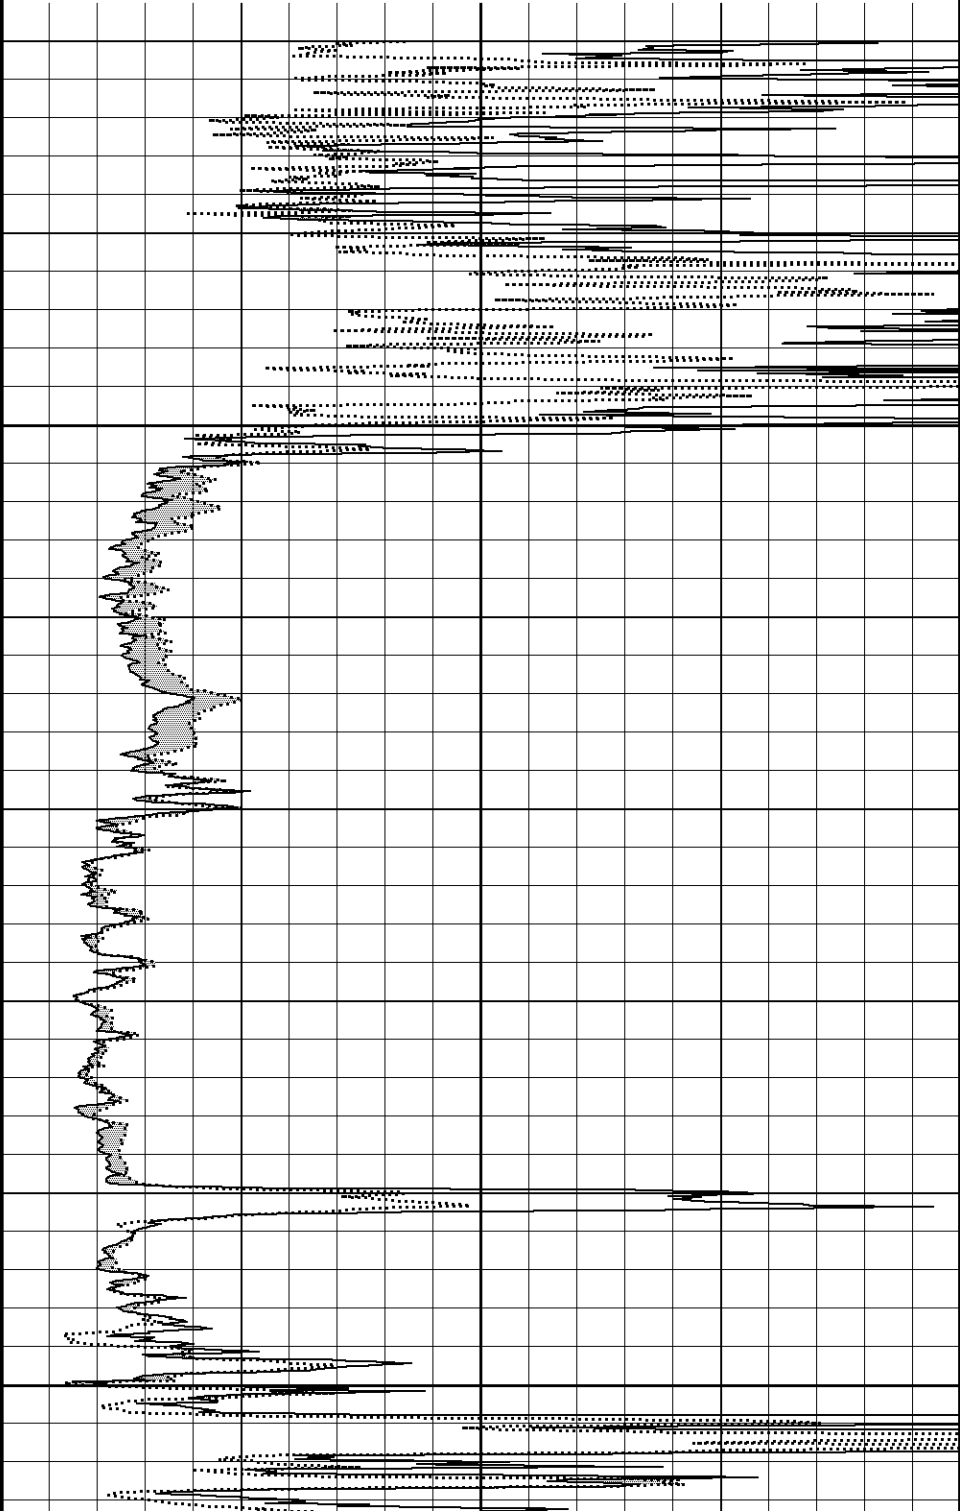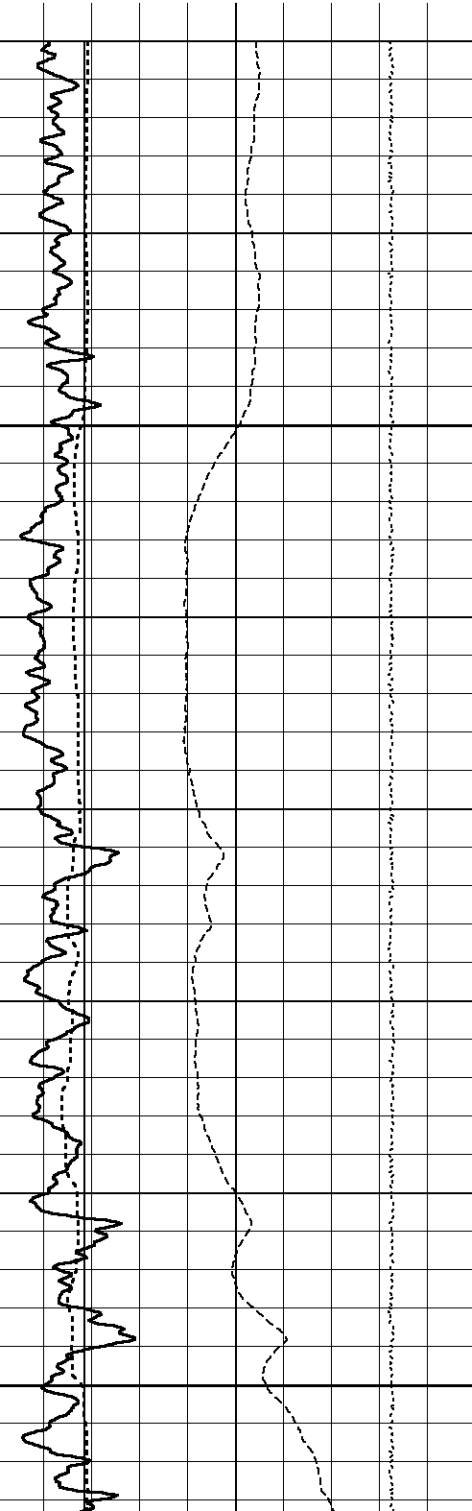


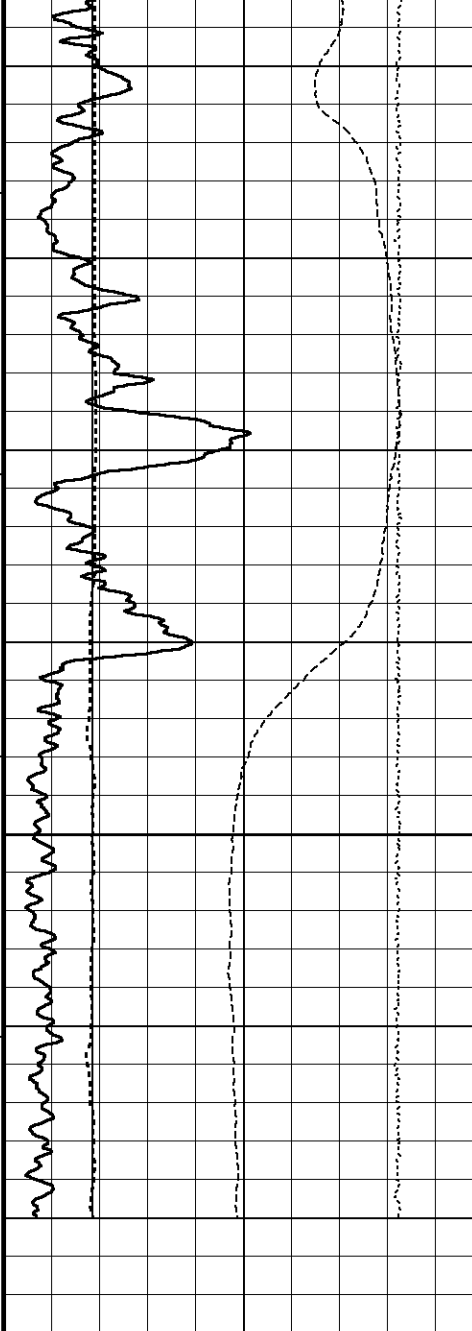


111°
6100




Depth
in
Feet

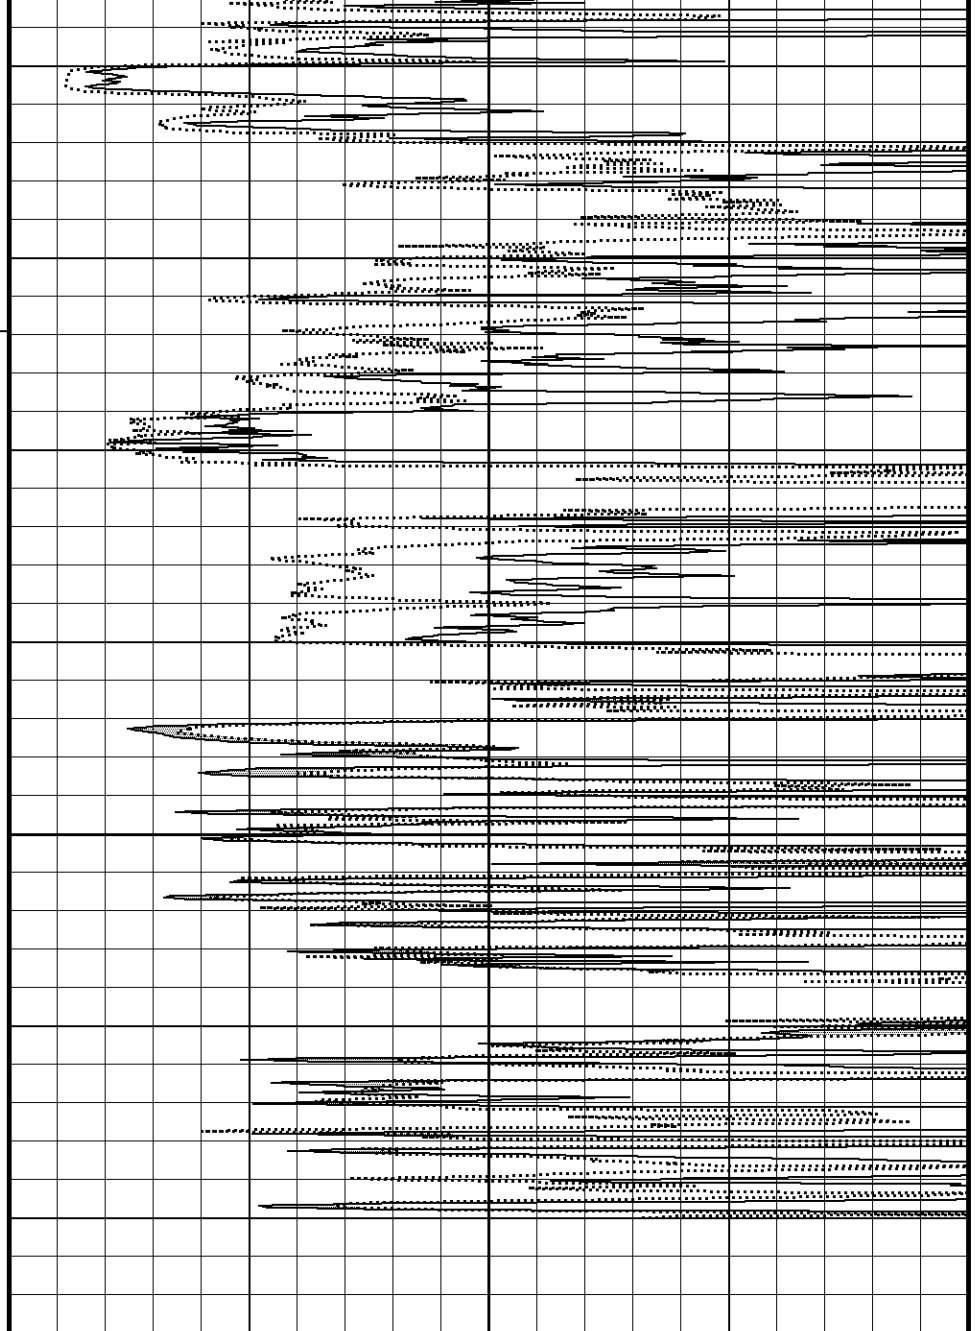


Borehole
Temp in
deg F



Timing Marks
every 60.0 sec

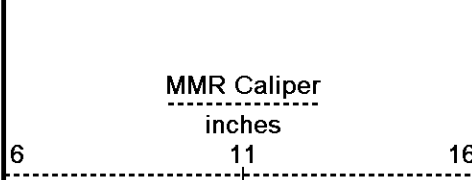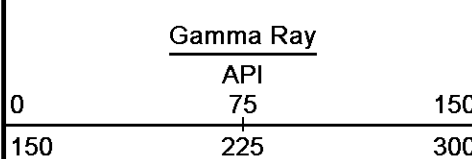

HVI
every
10 cu ft

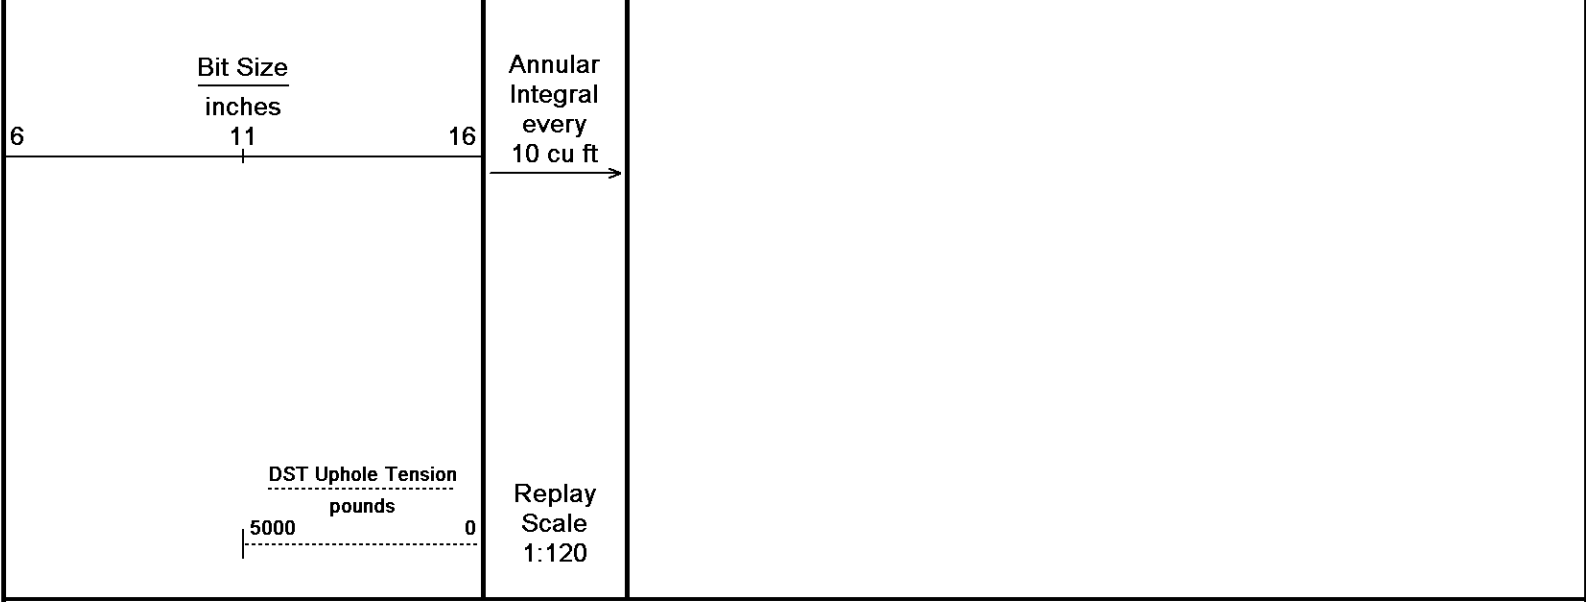

Depth Based Data - Maximum Sampling Increment 2.5cm
 Plotted on 20-DEC-2015 03:10
 Filename: C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Hi-Res Lower.dta
 Recorded on 19-DEC-2015 21:43
 System Versions: Logged with 15.03.5939 Plotted with 15.03.5939

↑ 10 INCH HIGH RESOLUTION LOWER SECTION ↑

BEFORE SURVEY CALIBRATION
 C:\Minimus 15.03.5939\Logs\O'Brien Mary #1-1\O'Brien Mary #1-1 Repeat.dta

General Constants All 000 Last Edited on 19-DEC-2015,20:31

| | | |
|--|-----------------------|------------|
| General Parameters | | |
| Mud Resistivity | 0.700 | ohm-metres |
| Mud Resistivity Temperature | 75.000 | degrees F |
| Water Level | 0.000 | feet |
| Borehole Fluid Processing | Wet Hole | |
| Hole/Annular Volume and Differential Caliper Parameters | | |
| HVOL Method | Single Caliper | |
| HVOL Caliper 1 | Density Caliper | |
| HVOL Caliper 2 | N/A | |
| Annular Volume Diameter | 4.500 | inches |
| Caliper for Differential Caliper | None | |
| Rwa Parameters | | |
| Porosity used | Crossplot Porosity | |
| Resistivity used | Array Ind. One Res Rt | |
| RWA Constant A | 0.610 | |
| RWA Constant M | 2.150 | |
| SW/APOR Tool Source | 0.000 | |

Down-hole Tension Calibration SMS 0 Field Calibration on 15-DEC-2015 07:54

| Reading No | Measured | Calibrated (lbs) |
|------------|----------|------------------|
| 1 | 15210.27 | 0.00 |
| 2 | 16310.99 | 481.00 |

Gamma Calibration MCG-C 123 Field Calibration on 19-DEC-2015 14:25

| | Measured | Calibrated (API) |
|--------------------|----------|------------------|
| Background | 71 | 49 |
| Calibrator (Gross) | 729 | 505 |
| Calibrator (Net) | 658 | 456 |



Gamma Constants MCG-C 123 Last Edited on 19-DEC-2015,18:43

| | | | |
|---------------------------------|-----------------|------|-------|
| Gamma Calibrator Number | MCGGRCC141 | | |
| GRC-M Calibrator Jig in Use? | | NO | |
| Inactive Background Jig in Use? | | NO | |
| Mud Density | | 1.13 | gm/cc |
| Caliper Source for Processing | Density Caliper | | |
| Tool Position | Eccentred | | |
| Potassium Equivalence | Chloride | | |
| K Mud Concentration | | 0.00 | % |

High Resolution Temperature Calibration MCG-C 123

Field Calibration on 31-OCT-2015,17:05

| | | |
|-------|----------|-------------------|
| | Measured | Calibrated(Deg F) |
| Lower | 50.00 | 50.00 |
| Upper | 100.00 | 100.00 |

High Resolution Temperature Constants MCG-C 123

Last Edited on 22-SEP-2015,11:43

Pre-filter Length 11

SP Calibration MCG-C 123

Field Calibration on 02-NOV-2015 16:50

| | | |
|-------------|----------|-----------------|
| | Measured | Calibrated (mV) |
| Reference 1 | 100.3 | 100.0 |
| Reference 2 | -100.1 | -99.9 |

Micro Normal and Micro Inverse Calibration MMR-C.A 247

Base Calibration on 08-DEC-2015 14:10


Field Check on 19-DEC-2015 14:13

Base Calibration

| | | | | | |
|---------|---------------|------------|------------|--------------------|------|
| | | Measured | | Calibrated (ohm-m) | |
| Channel | Resistor 1 | Resistor 2 | Resistor 1 | Resistor 2 | |
| | Micro Normal | 10.2 | 50.0 | 5.1 | 25.6 |
| | Micro Inverse | 10.0 | 49.5 | 3.4 | 16.9 |

| | | |
|---------------|--------------------|---------------------|
| Channel | Base Check (ohm-m) | Field Check (ohm-m) |
| Micro Normal | 93.5 | 93.5 |
| Micro Inverse | 62.2 | 62.2 |

Micro Normal & Micro Inverse Calibration Tolerance MMR-C.A 247

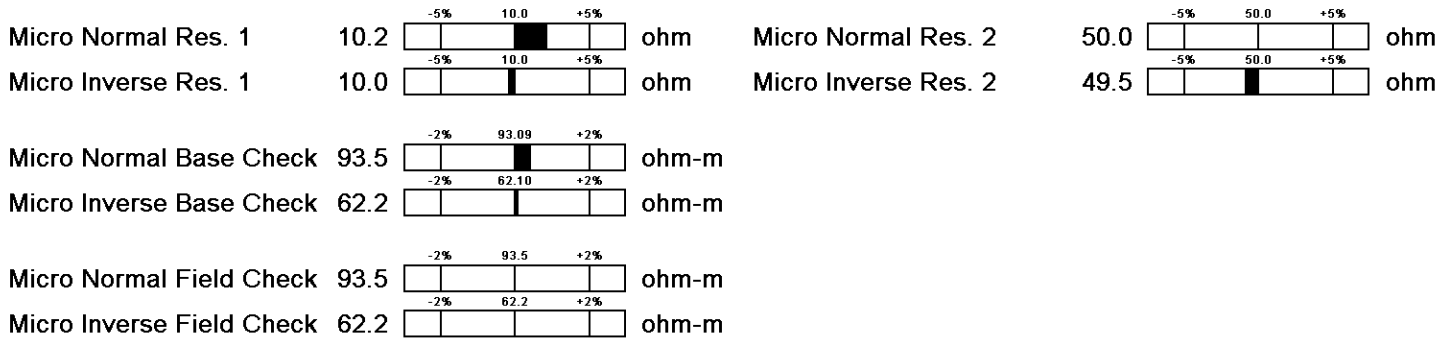

Micro Normal and Micro Inverse Constants MMR-C.A 247

Last Edited on 20-OCT-2015,12:33

Pad Type 8-12 in Soft Rubber Inflatable 006-9011-159

Micro Normal K Factor 0.5110

Micro Inverse K Factor 0.3380

Standoff Offset 0.0000 inches

Caliper Calibration MMR-C.A 247


Base Calibration on 08-DEC-2015 14:01

Field Calibration on 19-DEC-2015 14:11

| | | |
|------------------|----------|----------------------|
| Base Calibration | | |
| Reading No | Measured | Calibrator Size (in) |
| 1 | 14497 | 5.98 |
| 2 | 17836 | 7.97 |
| 3 | 21070 | 9.86 |
| 4 | 24988 | 11.92 |
| 5 | 0 | 0.00 |
| 6 | N/A | N/A |

| | | |
|-------------------|-----------------------|---------------------|
| Field Calibration | | |
| | Measured Caliper (in) | Actual Caliper (in) |
| | 7.96 | 7.97 |

Caliper Calibration Tolerances MMR-C.A 247

Short Arm Field Cal. 7.96  in

Micro-Resistivity Caliper Constants MMR-C.A 247

Last Edited on

Sonde Configuration Resistivity Mode

Neutron Calibration MDN-A.B 114

Base Calibration on 08-DEC-2015 14:59
Field Check on 19-DEC-2015 14:30

Base Calibration

| | Measured | | Calibrated (cps) | |
|-------|----------|-----|------------------|-----|
| | Near | Far | Near | Far |
| Ratio | 3047 | 94 | 3714 | 110 |
| | 32.339 | | 33.764 | |


Field Calibrator at Base

| | Calibrated (cps) | |
|-------|------------------|------|
| Ratio | 2143 | 3132 |
| | 0.684 | |

Field Check

| | Calibrated (cps) | |
|-------|------------------|------|
| Ratio | 2126 | 3071 |
| | 0.692 | |

Neutron Calibration Tolerances MDN-A.B 114

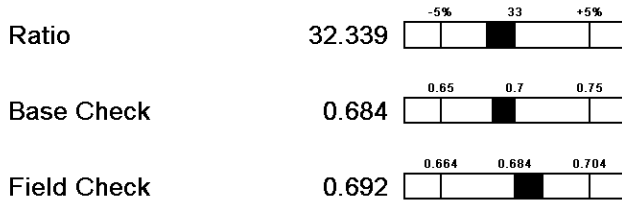

Neutron Constants MDN-A.B 114

Last Edited on 19-DEC-2015,18:43

| | | |
|---------------------------------|-----------------|-----------|
| Neutron Source Id | P0204NN | |
| Neutron Jig Number | NJ5736 | |
| Air Hole Processing | Legacy | |
| Caliper Source for Processing | Density Caliper | |
| Stand-off | 0.00 | inches |
| Mud Density | 1.00 | gm/cc |
| Limestone Sigma | 7.10 | cu |
| Sandstone Sigma | 4.26 | cu |
| Dolomite Sigma | 4.70 | cu |
| Formation Pressure Source | None | |
| Formation Pressure | N/A | kpsi |
| Temperature Source | Constant Value | |
| Temperature | 68.00 | degrees F |
| Mud Salinity | 0.00 | kppm |
| Salinity Correction | Not Applied | |
| Formation Fluid Salinity Source | None | |
| Formation Fluid Salinity | N/A | kppm |
| Barite Mud Correction | Not Applied | |

FE Calibration MFE-A.A 135

Base Calibration on 08-DEC-2015 14:21
Field Check on 19-DEC-2015 14:04


Base Calibration

| | Measured | Calibrated (ohm-m) |
|-------------|----------|--------------------|
| Reference 1 | 0.0 | 0.0 |
| Reference 2 | 963.1 | 126.8 |

Base Check 281.2

Field Check 281.5

FE Calibration Tolerances MFE-A.A 135

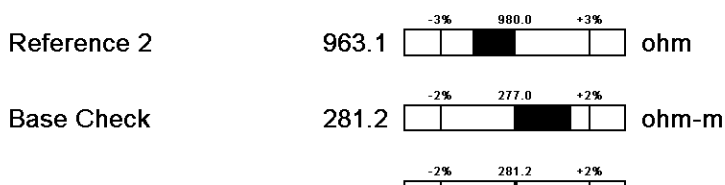

FE Constants MFE-A.A 135

Last Edited on 19-DEC-2015,18:42

Running Mode No Sleeve
MFE K Factor 0.1268

Borehole Correction Constants

Sonde Position 0.5 inches
Hole Size Source Density Caliper
Hole Size Constant Value N/A inches
Rm Source Global Value: Temperature Corrected
Temp. for Rm Corr. MCG External Temperature

Induction Calibration MAI-A.A 111

Base Calibration on 05-AUG-2014,09:34
Field Check on 19-DEC-2015 14:03

Base Calibration

| Test Loop Calibration Channel | Measured | | Calibrated (mmho/m) | |
|-------------------------------|----------|-------|---------------------|-------|
| | Low | High | Low | High |
| 1 | 17.6 | 473.6 | 9.3 | 966.2 |
| 2 | 6.4 | 385.9 | 7.6 | 821.4 |
| 3 | 3.2 | 264.0 | 5.2 | 566.0 |
| 4 | 2.1 | 135.5 | 2.6 | 279.2 |

















Array Temperature 23.0 Deg F

Test Loop Calibration Verified 09-DEC-2015 11:03

| Channel | Base Check (mmho/m) | | Field Check (mmho/m) | |
|---------|---------------------|--------|----------------------|--------|
| | Low | High | Low | High |
| 1 | 12.1 | 3873.0 | 11.2 | 3872.7 |
| 2 | 29.8 | 3528.1 | 29.4 | 3528.3 |
| 3 | 29.1 | 3021.3 | 28.8 | 3021.7 |
| 4 | 19.1 | 2058.5 | 19.0 | 2058.8 |
| Deep | 17.7 | 1962.1 | 17.6 | 1962.4 |
| Medium | 43.1 | 3976.4 | 42.9 | 3977.0 |
| Shallow | 44.4 | 5232.7 | 43.8 | 5232.9 |

Array Temperature 65.8 54.4 Deg F

Induction Calibration Tolerances MAI-A.A 111

| | | | | | | | |
|--------------------|------|---|--------|---------------------|-------|---|--------|
| Low Conductivity 1 | 17.6 |  | mmho/m | High Conductivity 1 | 473.6 |  | mmho/m |
| Low Conductivity 2 | 6.4 |  | mmho/m | High Conductivity 2 | 385.9 |  | mmho/m |
| Low Conductivity 3 | 3.2 |  | mmho/m | High Conductivity 3 | 264.0 |  | mmho/m |
| Low Conductivity 4 | 2.1 |  | mmho/m | High Conductivity 4 | 135.5 |  | mmho/m |
| Background Vx 1 | 0.0 |  | mmho/m | Phase Check Loop 1 | 0.0 |  | % |
| Background Vx 2 | 0.0 |  | mmho/m | Phase Check Loop 2 | 0.0 |  | % |
| Background Vx 3 | 0.0 |  | mmho/m | Phase Check Loop 3 | 0.0 |  | % |
| Background Vx 4 | 0.0 |  | mmho/m | Phase Check Loop 4 | 0.0 |  | % |

Induction Constants MAI-A.A 111

Last Edited on 19-DEC-2015,18:42

Induction Model RtAP-WBM

Borehole Correction Constants

Tool Centred No
Hole Size Source Density Caliper
Hole Size Constant Value N/A inches
Stand-off Type Fins
Stand-off 0.50 inches
Number of Fins on Stand-off 8.0000
Stand-off Fin Angle 45.00 degrees
Stand-off Fin Width 0.5000 inches
Rm Source Global Value: Temperature Corrected
Temp. for Rm Corr. MCG External Temperature

Squasher Start 0.0020 mhos/metre

Squasher Offset N/A mhos/metre

Squasher Onset

N/A

mmhos/metre

Borehole Normalisation

| | | | |
|------|--------|------|--------|
| DRM1 | 0.0000 | DRC1 | 0.0000 |
| DRM2 | 0.0000 | DRC2 | 0.0000 |
| MRM1 | 0.0000 | MRC1 | 0.0000 |
| MRM2 | 0.0000 | MRC2 | 0.0000 |
| SRM1 | 0.0000 | SRC1 | 0.0000 |
| SRM2 | 0.0000 | SRC2 | 0.0000 |

Calibration Site Corrections

| | | |
|-----------|------|-------------|
| Channel 1 | 0.00 | mmhos/metre |
| Channel 2 | 0.00 | mmhos/metre |
| Channel 3 | 0.00 | mmhos/metre |
| Channel 4 | 0.00 | mmhos/metre |

Symmetrised Receiver Gains

| | |
|------------|------|
| Receiver 1 | 1.00 |
| Receiver 2 | 1.00 |
| Receiver 3 | 1.00 |
| Receiver 4 | 1.00 |

Apparent Porosity and Water Saturation Constants

| | | |
|--------------------------------------|--------|---------|
| Archie Constant (A) | 1.00 | |
| Cementation Exponent (M) | 2.00 | |
| Saturation Exponent (N) | 2.00 | |
| Saturation of Water for Apor | 100.00 | percent |
| Resistivity of Water for Apor and Sw | 0.05 | ohm-m |
| Resistivity of Mud Filtrate for Sw | 0.00 | ohm-m |
| Source for Rt | 0.00 | |
| Source for Rxo | 0.00 | |

High Resolution Temperature Calibration MAI-A.A 111

Field Calibration on 24-NOV-2014,10:23

| | Measured | Calibrated(Deg F) |
|-------|----------|-------------------|
| Lower | 10.00 | 10.00 |
| Upper | 100.00 | 100.00 |

High Resolution Temperature Constants MAI-A.A 111

Last Edited on 26-JUN-2014,15:06

Pre-filter Length 11

Caliper Calibration MPD-C.A 216

Base Calibration on 08-DEC-2015 13:20

Field Calibration on 19-DEC-2015 14:06

Base Calibration

| Reading No | Measured | Calibrator Size (in) |
|------------|----------|----------------------|
| 1 | 20896 | 3.99 |
| 2 | 31104 | 5.98 |
| 3 | 41152 | 7.97 |
| 4 | 51010 | 9.86 |
| 5 | 61632 | 11.92 |
| 6 | N/A | N/A |

Field Calibration

| Measured Caliper (in) | Actual Caliper (in) |
|-----------------------|---------------------|
| 7.98 | 7.97 |

Caliper Calibration Tolerances MPD-C.A 216


Short Arm Field Cal. 7.98  in

Photo Density Calibration MPD-C.A 216

Base Calibration on 08-DEC-2015 13:38

Field Check on 19-DEC-2015 14:10

Density Calibration

| Base Calibration | Measured | | Calibrated (sdu) | |
|------------------|----------|-------|------------------|-------|
| | Near | Far | Near | Far |
| Background | 1066 | 1262 | | |
| Reference 1 | 52985 | 25543 | 59556 | 30836 |
| Reference 2 | 21151 | 2428 | 24941 | 2541 |

Field Check at Base

1066.1 1261.6

Field Check

1070.1 1262.5

PE Calibration

| Base Calibration | WS | Measured WH | Ratio | Calibrated Ratio |
|------------------|-------|-------------|-------|------------------|
| Background | 194 | 945 | | |
| Reference 1 | 21734 | 52806 | 0.415 | 0.371 |
| Reference 2 | 5972 | 21023 | 0.288 | 0.272 |





Field Check at Base

194.5 945.4

Field Check

194.1 950.3

Photo Density Calibration Tolerances MPD-C.A 216



Density Constants MPD-C.A 216

Last Edited on 19-DEC-2015,18:43

| | | |
|-------------------------------|-----------------|-------|
| Density Source Id | P50557B | |
| Nylon Calibrator Number | DNCE695 | |
| Aluminium Calibrator Number | DACD698 | |
| Density Shoe Profile | 8 inch | |
| Caliper Source for Processing | Density Caliper | |
| PE Correction to Density | Not Applied | |
| Mud Density | 1.13 | gm/cc |
| Mud Density Z/A Multiplier | 1.11 | |
| Mud Filtrate Density | 1.00 | gm/cc |
| Dry Hole Mud Filtrate Density | 1.00 | gm/cc |
| DNCT | 0.00 | gm/cc |
| CRCT | 0.00 | gm/cc |
| Density Z/A Correction | Hybrid | |
| Matrix Density (gm/cc) | Depth (ft) | |
| 2.71 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |
| 0.00 | 0.00 | |


DOWNHOLE EQUIPMENT

C:\Minimus 15.03.5939\Log\O'Brien Mary #1-1\O'Brien Mary #1-1 Repeat.dta

Cablehead, 11 pin
CBH-CA 155 LG: 2.40 ft WT: 24.3 lb OD: 2.244 in

Compact Comms Gamma
MCG-C 123 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in

Compact Micro-Resistivity
MMR-C.A 247 LG: 8.59 ft WT: 81.6 lb OD: 4.882 in

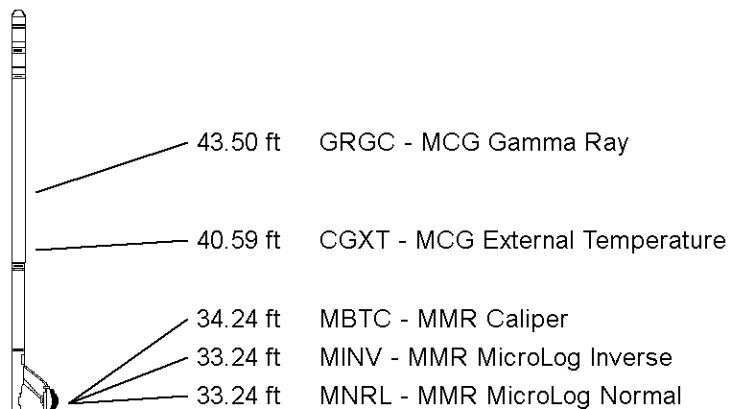


Compact Neutron
MDN-A.B 114 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in

Compact Density/Caliper
MPD-C.A 216 LG: 9.59 ft WT: 90.4 lb OD: 2.449 in

Compact Focussed Electric
MFE-A.A 135 LG: 6.05 ft WT: 48.5 lb OD: 2.244 in

Compact Induction
MAI-A.A 111 LG: 10.81 ft WT: 48.5 lb OD: 2.244 in

Total Length: 51.18 ft Weight: 407.9 lb

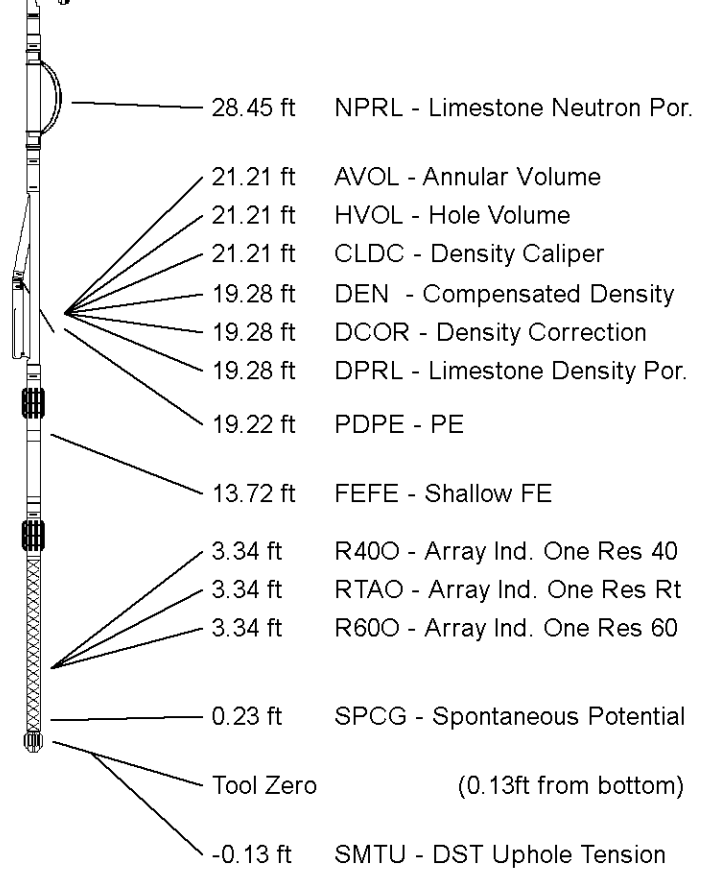

All measurements relative to tool zero.

| | |
|-----------------|--------------------------------|
| COMPANY | O'BRIEN ENERGY RESOURCES CORP. |
| WELL | MARY #1-1 |
| FIELD | GRANGER CREEK |
| PROVINCE/COUNTY | CLARK |
| COUNTRY/STATE | U.S.A. / KANSAS |

| | | | | | |
|-------------------------|---------|------|---------------|---------|------|
| Elevation Kelly Bushing | 2265.00 | feet | First Reading | 6469.00 | feet |
| Elevation Drill Floor | 2263.00 | feet | Depth Driller | 6500.00 | feet |
| Elevation Ground Level | 2252.00 | feet | Depth Logger | 6502.00 | feet |



Weatherford[®]

MICRORESISTIVITY LOG