



DUAL INDUCTION LOG

Company DOWNING-NELSON OIL CO., INC.		Company DOWNING-NELSON OIL CO., INC.	
Well	RED #1-36	Well	RED #1-36
Field	GROFF	Field	GROFF
County	TREGO	County	TREGO
State	KANSAS	State	KANSAS
Location: 800 FSL & 2161 FWL		API # : 15-195-23040-00-00	
SEC 36 TWP 14S RGE 21W		Other Services DIL/MEL	
Permanent Datum	GROUND LEVEL	Elevation	2049'
Log Measured From	KELLY BUSHING 8' A.G.L.	K.B. 2057	
Drilling Measured From	KELLY BUSHING	D.F. 2055	
		G.L. 2049	
Date	04/08/18		
Run Number	ONE		
Depth Driller	3865		
Depth Logger	3866		
Bottom Logged Interval	3864		
Top Log Interval	50		
Casing Driller	8 5/8@ 1232		
Casing Logger	1232		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5000 PPM	
Density / Viscosity	9.2/49		
pH / Fluid Loss	9.5/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.1@56		
Rmt @ Meas. Temp	.83@56		
Rmc @ Meas. Temp	.62@56		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.53@115		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	115F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	MARC DOWNING		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


SOUTH OF ELLIS TO BUTTERFIELD TRAIL, WEST 3 MILES,
SOUTH TO T GO THROUGH CATTLE GUARD FOLLOW TRAIL.


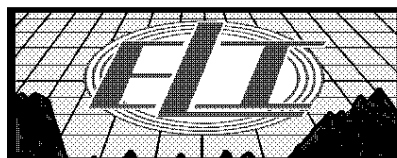




MAIN PASS



Database File: 2418ddn.db
Dataset Pathname: pass3.1
Presentation Format: _dil2
Dataset Creation: Sun Apr 08 07:01:15 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
-----			CILD (mmho/m)		
			1000		0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

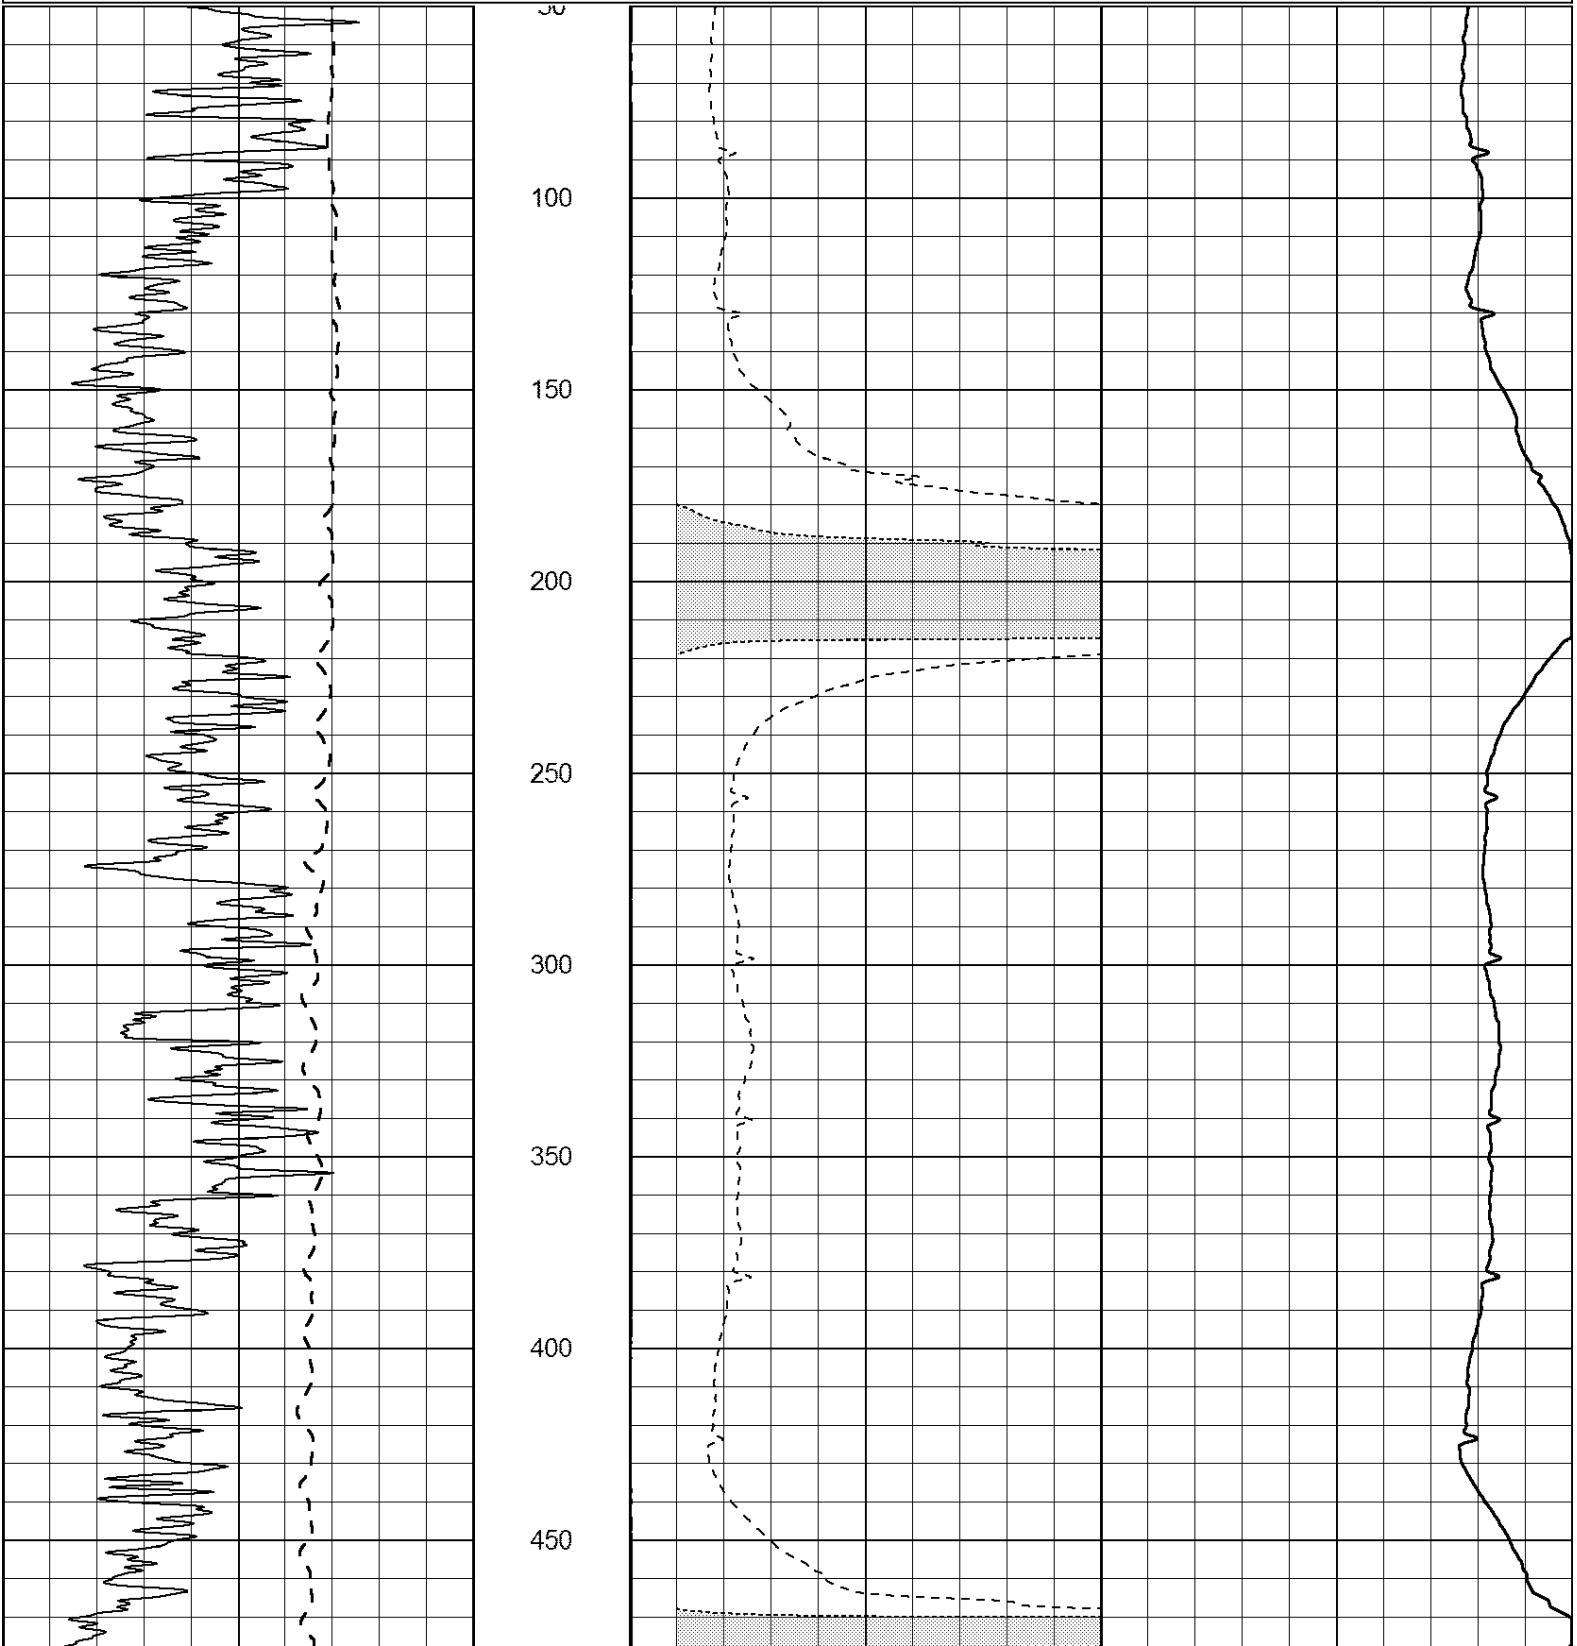

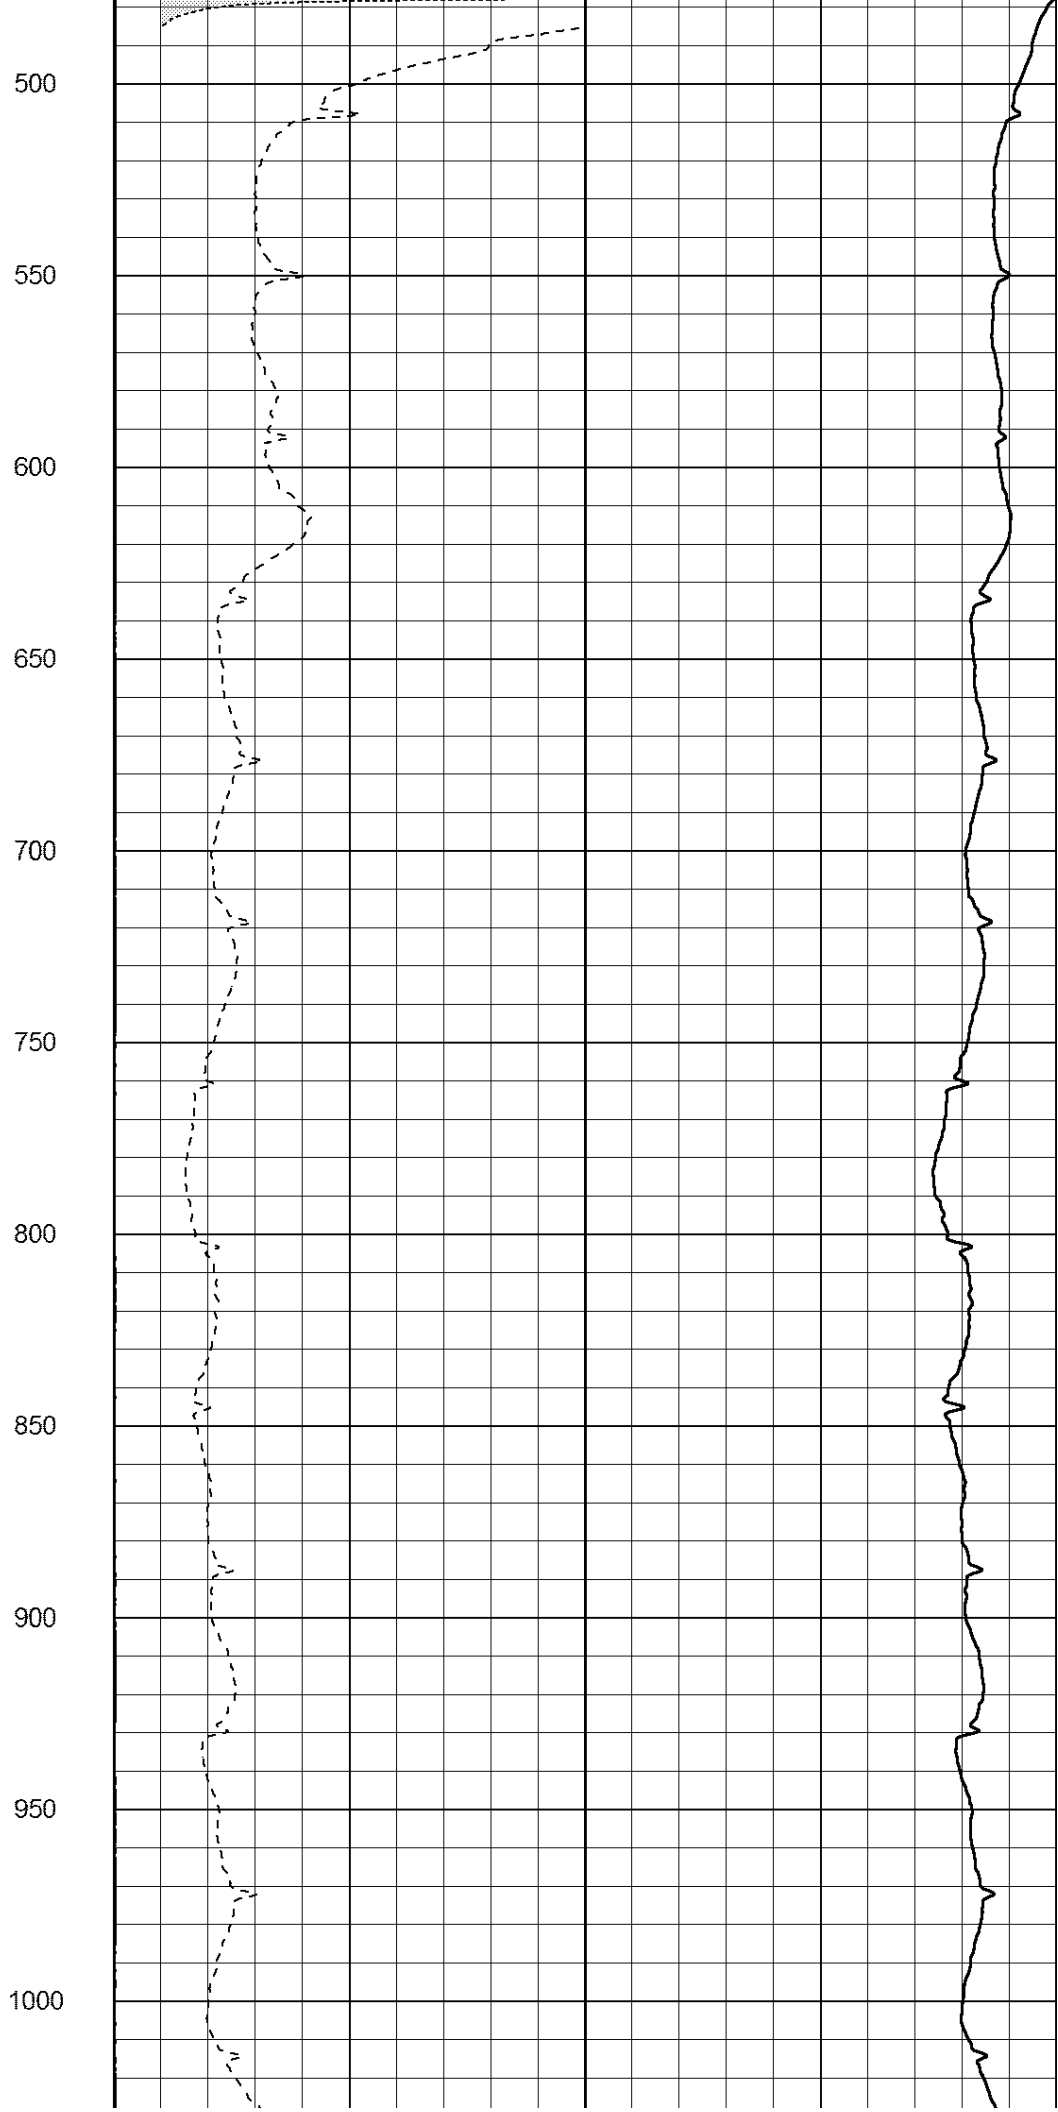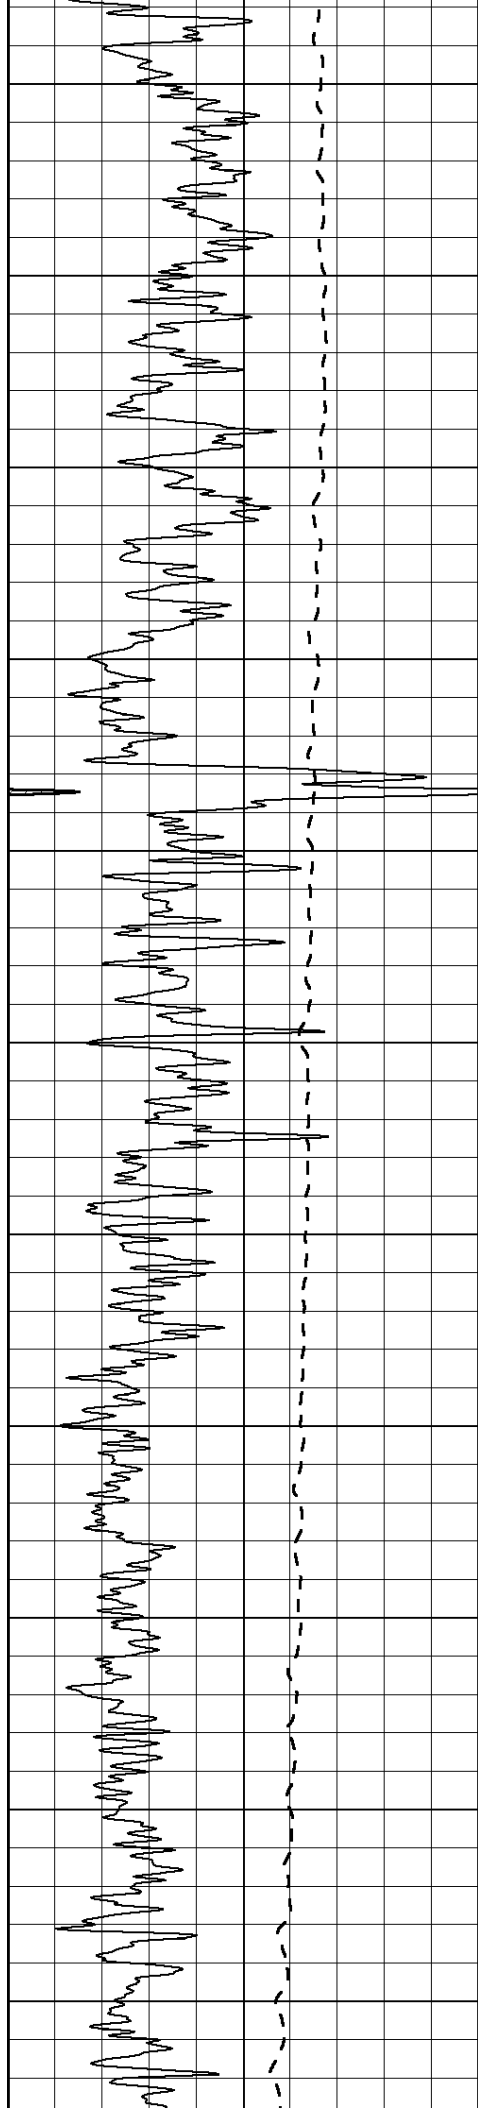

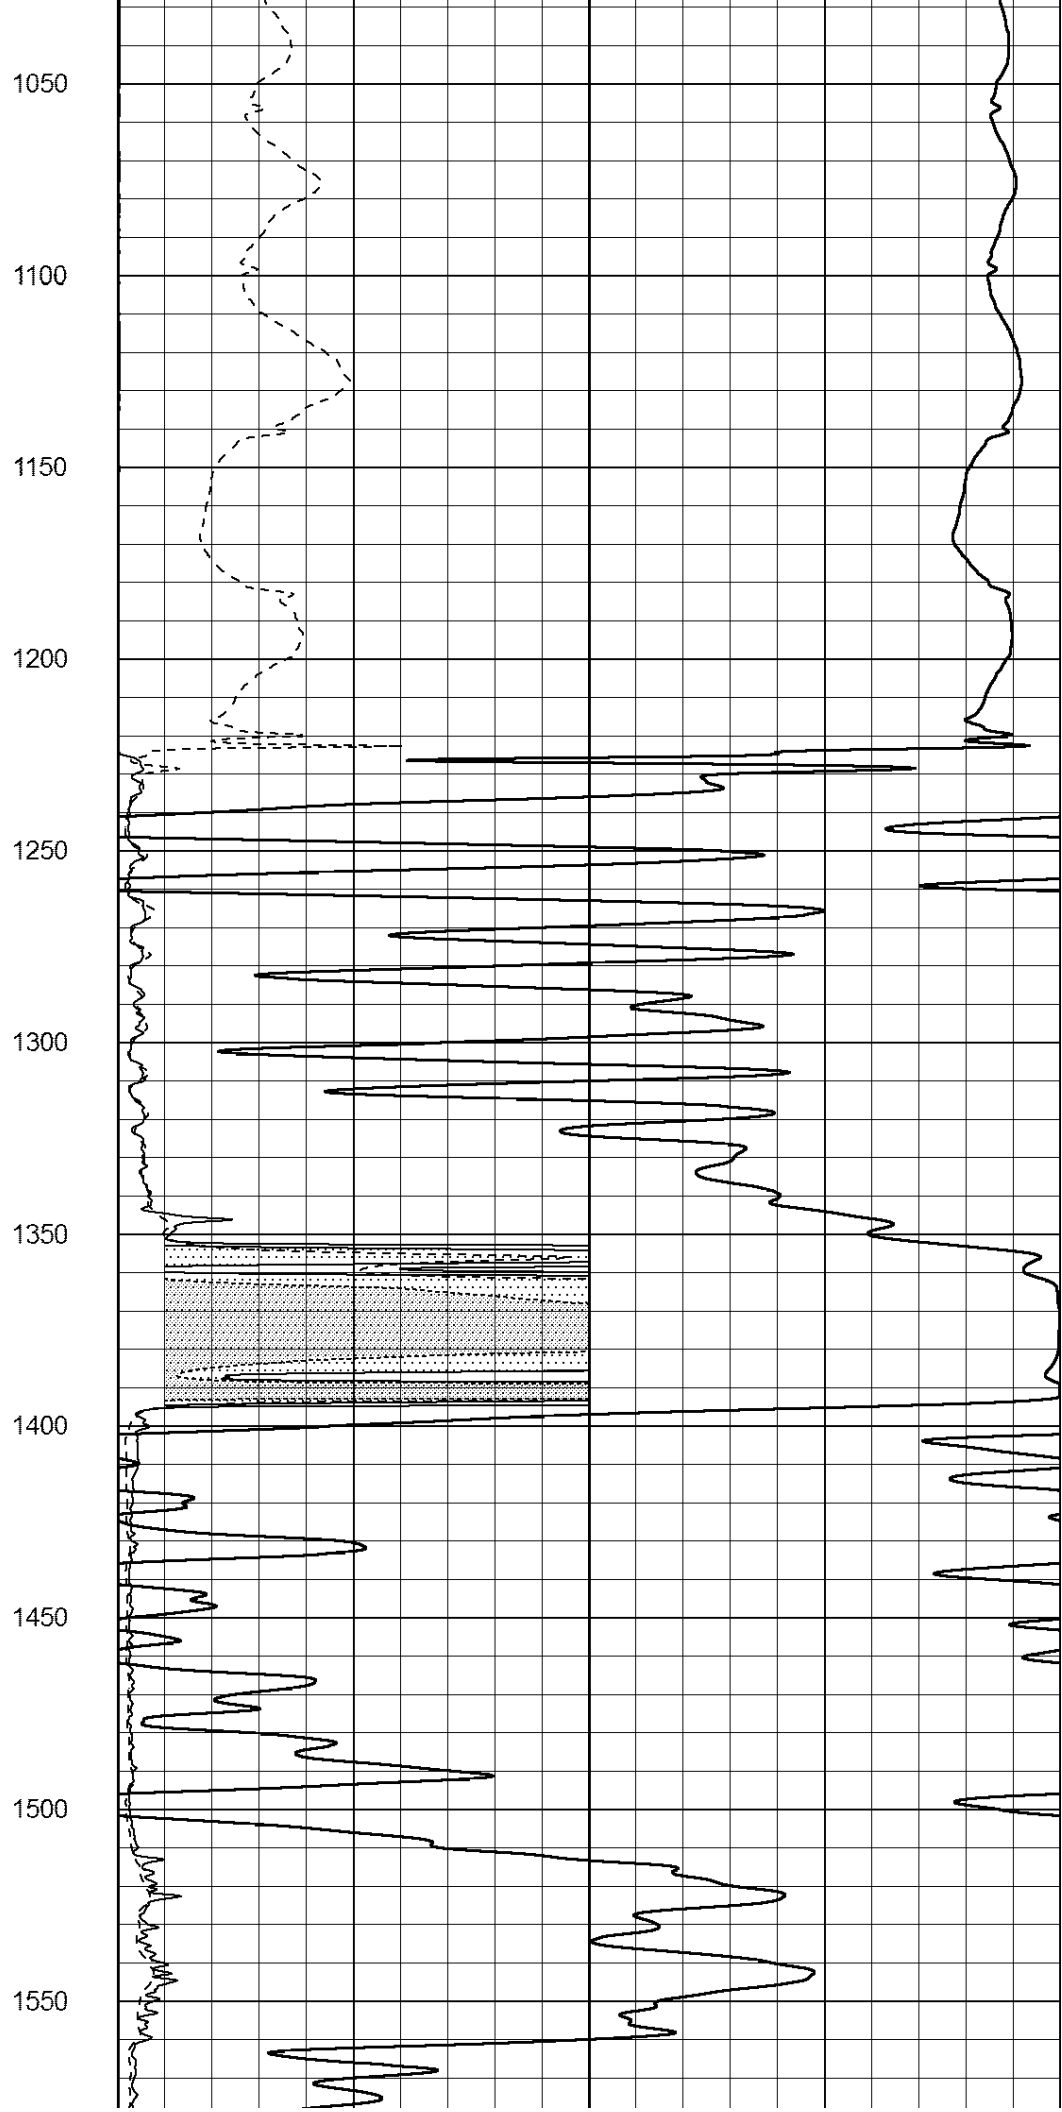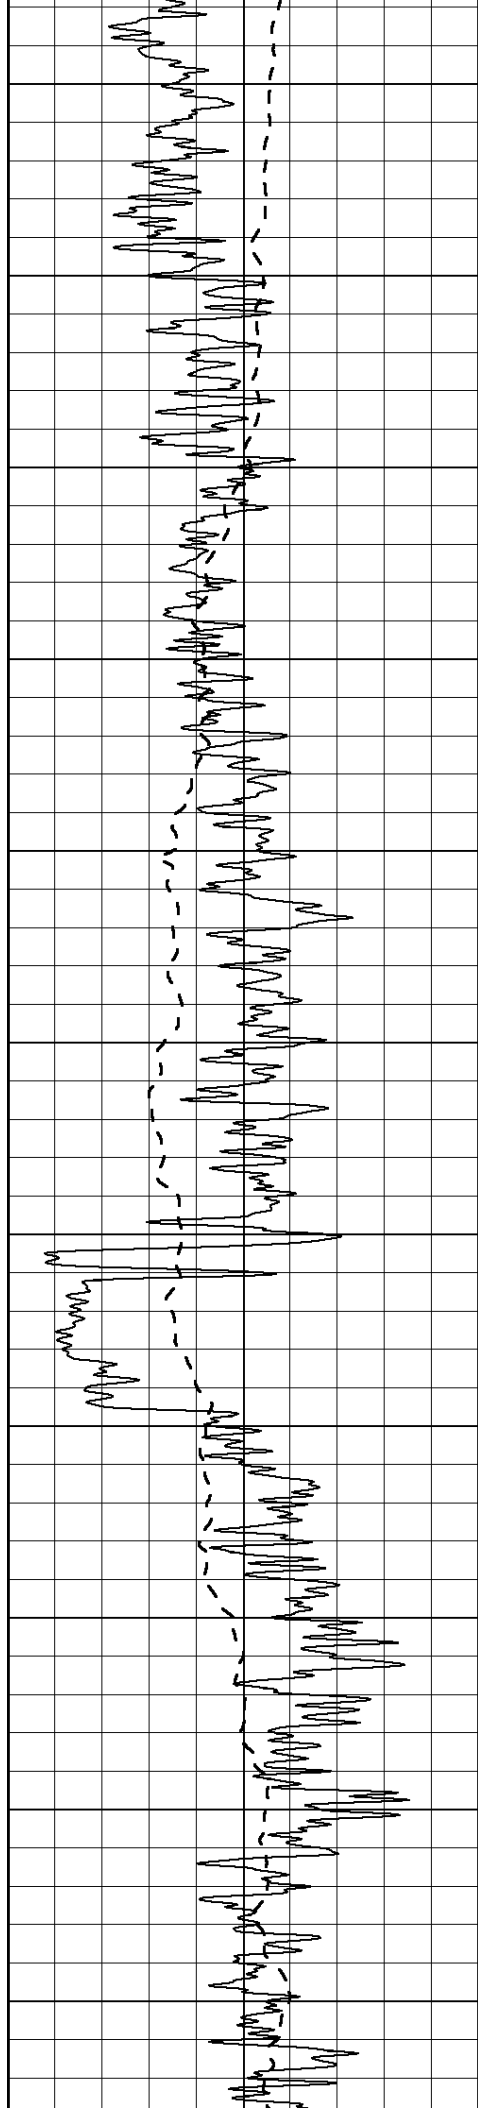

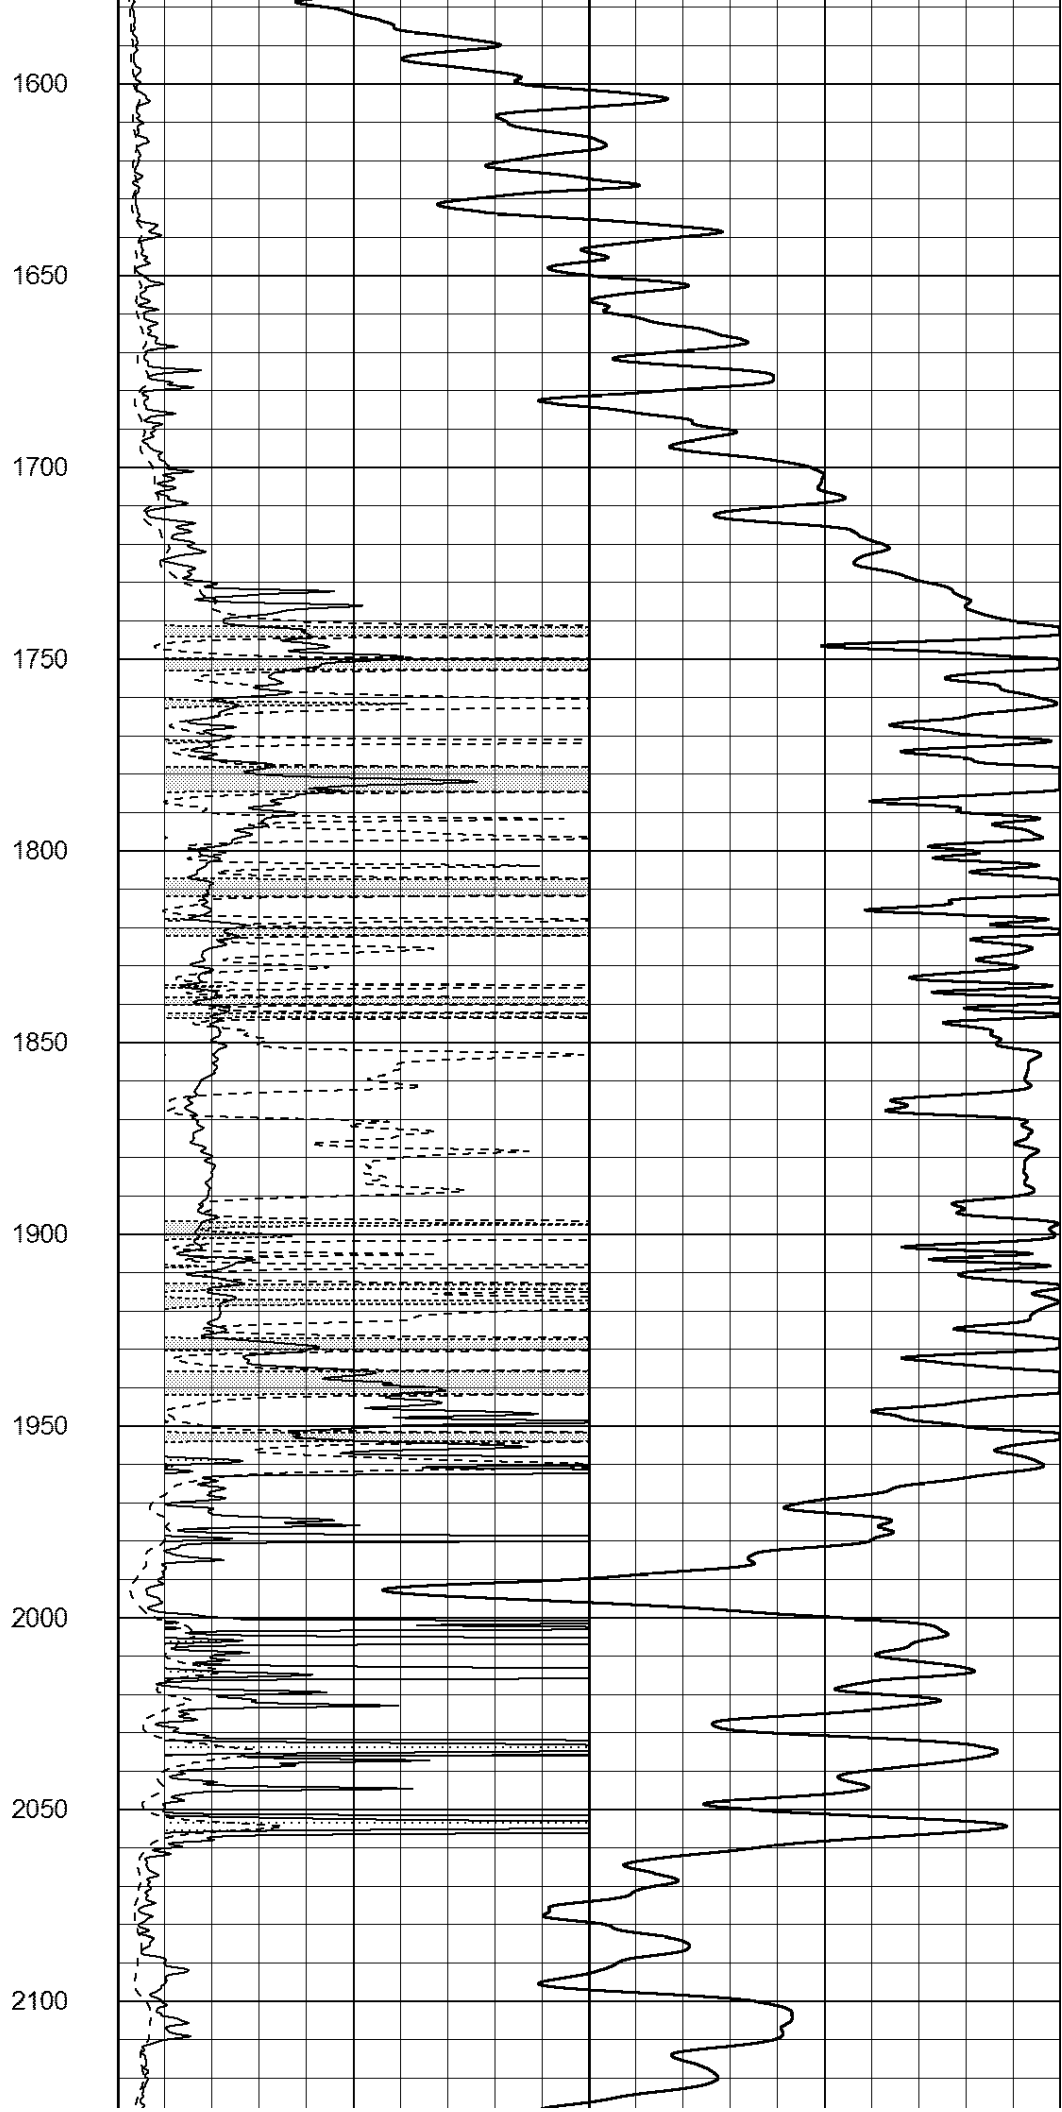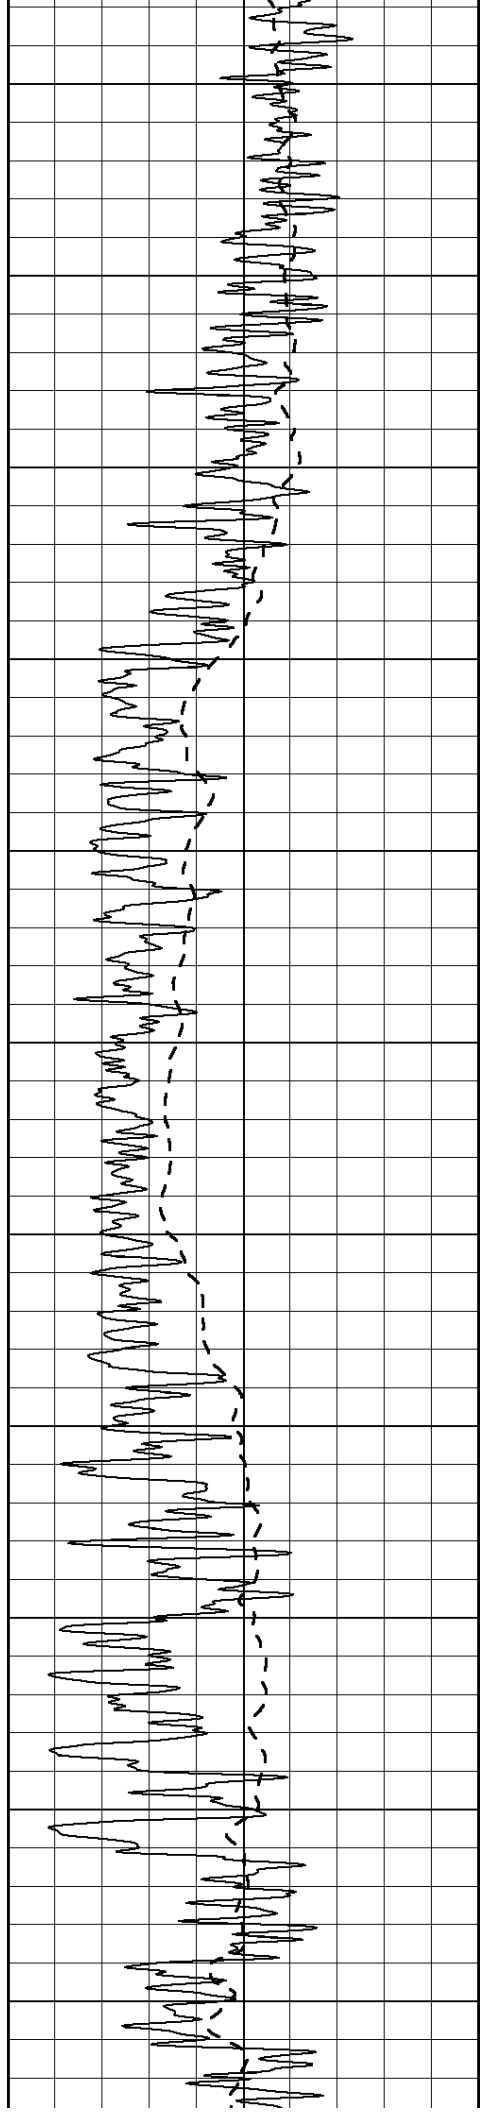

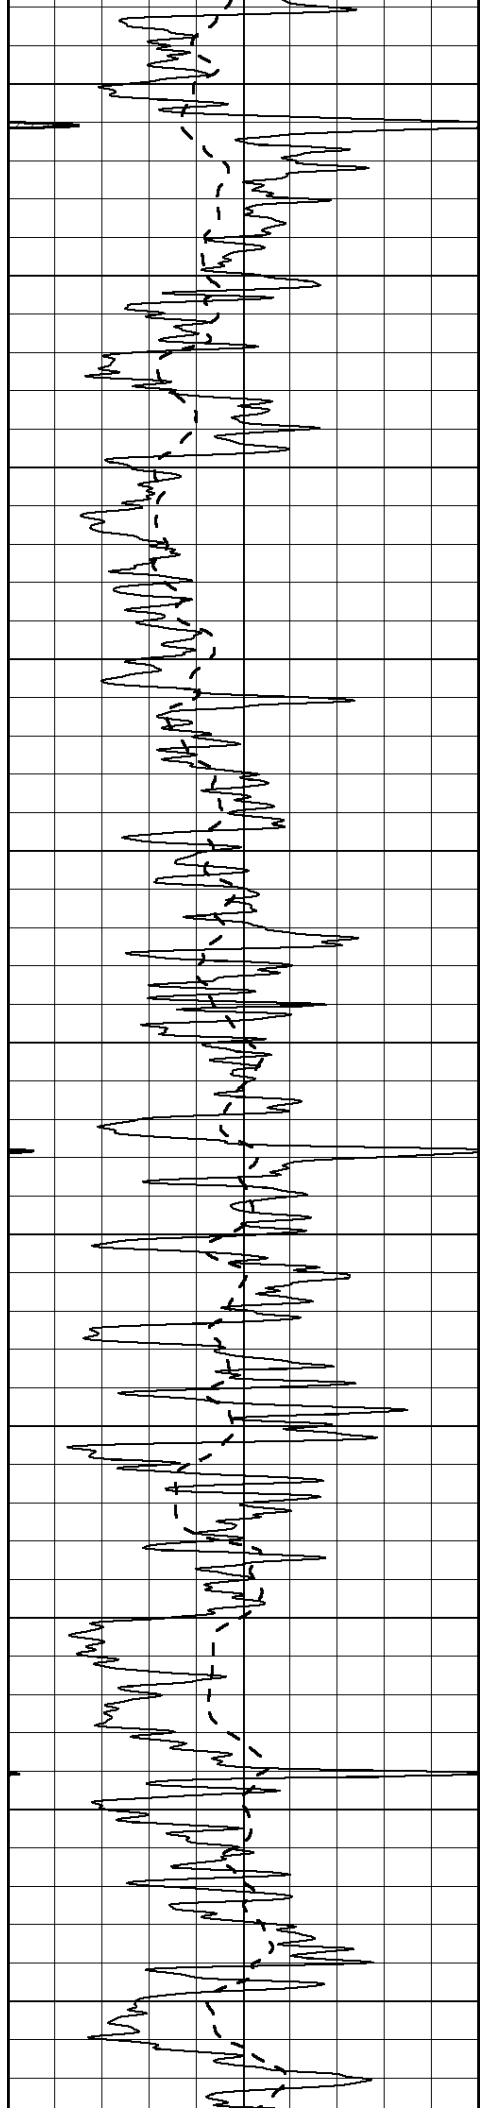

2150

2200

2250

2300

2350

2400


2450



2500


2550

2600

2650

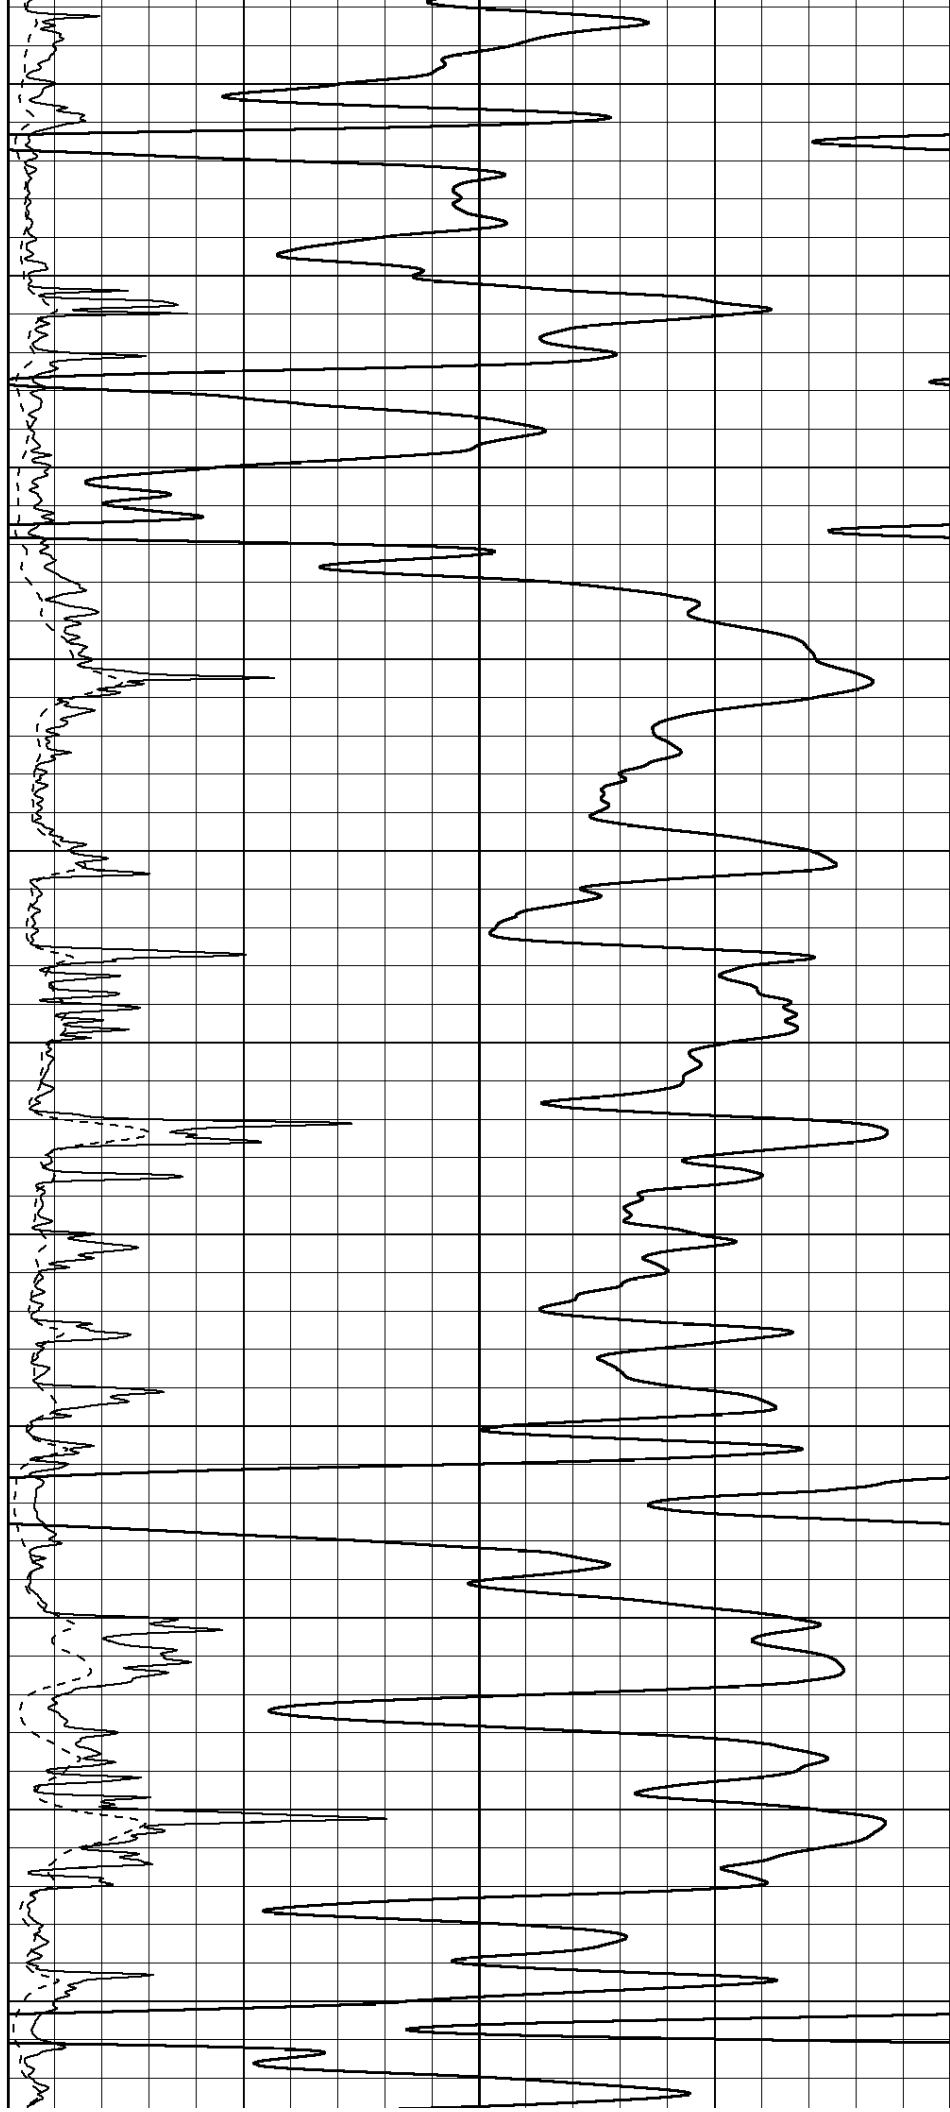

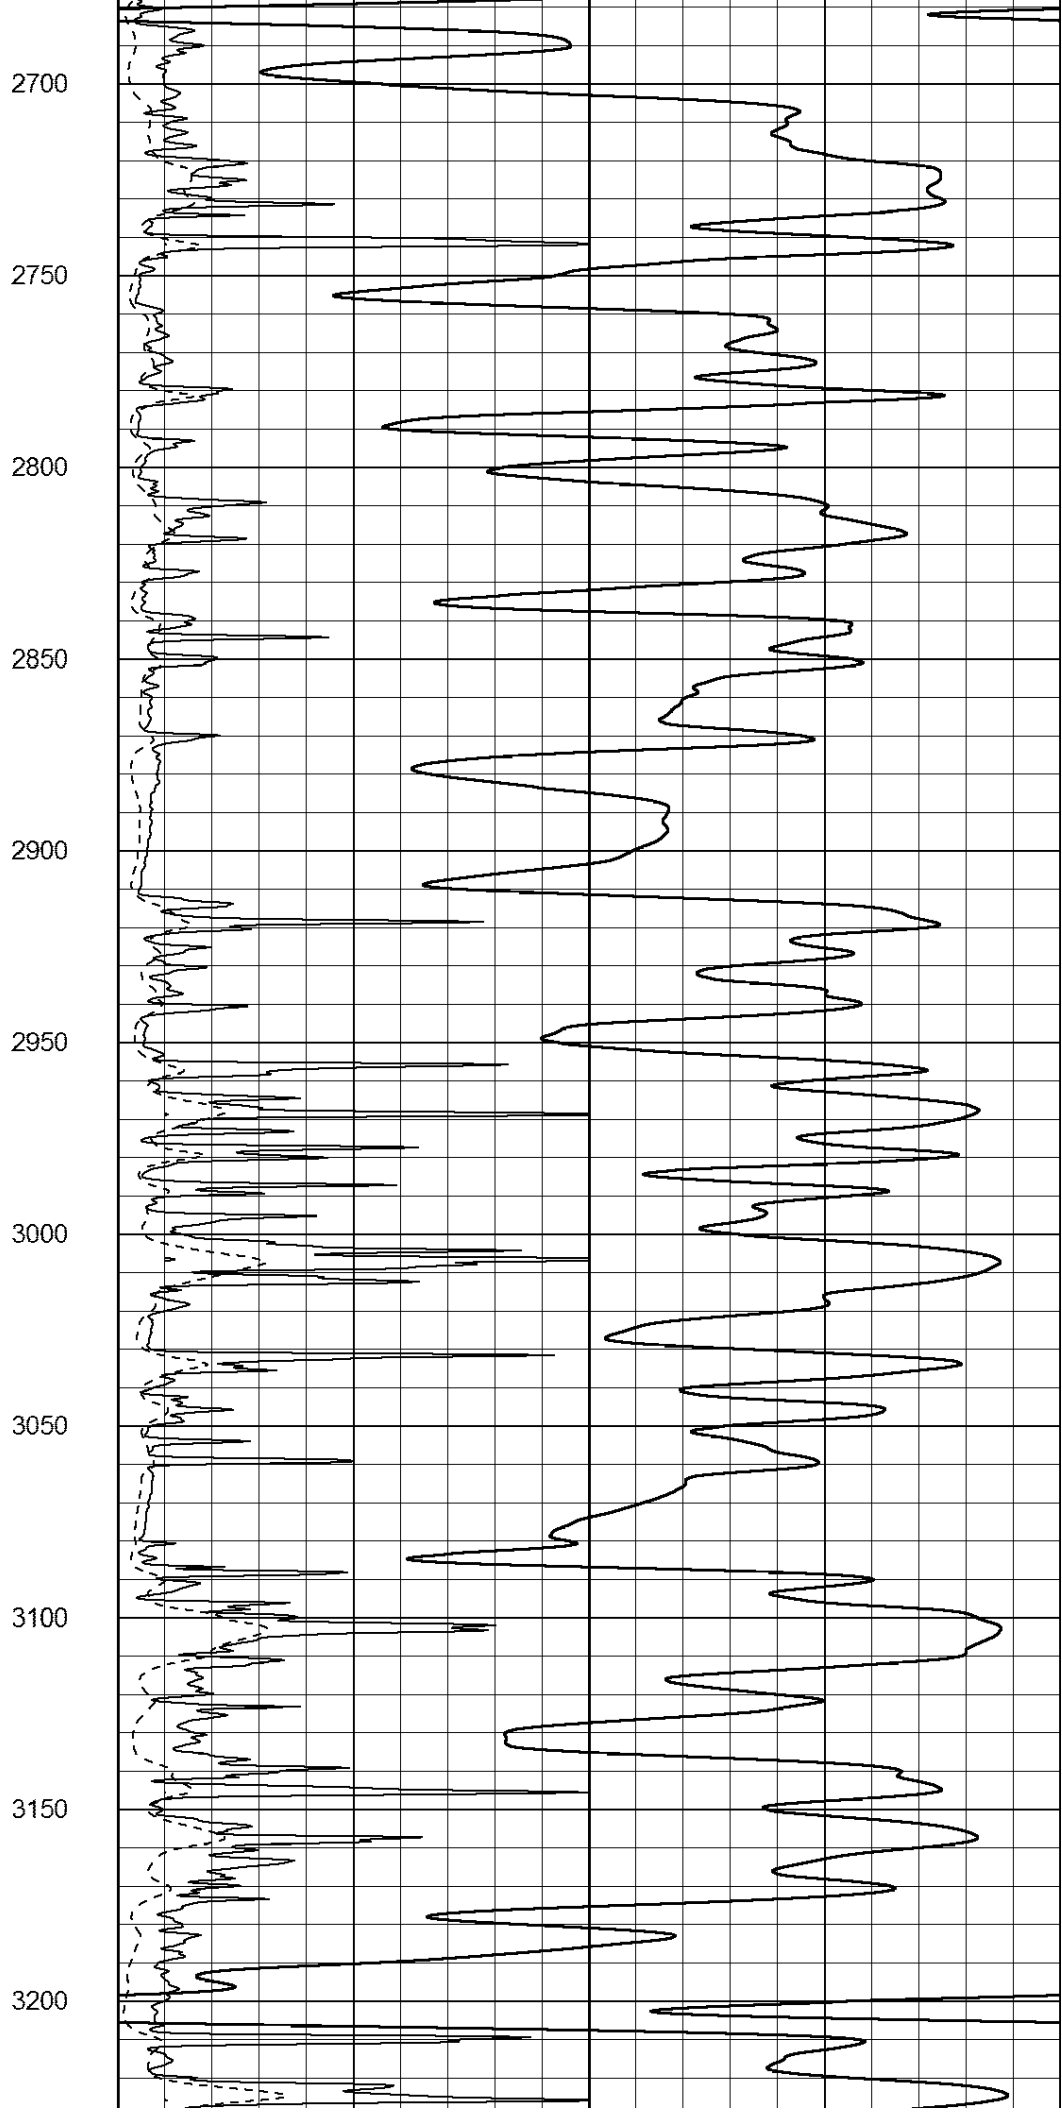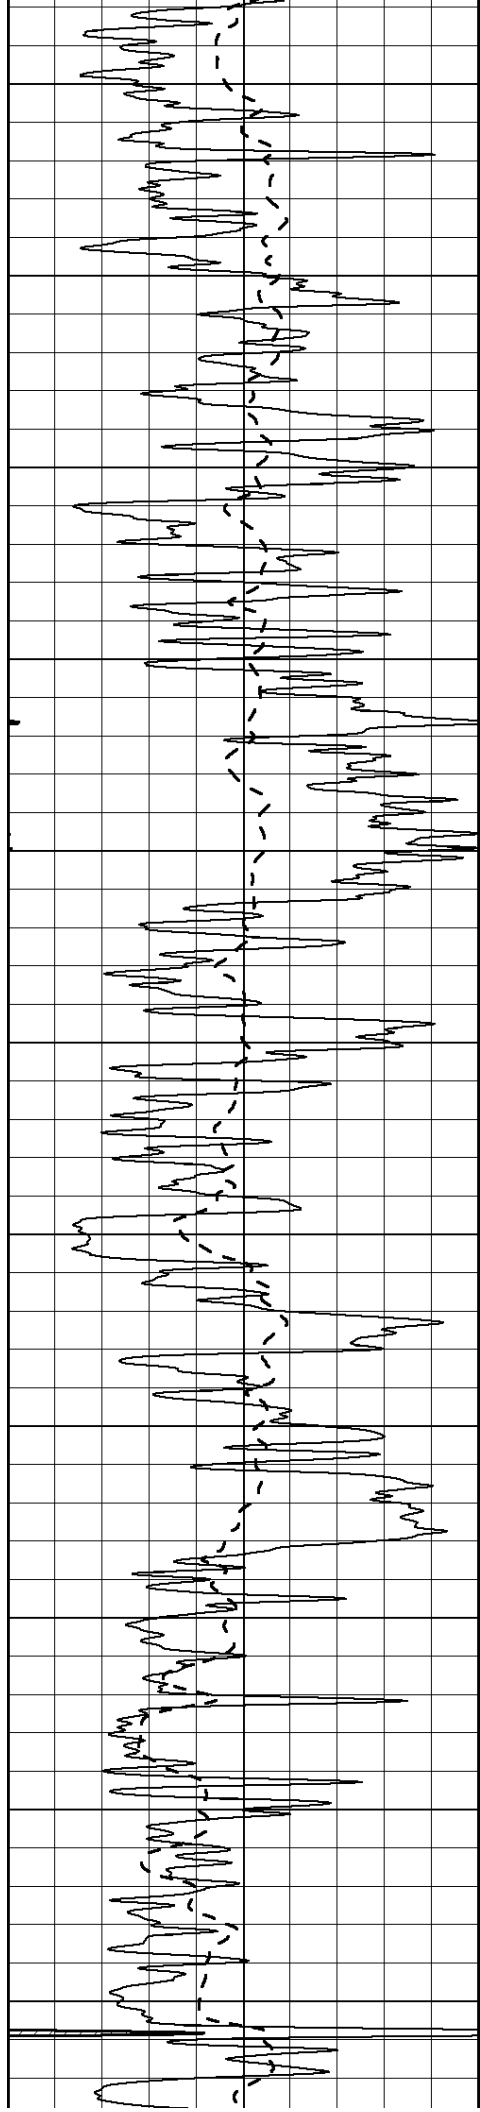

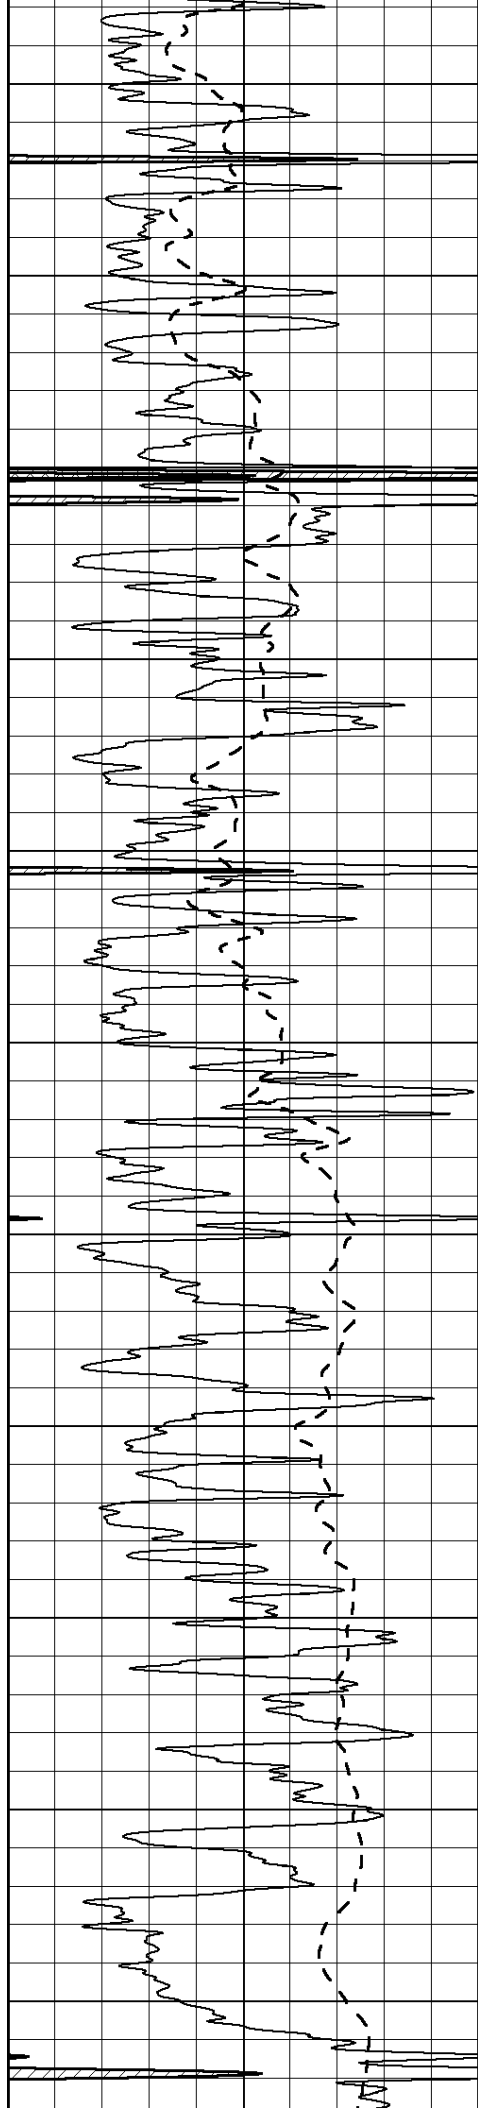

3250

3300

3350

3400

3450

3500



3550



3600

3650

3700

3750

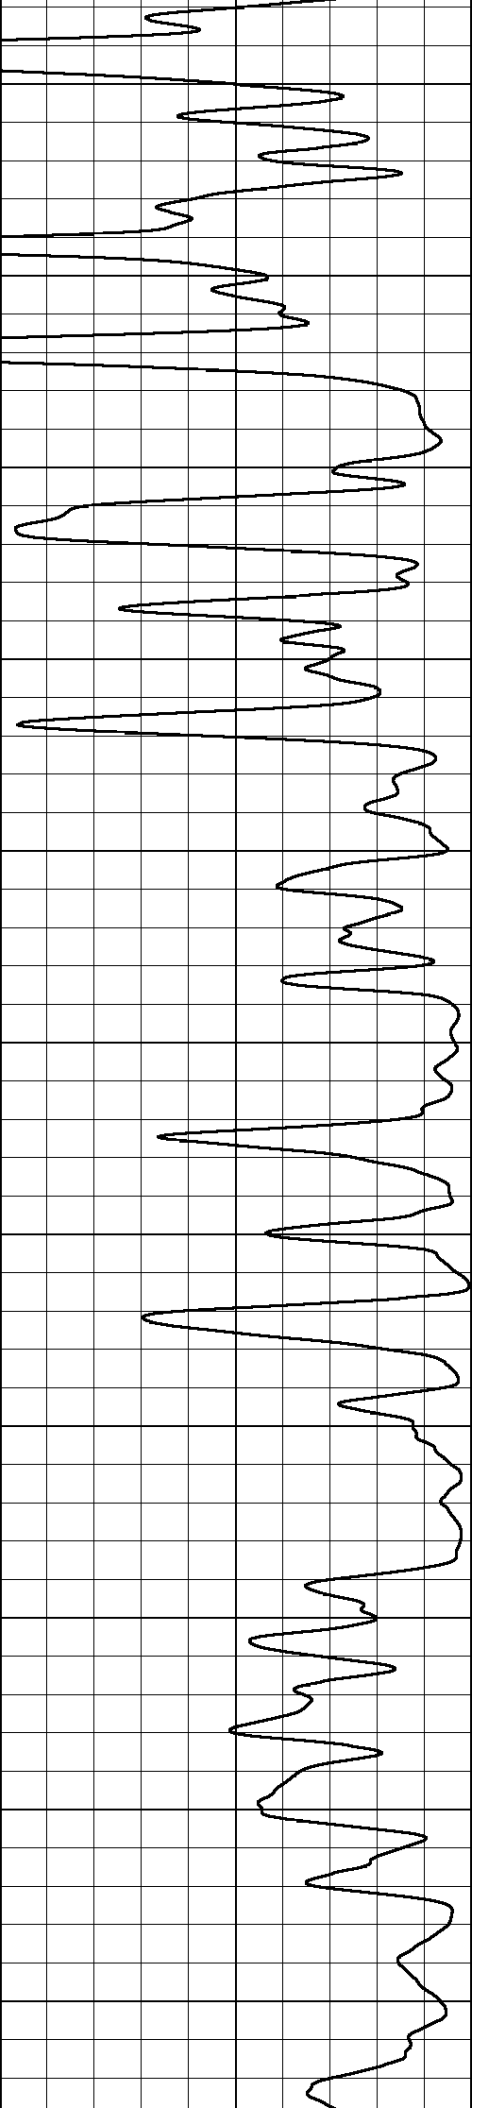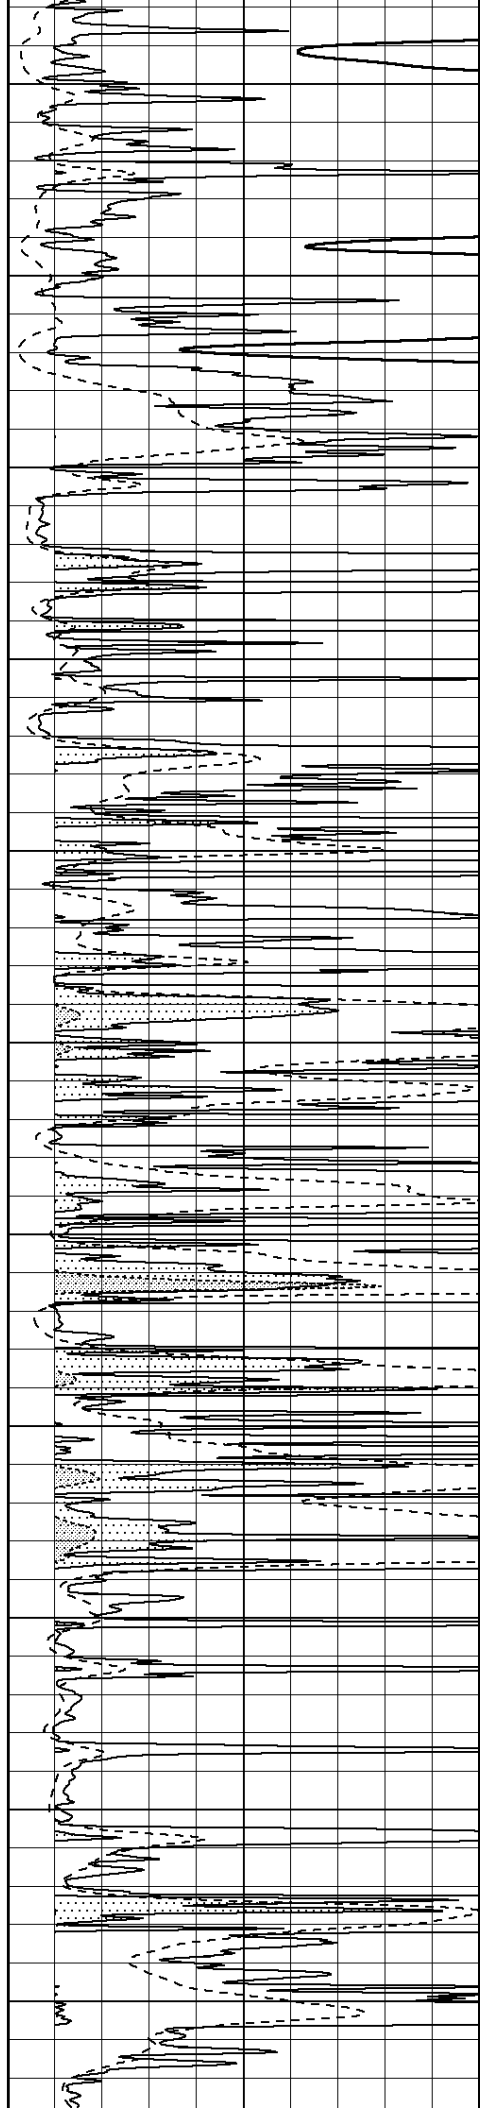


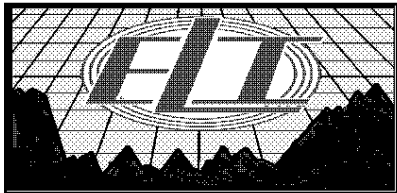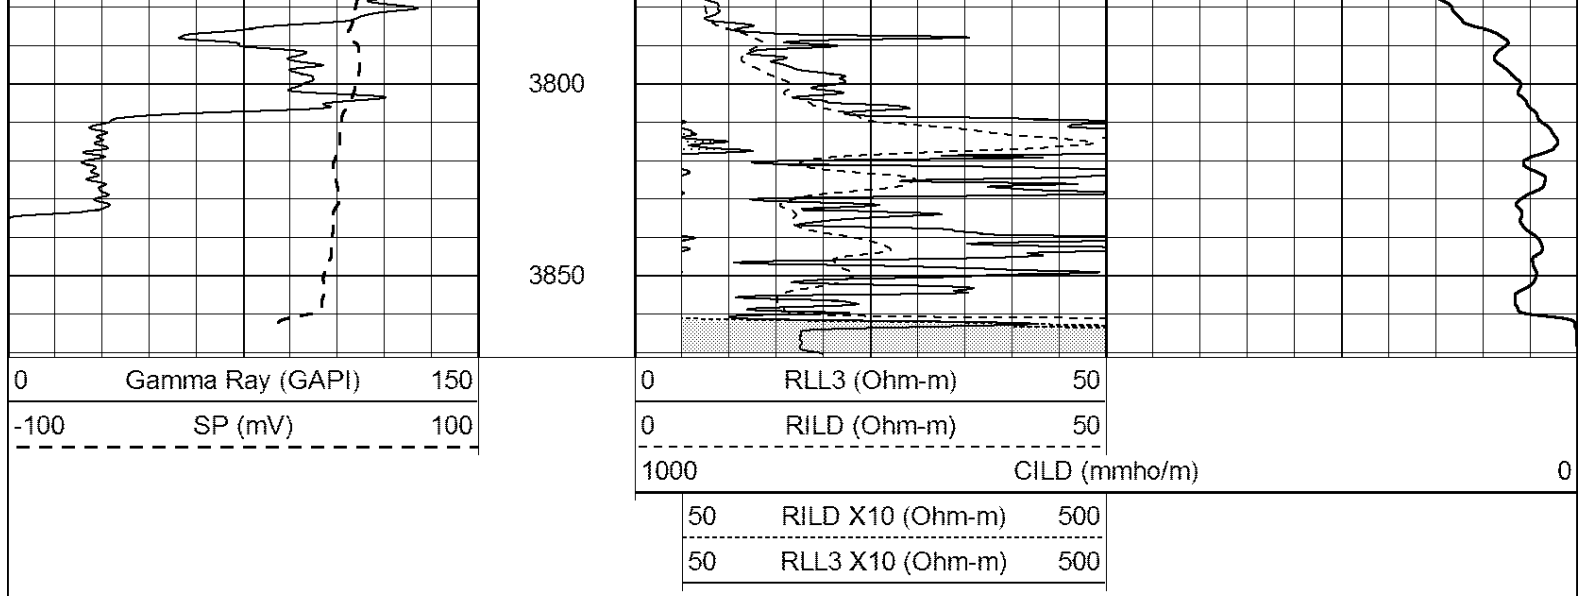


MAIN PASS

Database File: 2418ddn.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Sun Apr 08 07:01:15 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

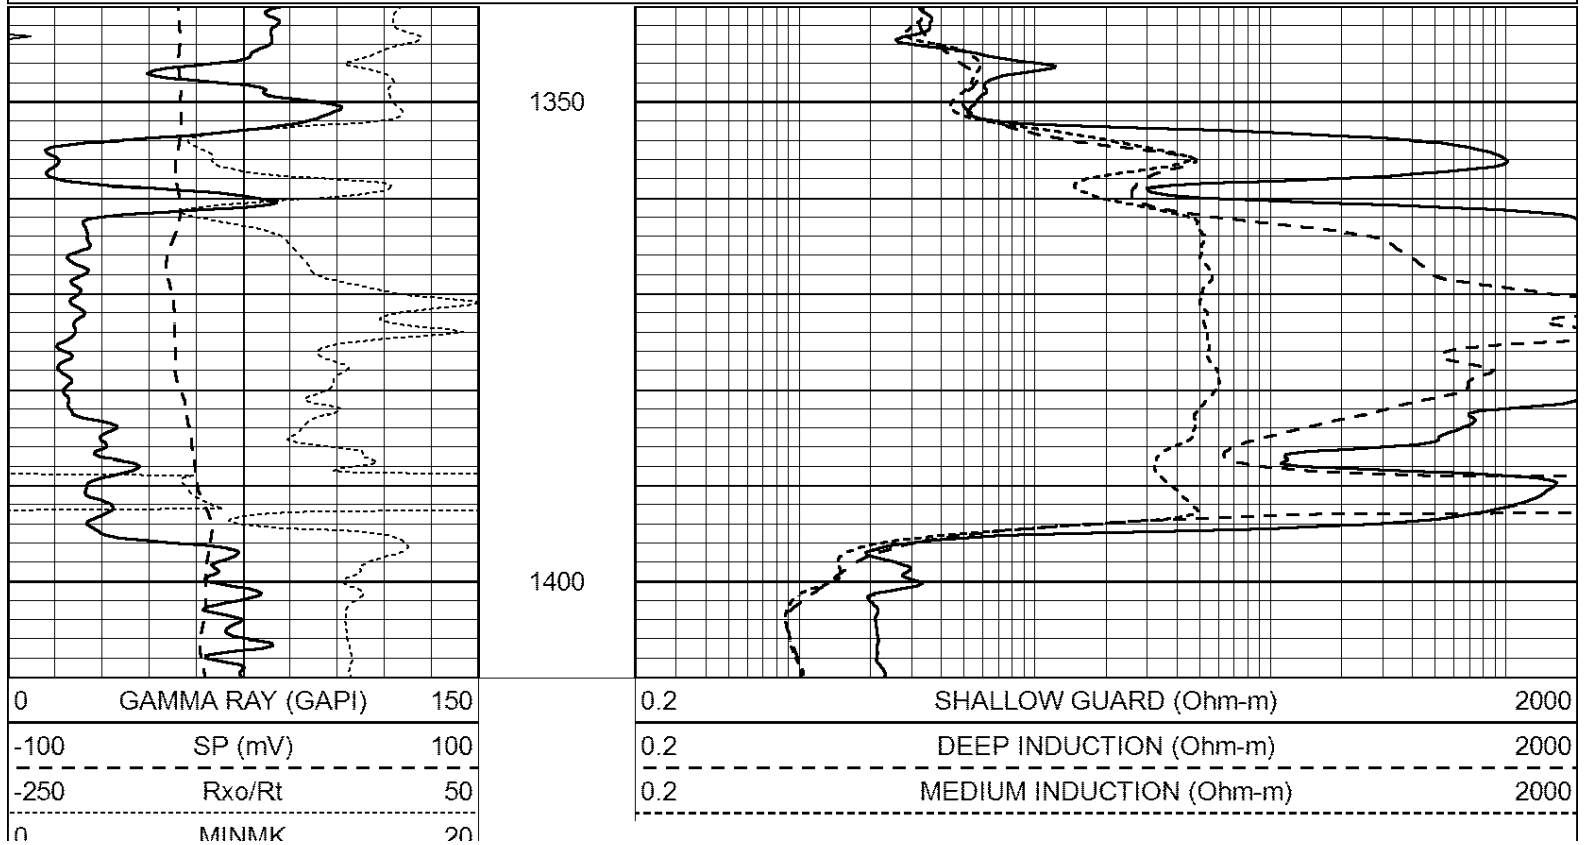

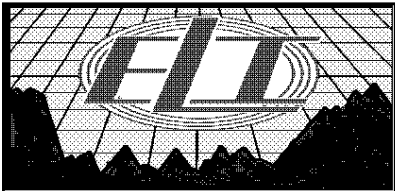


MAIN PASS

Database File: 2418ddn.db
Dataset Pathname: pass3.1
Presentation Format: _dil
Dataset Creation: Sun Apr 08 07:01:15 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

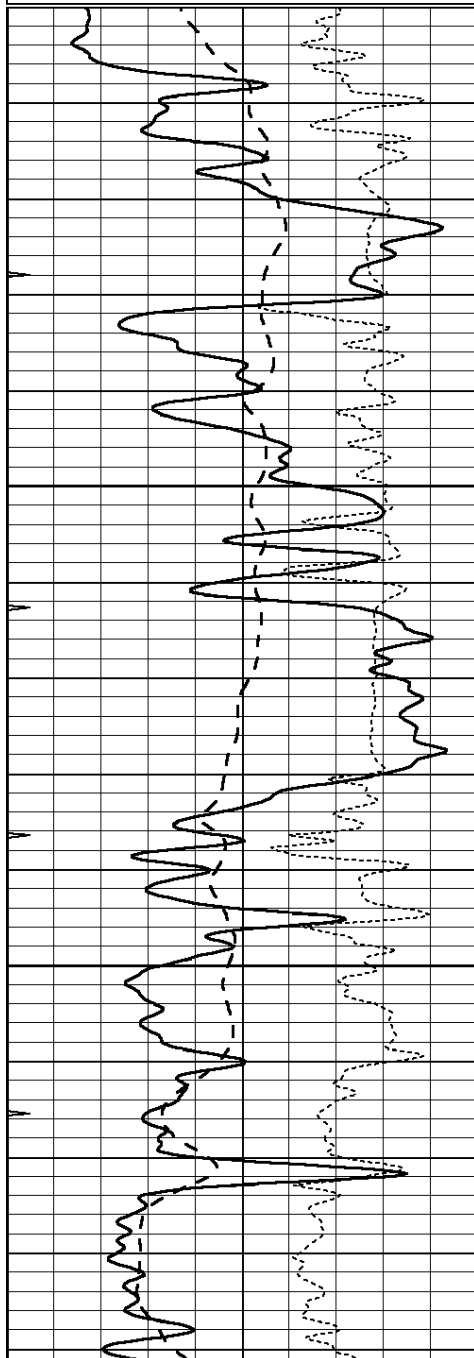


3000

3050

3100

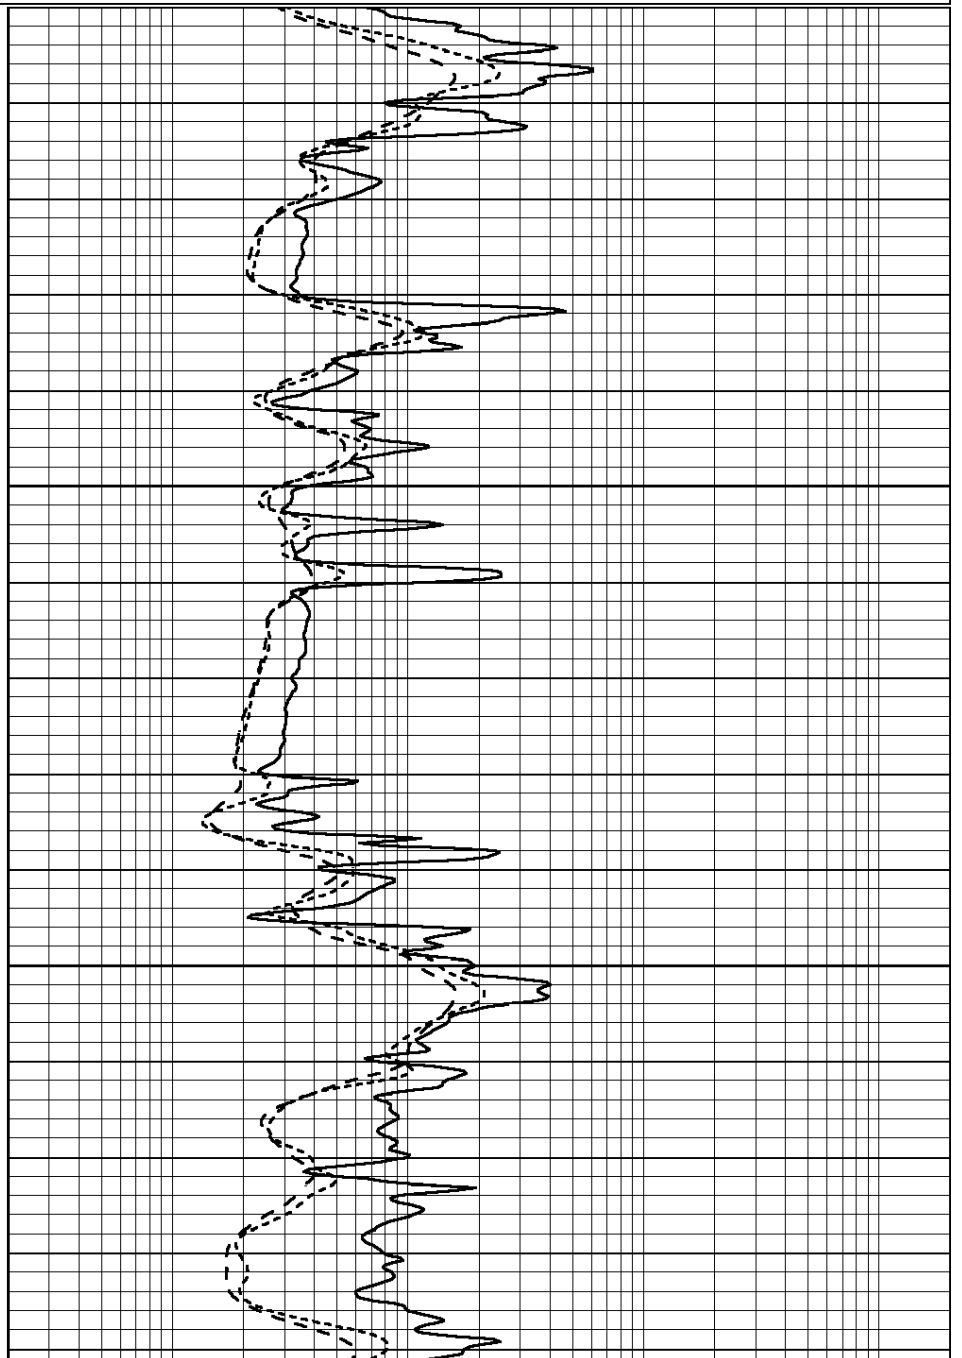

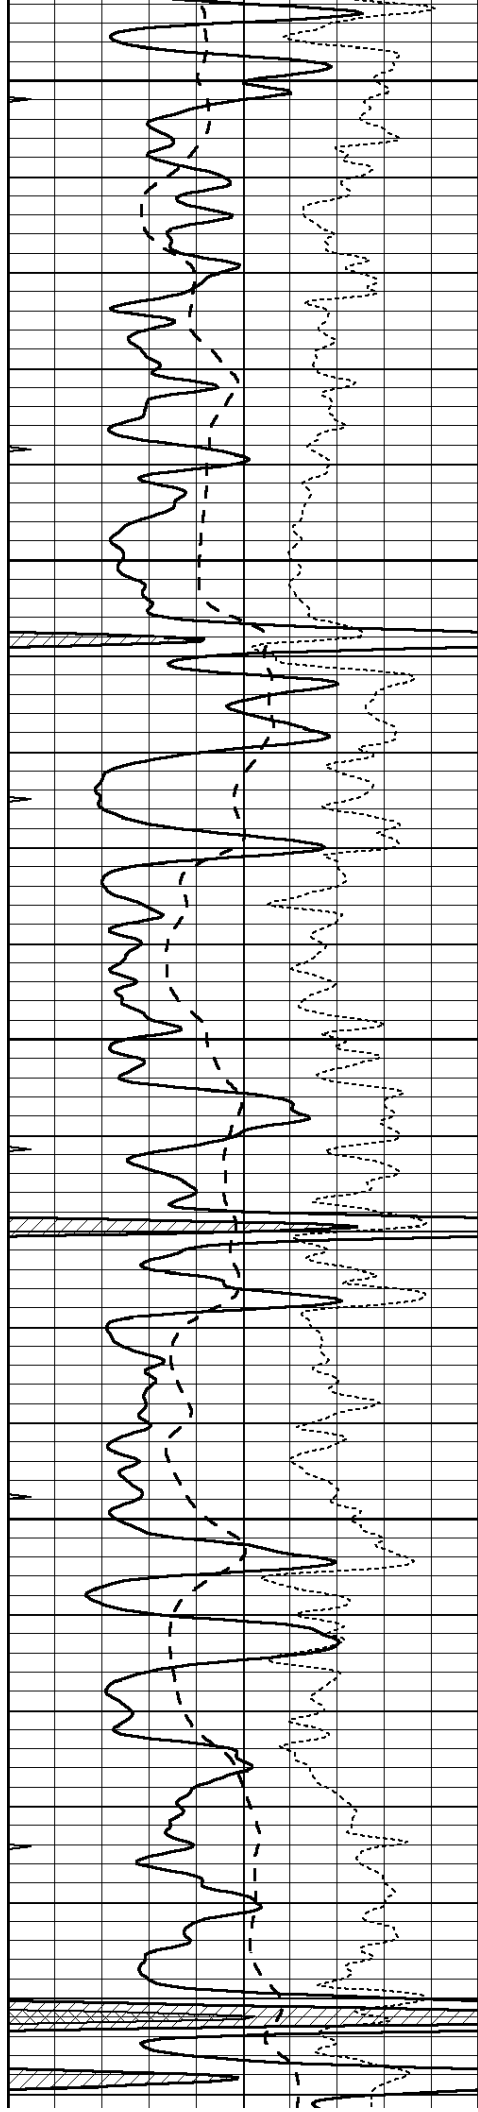


3150


3200

3250

3300

3350

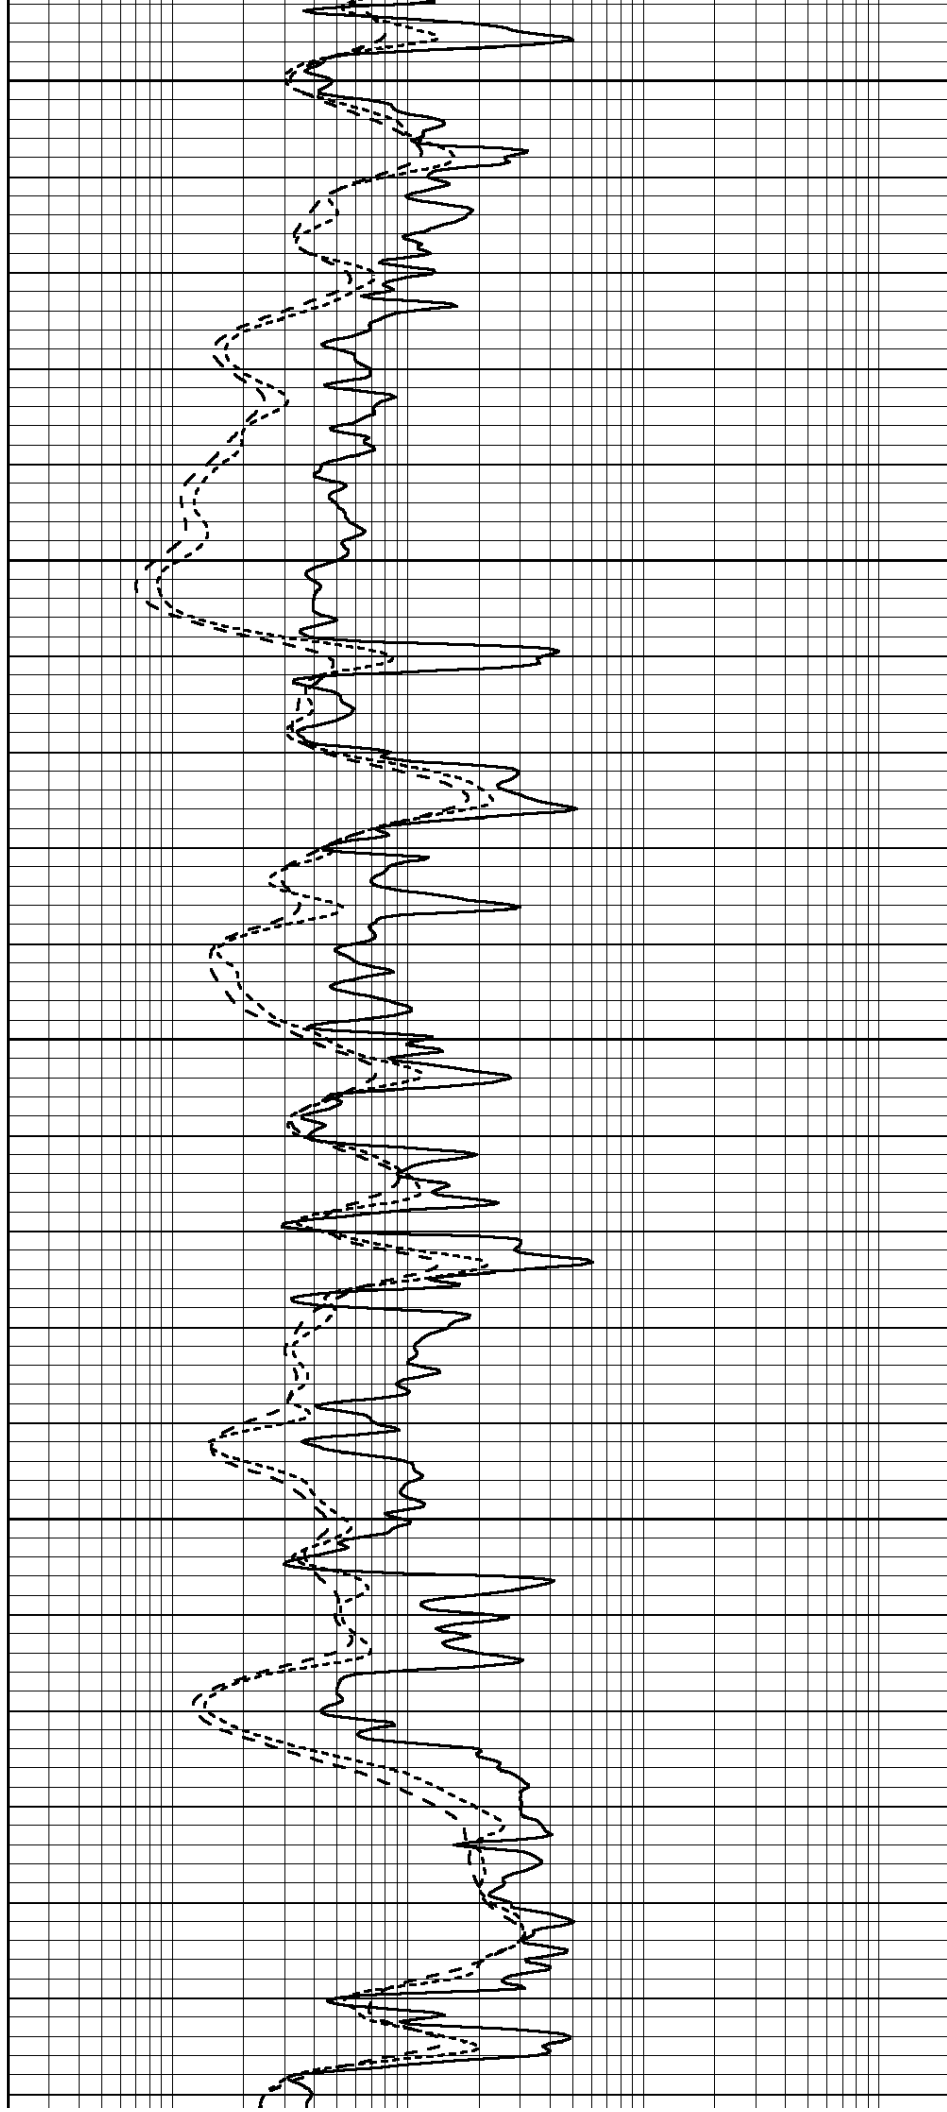

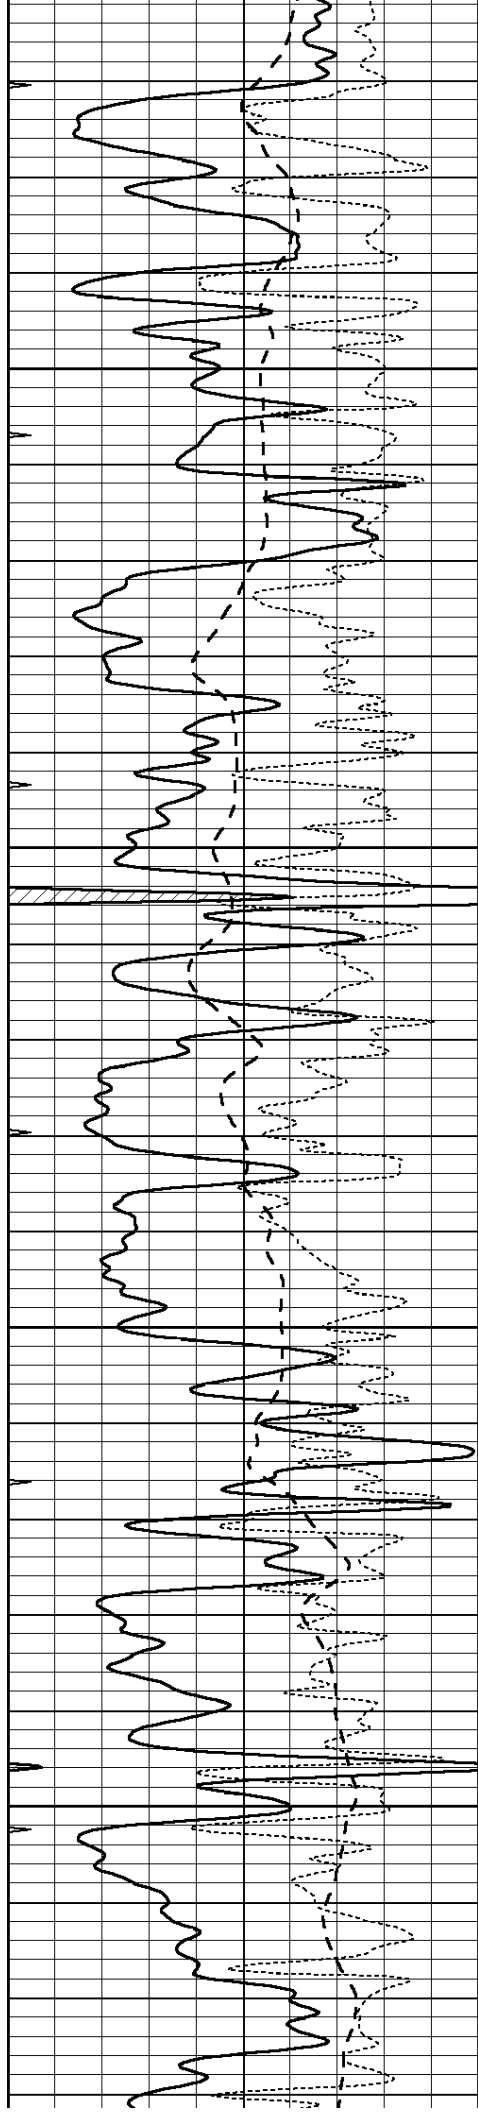



3400

3450

3500

3550

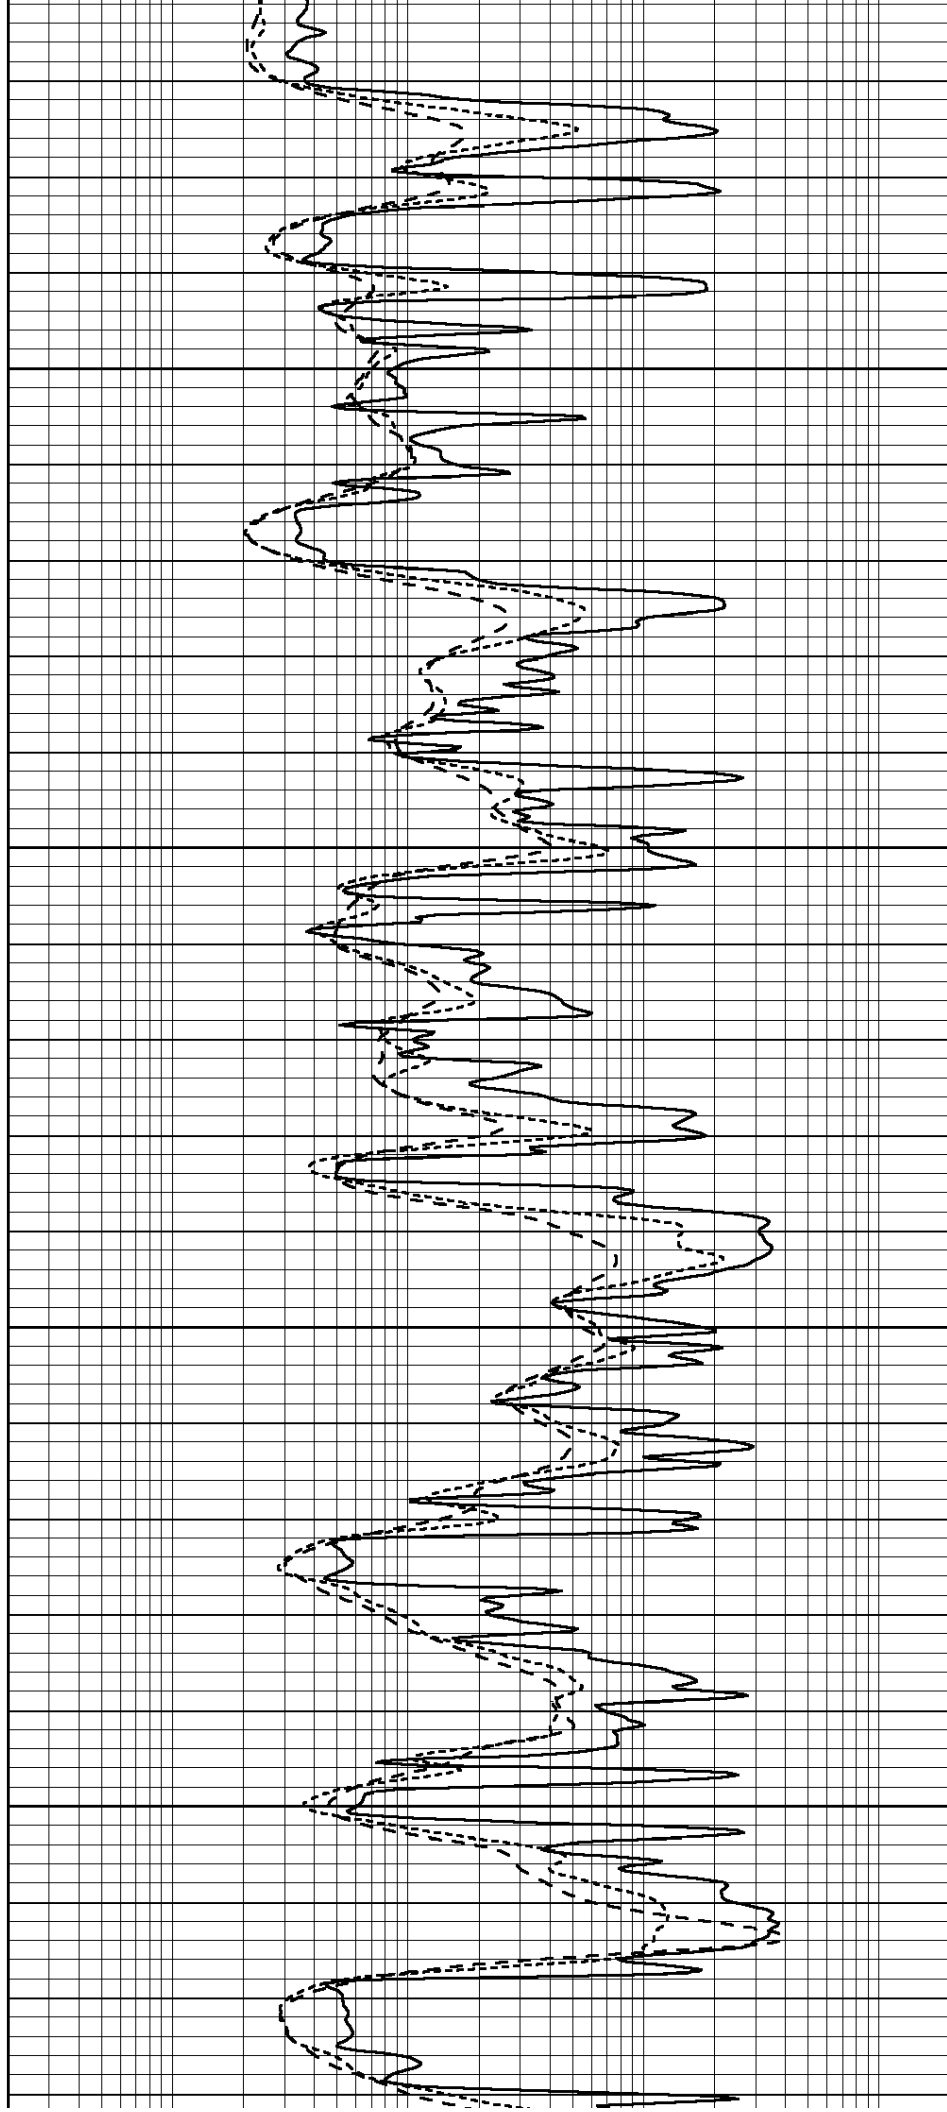

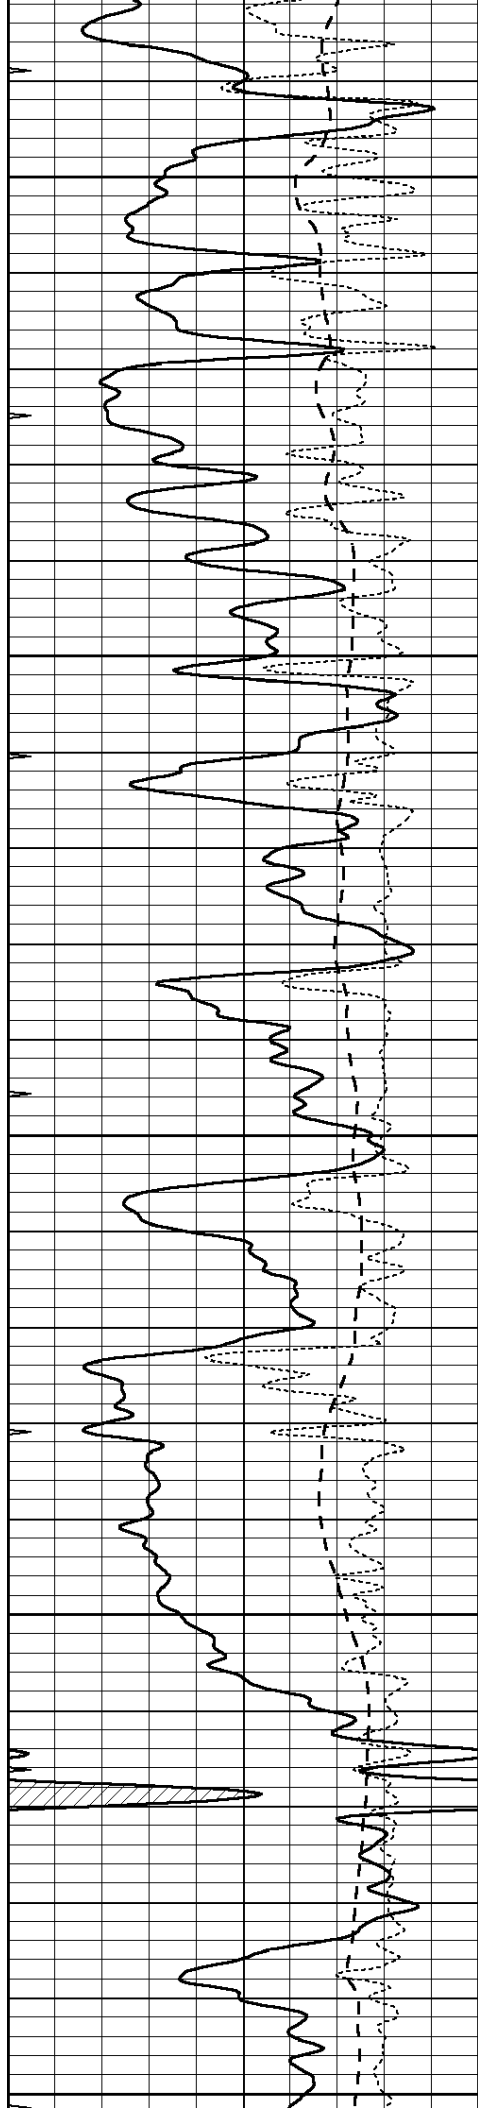


3600


3650

3700

3750

3800

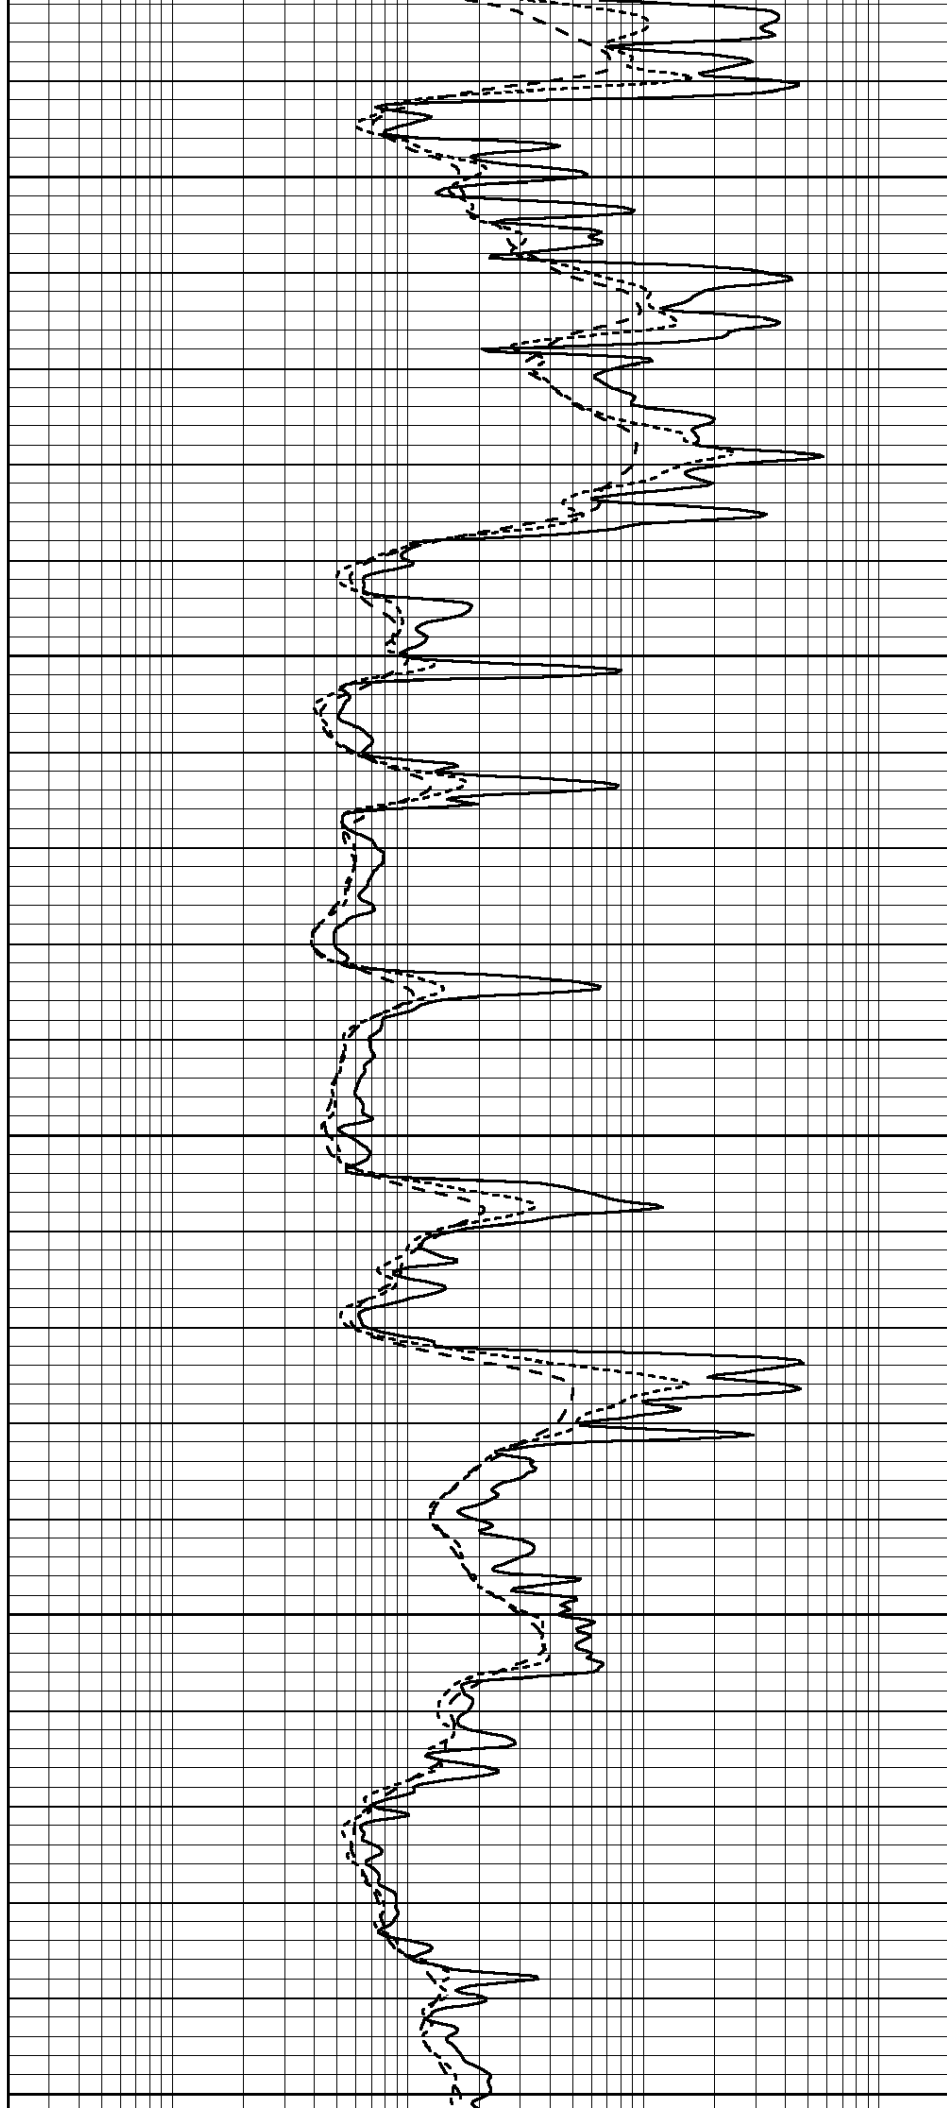


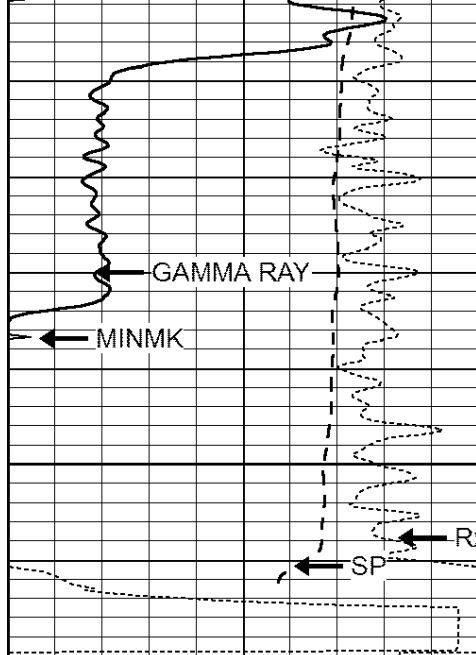


3850

LTD 3866

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

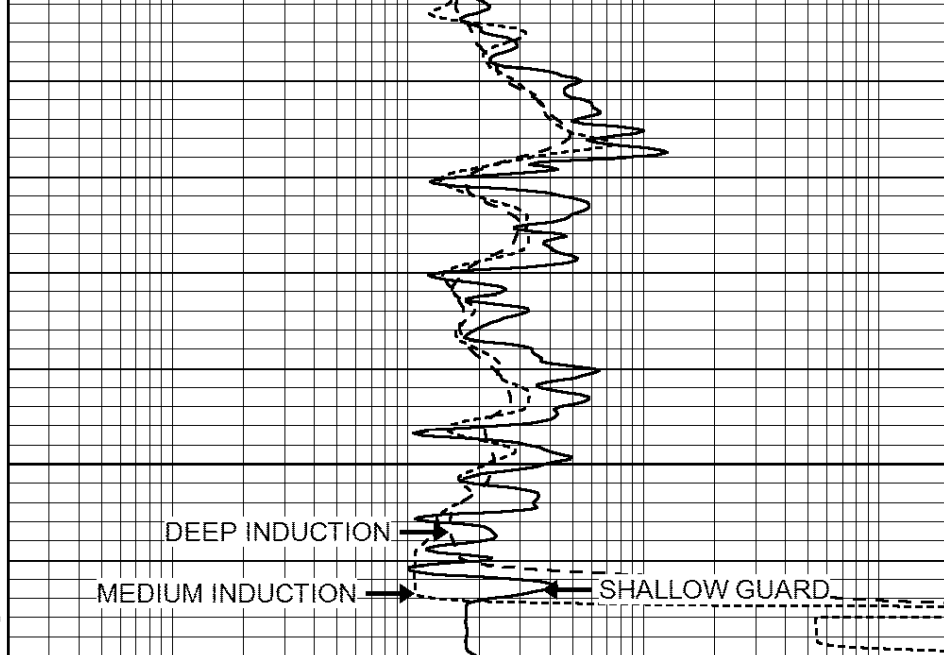

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

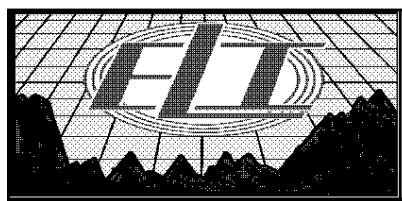


REPEAT SECTION


Database File: 2418ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: _dil
 Dataset Creation: Sun Apr 08 05:58:05 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

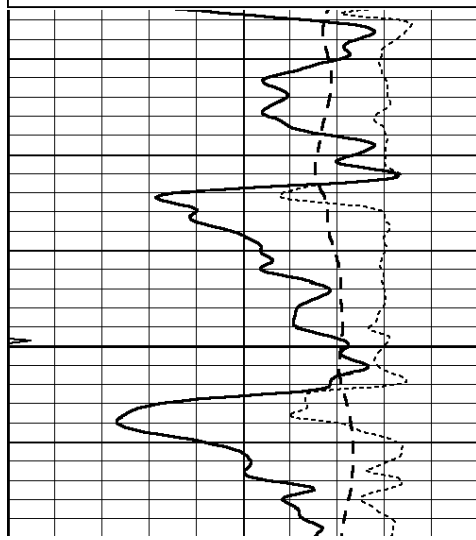

3700

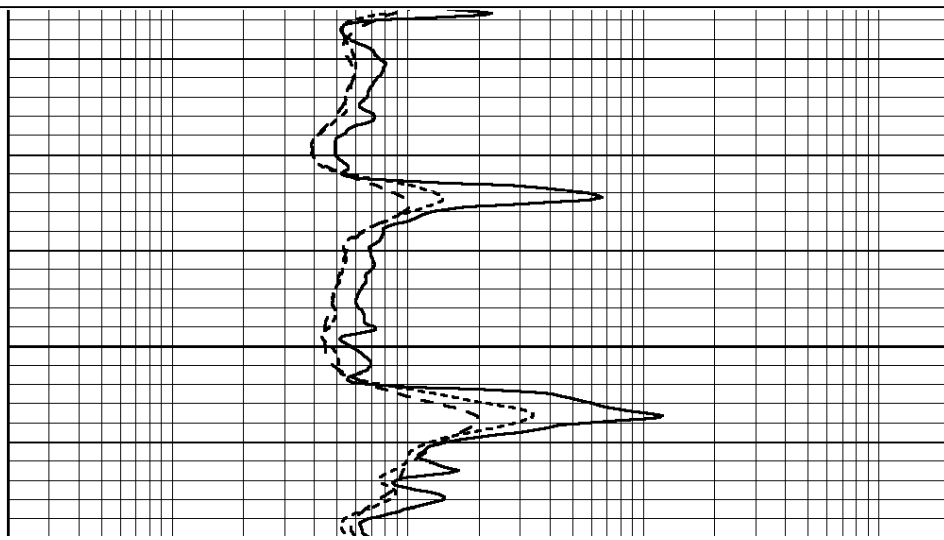

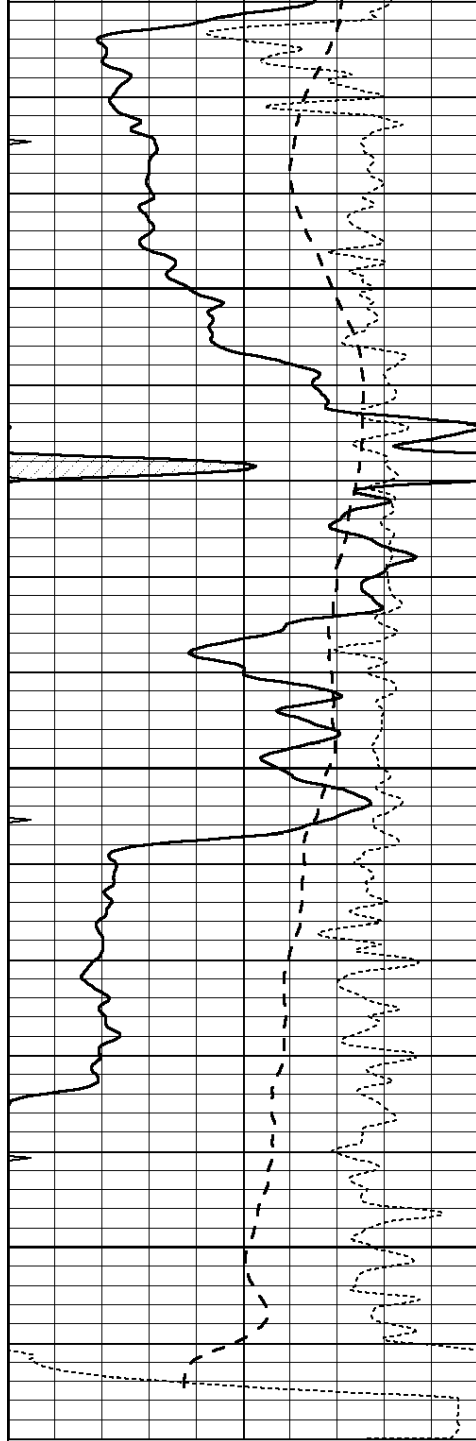


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

3750

3800

3850

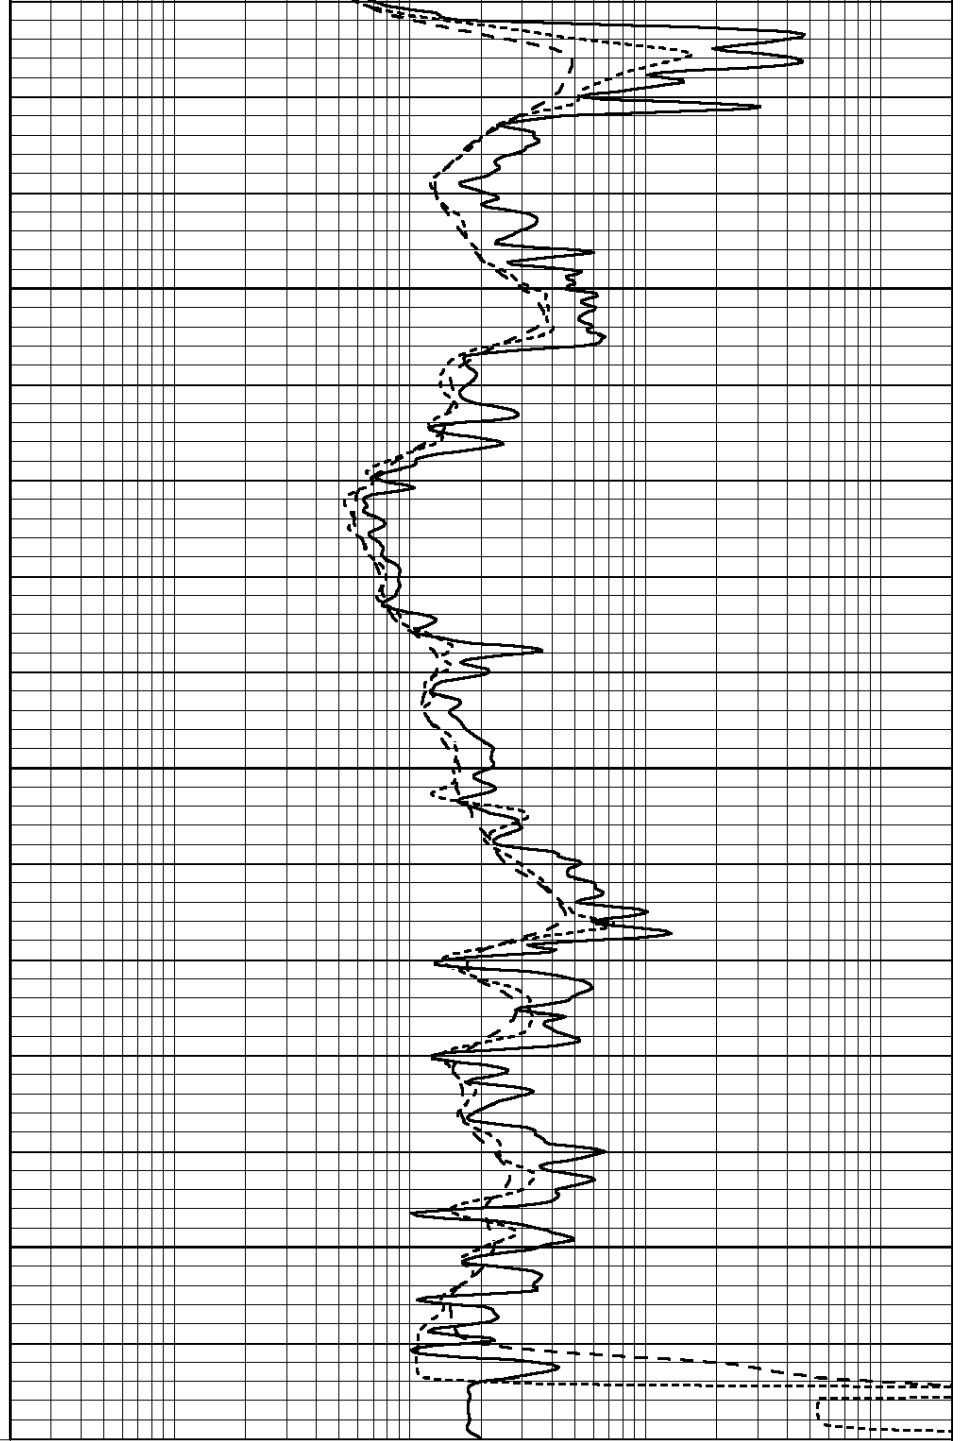

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: pe2.db
 Dataset Pathname: pass2
 Dataset Creation: Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model:	PROBE8-DILG
Surface Cal Performed:	Mon Aug 21 11:58:18 2017
Downhole Cal Performed:	Mon Aug 21 11:58:21 2017
After Survey Verification Performed:	Mon Aug 21 11:58:23 2017

Surface Calibration			Readings		References		Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration			Readings		References		Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification			Readings		Targets		Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report		
Serial: 002	Model: PRB	

Master Calibration		Performed Mon Aug 21 11:56:41 2017			
	Background	Magnesium	Aluminum	Sandstone	
Window 1	833.6	7394.2	2287.3	8111.8	cps
Window 2	768.9	6322.3	1995.6	6800.0	cps
Window 3	621.5	3261.9	1186.4	3380.9	cps
Window 4	184.2	185.7	184.9	184.8	cps
Long Space	0.0	5553.4	1226.6	6031.1	cps
Short Space	1.2	1307.5	903.9	1387.7	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio	: 0.566
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept	: -20.7

Before Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings		Measured	Target
1)	Short Space		cps		
	Long Space		cps	pu	pu
2)	Short Space		cps		
	Long Space		cps	pu	
3)	Short Space		cps		
	Long Space		cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings		Measured	Target
1)	Short Space		cps		
	Long Space		cps	pu	pu
2)	Short Space		cps		
	Long Space		cps	pu	pu
3)	Short Space		cps		
	Long Space		cps	pu	pu

Gamma Ray Calibration Report

Serial Number: GR6
Tool Model: OPEN
Performed: Mon Aug 21 11:59:01 2017

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 276.0 cps

Sensitivity: 0.5500 GAPI/cps