

DUAL INDUCTION LOG


Company	BEAR PETROLEUM, LLC.	Company	BEAR PETROLEUM, LLC.
Well	RYAN #1	Well	RYAN #1
Field	WILDCAT	Field	WILDCAT
County	PAWNEE	County	PAWNEE
State	KANSAS	State	KANSAS
Location:	API # : 15-145-21829-0000	Other Services CDL/CNL MEL/SON	
Permanent Datum Log Measured From Drilling Measured From	330' FNL & 330' FWL NW - NW - NW SEC 15 TWP 22S RGE 20W	Elevation K.B. 2199 D.F. 2197 G.L. 2193	
Date	3/2/18		
Run Number	ONE		
Depth Driller	4488		
Depth Logger	4489		
Bottom Logged Interval	4487		
Top Log Interval	00		
Casing Driller	8 5/8"@1277'		
Casing Logger	1274		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,500 PPM	
Density / Viscosity	8.9/60		
pH / Fluid Loss	9.0/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.750@60F		
Rinf @ Meas. Temp	.563@60F		
Rmc @ Meas. Temp	.900@60F		
Source of Rinf / Rmc	MEASUREMENT		
Rim @ BHT	.375@120F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	10:30 P.M.		
Maximum Recorded Temperature	120F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ROD ANDERSEN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
BURDETT, KS., 1E. ON HWY 156 TO "340TH AVE.", 3S., JOG EAST, S. INTO

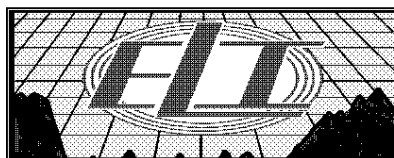

MAIN SECTION

Database File: 2344ddn.db
Dataset Pathname: pass3.10
Presentation Format: dil2
Dataset Creation: Sat Mar 03 00:24:53 2018
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
---	--------------	----

0	RILD (Ohm-m)	50
---	--------------	----



1000	CILD (mmho/m)	0
------	---------------	---


50	RILD X10 (Ohm-m)	500
----	------------------	-----

50	RLL3 X10 (Ohm-m)	500
----	------------------	-----

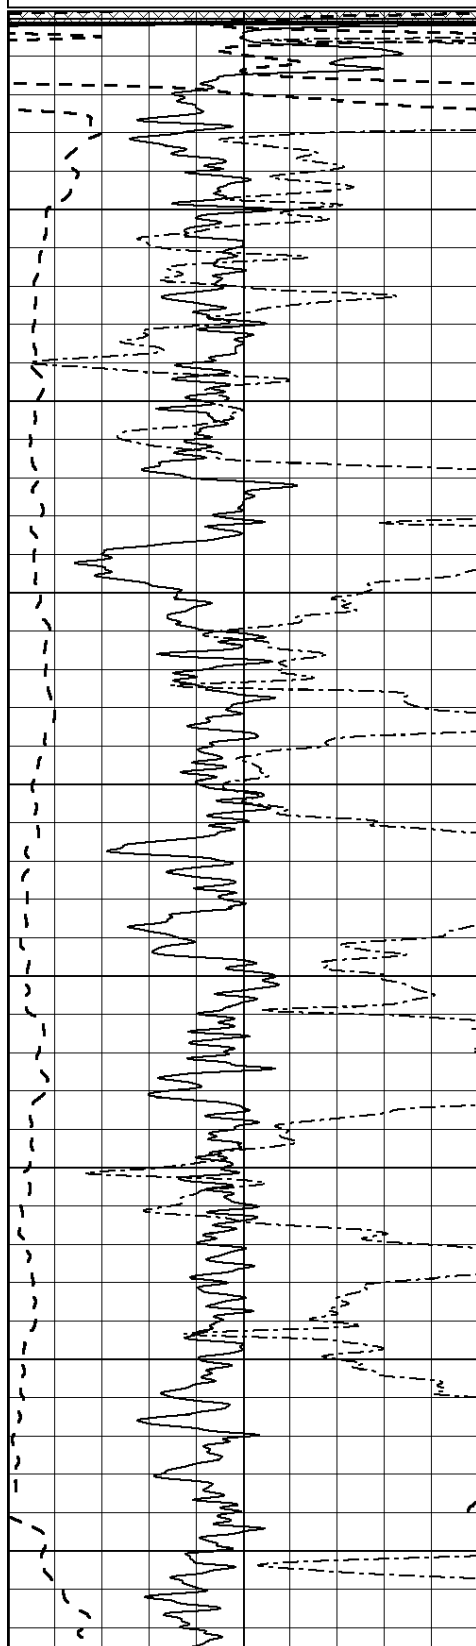

0
50
100
150
200
250
300
350
400

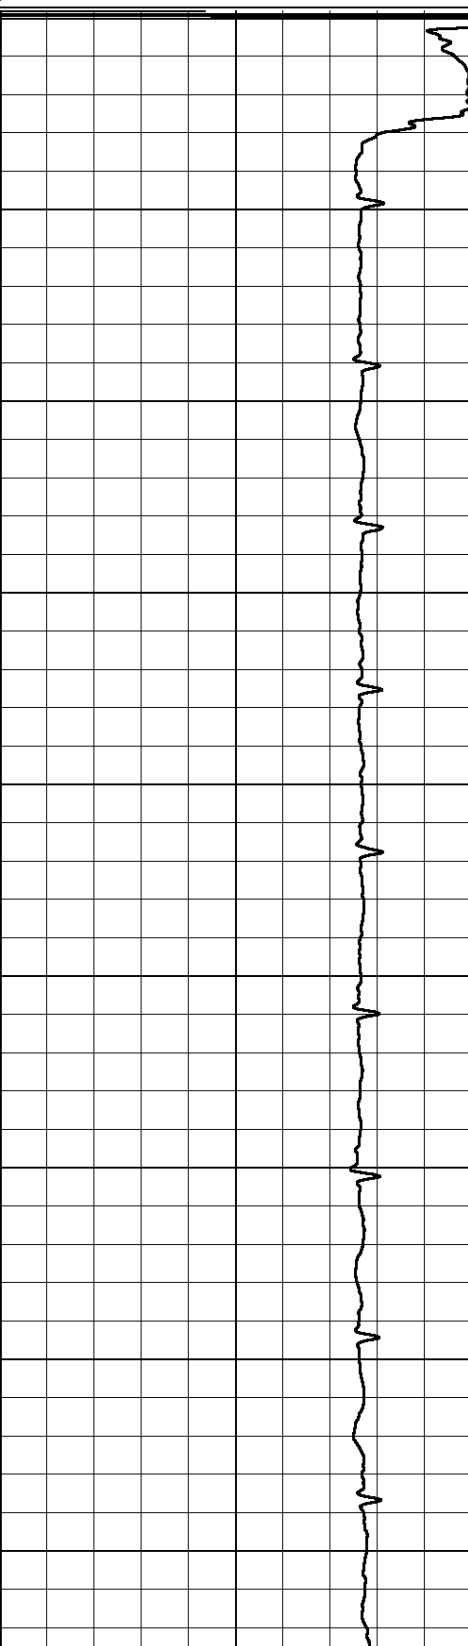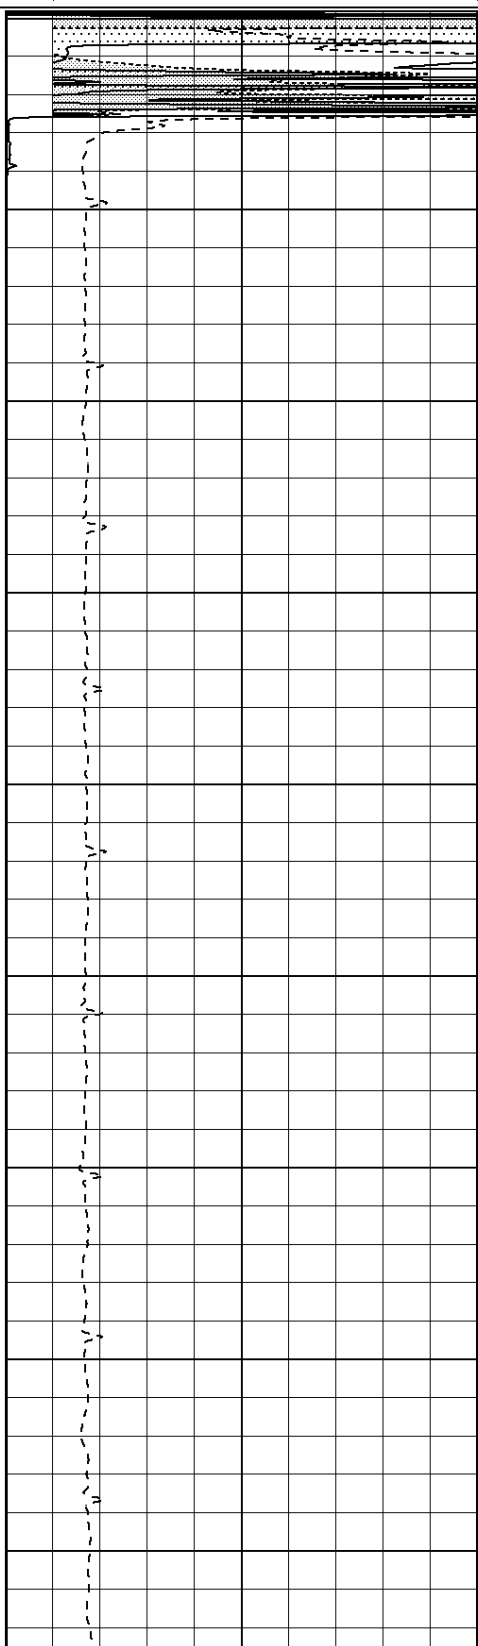

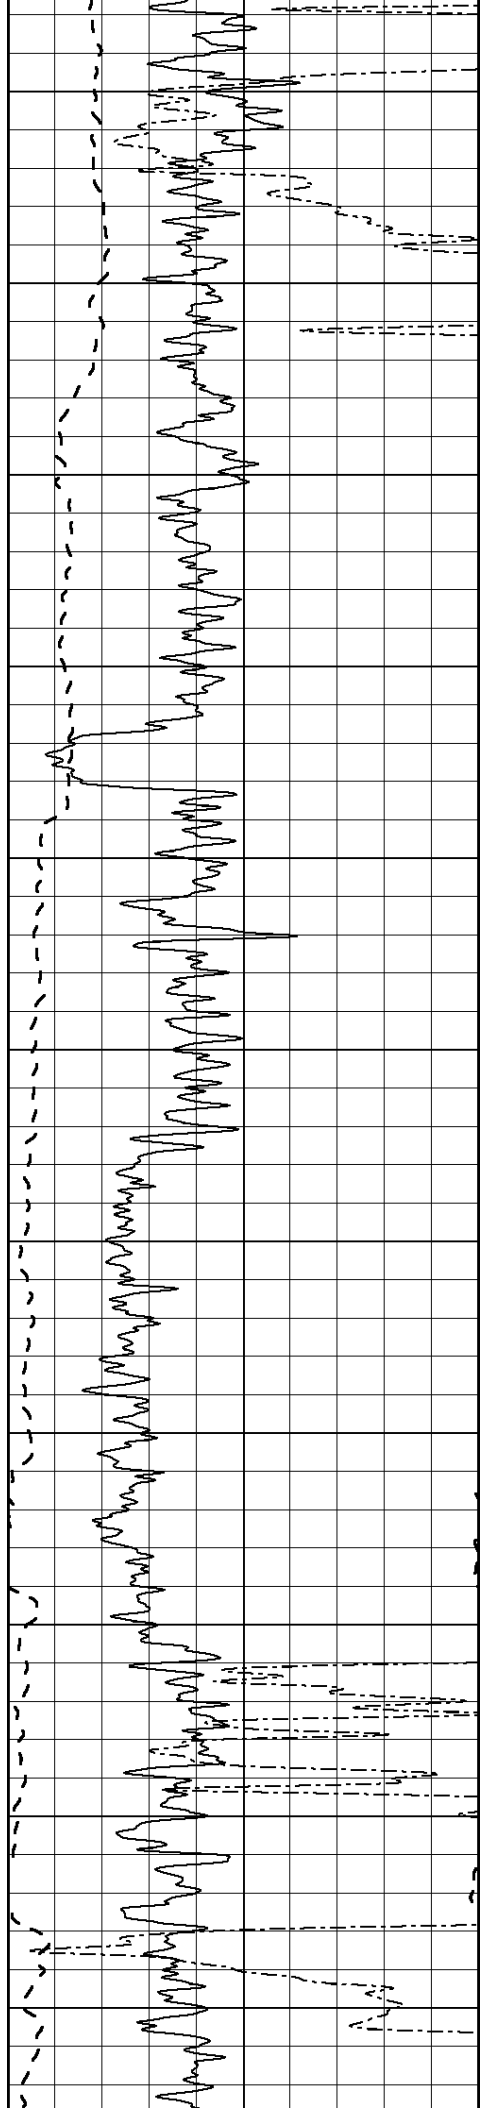

450

500

550

600

650

700


750


800

850


900


950

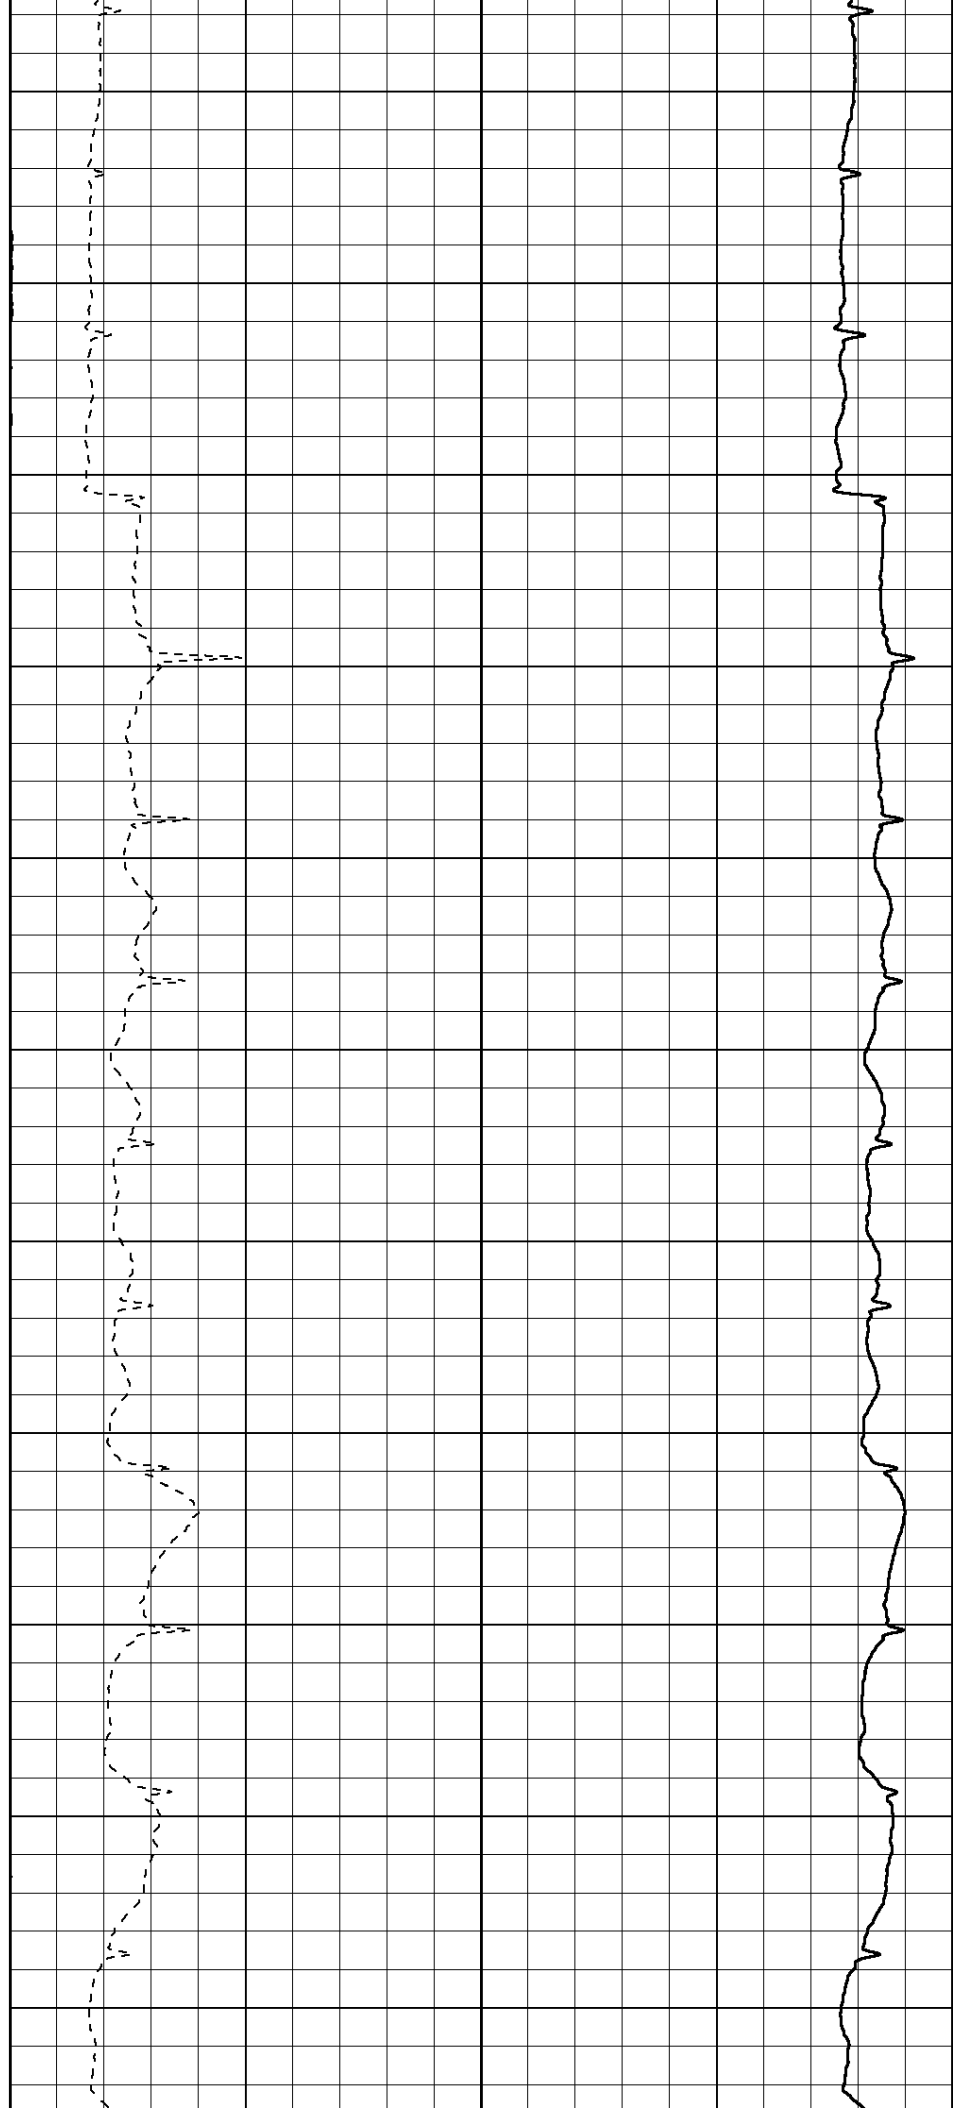

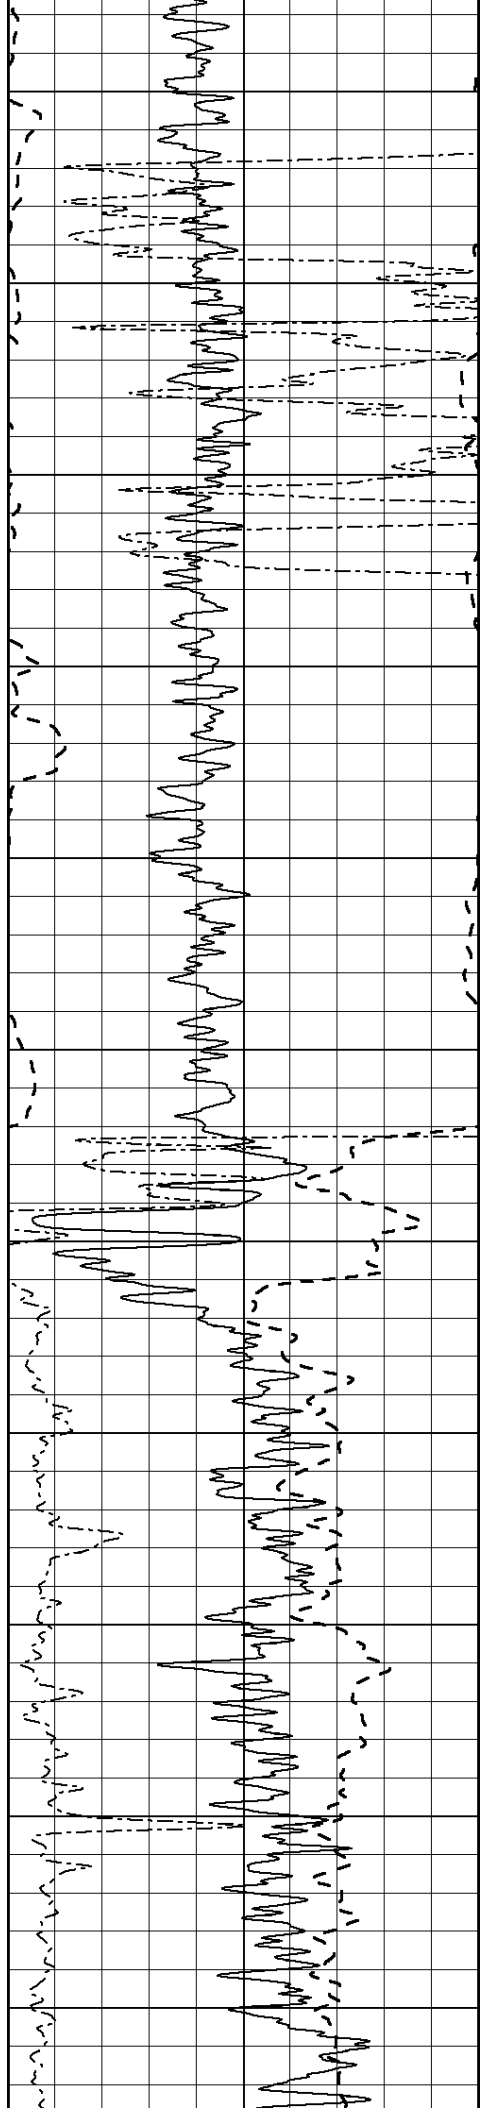

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

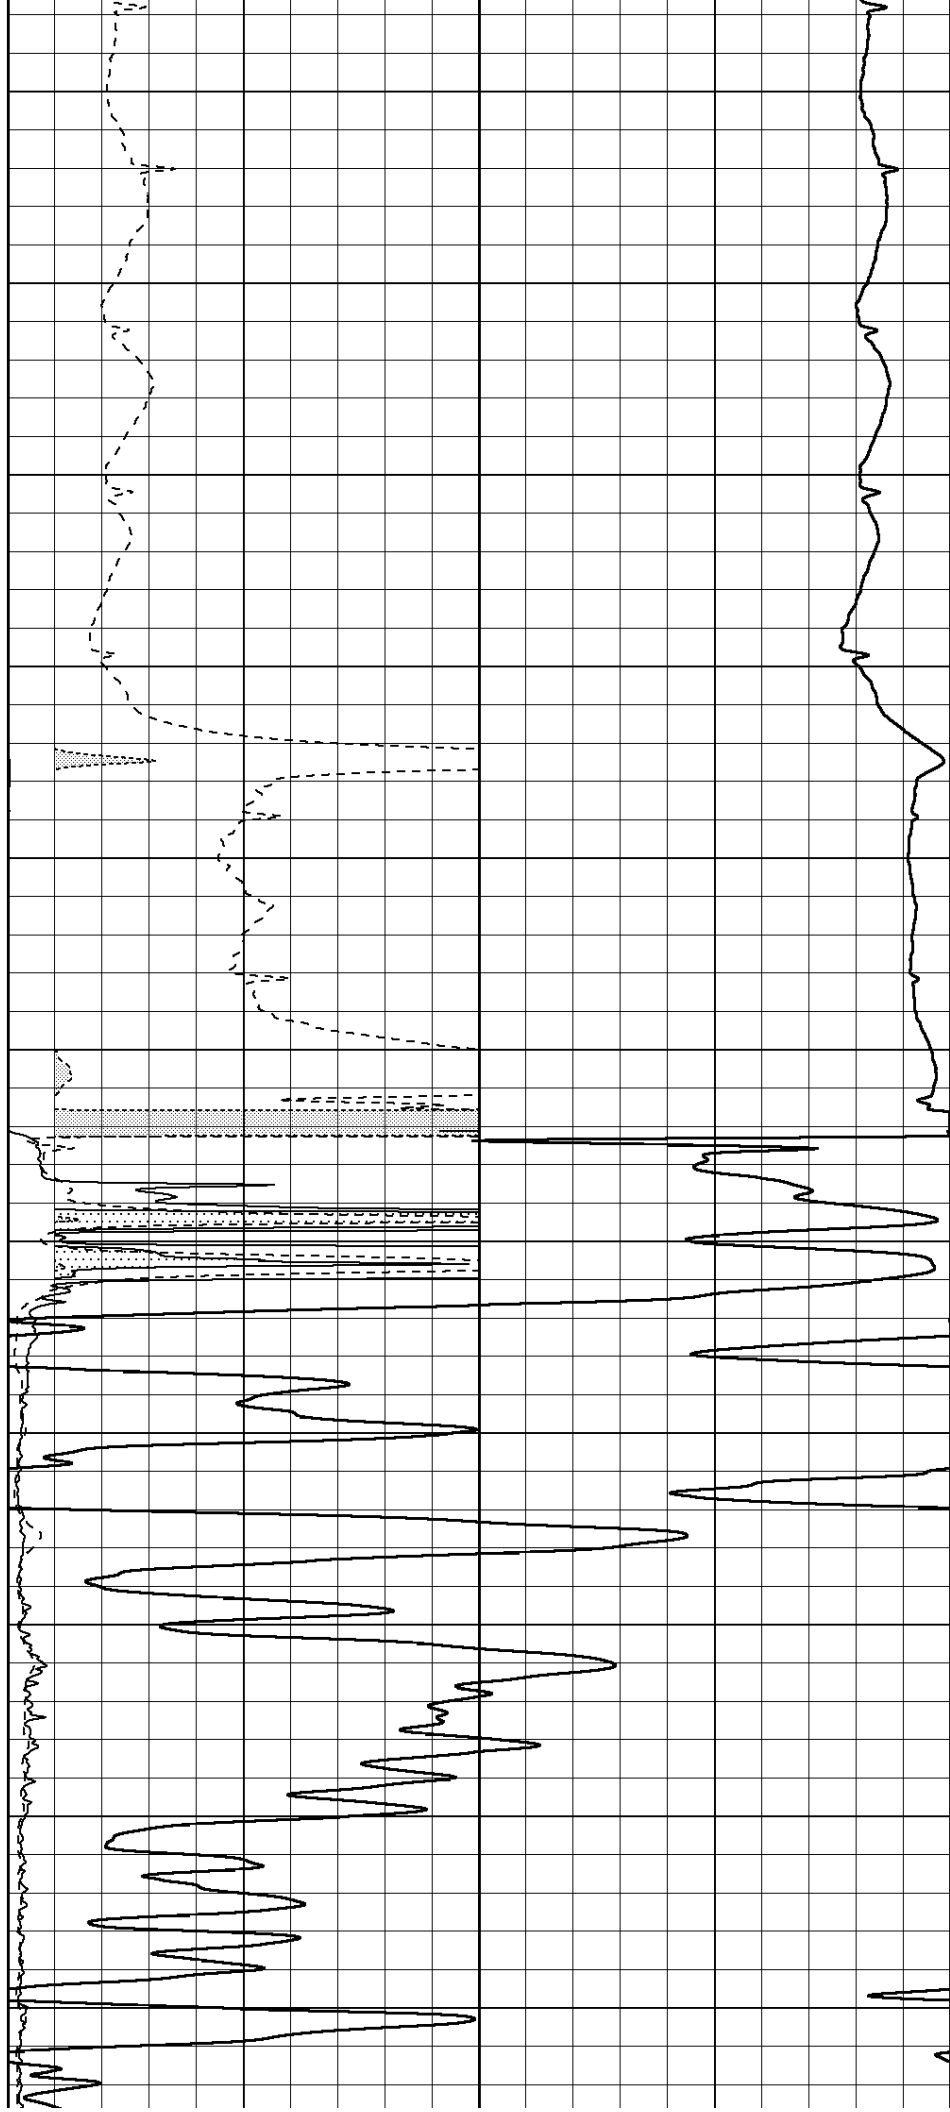

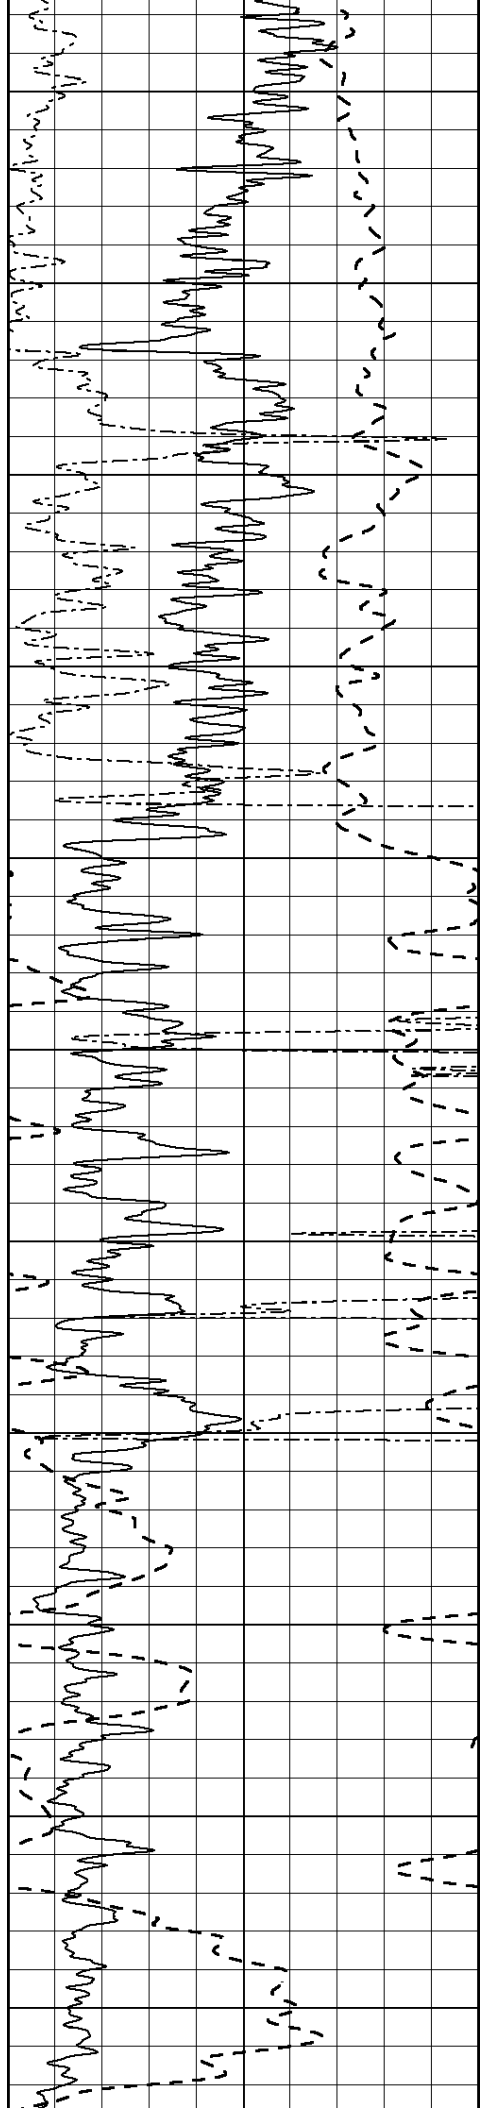

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

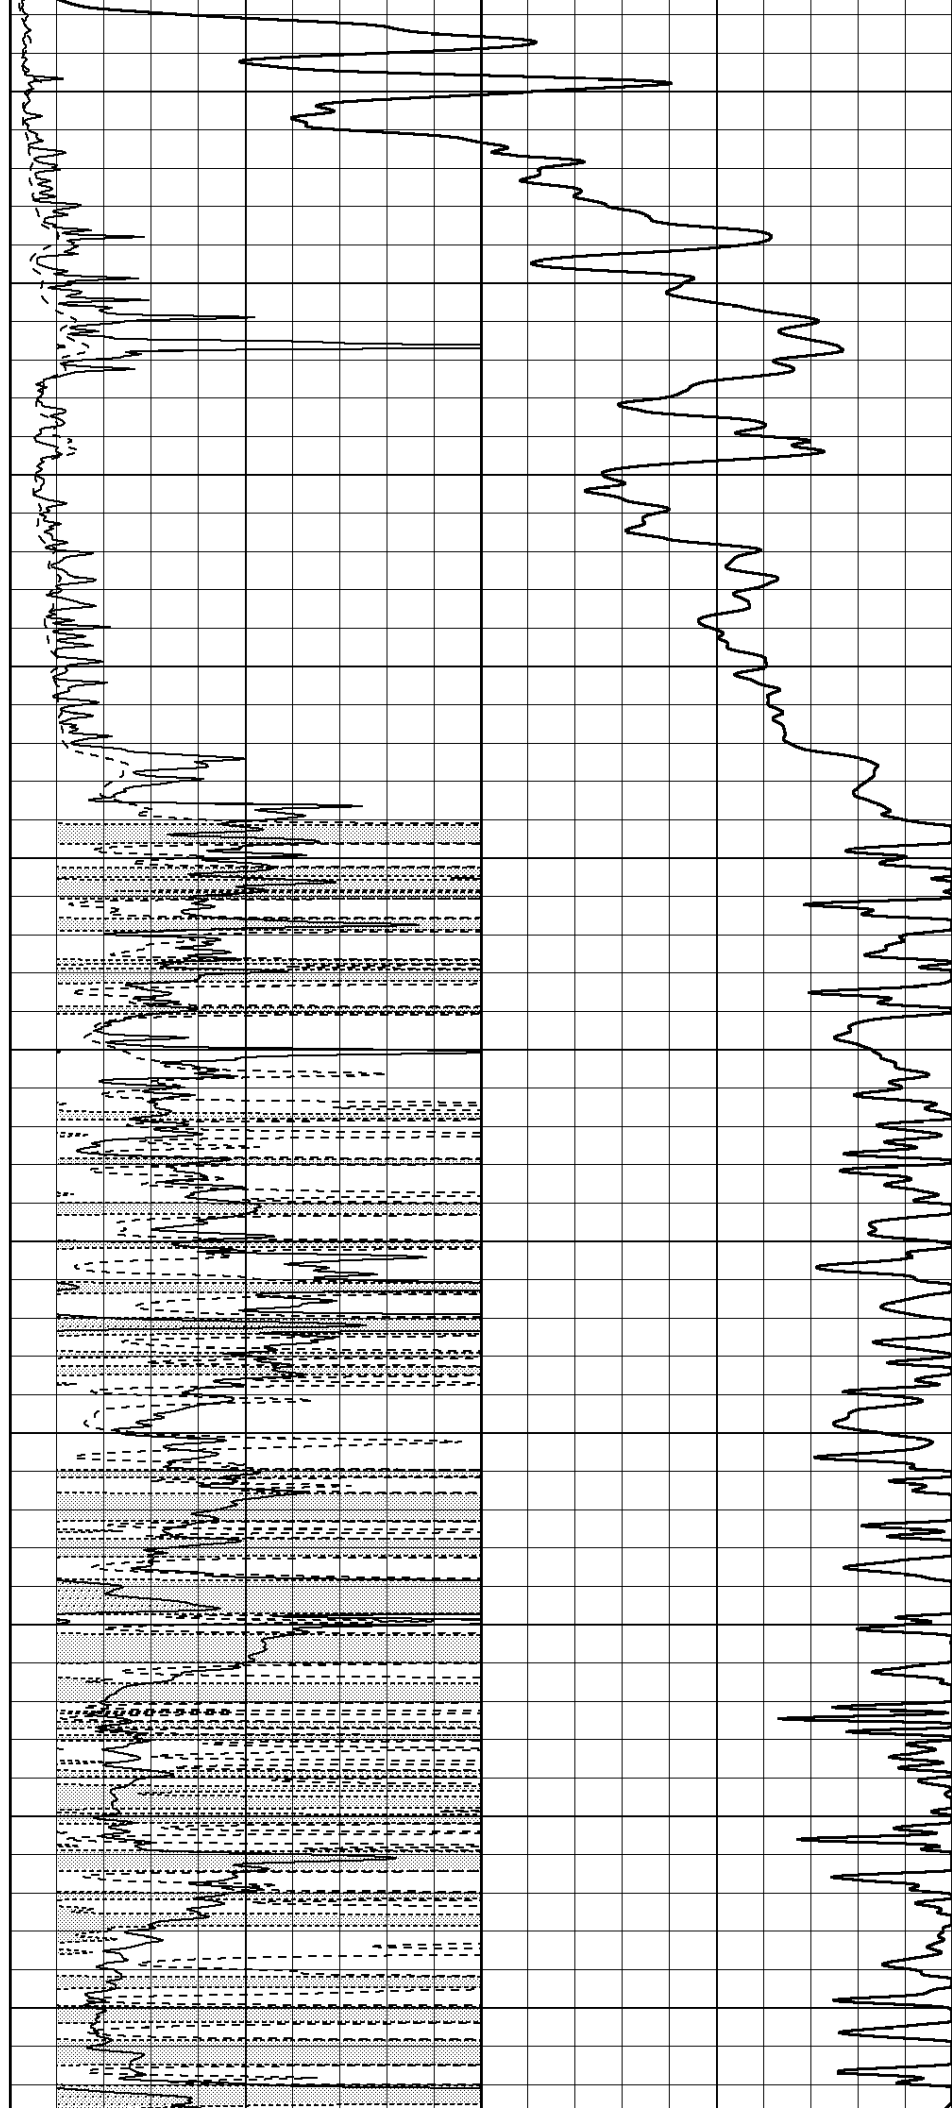

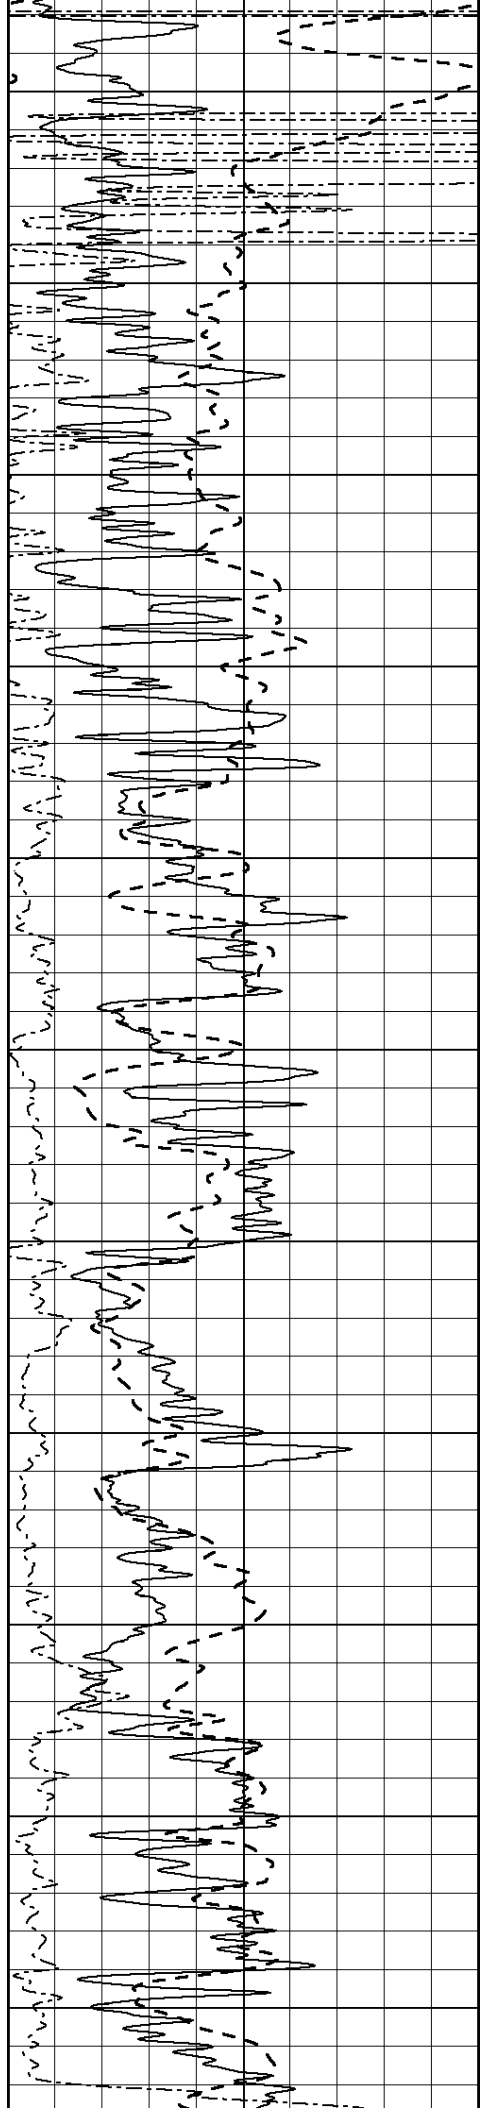

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

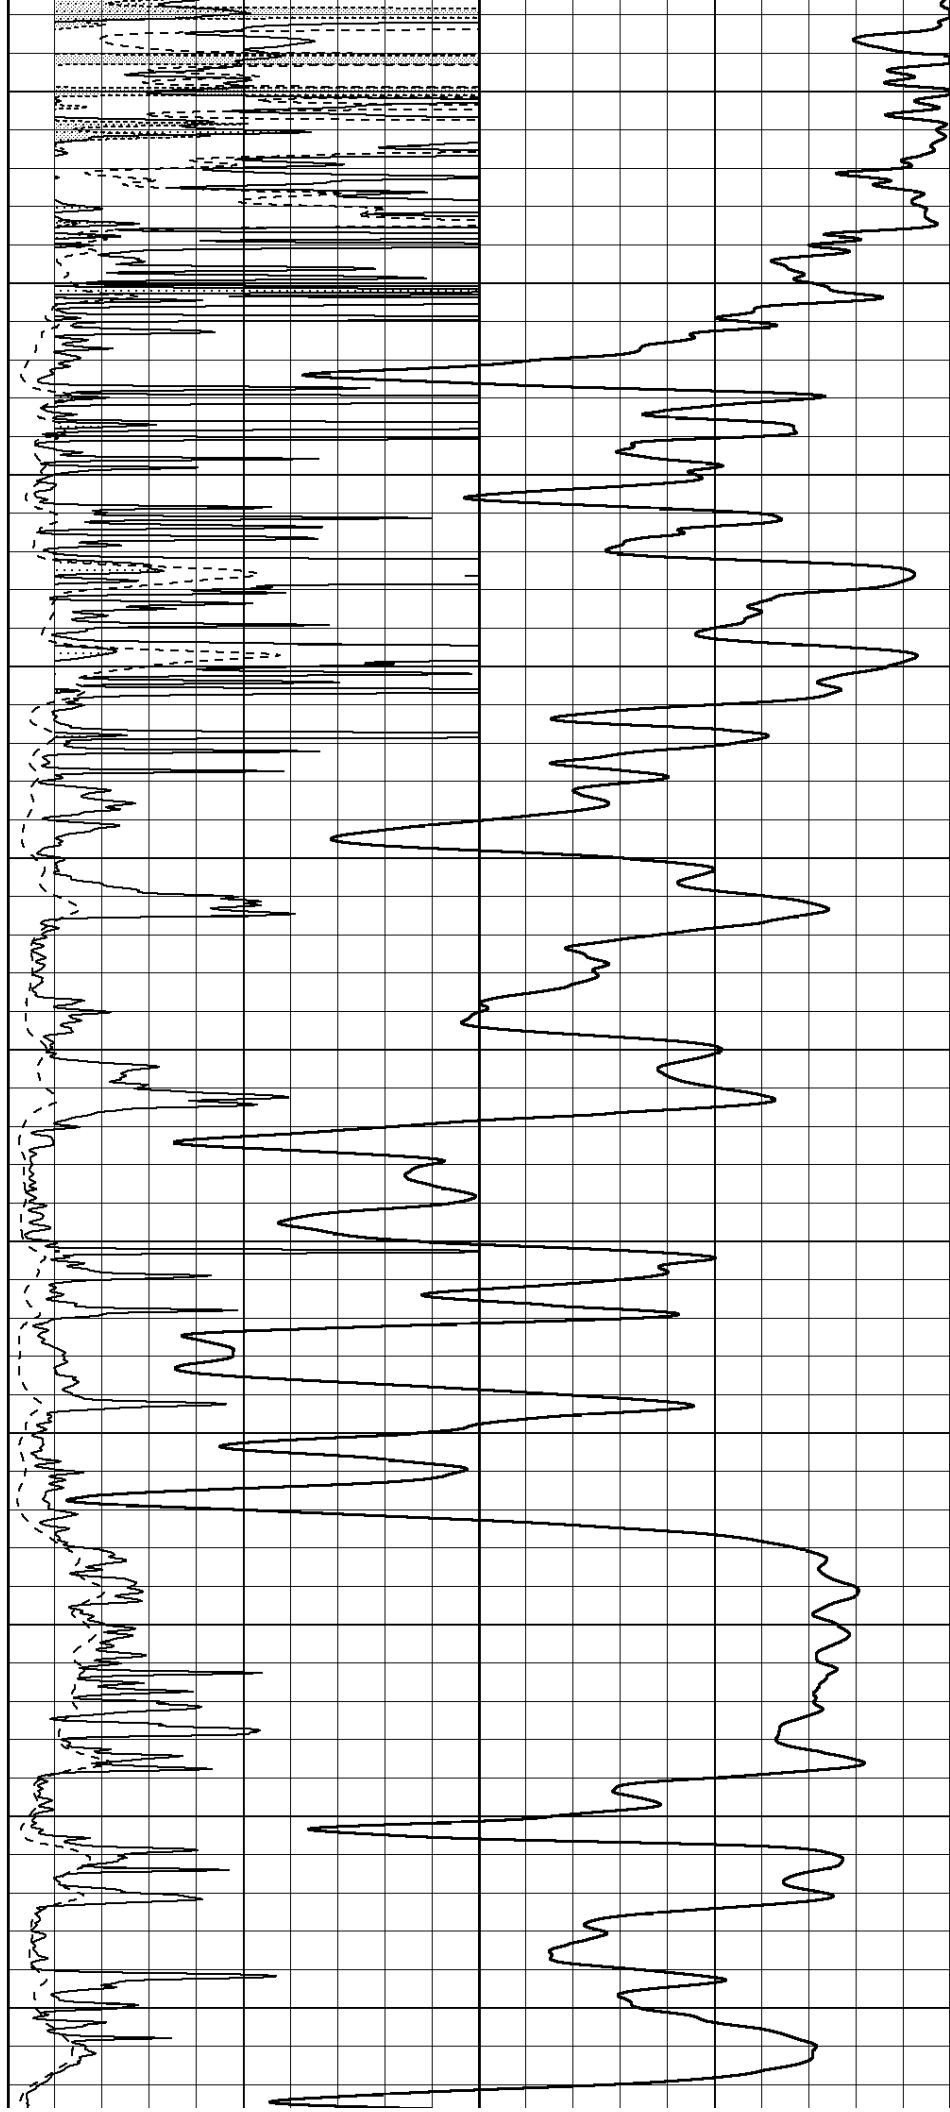

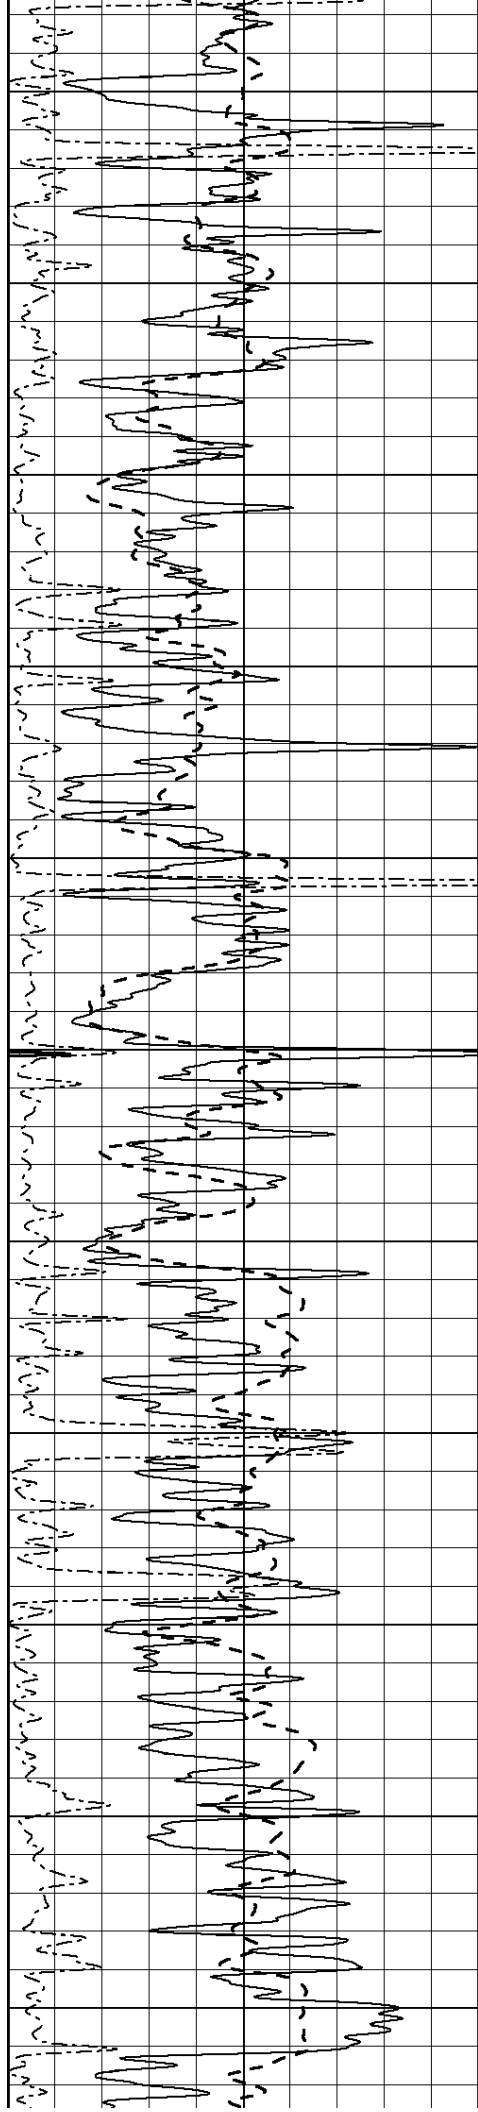

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

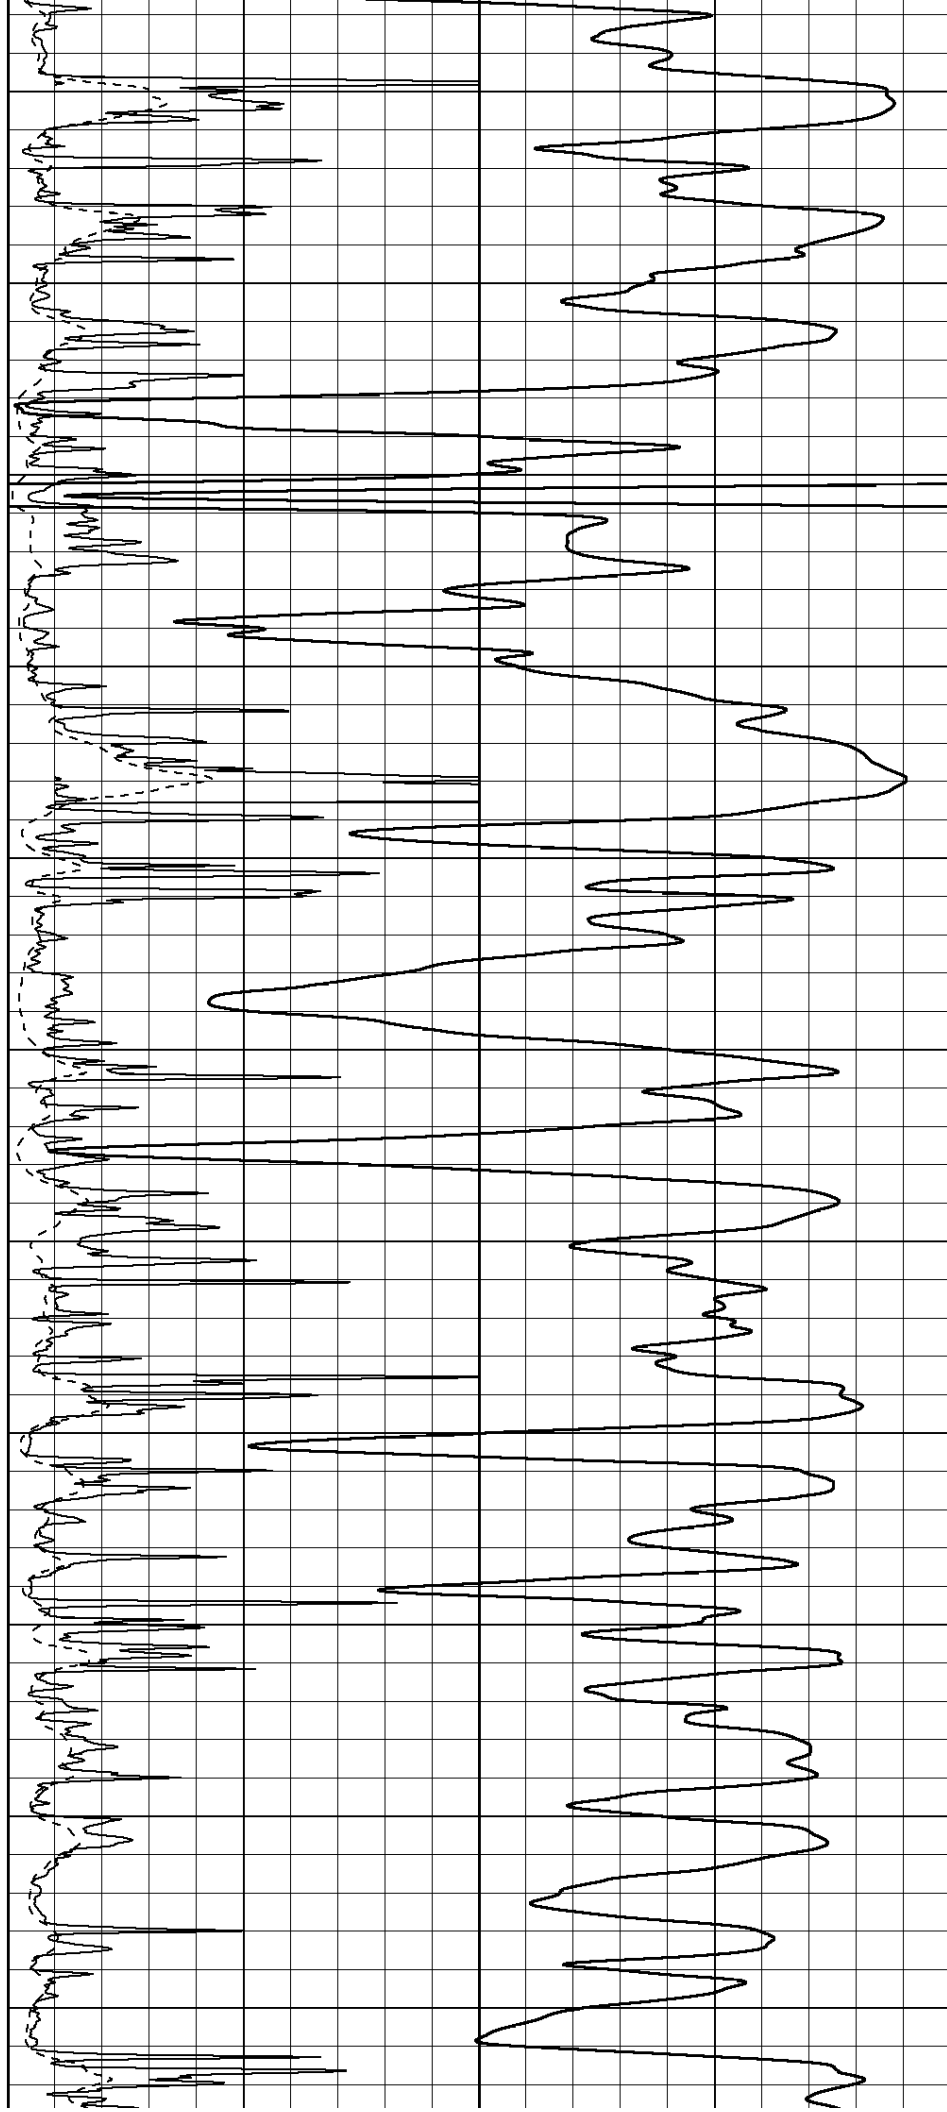

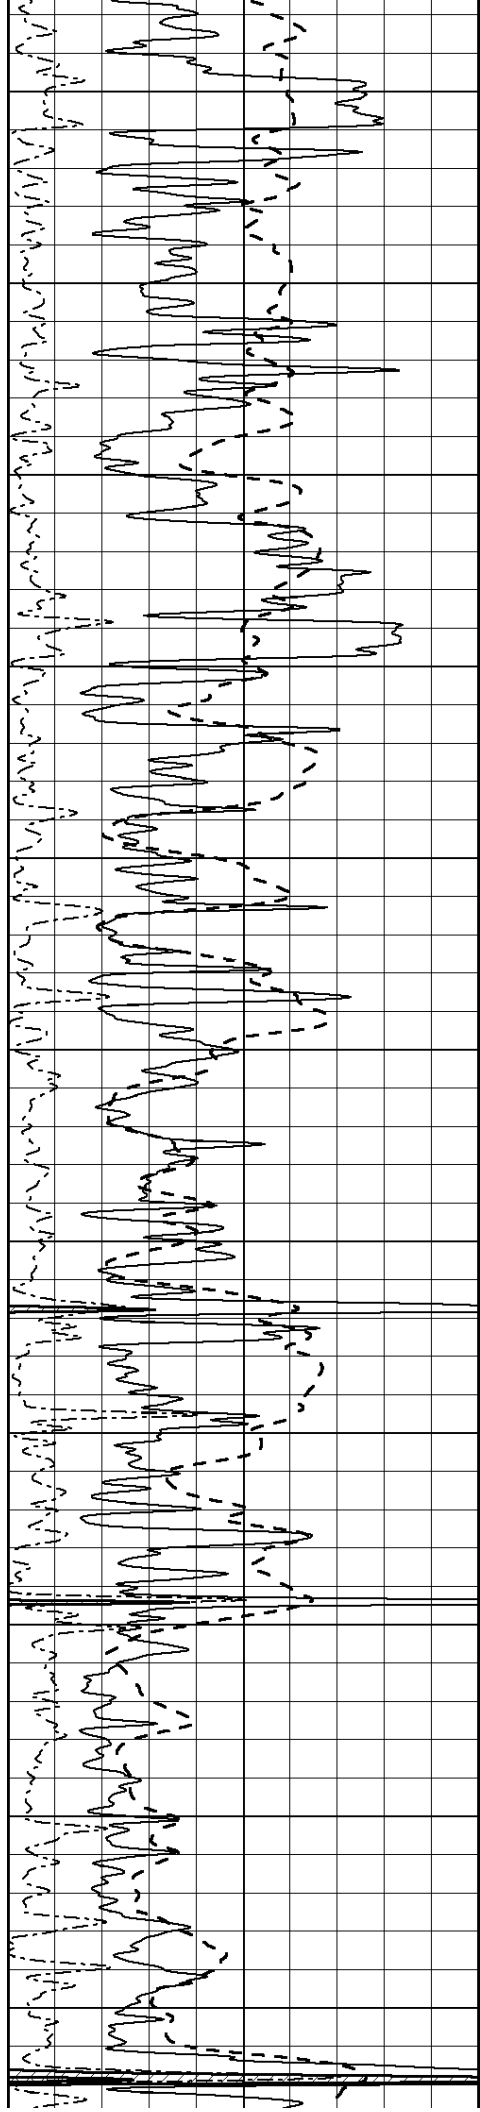

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

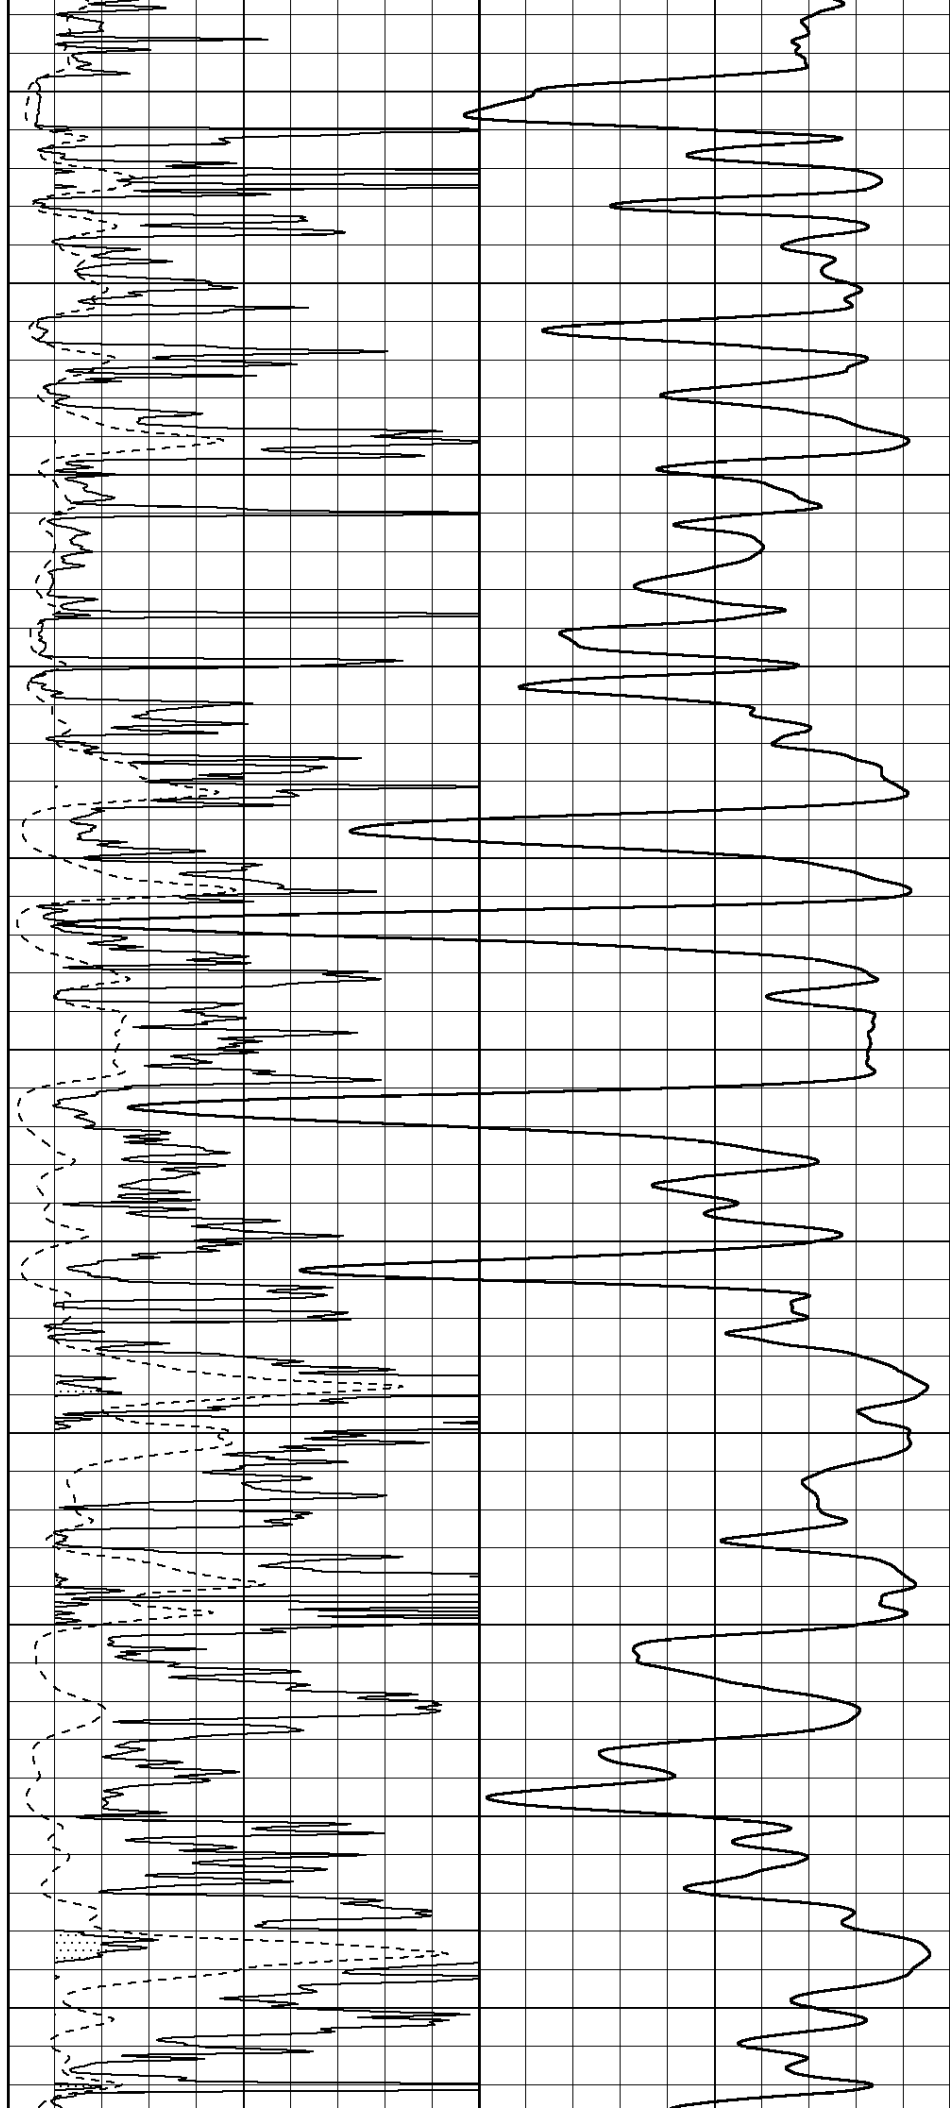

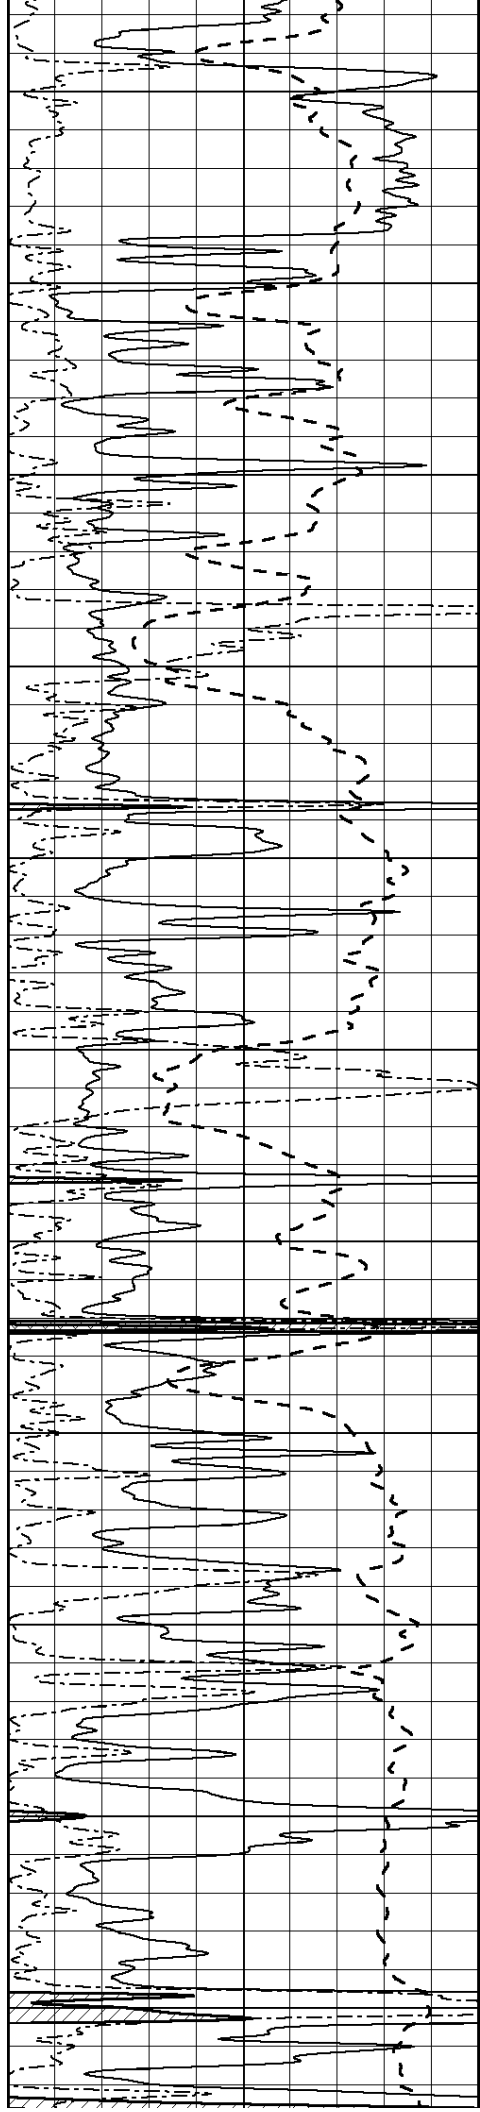

3750

3800

3850

3900

3950

4000



4050



4100

4150

4200



4250

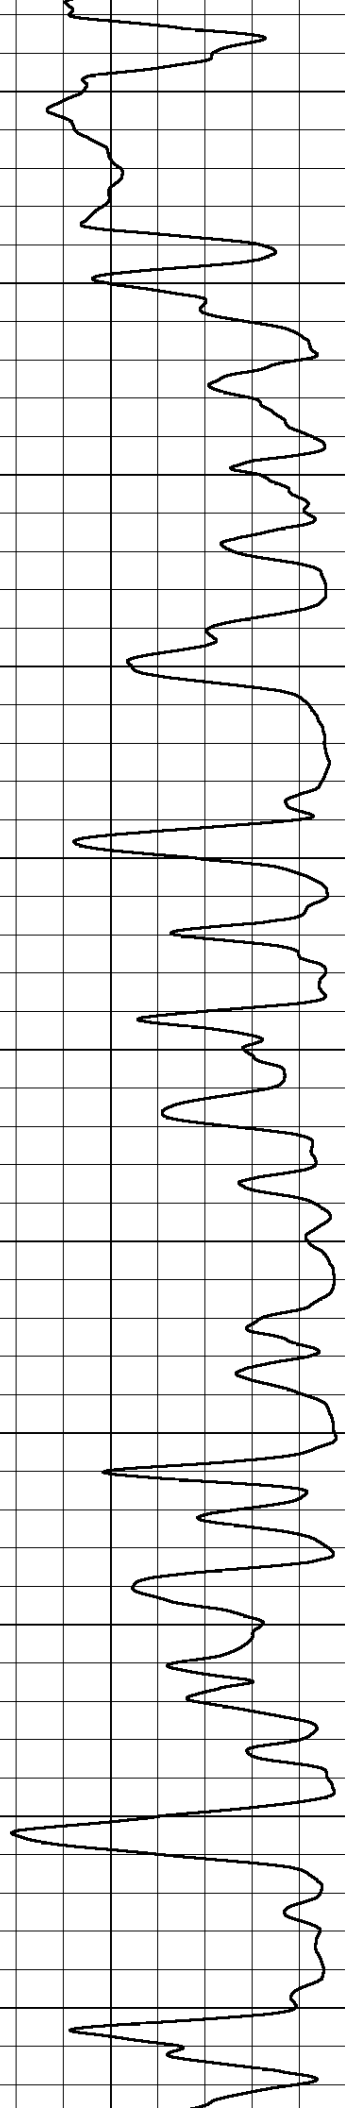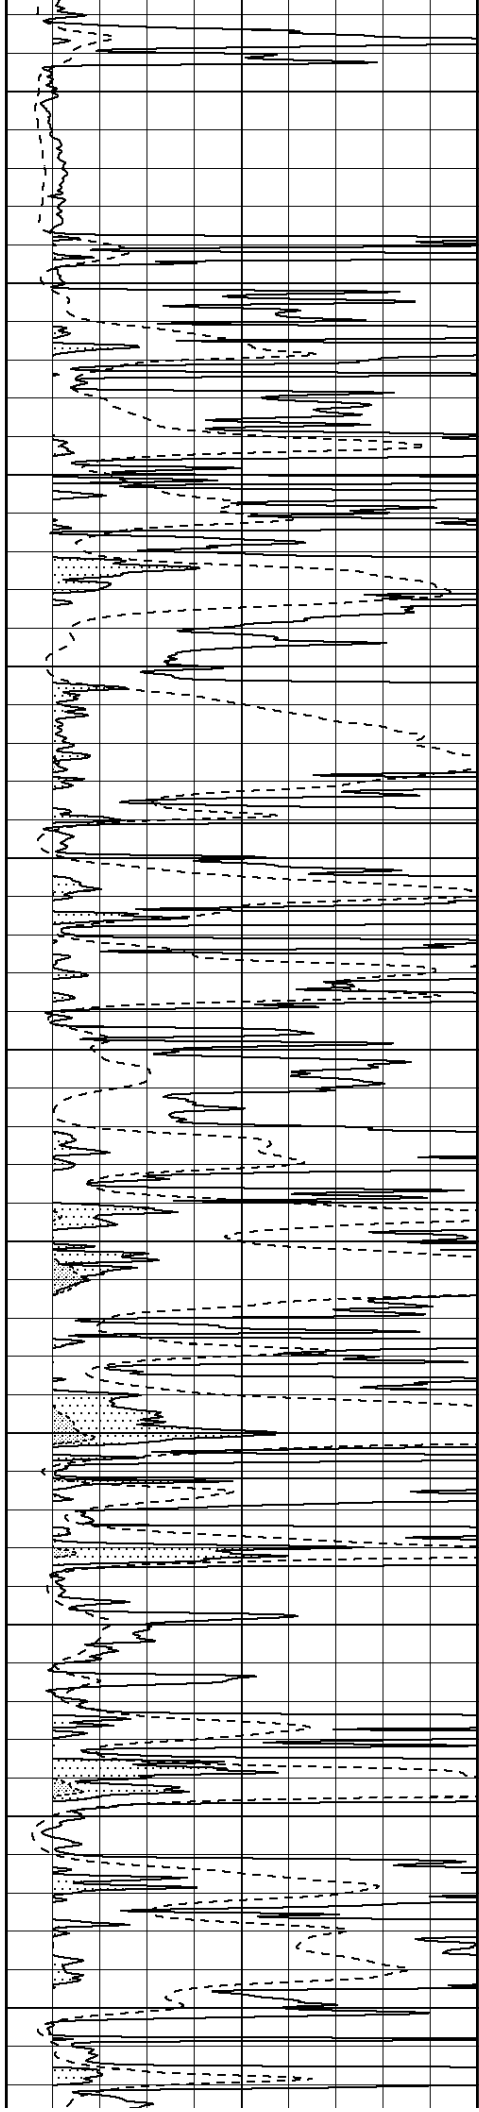


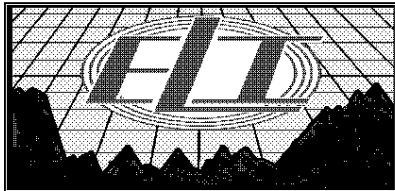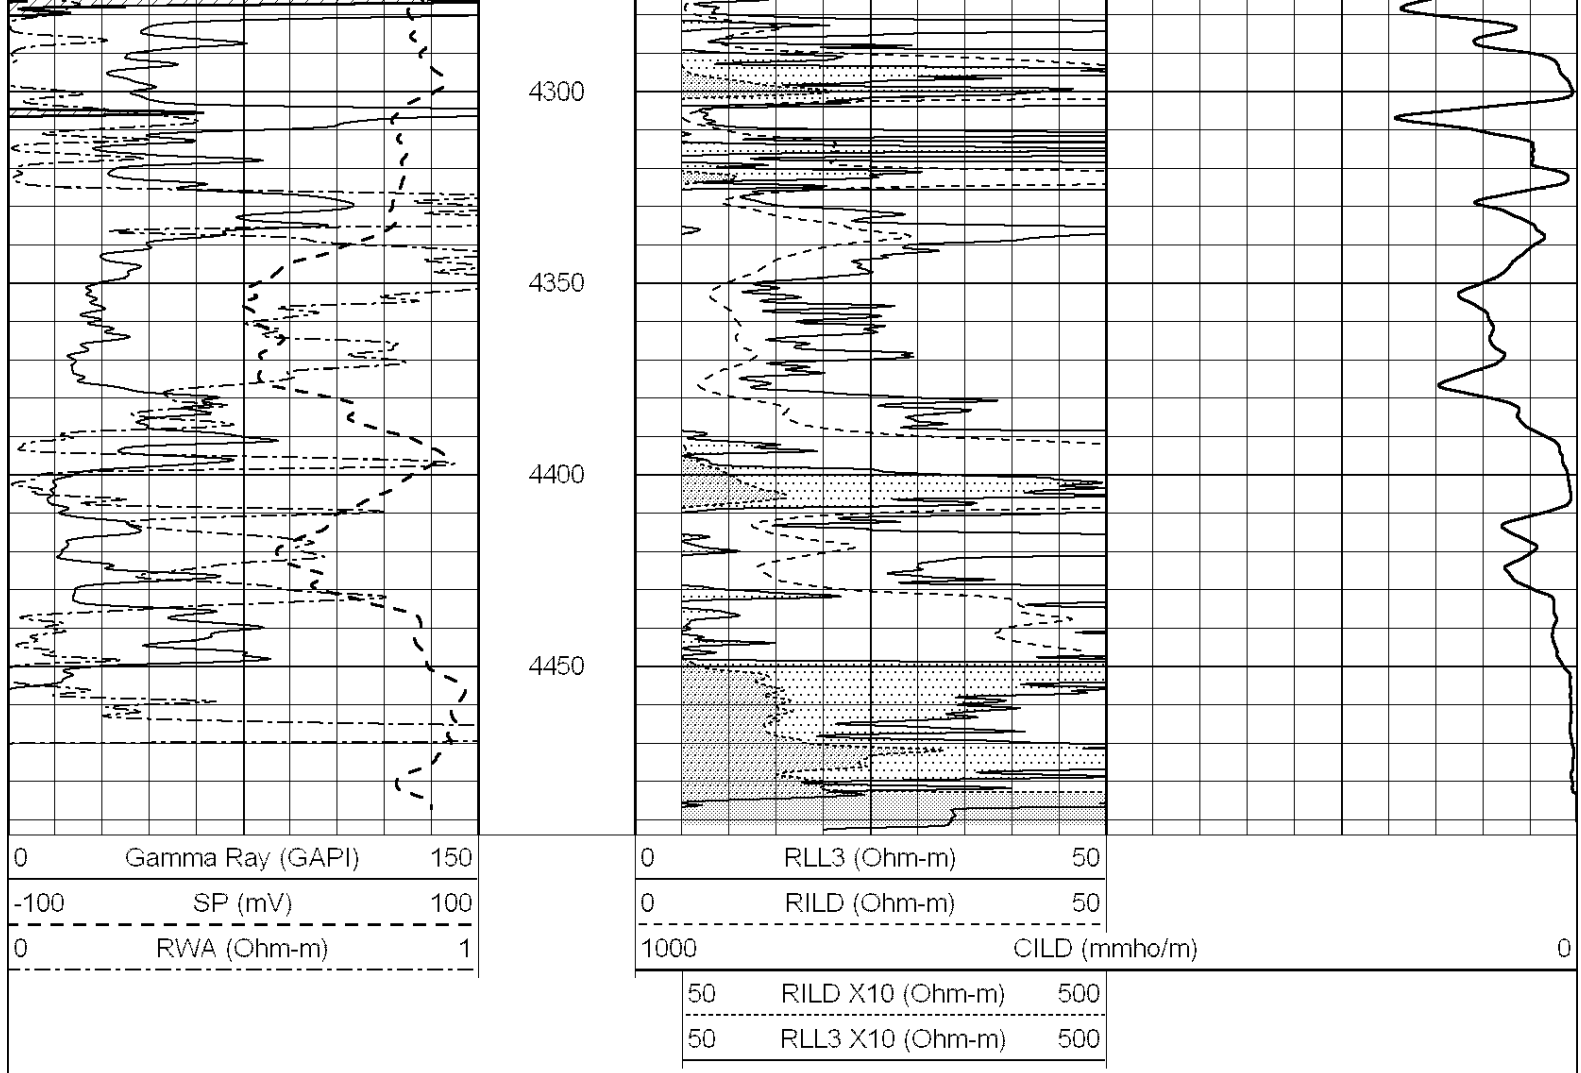

MAIN SECTION

Database File: 2344ddn.db
 Dataset Pathname: pass3.10
 Presentation Format: _dil
 Dataset Creation: Sat Mar 03 00:24:53 2018
 Charted by: Depth in Feet scaled 1:240

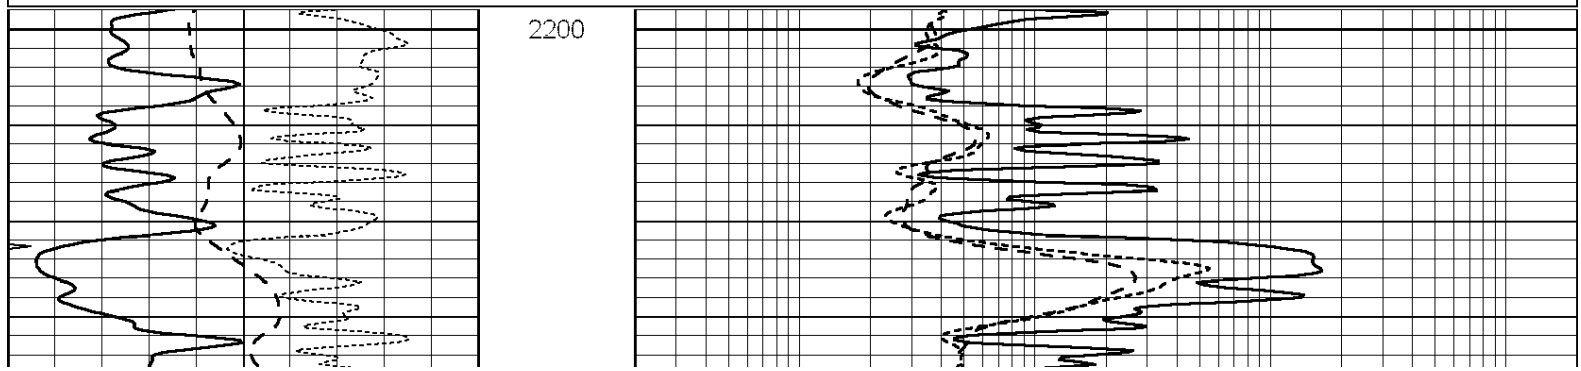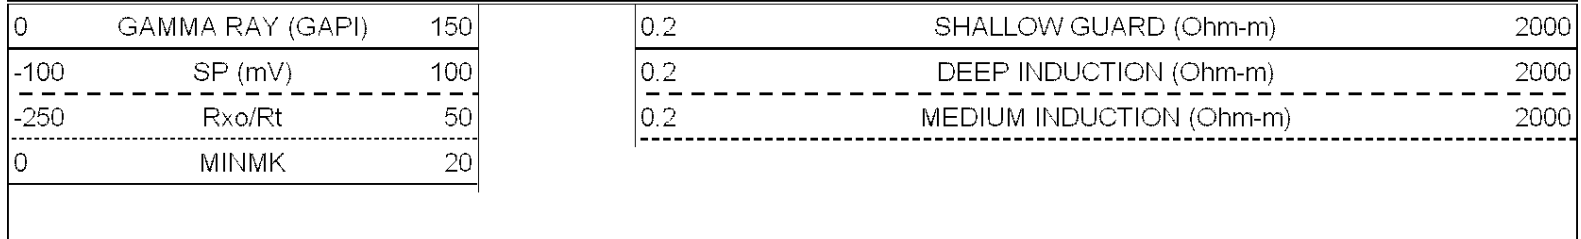

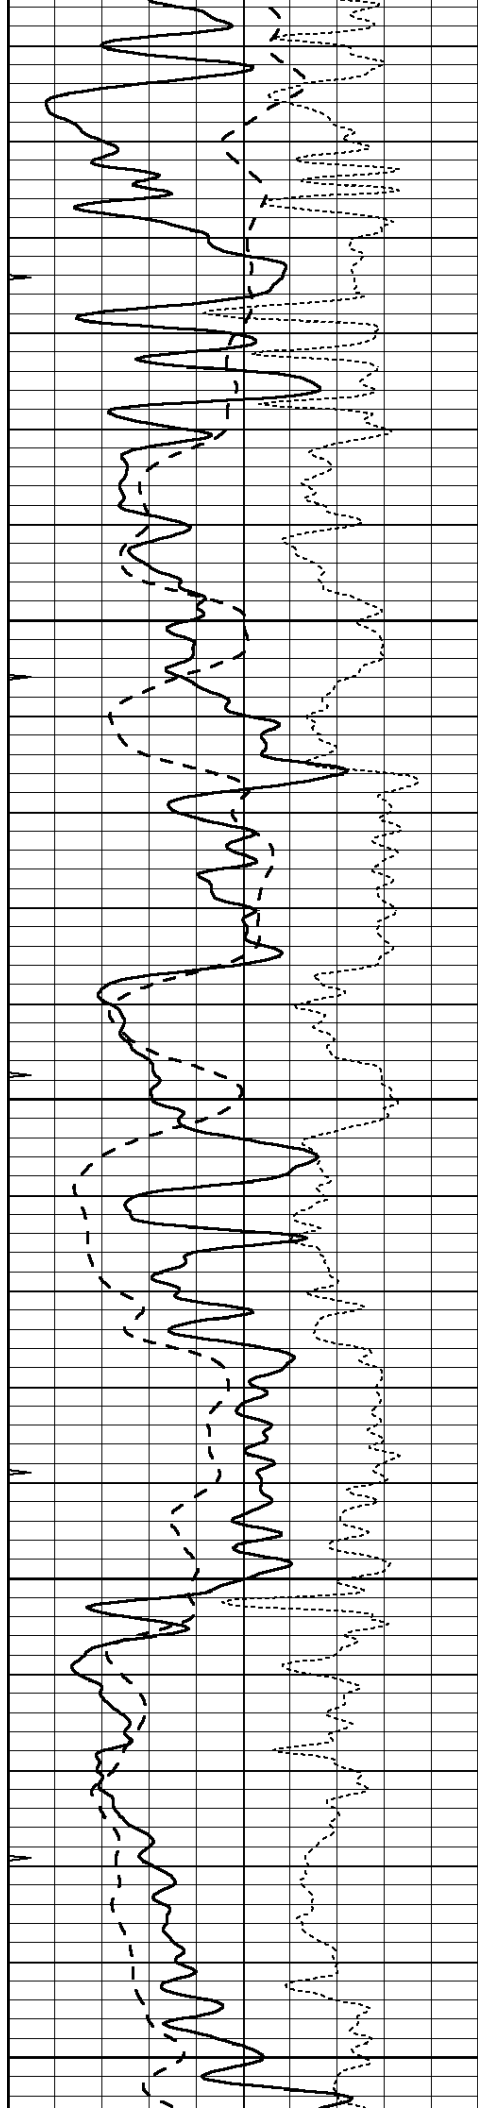


2250


2300

2350

2400

2450

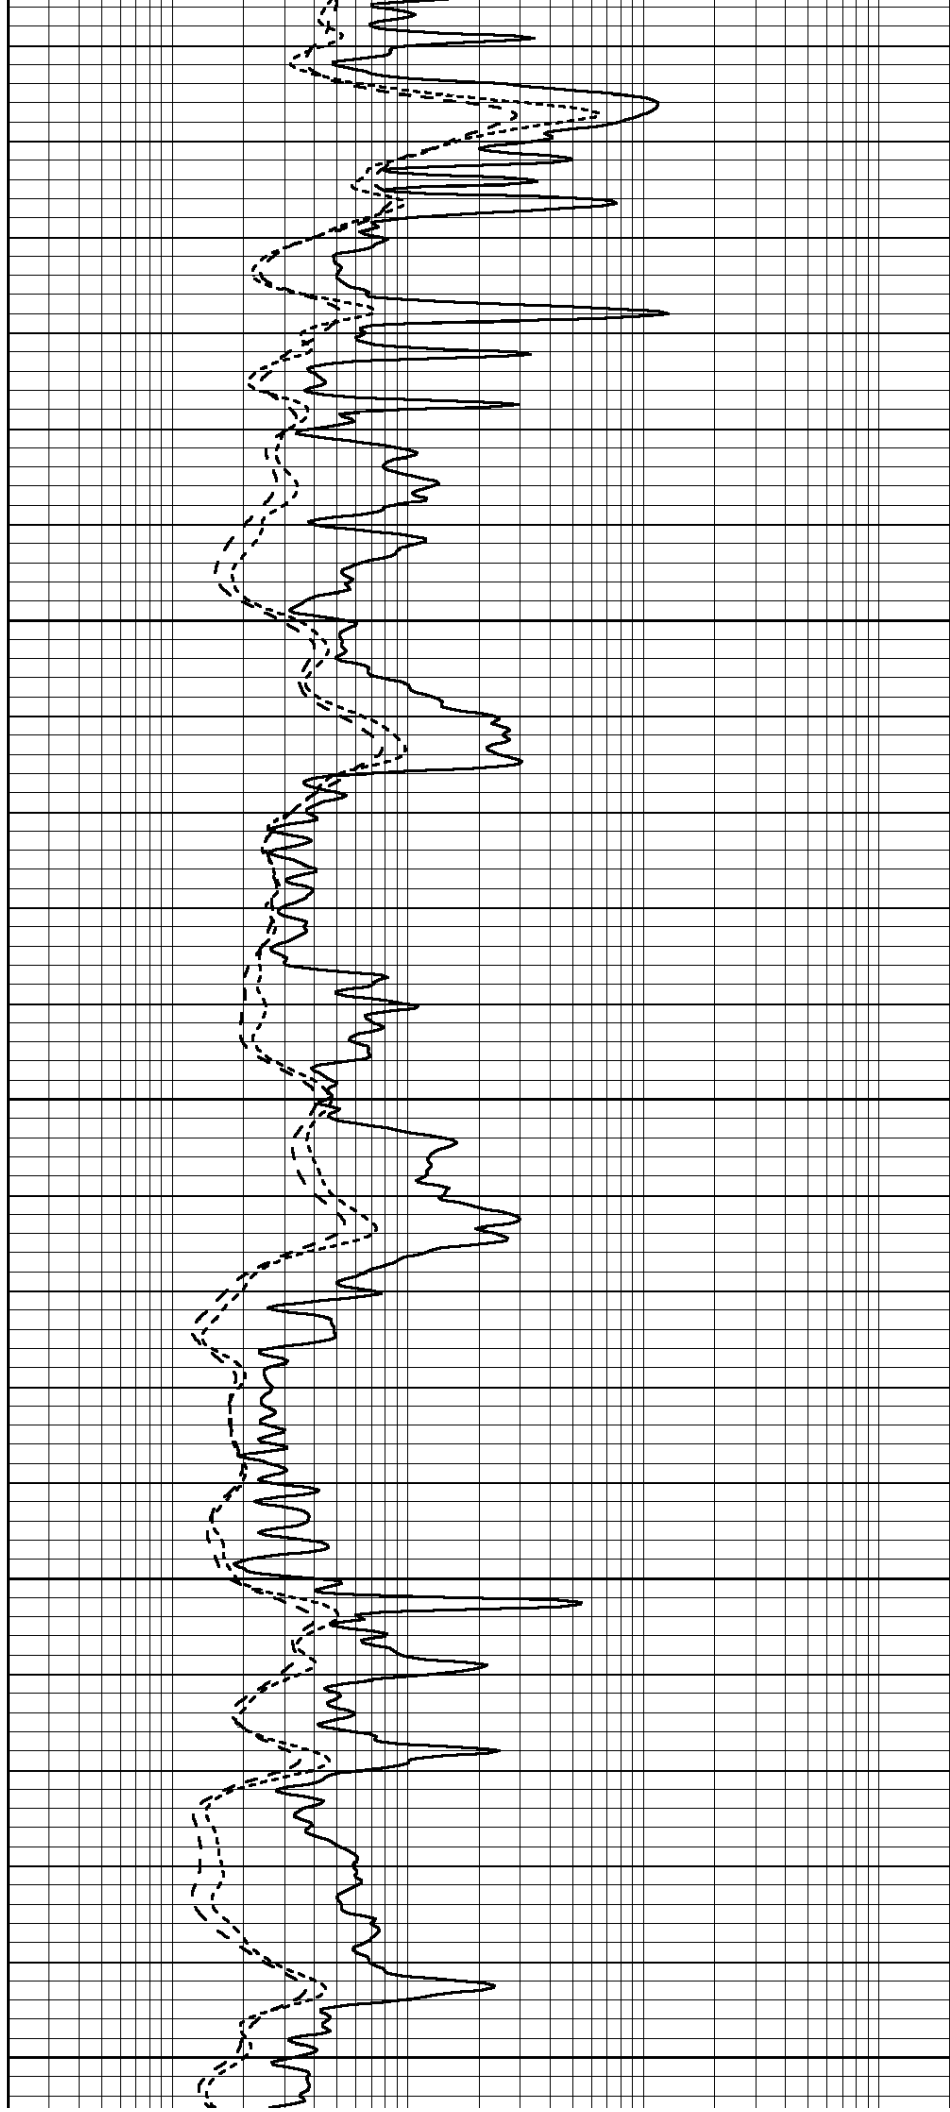

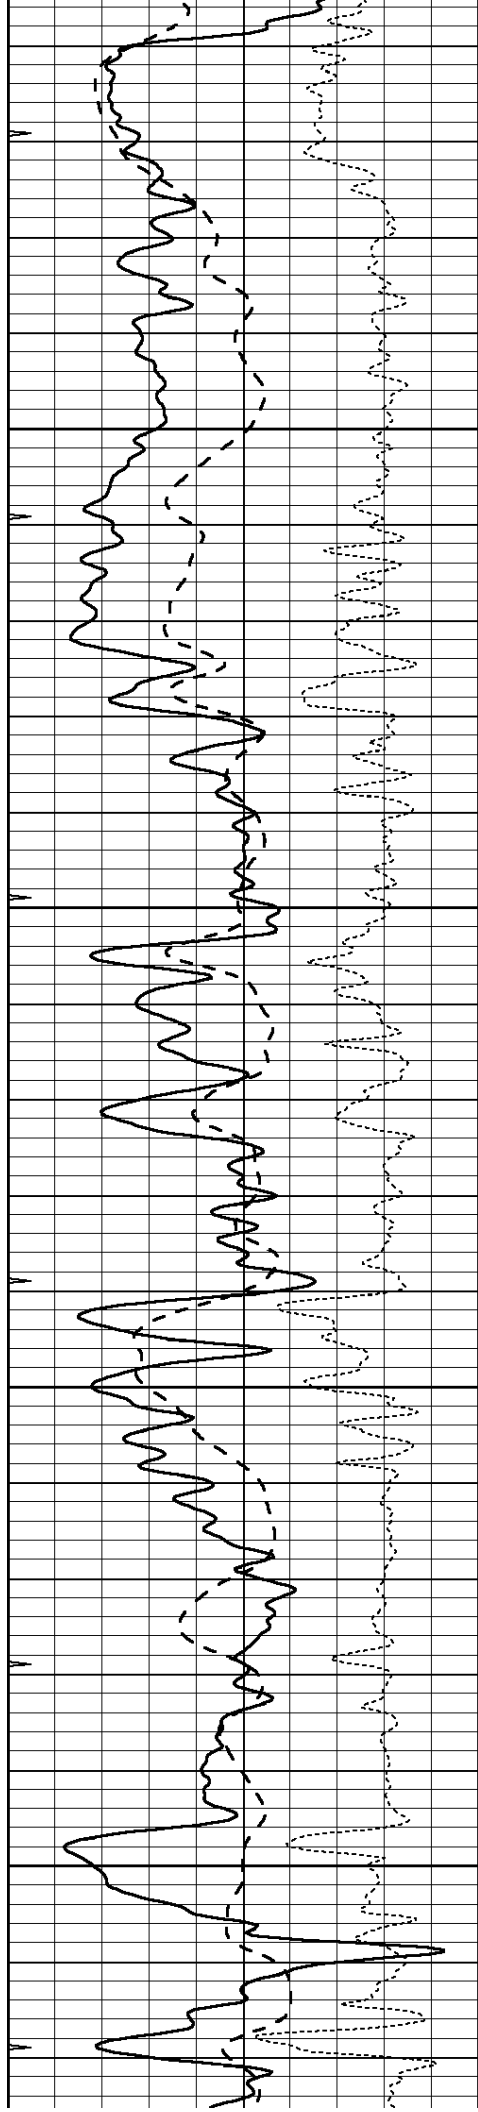



2500

2550

2600

2650

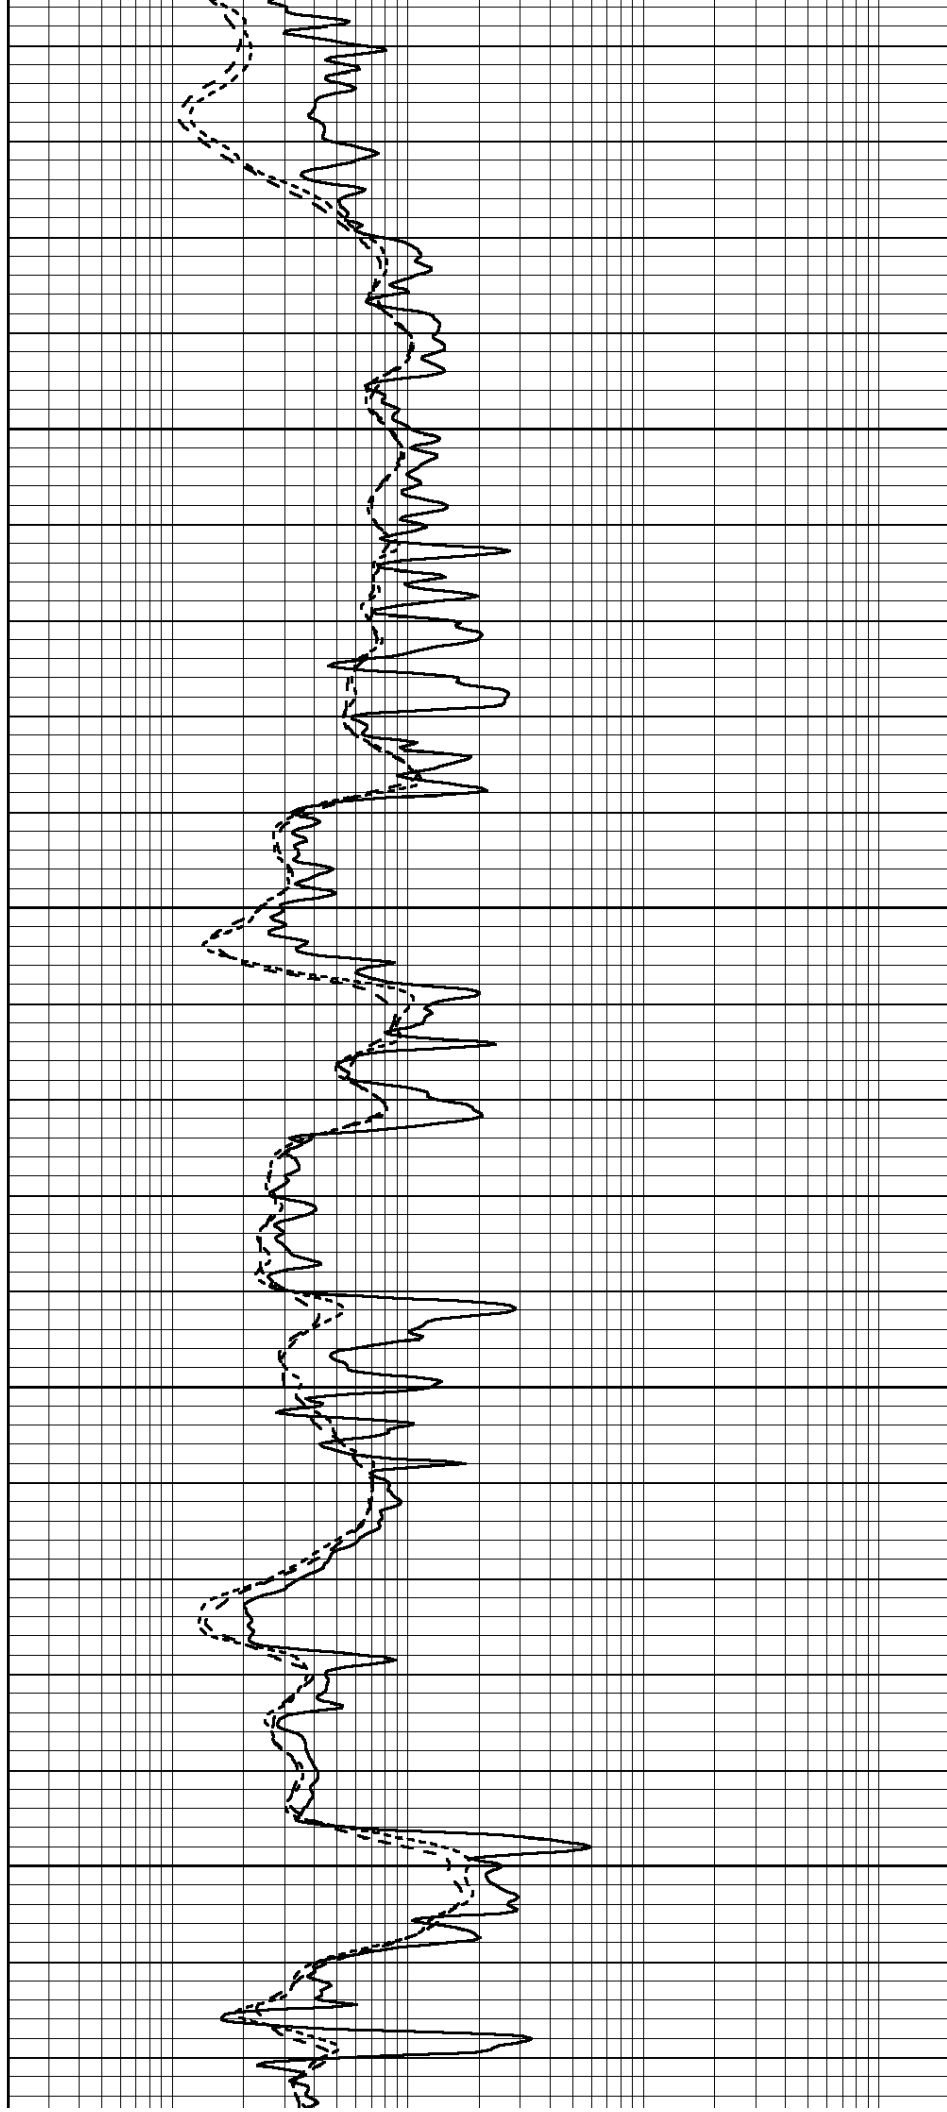

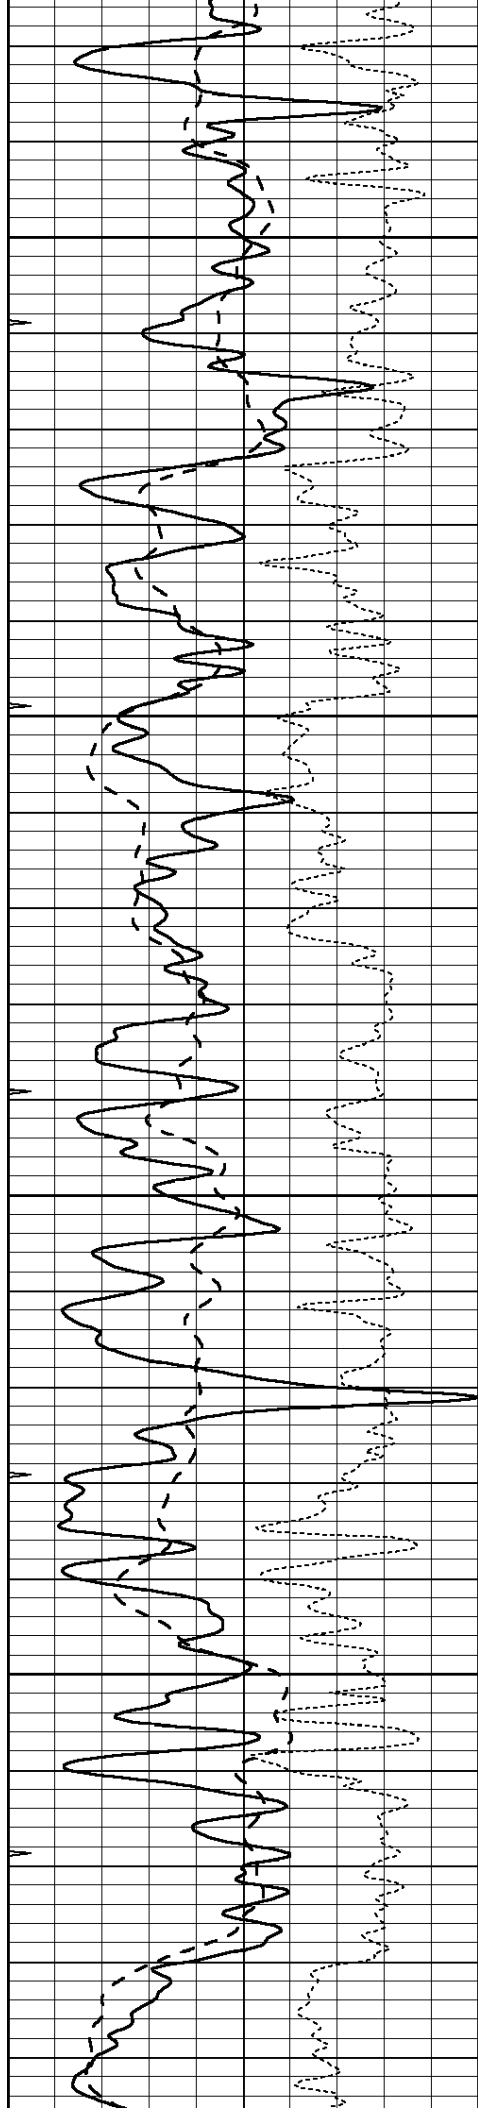



2700

2750

2800

2850

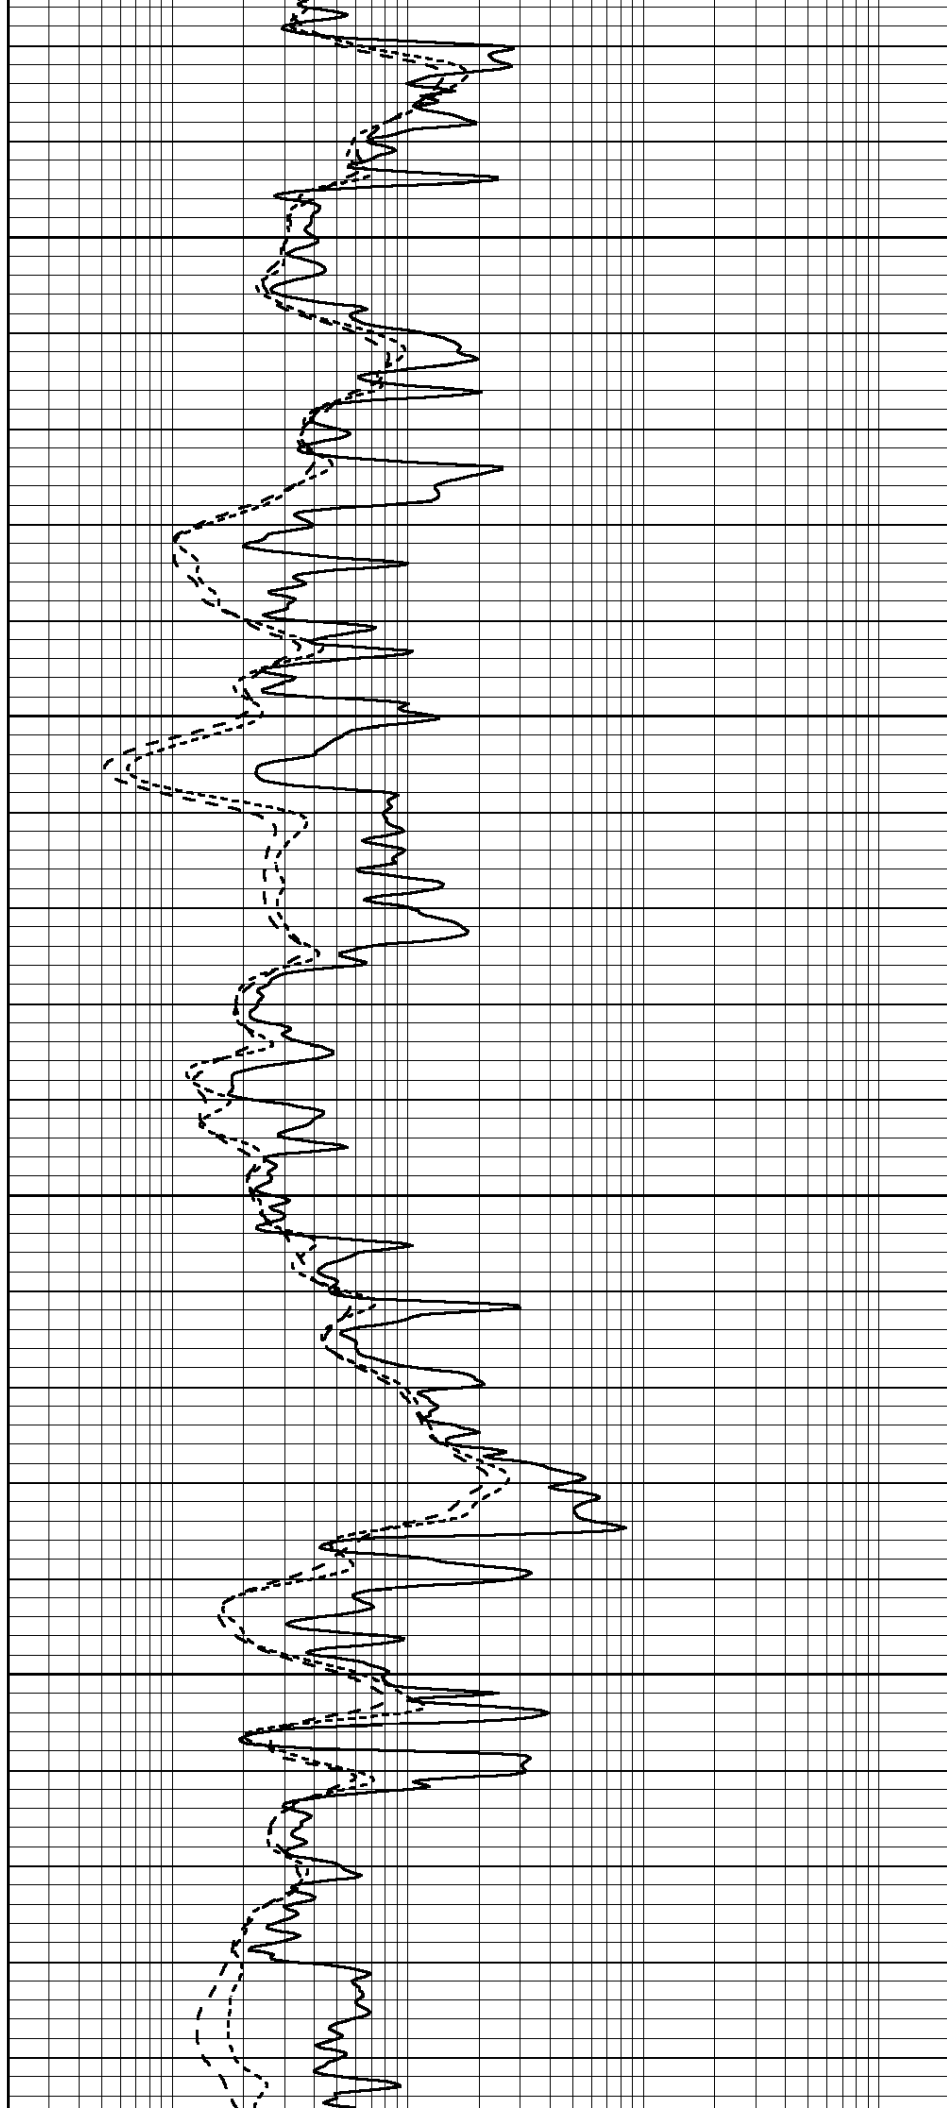

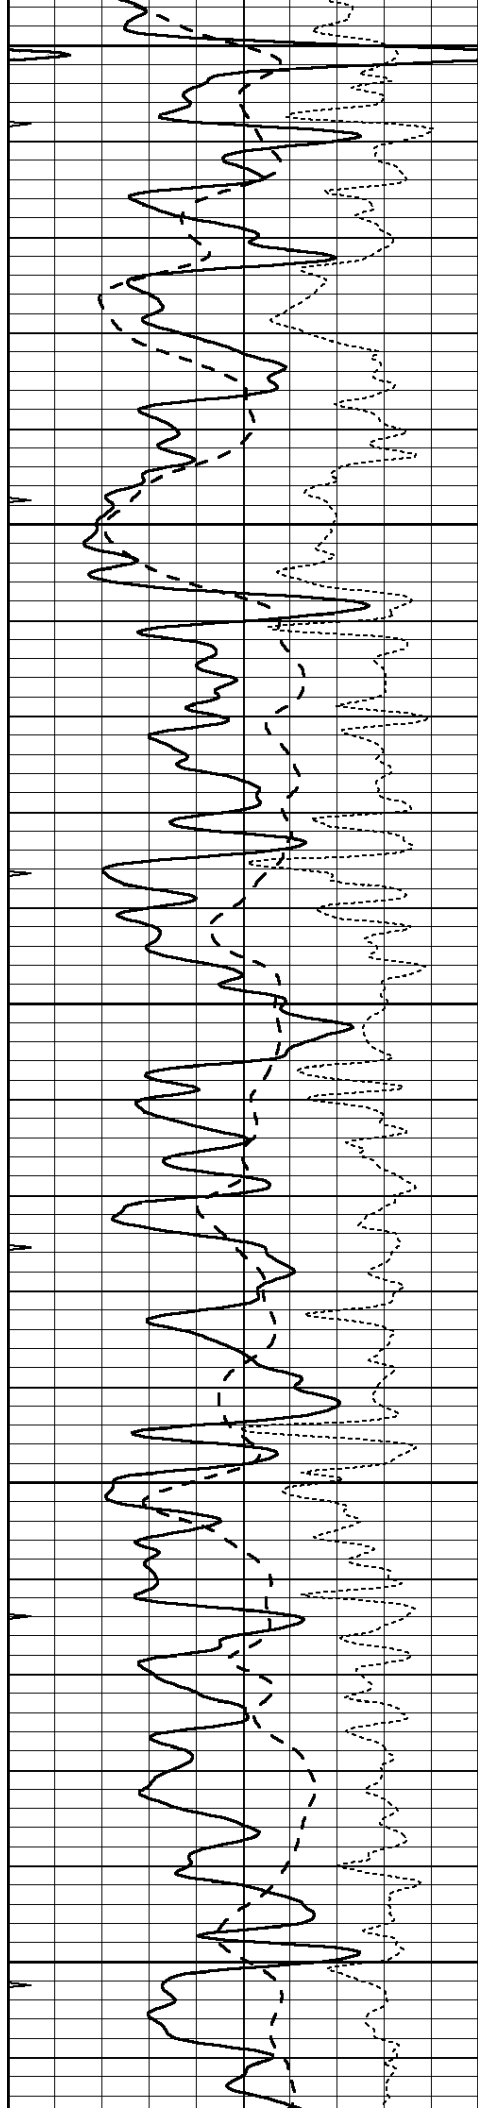


2900


2950

3000

3050

3100

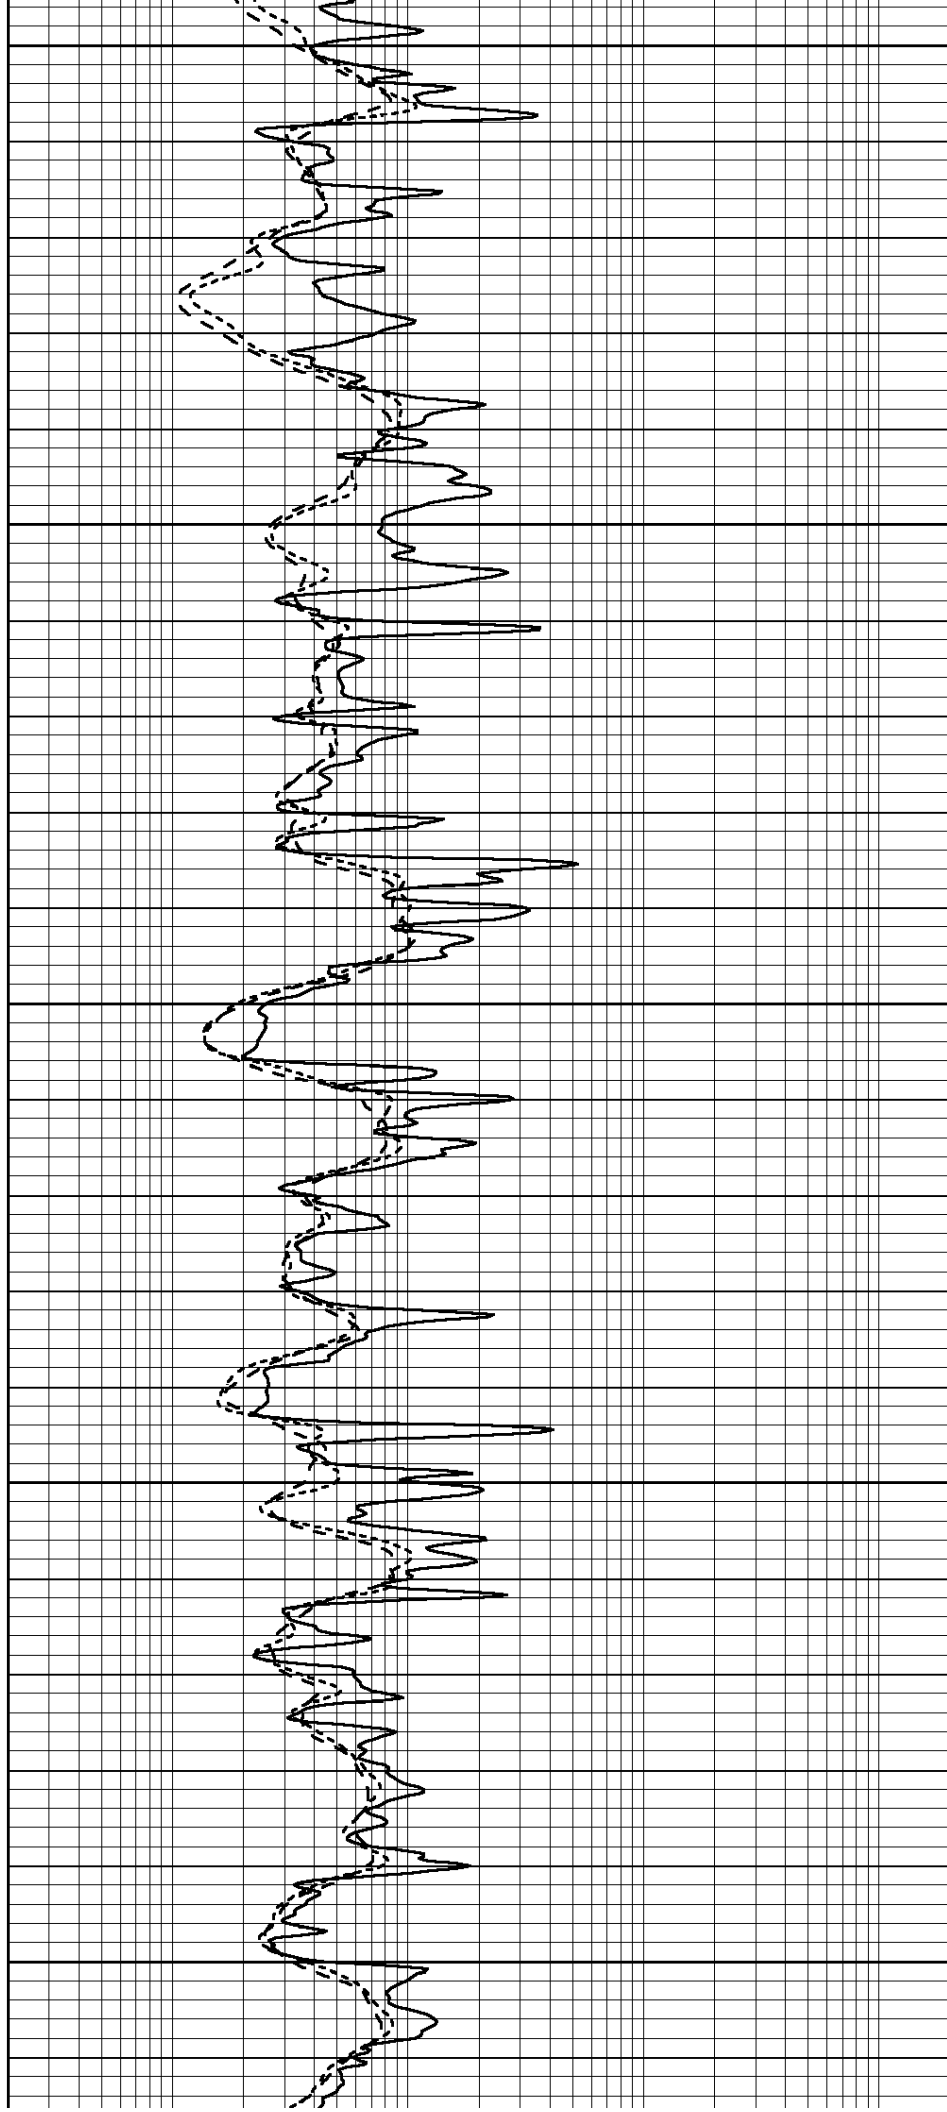

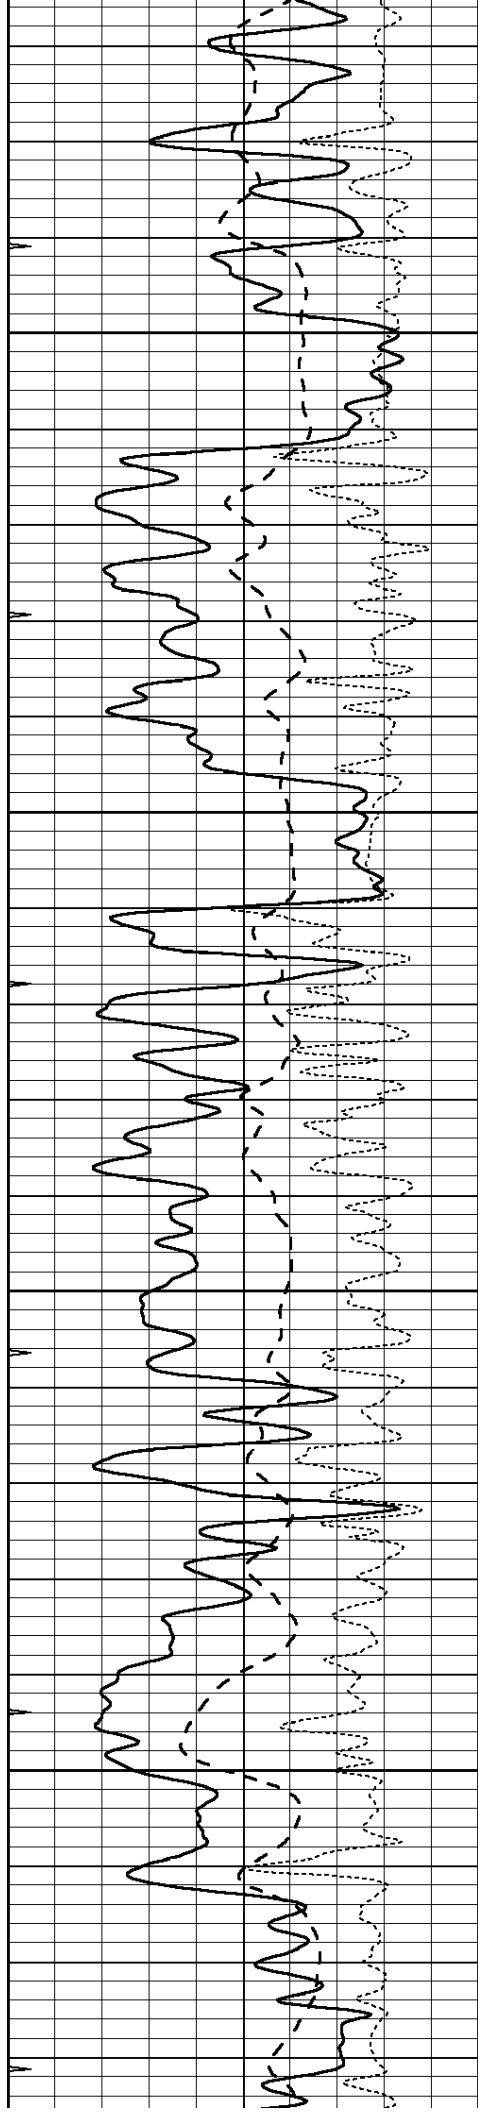



3150

3200

3250

3300

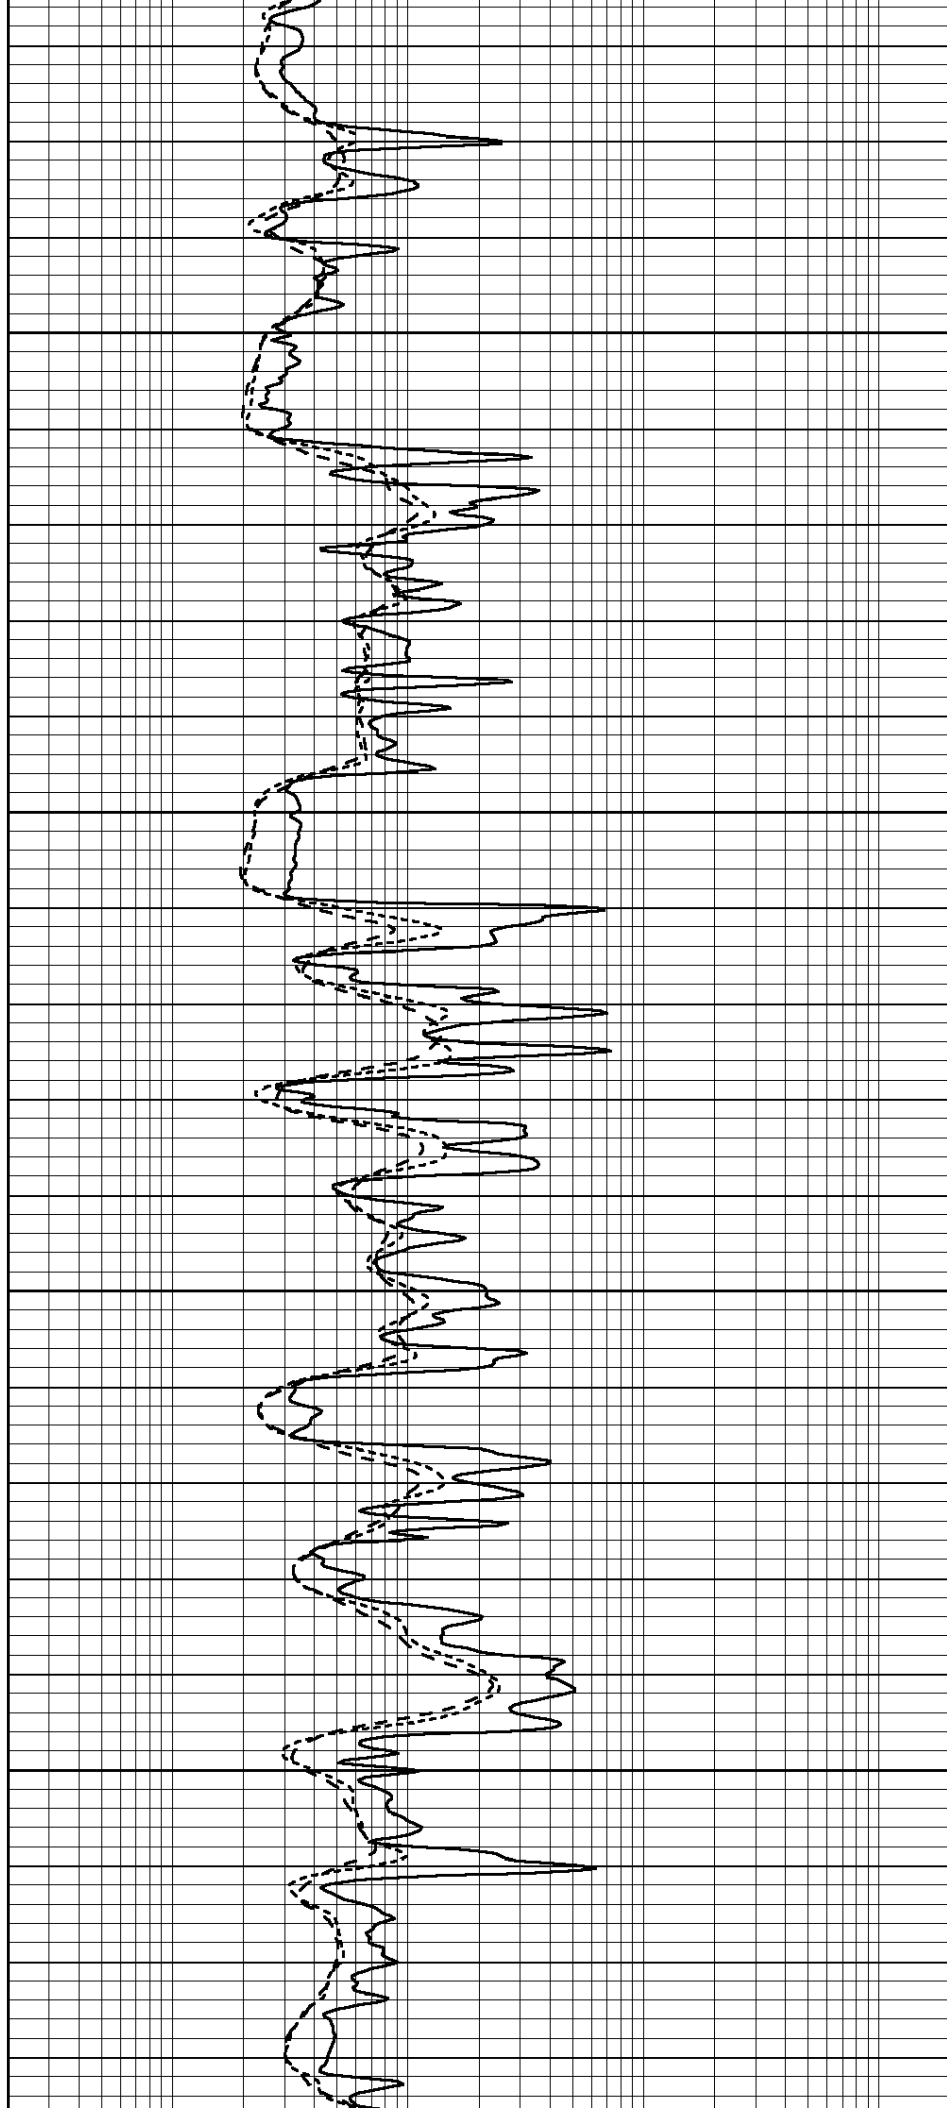

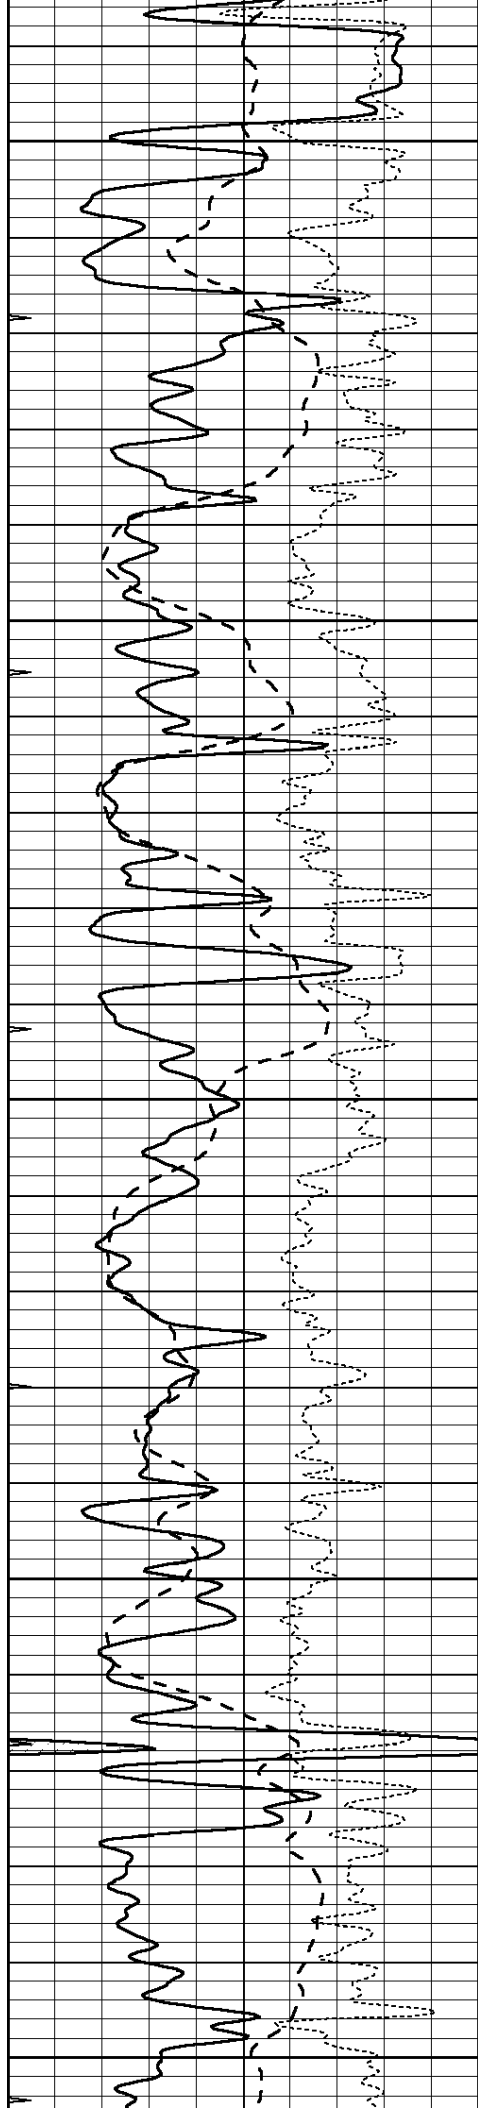


3350


3400

3450

3500

3550

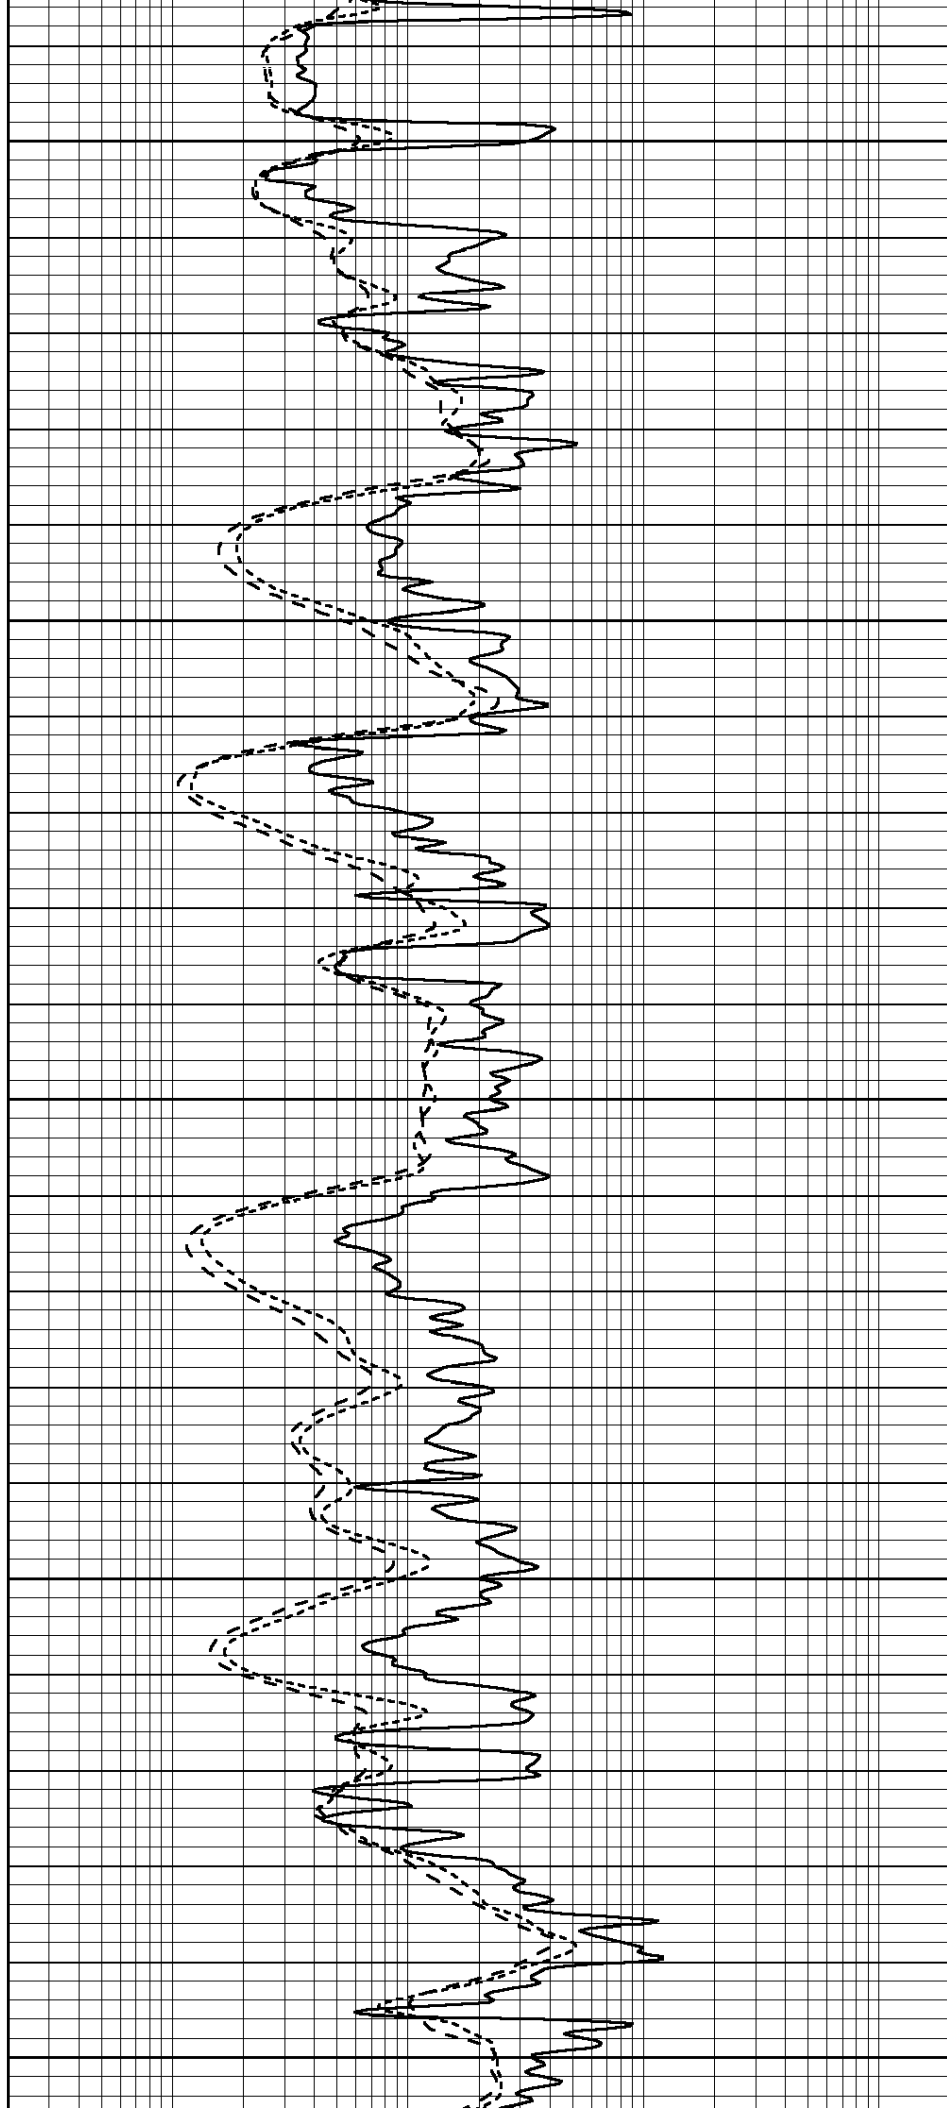

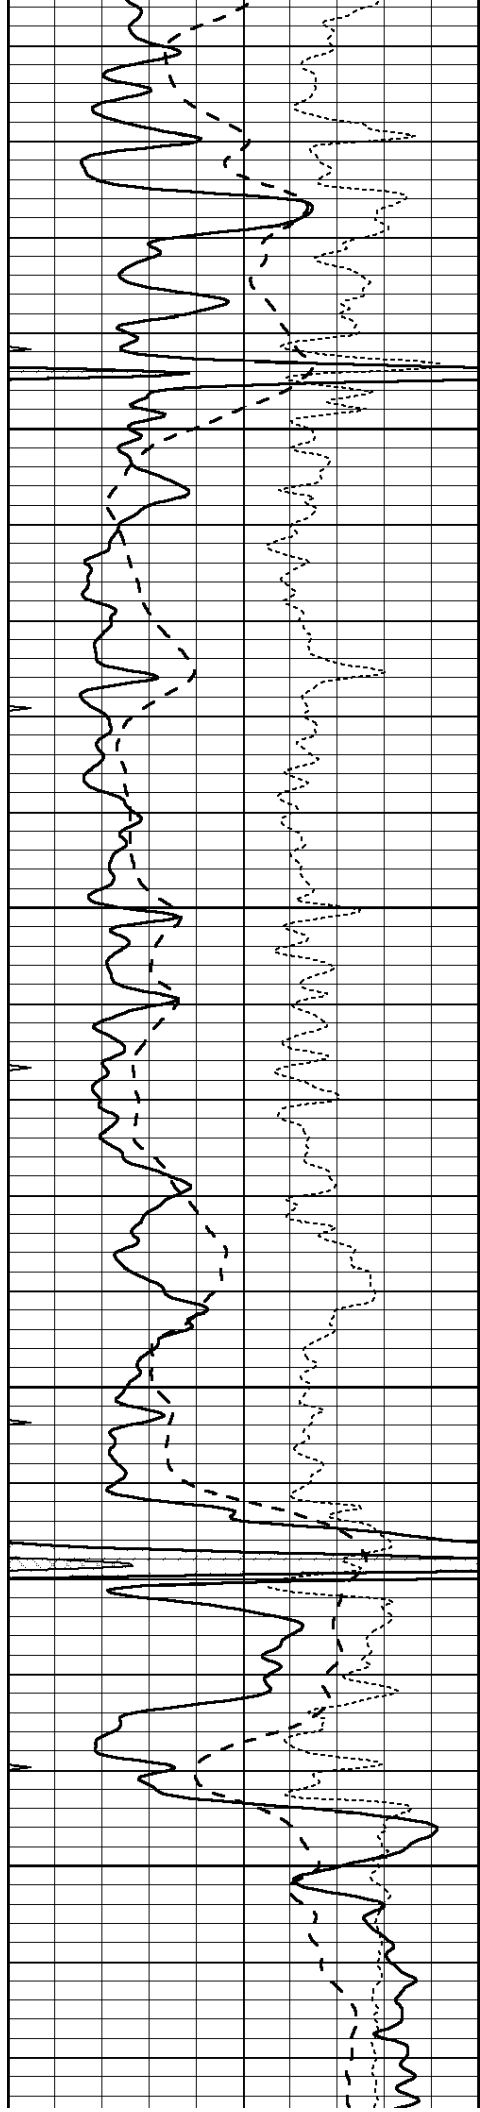



3600

3650

3700

3750

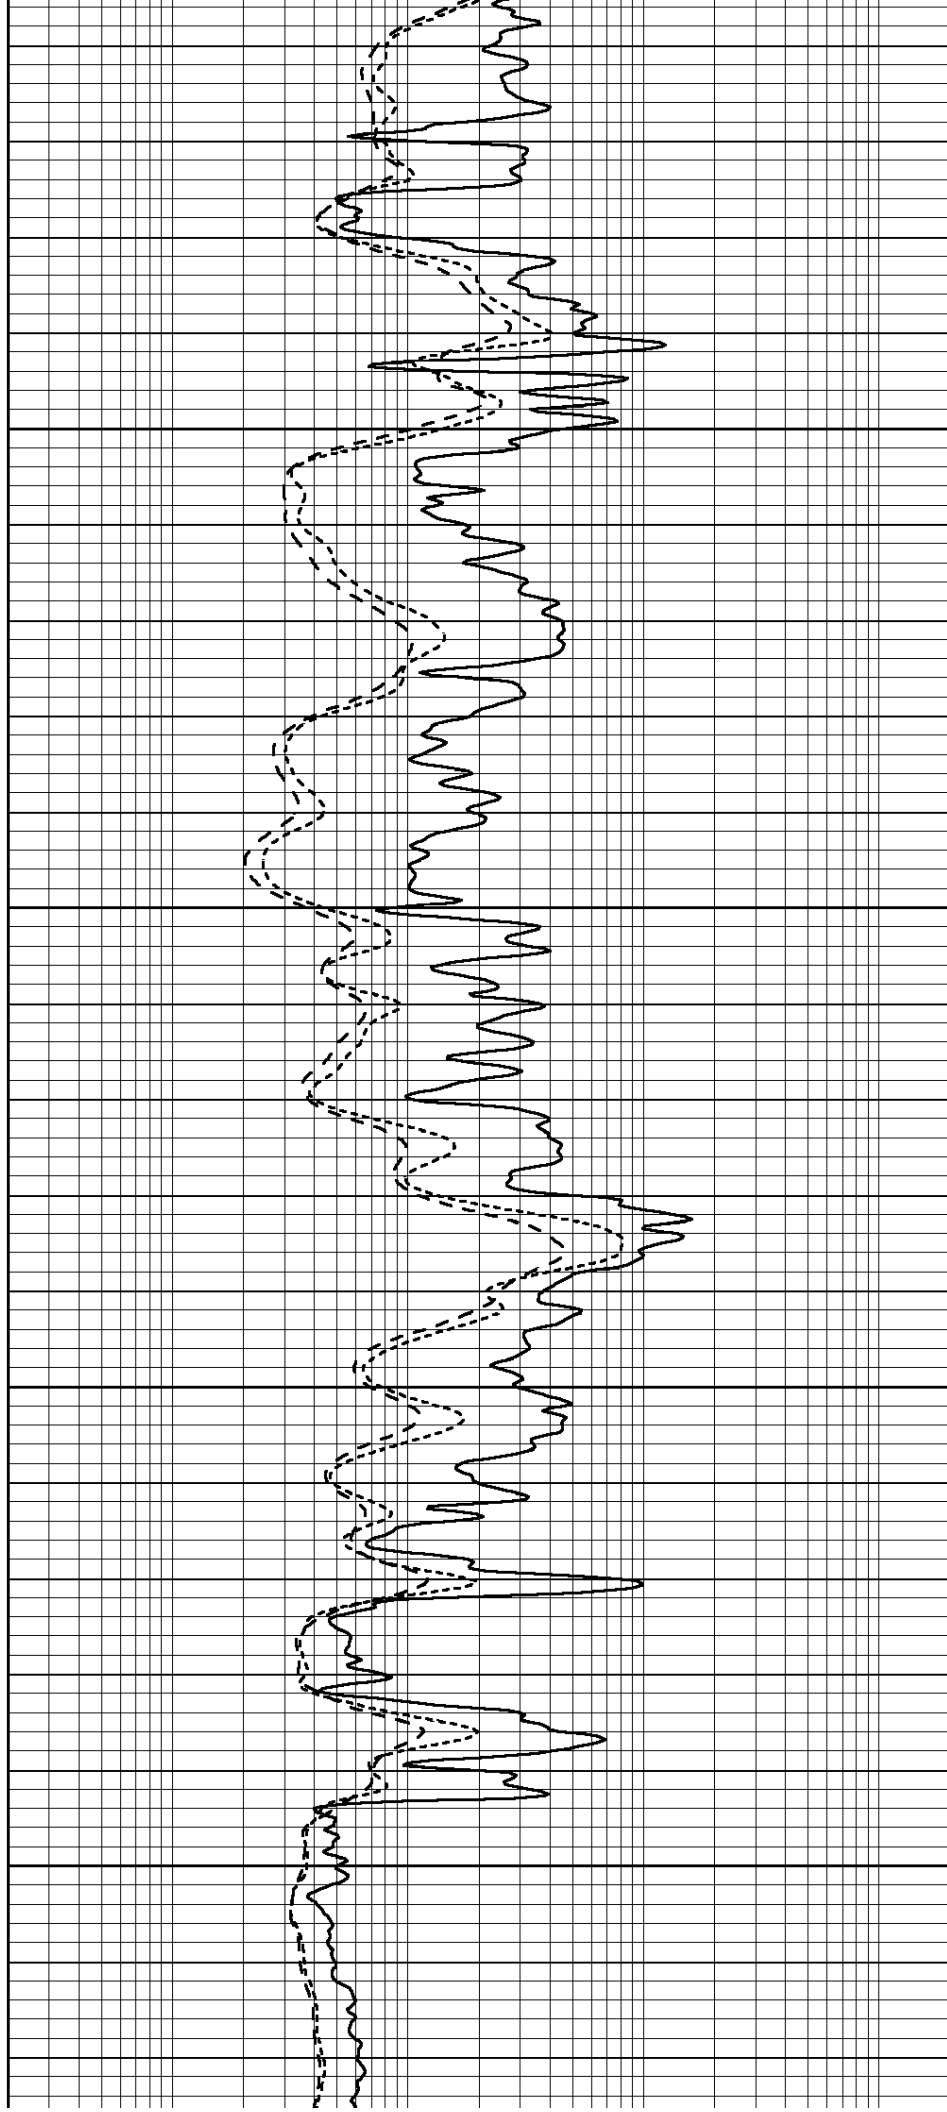

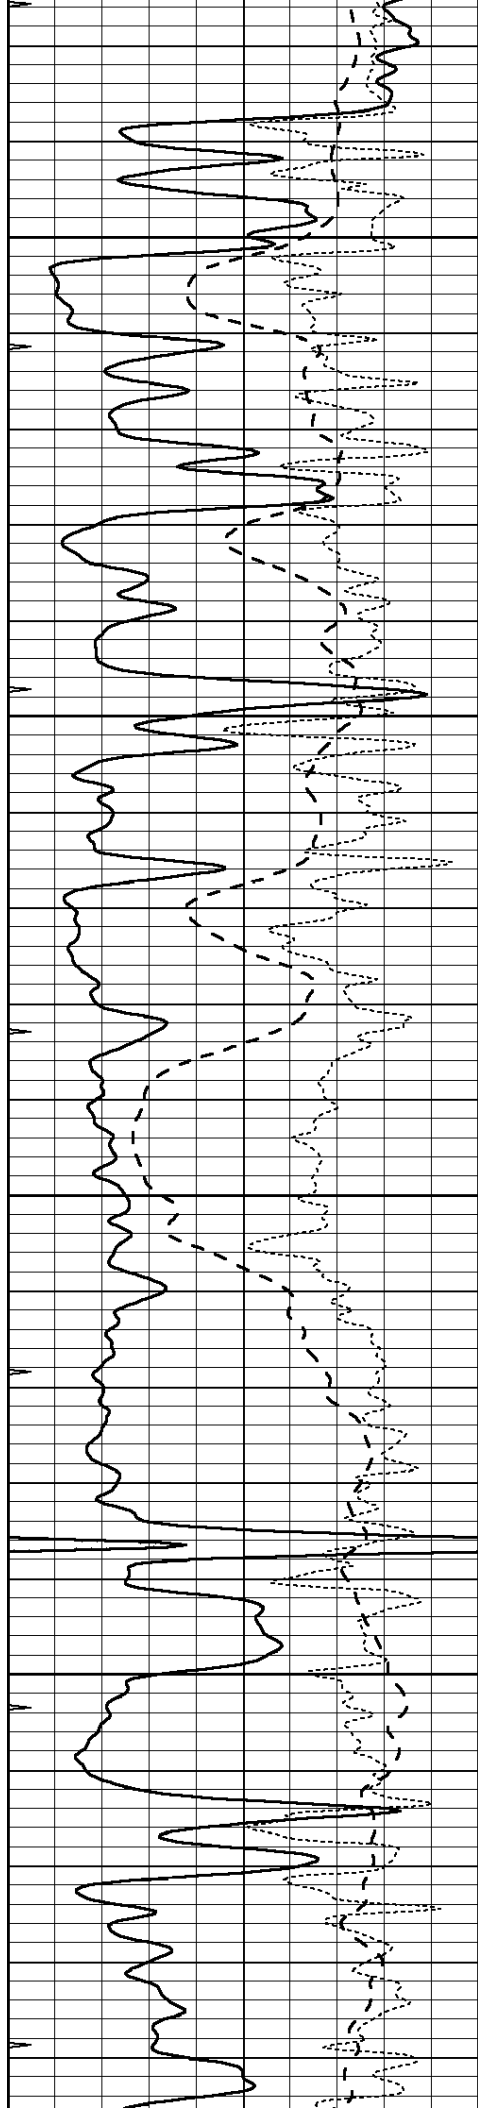



3800

3850

3900

3950

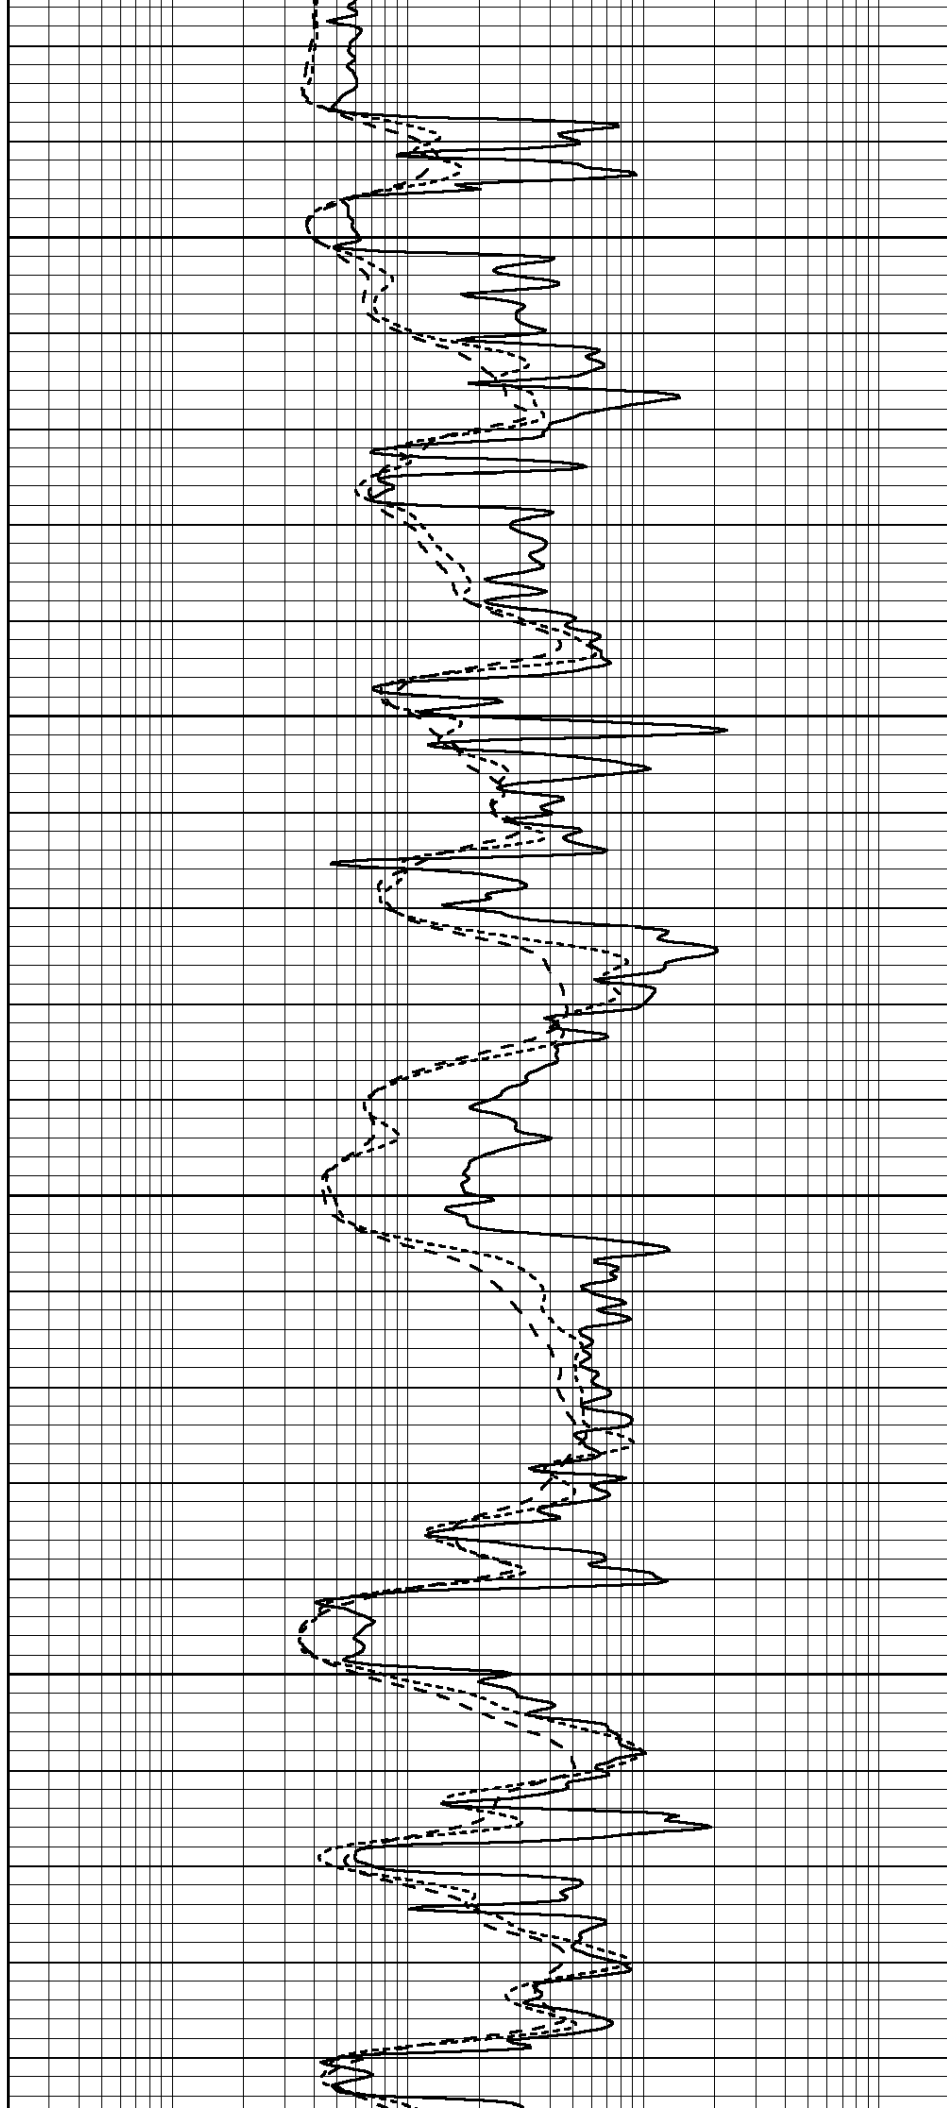

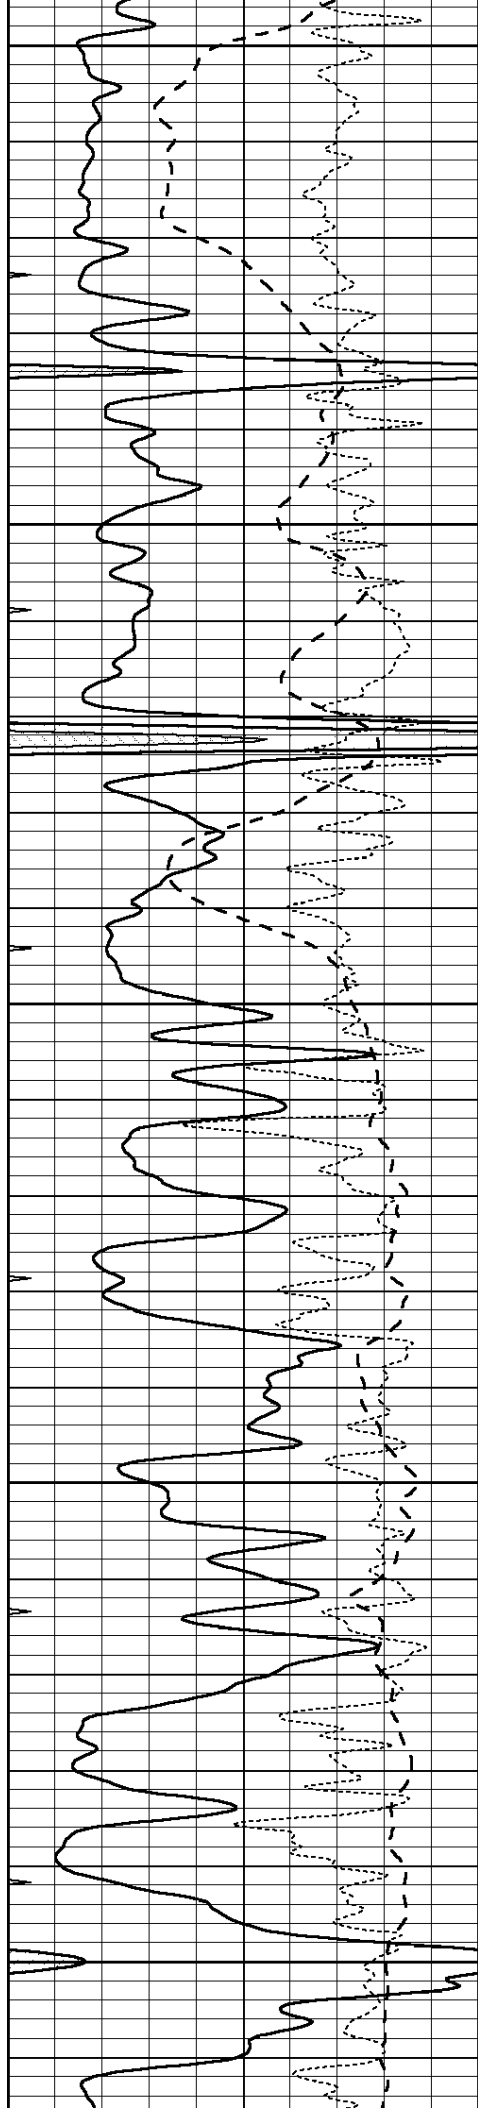


4000


4050

4100

4150

4200

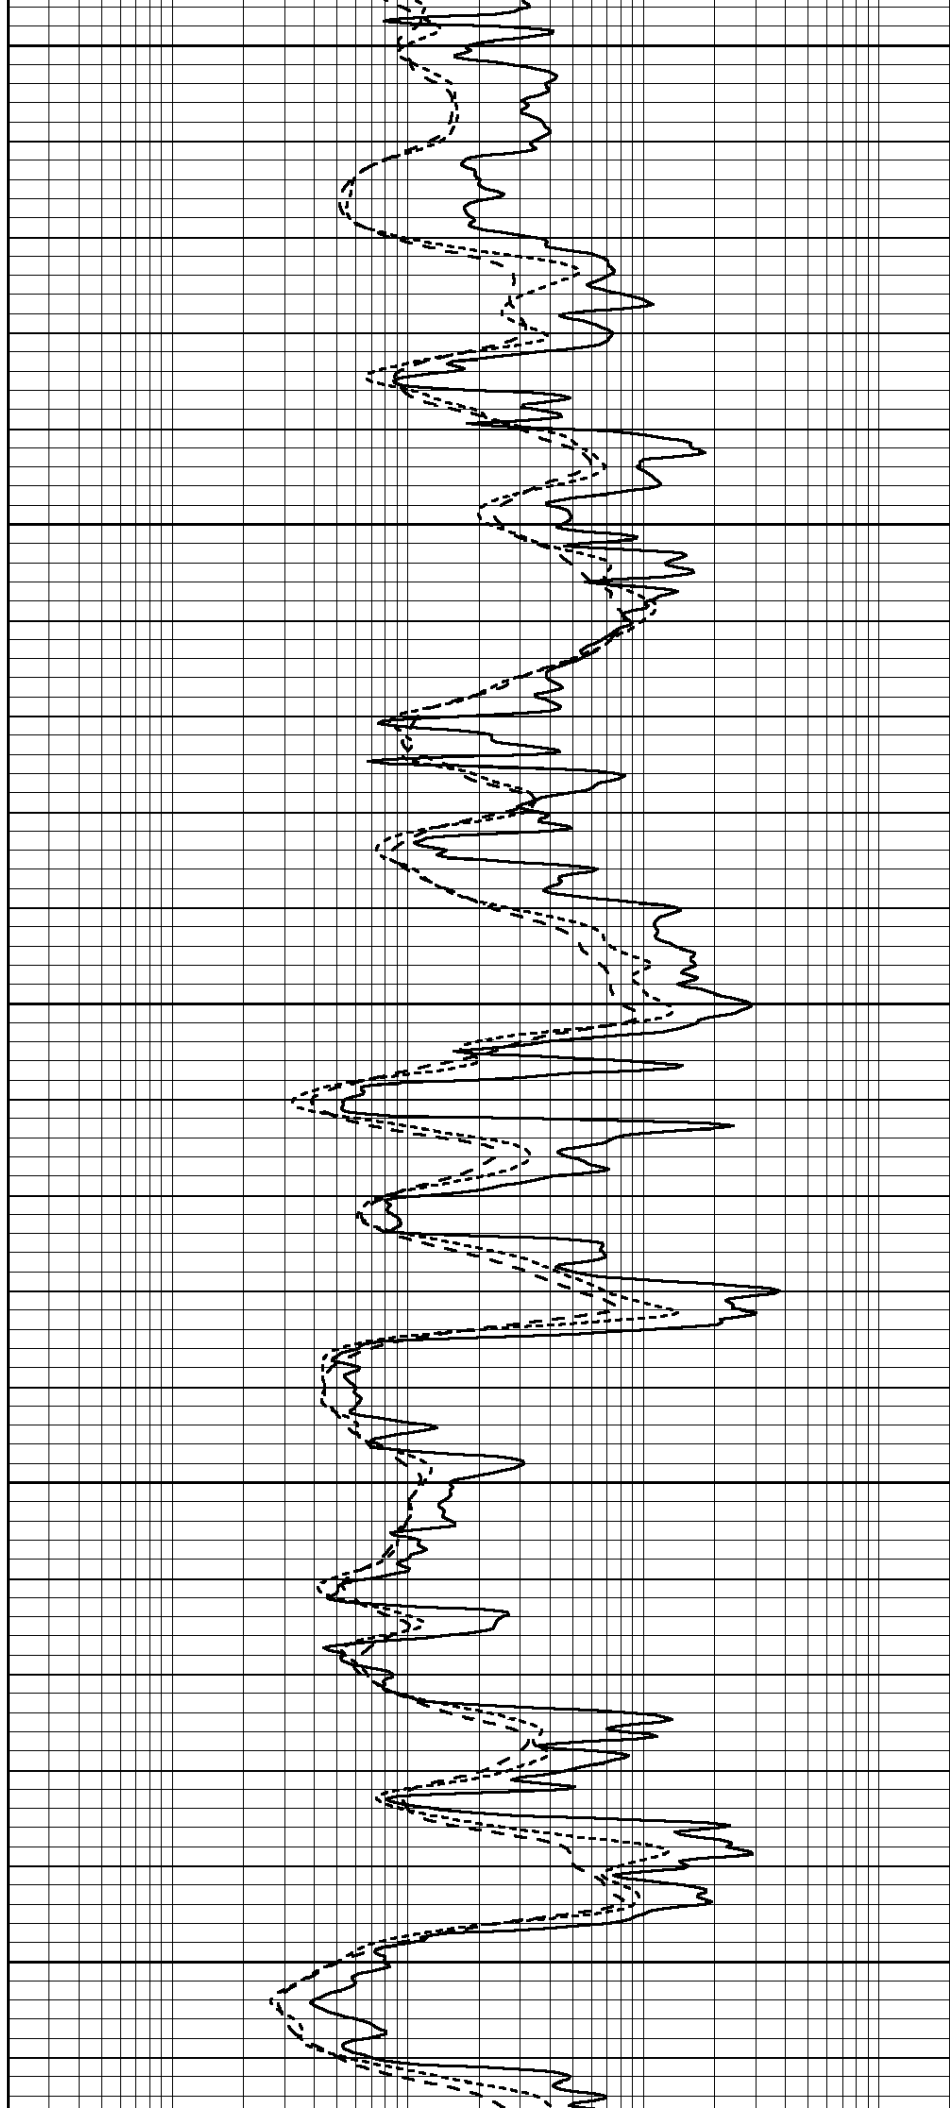

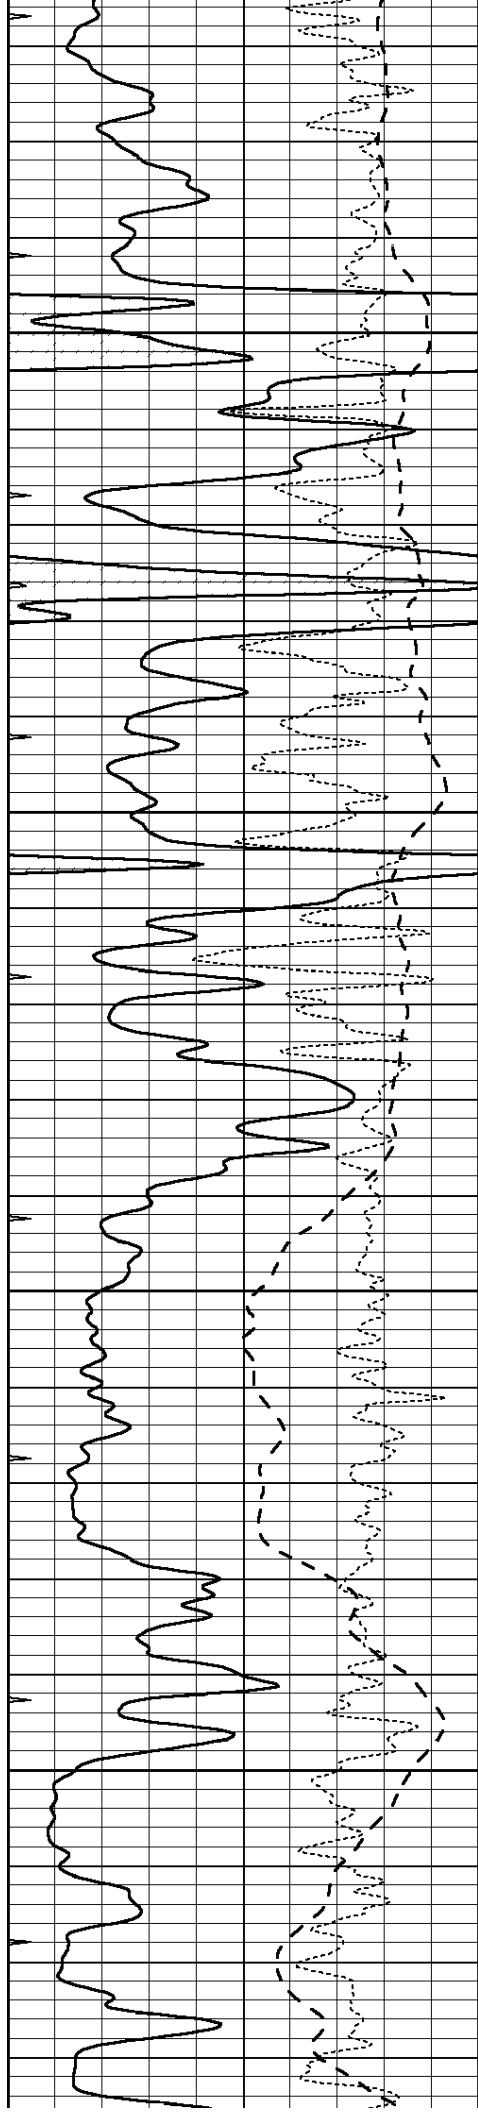



4250

4300

4350


4400

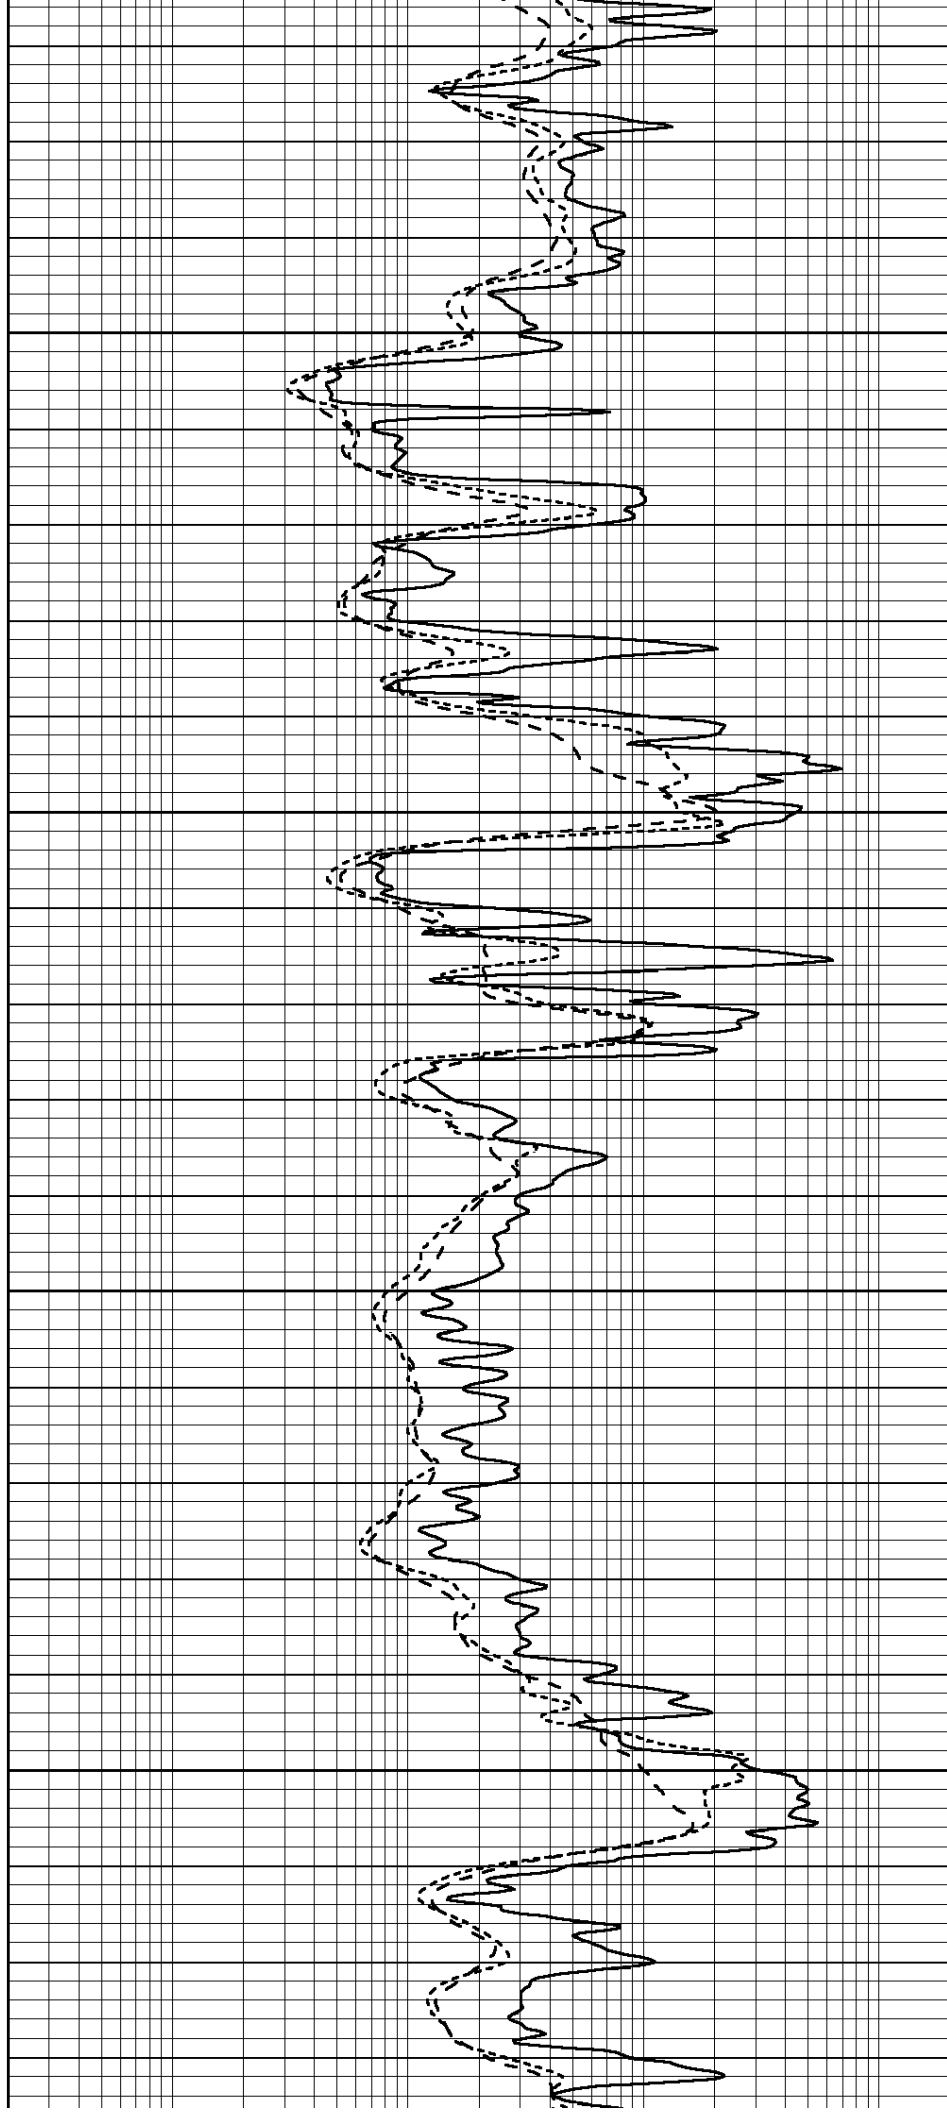

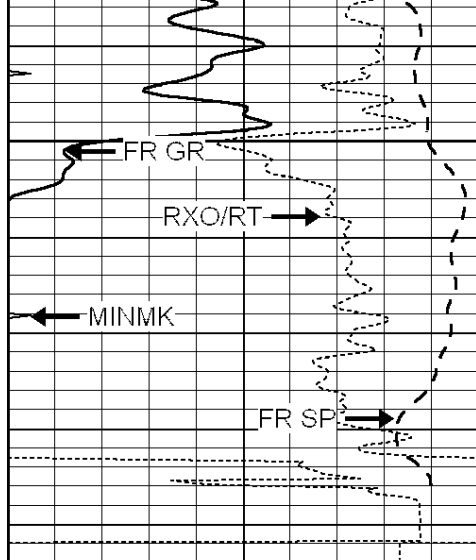


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

LTD 4489

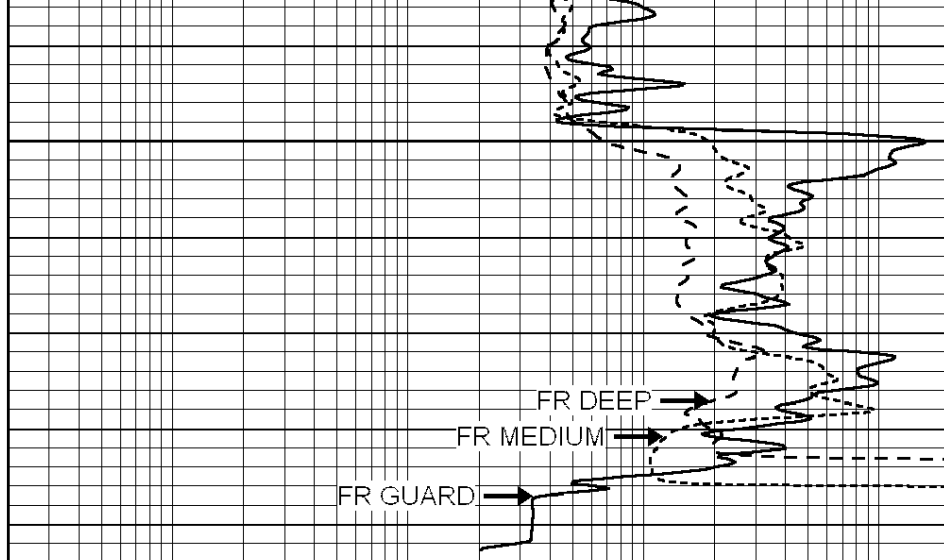

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000


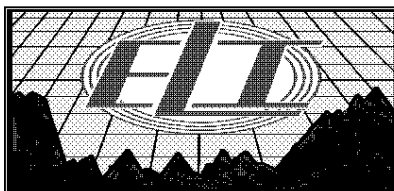



REPEAT SECTION

Database File: 2344ddn.db
 Dataset Pathname: pass2.3
 Presentation Format: _dil
 Dataset Creation: Sat Mar 03 00:11:28 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

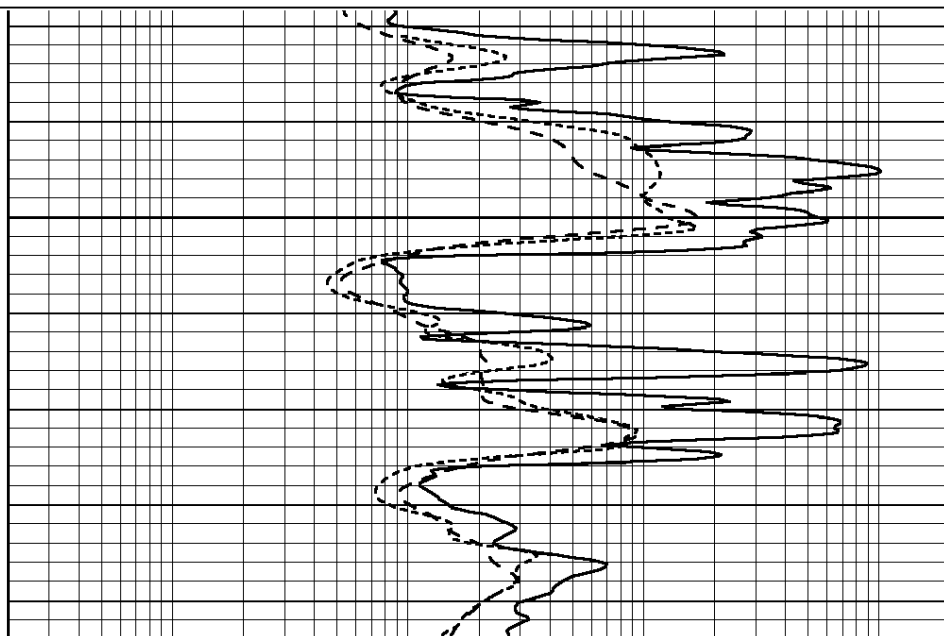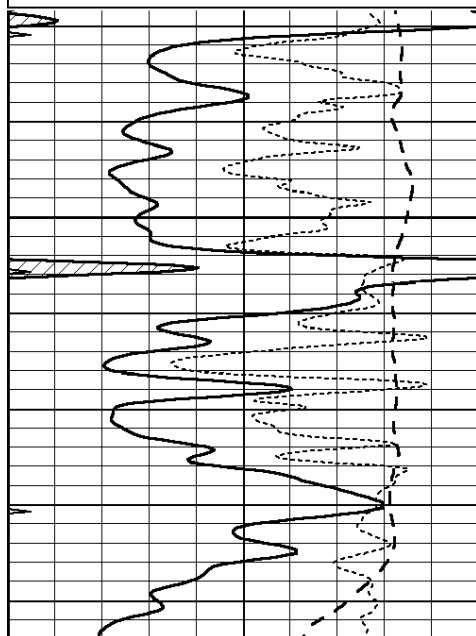


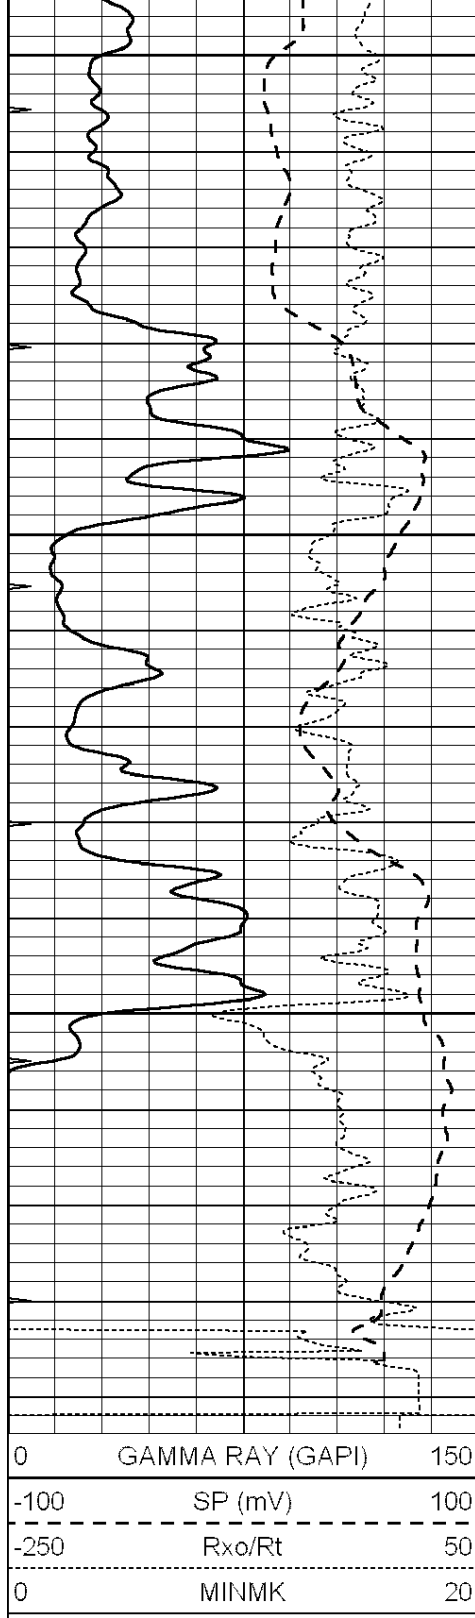

4350

4400

4450

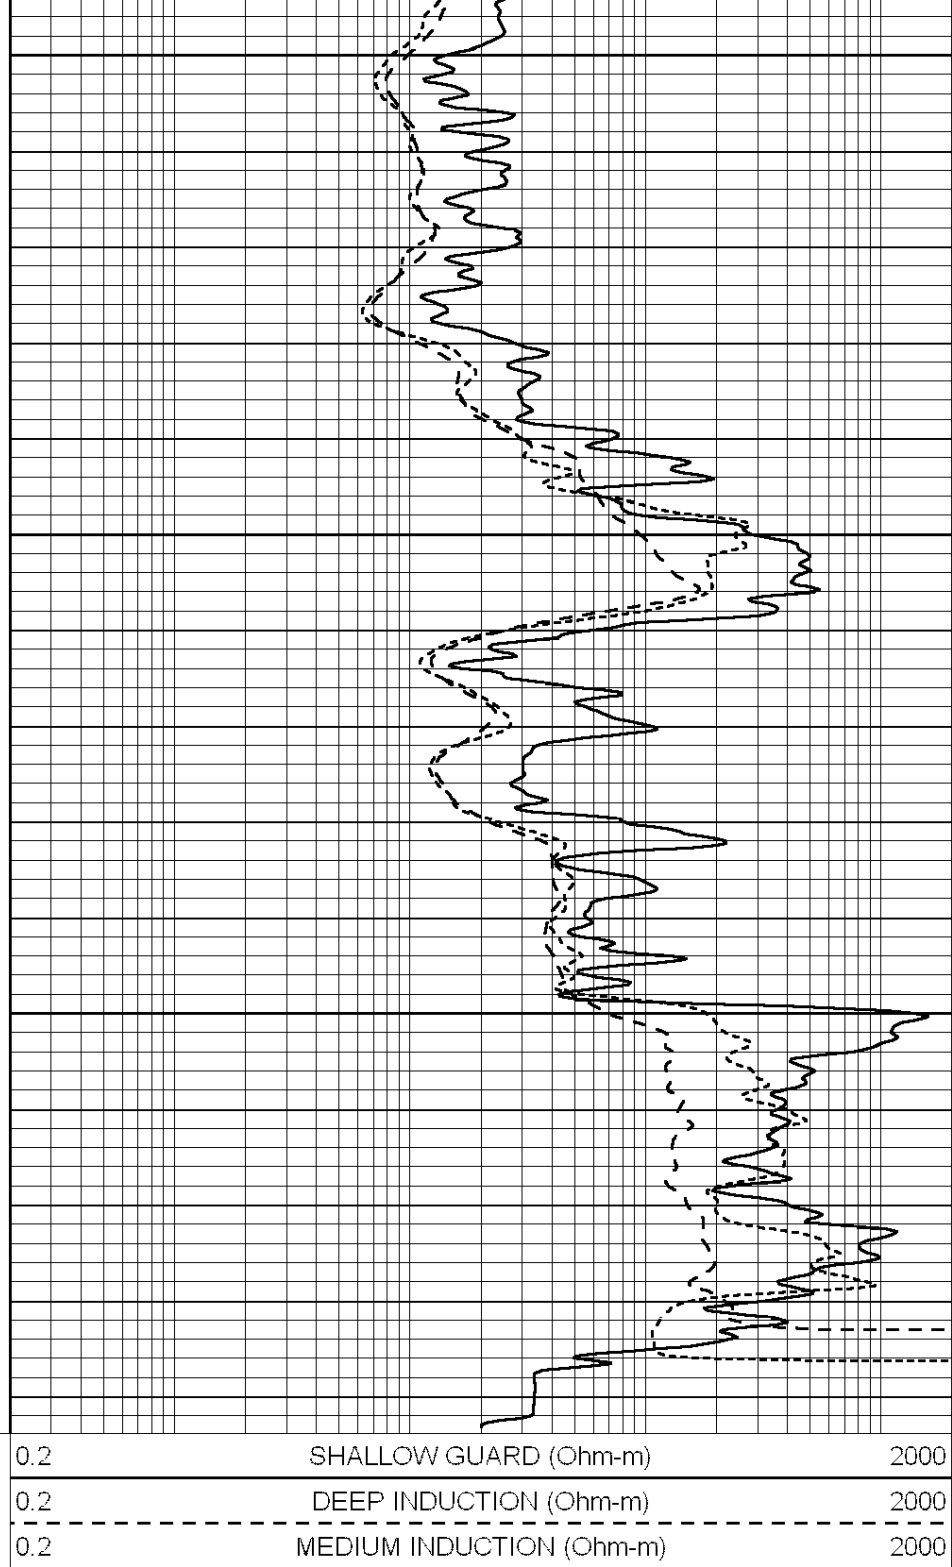

Calibration Report

Database File: 1598ddn.db
 Dataset Pathname: pass4
 Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model:	PROBE7-DILG
Surface Cal Performed:	Wed Aug 30 00:06:33 2017
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008

Surface Calibration							Results	
Loop:	Readings			References				
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration							Results	
	Readings			References				
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification							Results	
	Readings			Targets				
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report									
Serial: 002					Model: PRB				

Master Calibration				Performed Mon Aug 21 11:27:42 2017				
	Background	Magnesium		Aluminum		Sandstone		
Window 1	837.1	10632.5		2945.1		12110.1		cps
Window 2	772.0	9117.4		2570.1		10197.3		cps
Window 3	631.7	4669.0		1481.9		5042.9		cps
Window 4	187.0	187.5		185.9		189.9		cps
Long Space	0.0	8345.4		1798.1		9425.3		cps
Short Space	1.1	1927.9		1285.9		2050.2		cps
Rho		1.7100		2.5960		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio			: 0.558	
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept			: -19.6	

Before Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808
Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: OPEN_GR
Performed: Wed May 31 00:09:32 2017

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.2800 GAPI/cps