


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Rooks County. Sec. 33 Twp. 8S Rge. (E)16 (W)
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{4}$ " or footage from lines C EL E/2 SE
Lease Owner Cities Service Oil Company
Lease Name Adams A Well No. 3W
Office Address Box 553 Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Injection
Date well completed 4-20 19 62
Application for plugging filed 6-12 19 68
Application for plugging approved 6-13 19 68
Plugging commenced 6-11 19 68
Plugging completed 6-17 19 68
Reason for abandonment of well or producing formation Casing Bad

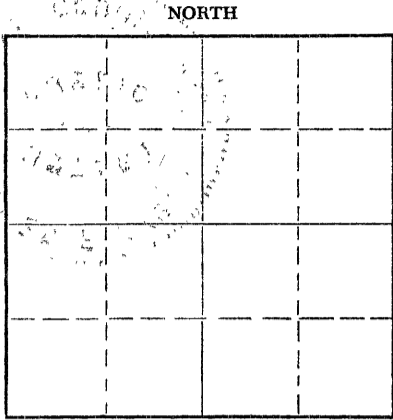

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey Hays, Kansas
Producing formation Kansas City Depth to top 3036 Bottom 3169 Total Depth of Well 3353 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	273'	None
				4 1/2"	3352'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Pump in 5 sx. hulls followed by 25 sx. mud, followed by 4 1/2" Howco wood plug, followed by 60 sx. 50/50 pozmix cement W/2% jell. Max. Press. 1100#
Shut in with 200# on casing. Cut casing off in cellar. Filled 4 1/2" casing (27') to base of cellar. Welded on cap. Filled Cellar.

RECEIVED
STATE CORPORATION COMMISSION
JUN 21 1968
CONSERVATION DIVISION
Wichita, Kansas
6/21/68

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Company
Address Hays

STATE OF Kansas, COUNTY OF Russell, ss.
M. M. Hardin (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) M. M. Hardin
M. M. Hardin, Dist. Supt.
(Address)



SWORN to before me this 20th day of June, 19 68

James F. Kyger
Notary Public.

10-5-68