

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-10225-00-02
Spot: NWNE Sec/Twnshp/Rge: 2-29S-20W
4620 feet from S Section Line, 1980 feet from E Section Line
Lease Name: RALSTIN Well #: A-1
County: KIOWA Total Vertical Depth: 5070 feet

Operator License No.: 33388
Op Name: J. MARK RICHARDSON FAMILY TRUS
Address: 1406 N. CHARLES
WICHITA, KS 67203

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4850		
PROD	4.5	5069	2600	WITH 200 SX CMT
SURF	8.625	289		

#164²⁸

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/13/2006 1:30 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 4350' WITH 4 SX CMT. PLUG AT 1300' WITH 12 SX GEL & 50 SX CMT. PLUG AT 650' WITH 50 SX CMT. PLUG AT 320' WITH 50 SX CMT- 28 SX GEL W/600# HULLS. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/14/2006 11:30 AM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

SAND TO 4350' WITH 4 SX CMT ON TOP. 1ST PLUG AT 1300' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 650' WITH 50 SX CMT. 3RD PLUG AT 320' WITH 28 SX GEL W/600# HULLS MIXED IN & 50 SX CMT. NO CMT. 2/14/06: TOC TAGGED AT 650'. FLUID LEVEL AT 230'. 4TH PLUG PUMPED 350# HULLS & WATER TO GET CIRCULATION AT 370'. PUMPED 50# HULLS W/50 SX CMT AT 370'. 5TH PLUG AT 40' WITH 20 SX CMT. CIRCULATED TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5000	5006		
4754	4758		
4671	4677		
4413	4419		

INVOICED


2-24-07

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

~~DATE~~ 2-24-07
~~WELL NO.~~ 2006061180

District: 01

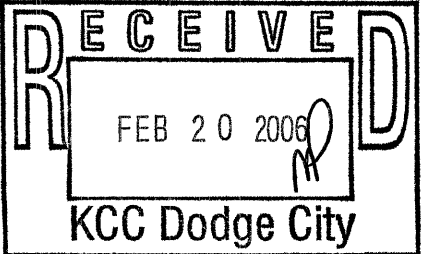

Signed Jerry W. Stapleton (TECHNICIAN) PIRTT

RECEIVED
FEB 23 2006
KCC WICHITA

Form CS-33