

Top - Bottom

A	BOREID	BOTTEMP	CASEOD	CASETHCK	FLUIDDEN	M	MATRXDEN
1	in 7.875	degF 125	in 4.5	in 0	g/cc 1	2	g/cc 2.71
NPORSEL	PERFS	SNDERR	SNDERRM	SPSHIFT	SRFTEMP	SZCOR	TDEPTH
Limestone	0	mmho/m 0	mmho/m 0	mV -716	degF 70	Off	ft 4908

Sensor	Offset (ft)	Schematic		Description	Length (ft)	O.D. (in)	Weight (lb)
GR	33.00			GR-M&W (89-M&W)	3.00	3.50	50.00
CNLSC	29.90			CNT-M&W (tk10-MW)	5.50	3.50	100.00
CNSSC	29.15						
LSD DCAL SSD	20.85			CDL-M&W (71-914)	8.50	4.00	250.00
	20.83						
	20.35						
RLL3	15.80						
RLL3F	15.79						
CILD	8.00			DIL-M&W (1987)	18.50	3.50	220.00

CILM 4.70

SP 0.20

Dataset: charlesngriffin_jazmyne_1.db: field/well/stack/pass3.1
Total length: 35.50 ft
Total weight: 620.00 lb
O.D.: 4.00 in




MAIN PASS


2" SCALE BULK DENSITY


Database File charlesngriffin_jazmyne_1.db
Dataset Pathname stack/pass3.3
Presentation Format cdl
Dataset Creation Thu May 12 16:21:00 2016
Charted by Depth in Feet scaled 1:600


0 GAMMA RAY (GAPI) 150
6 CALIPER (in) 16

30 COMPENSATED DENSITY (pu) -10
2 BULK DENSITY (g/cc) 3
15000 LINE TENSION (lb) 0
-0.25 CORRECTION (g/cc) 0.25
LINE SPEED
(ft/min)

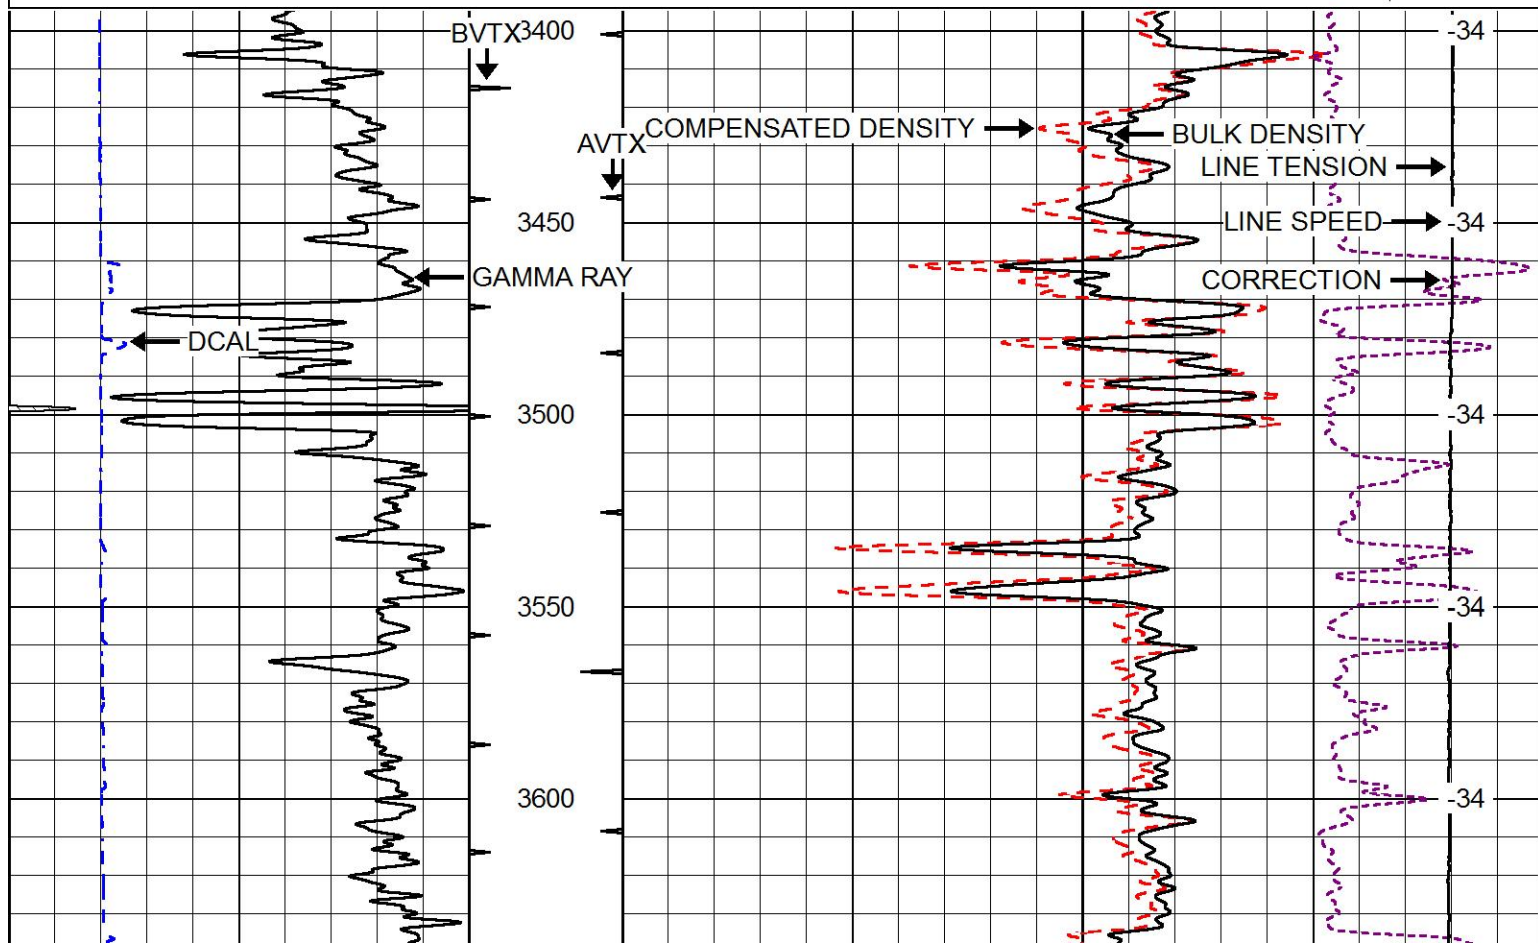


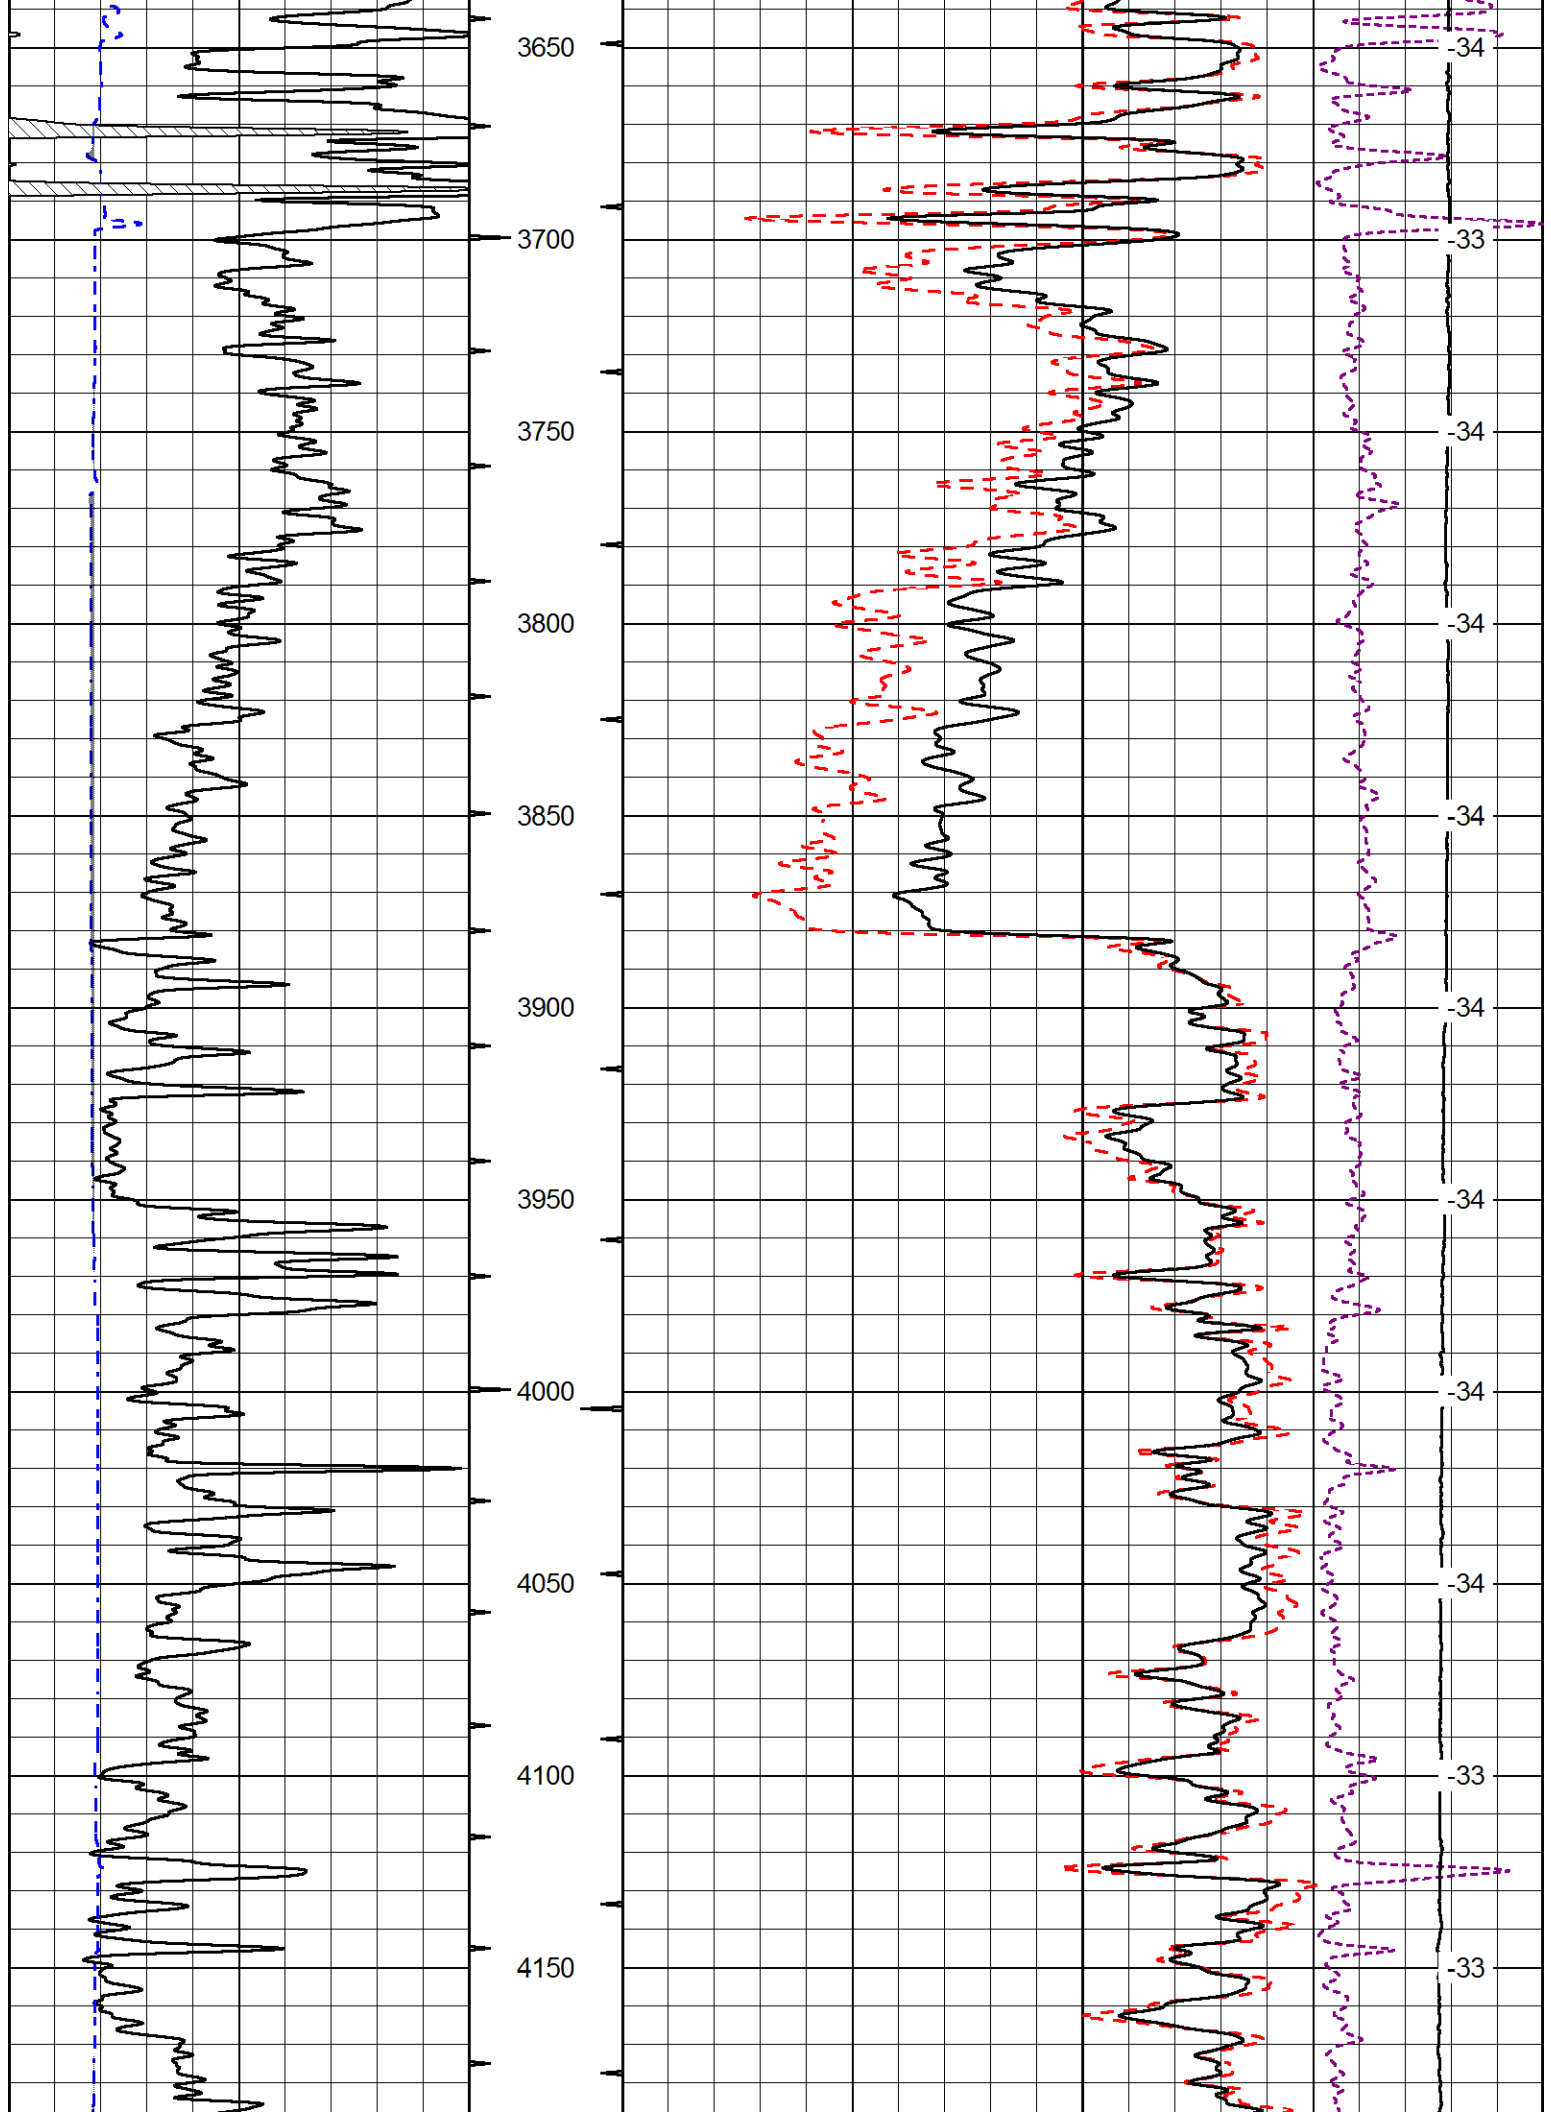


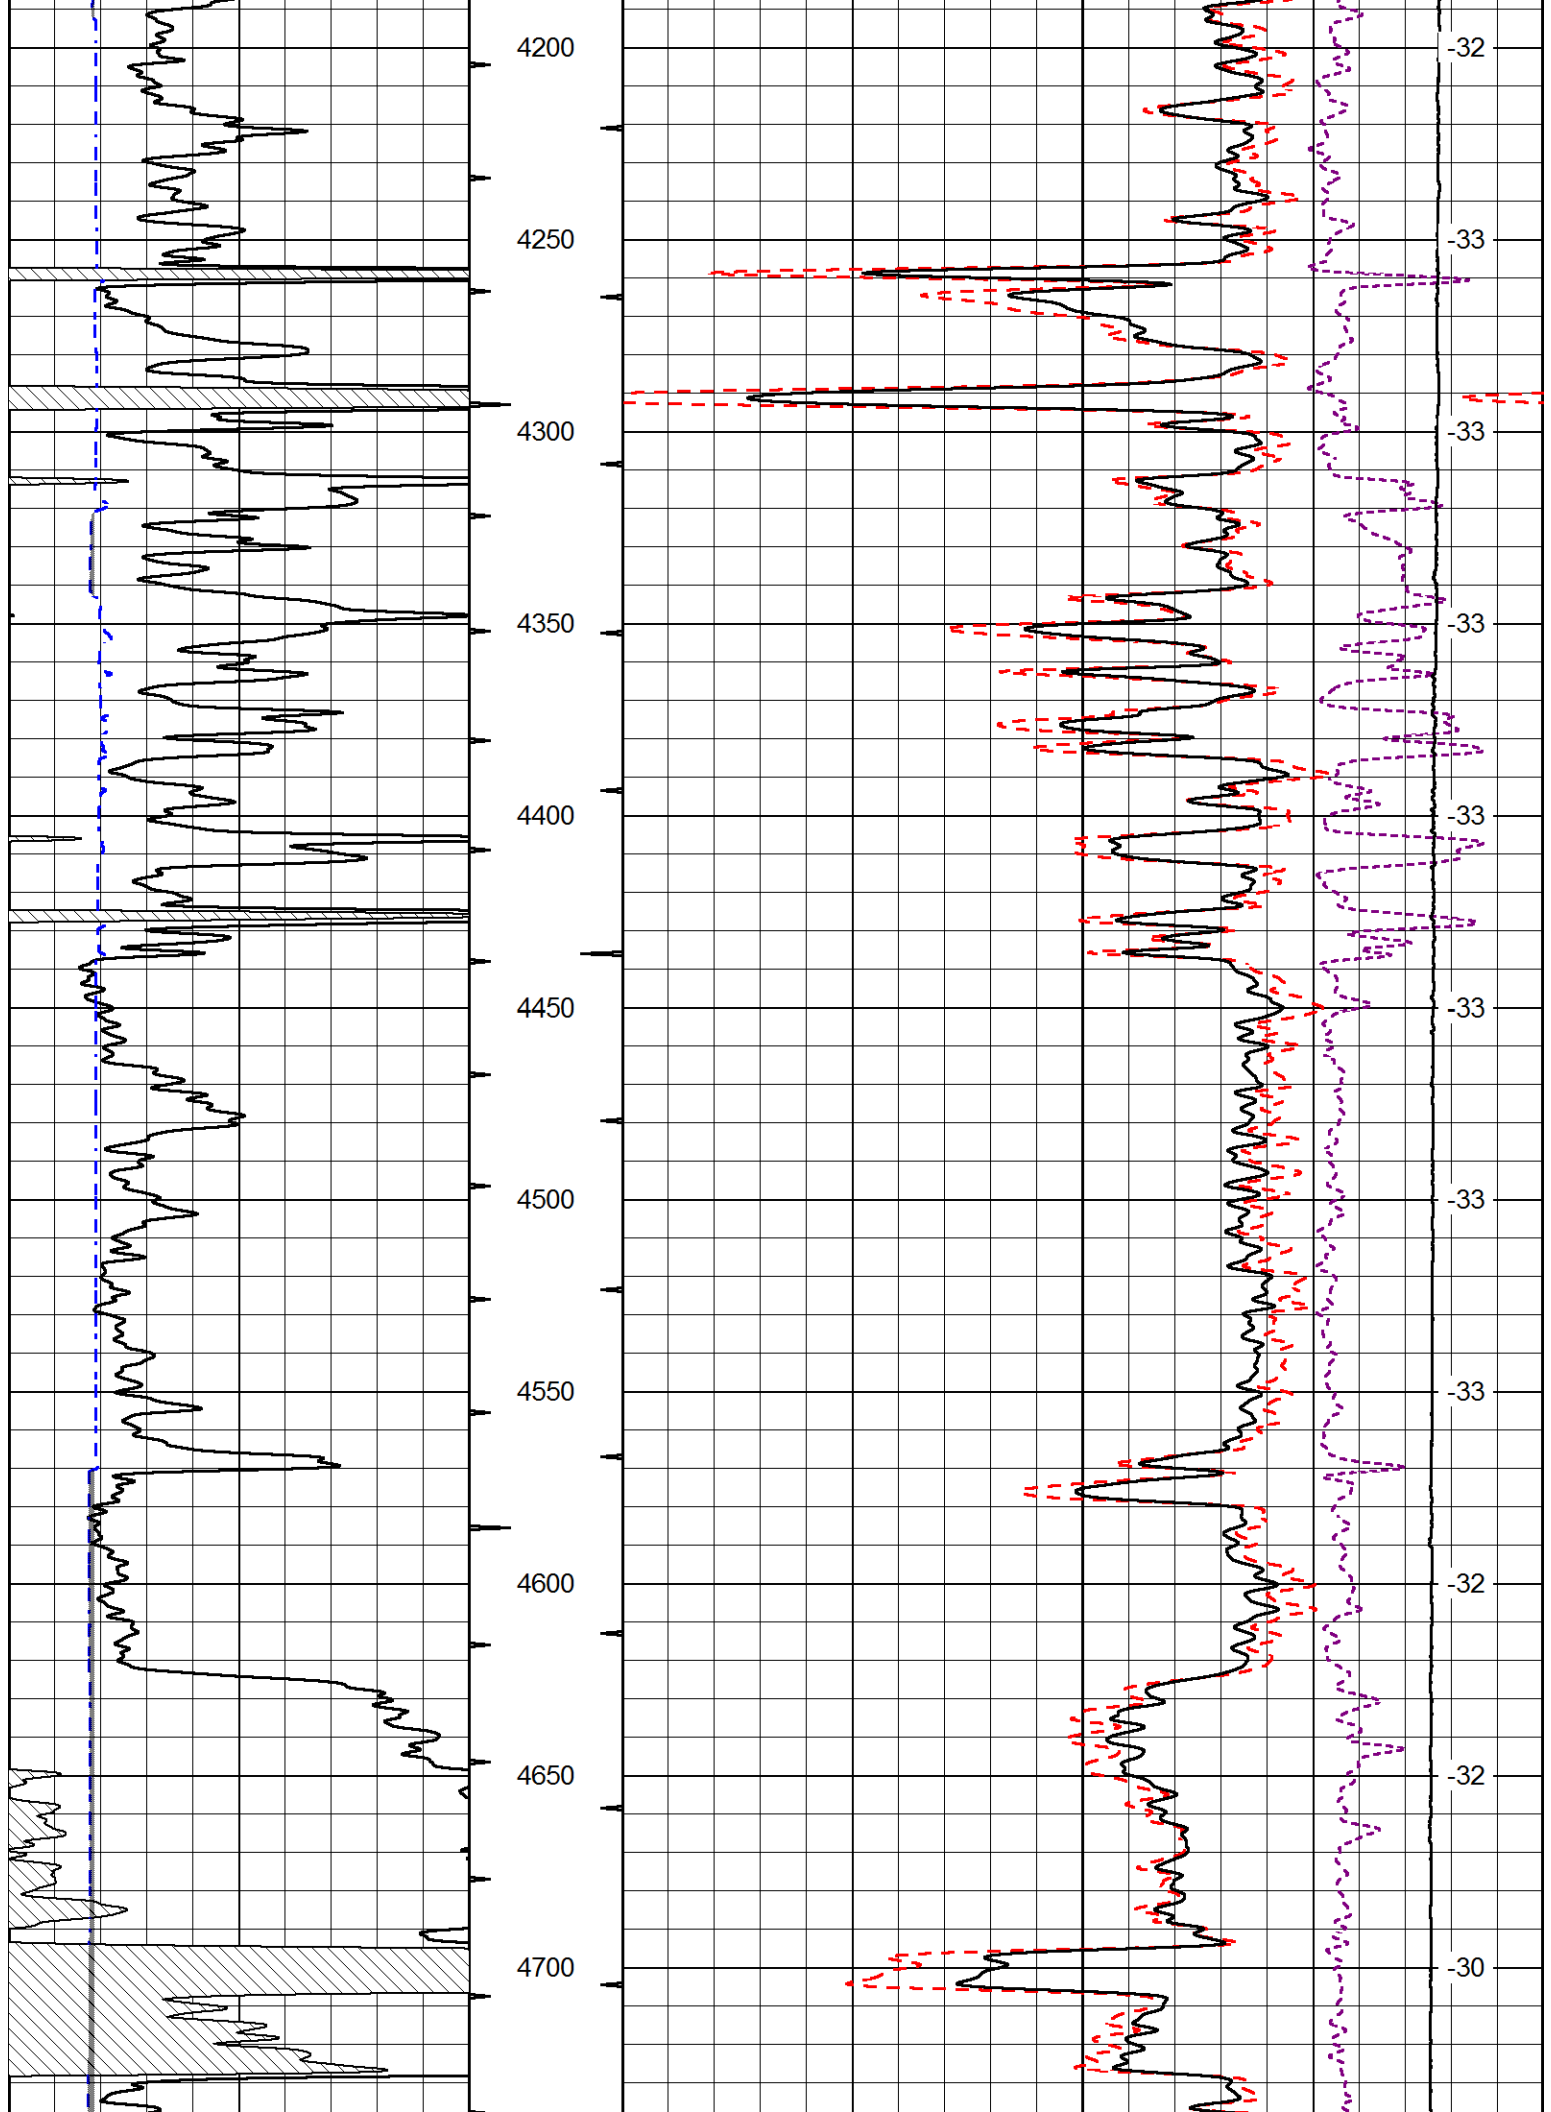


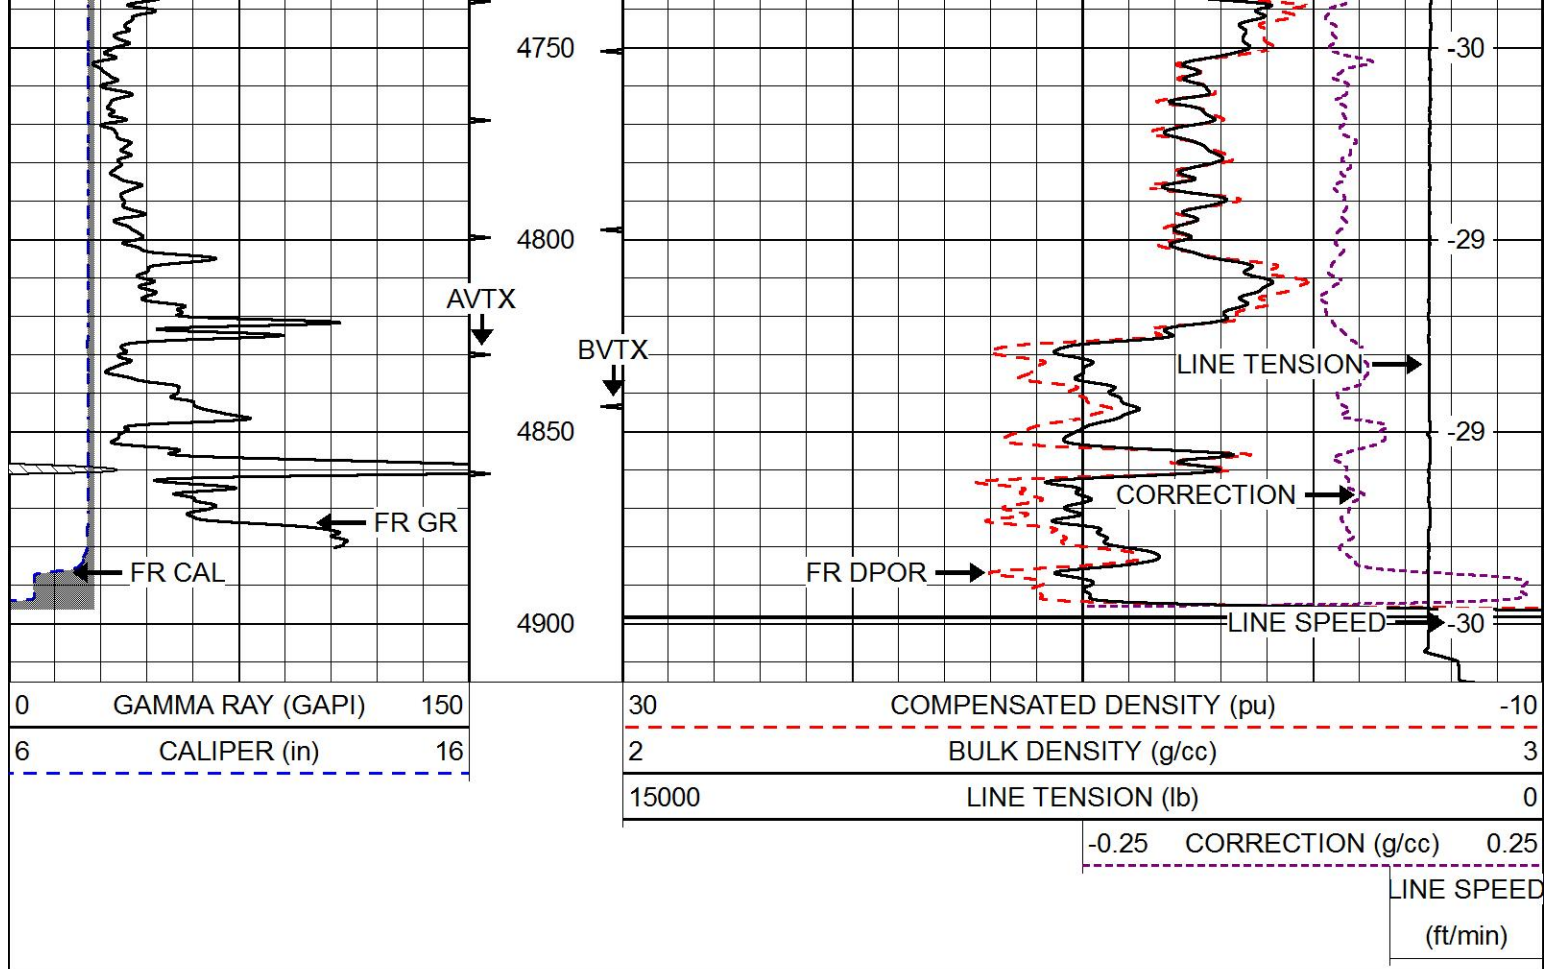



MAIN PASS


Database File	charlesngriffin_jazmyne_1.db
Dataset Pathname	stack/pass3.1
Presentation Format	cnslspec
Dataset Creation	Thu May 12 16:20:38 2016
Charted by	Depth in Feet scaled 1:240

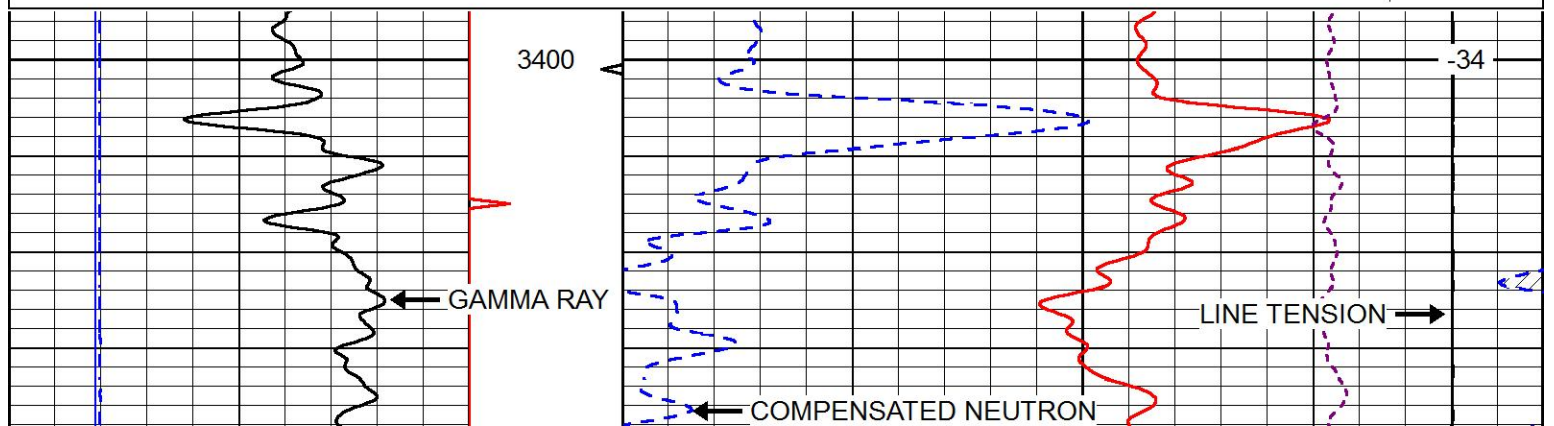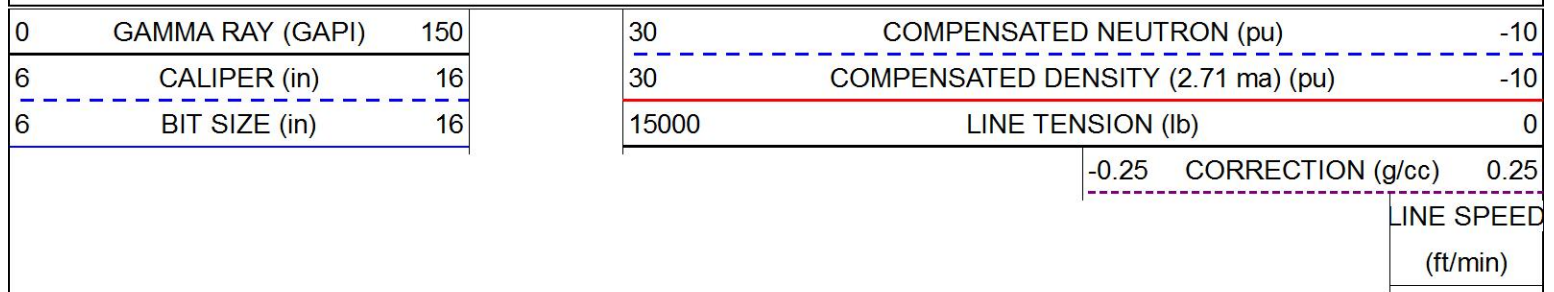


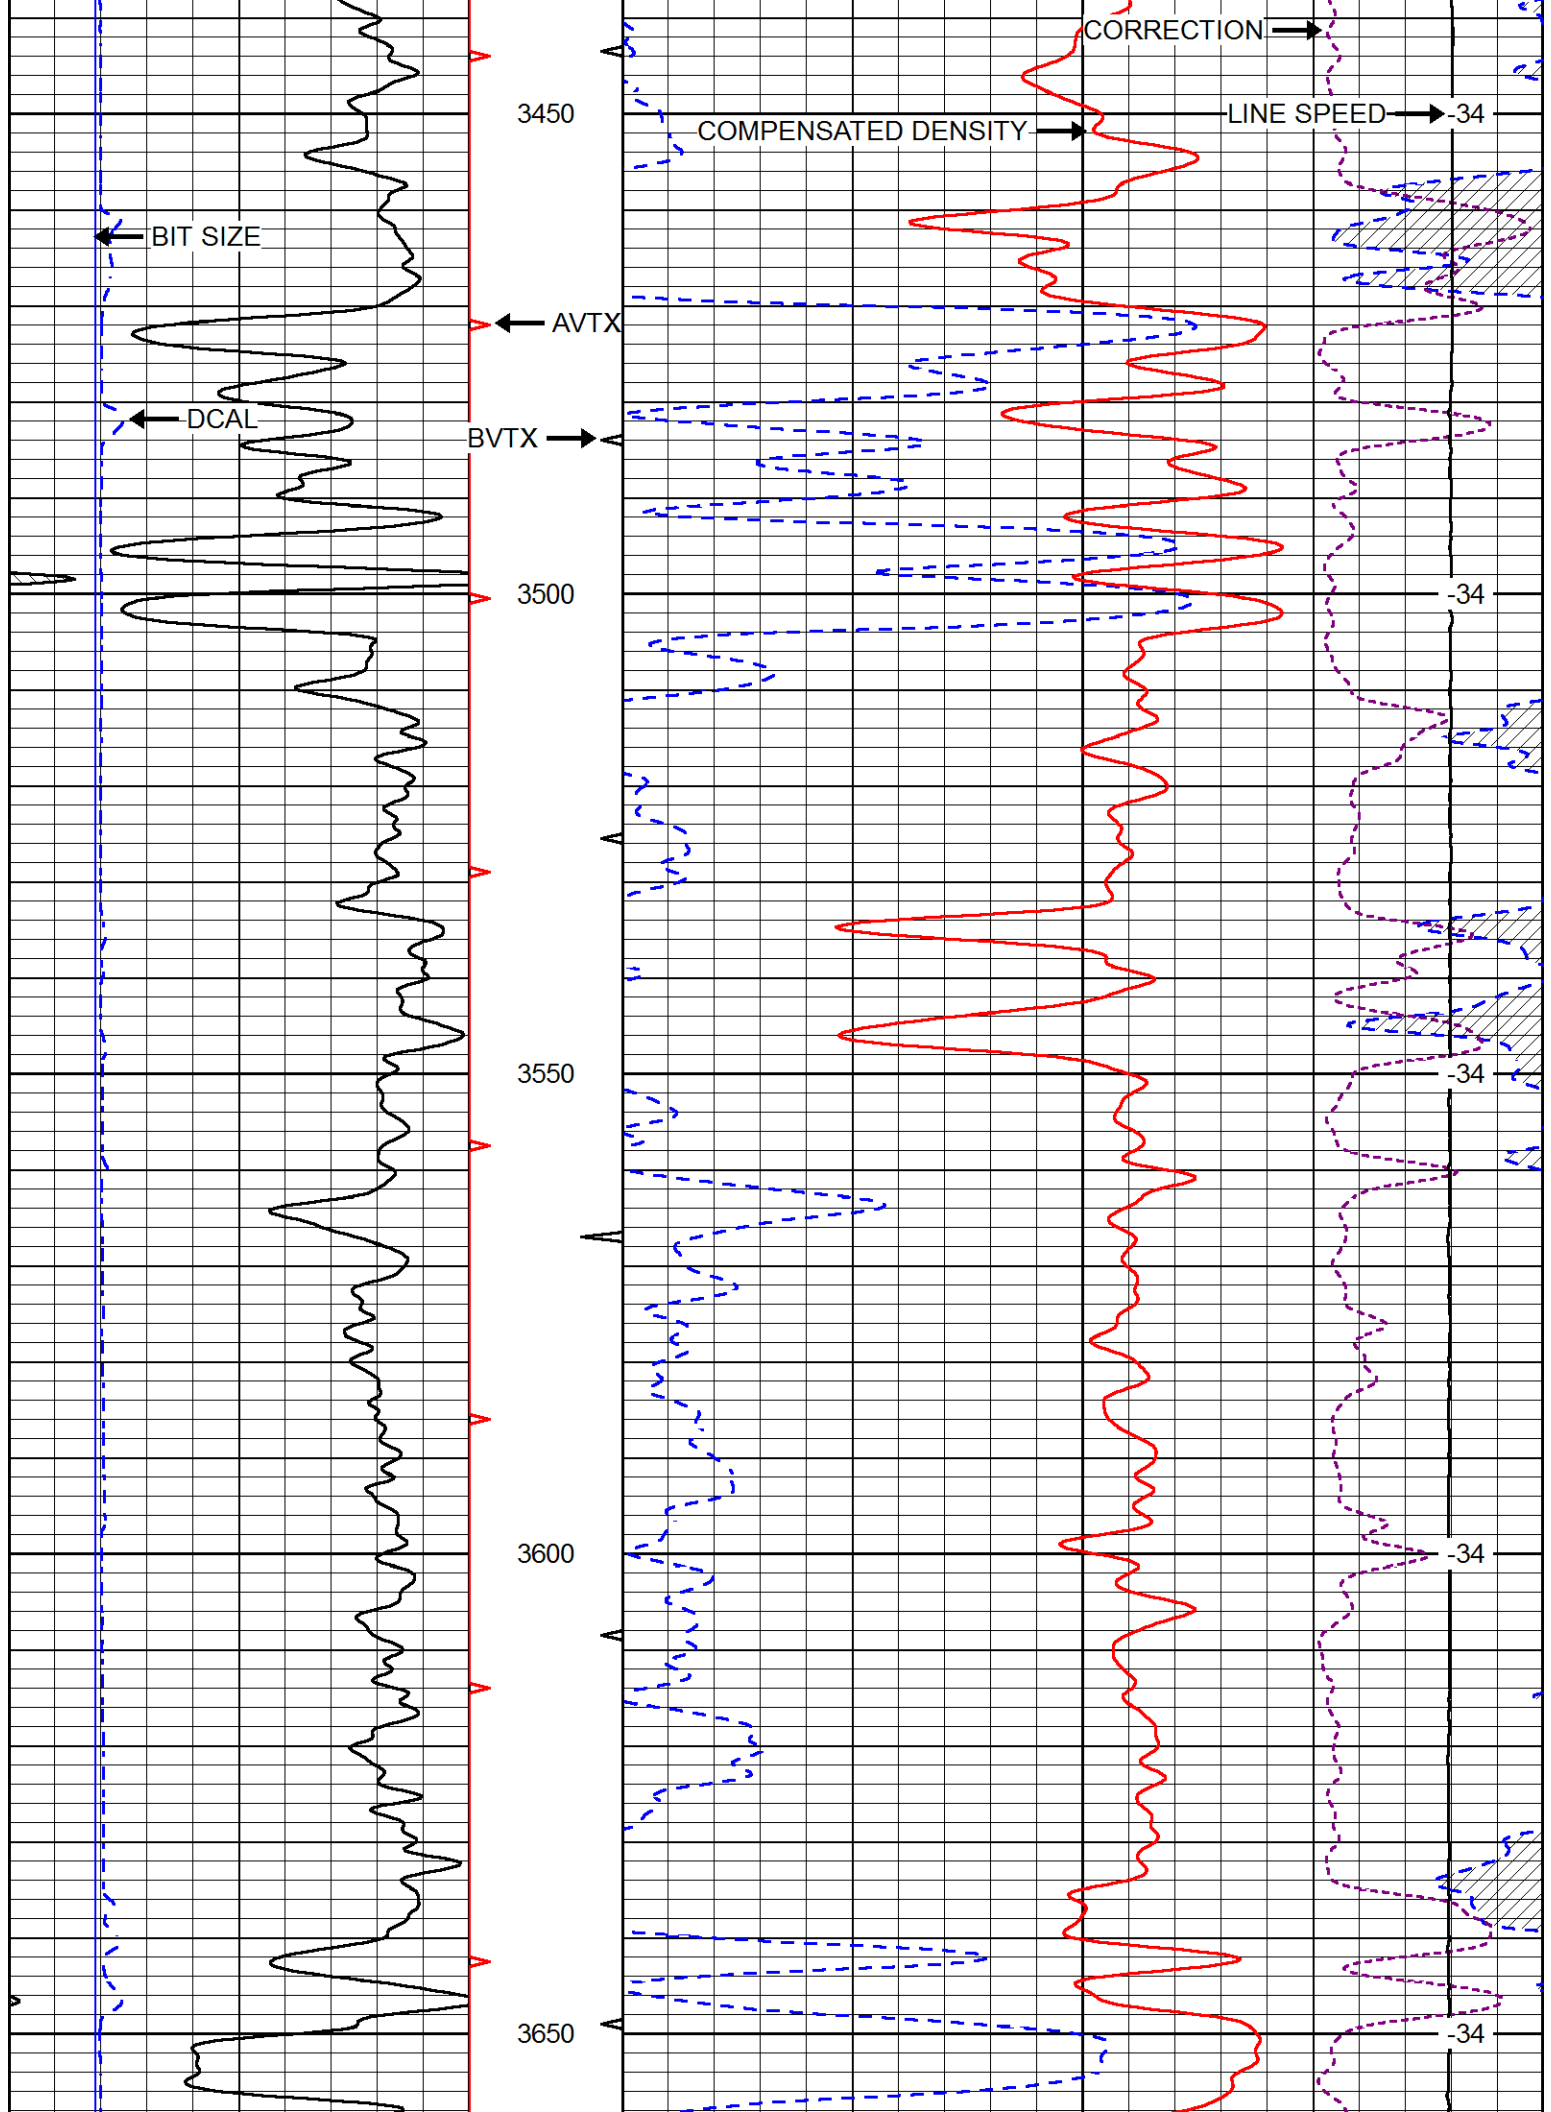


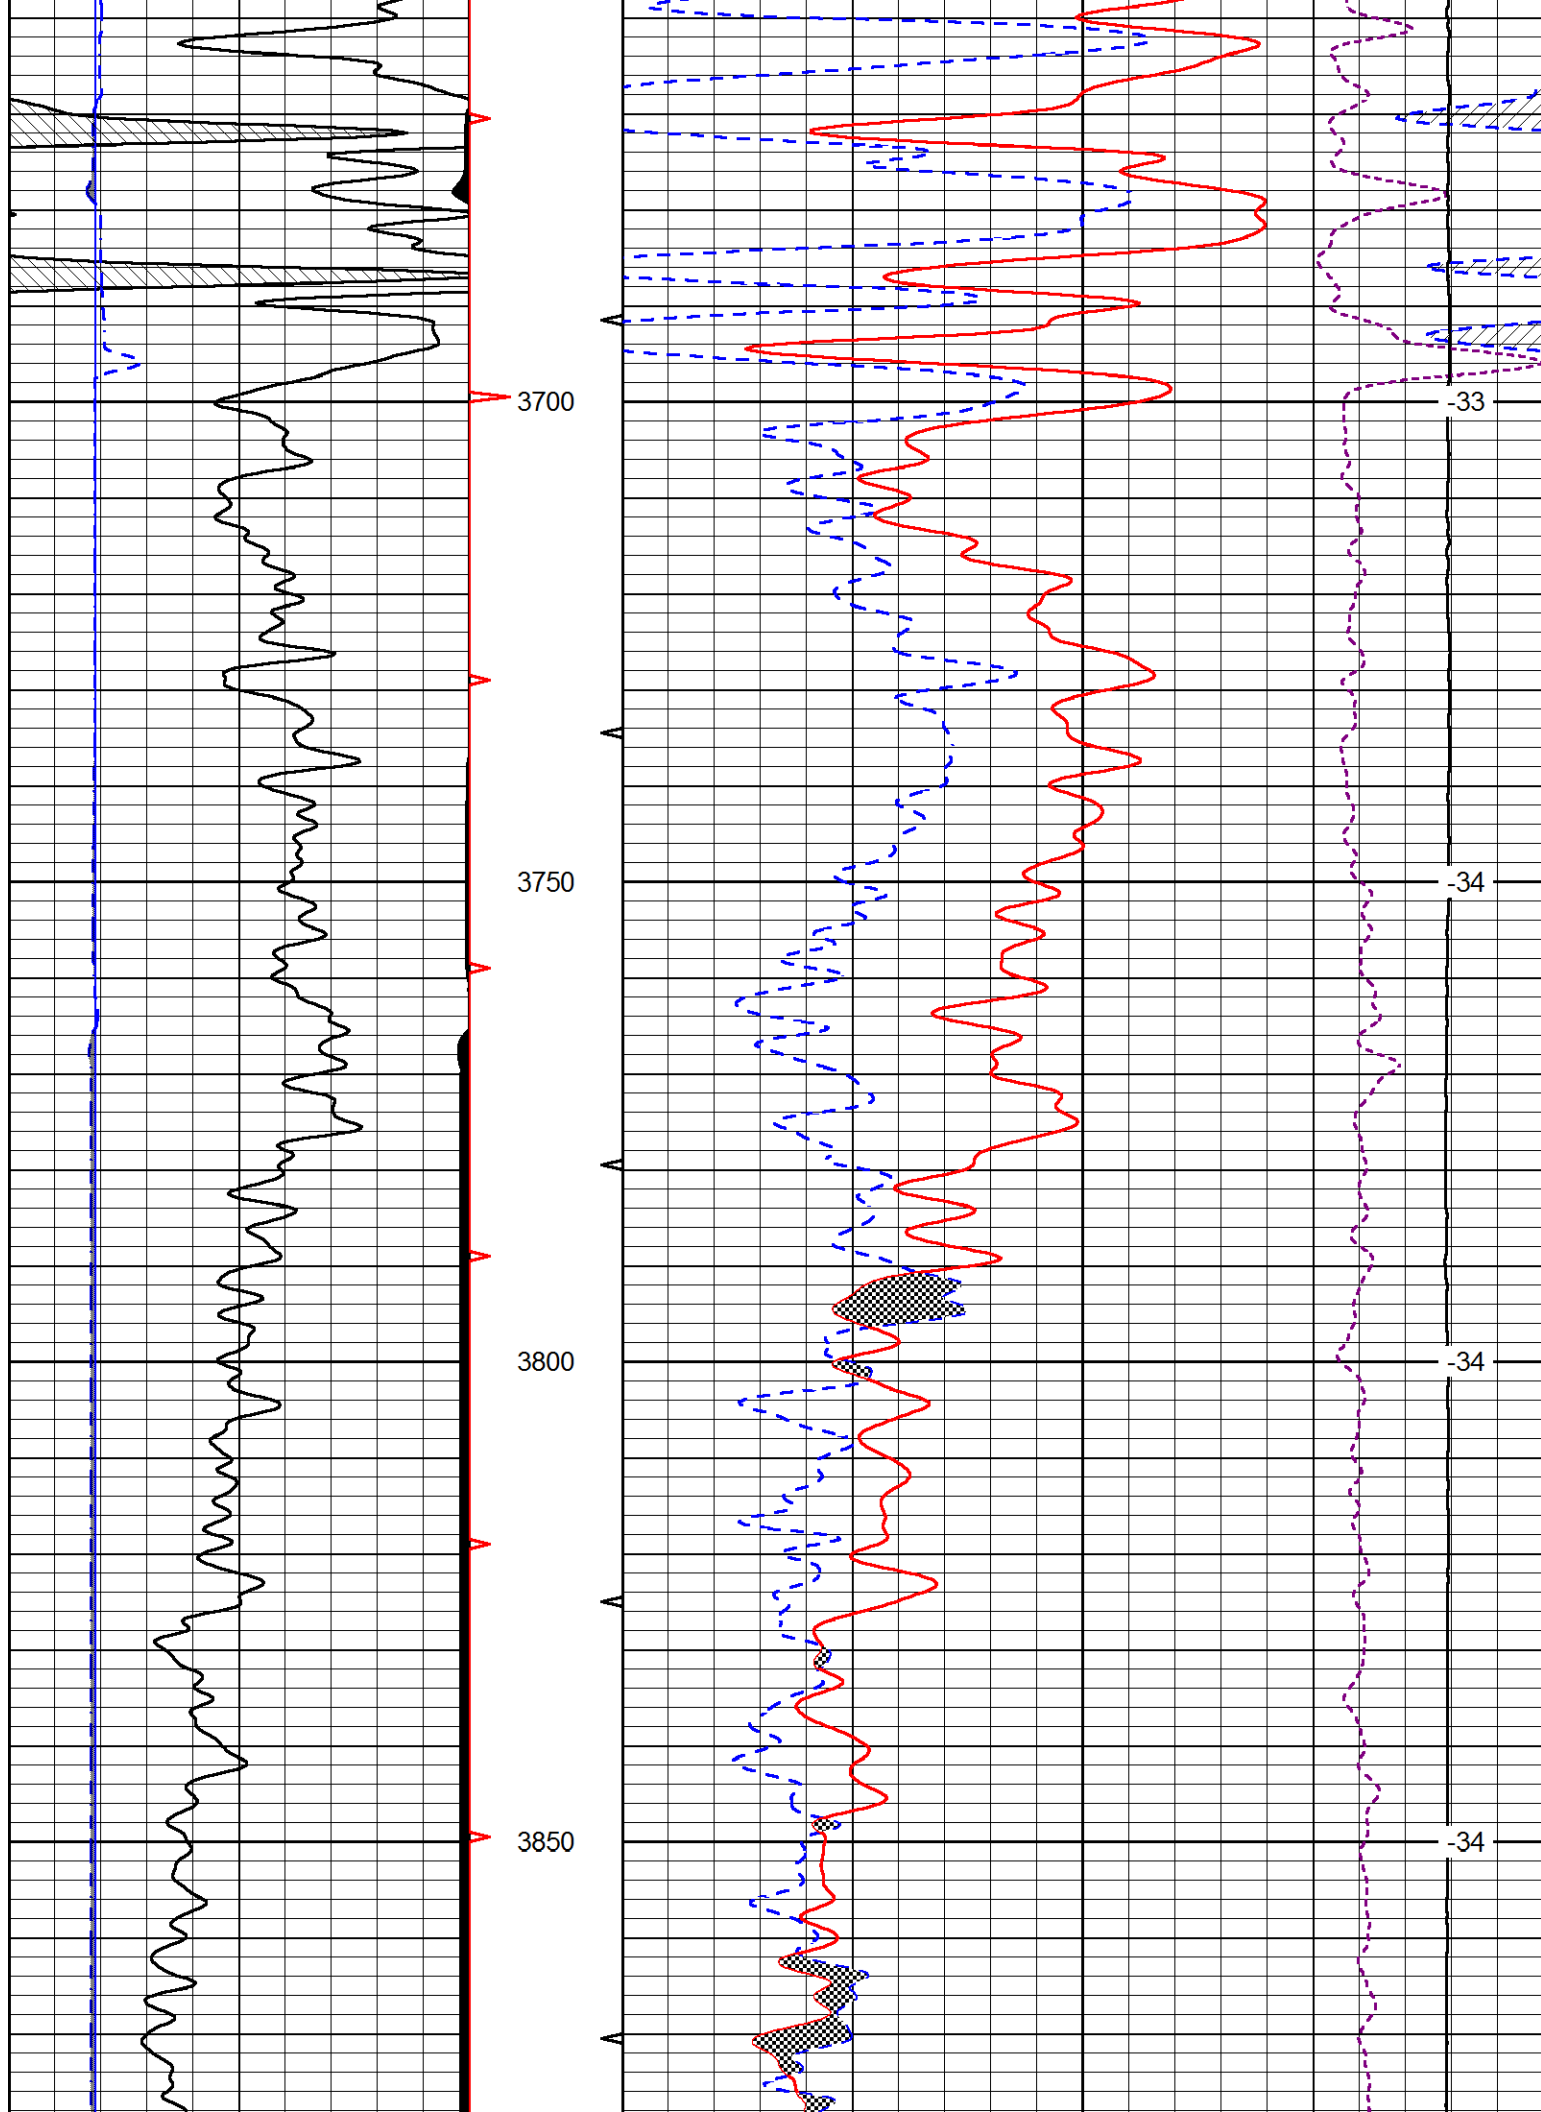


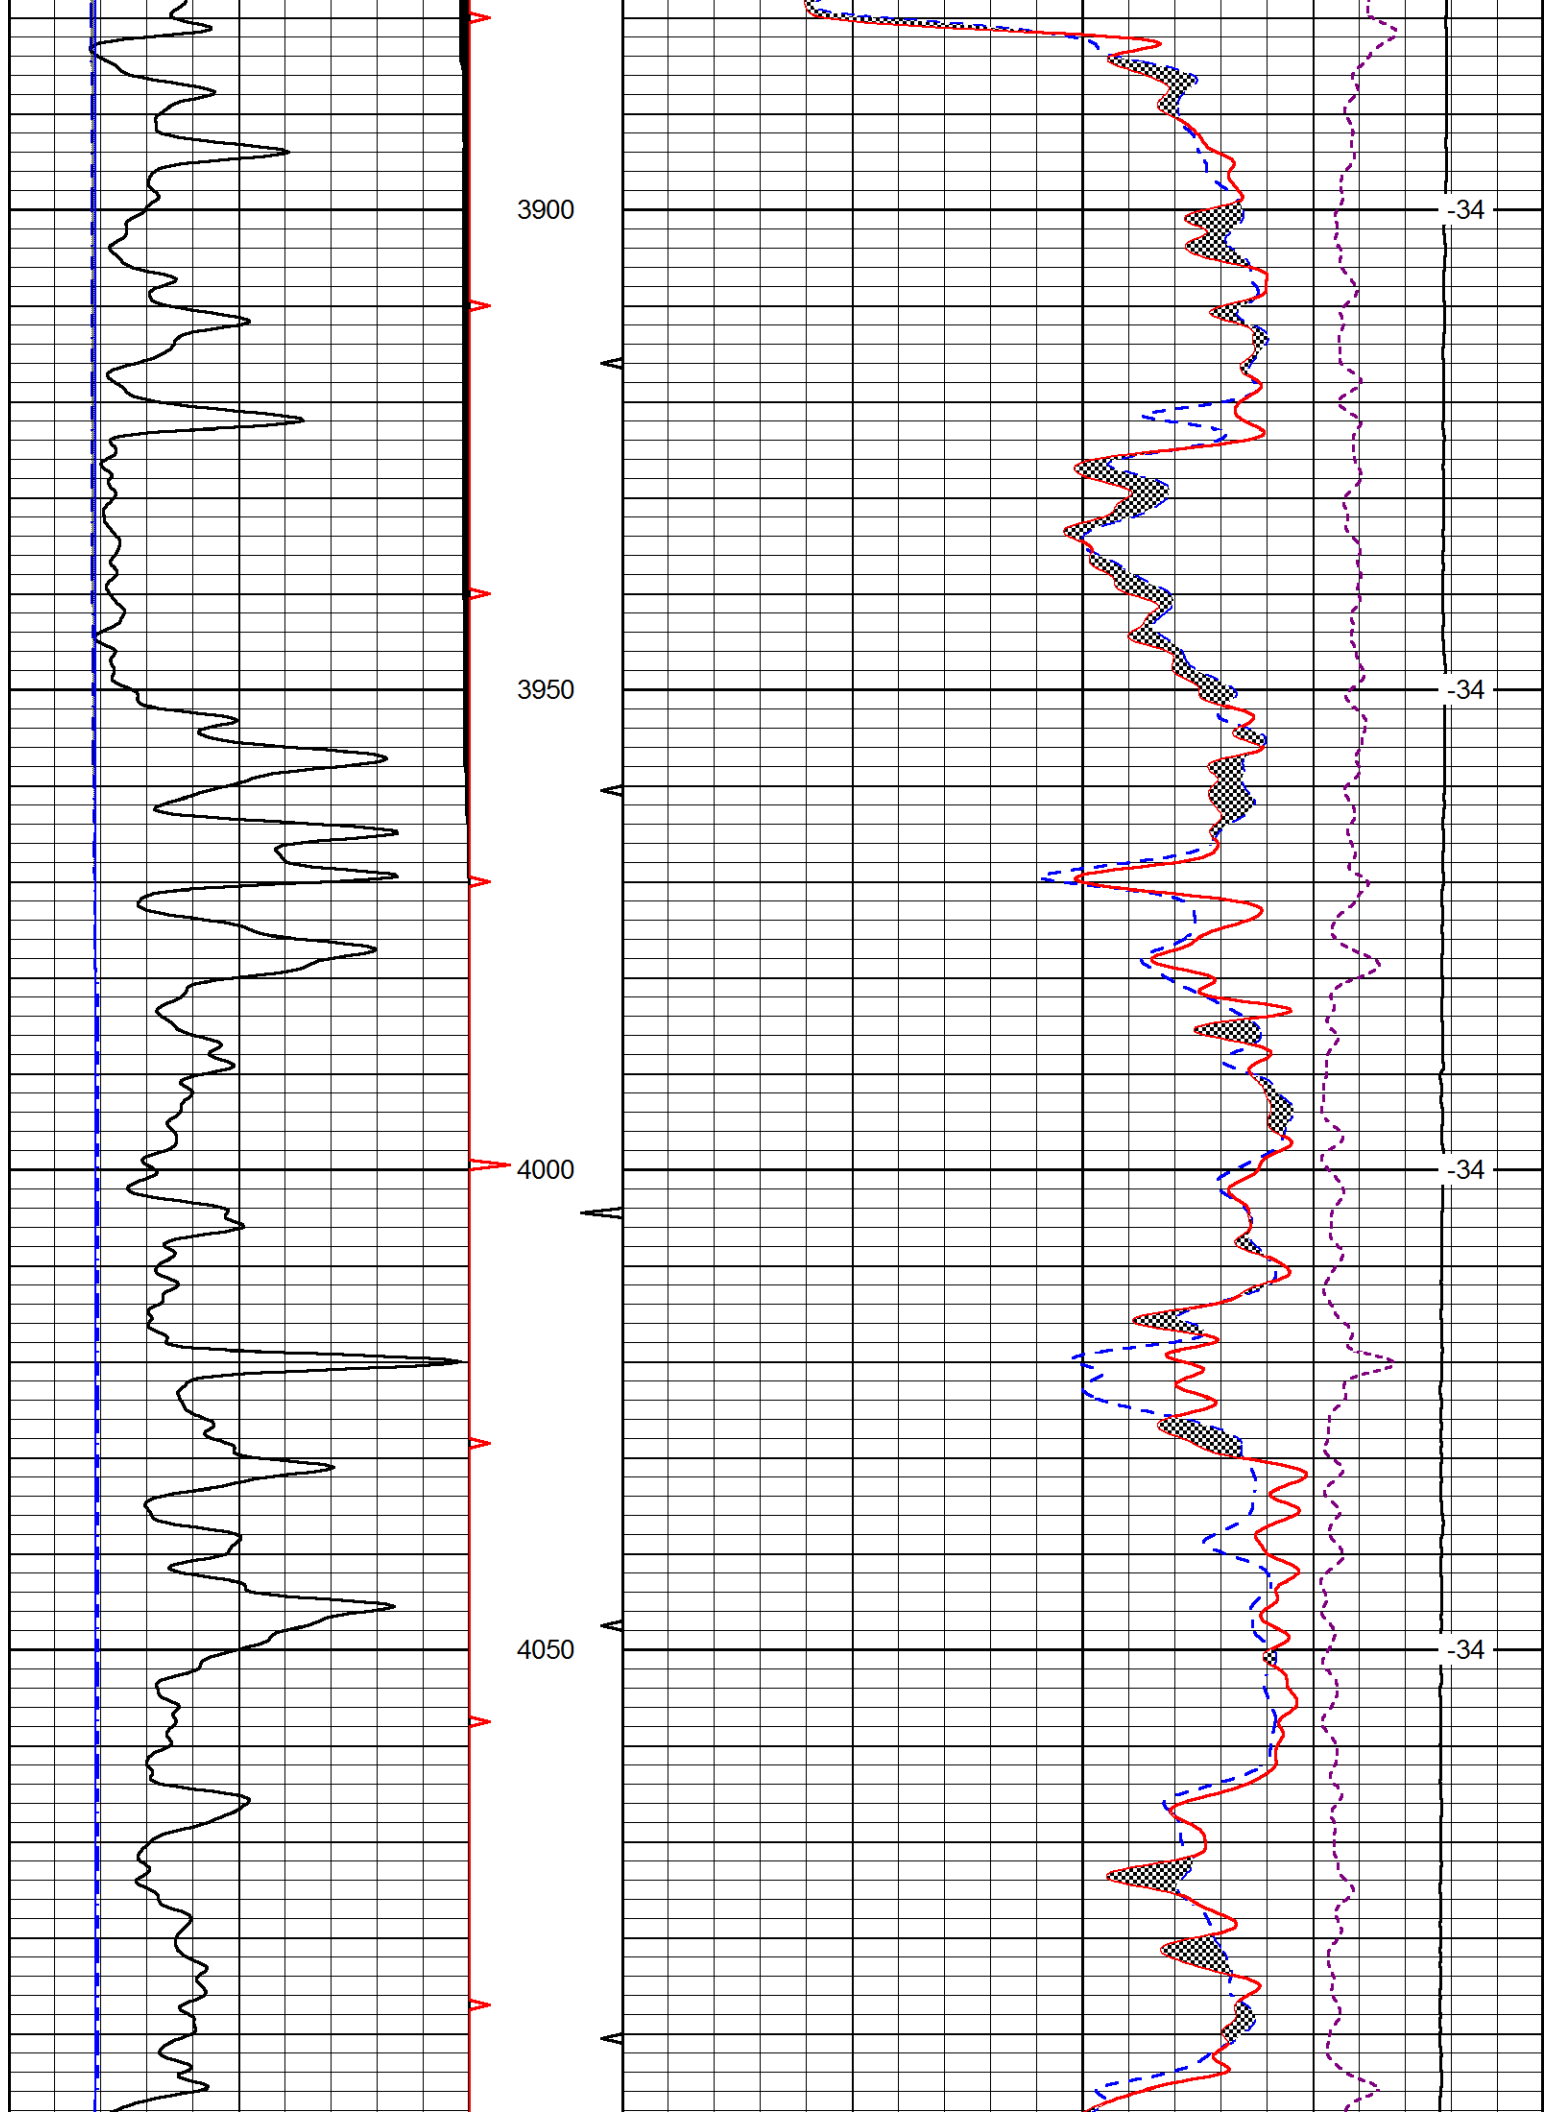

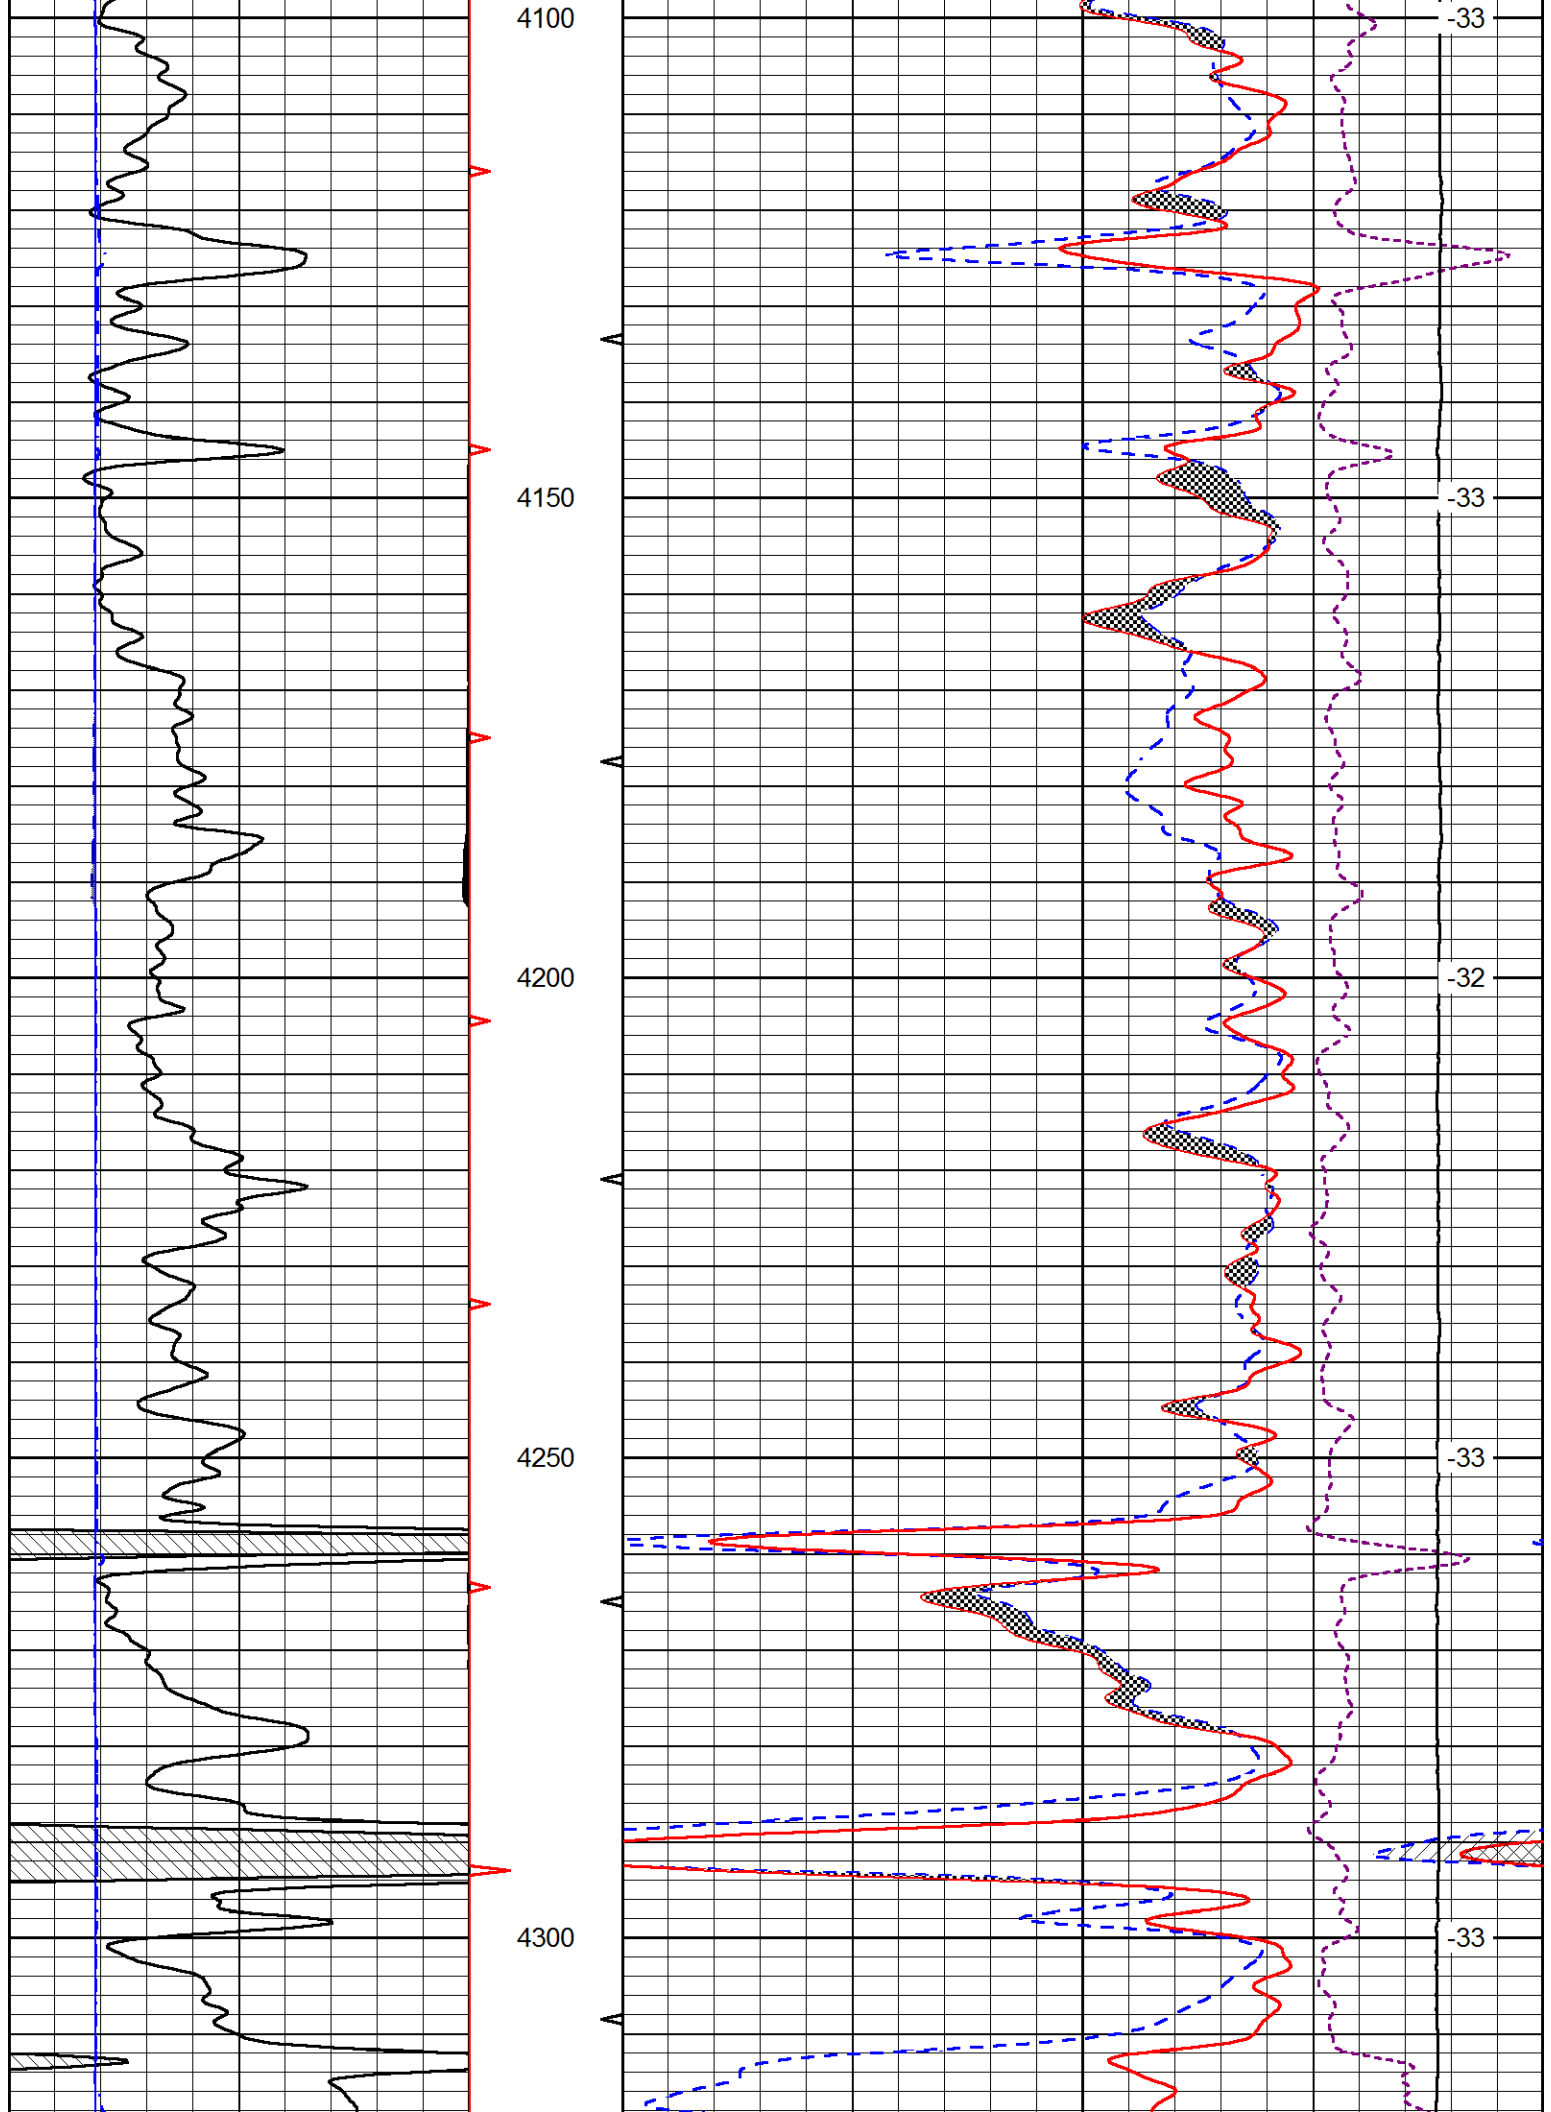

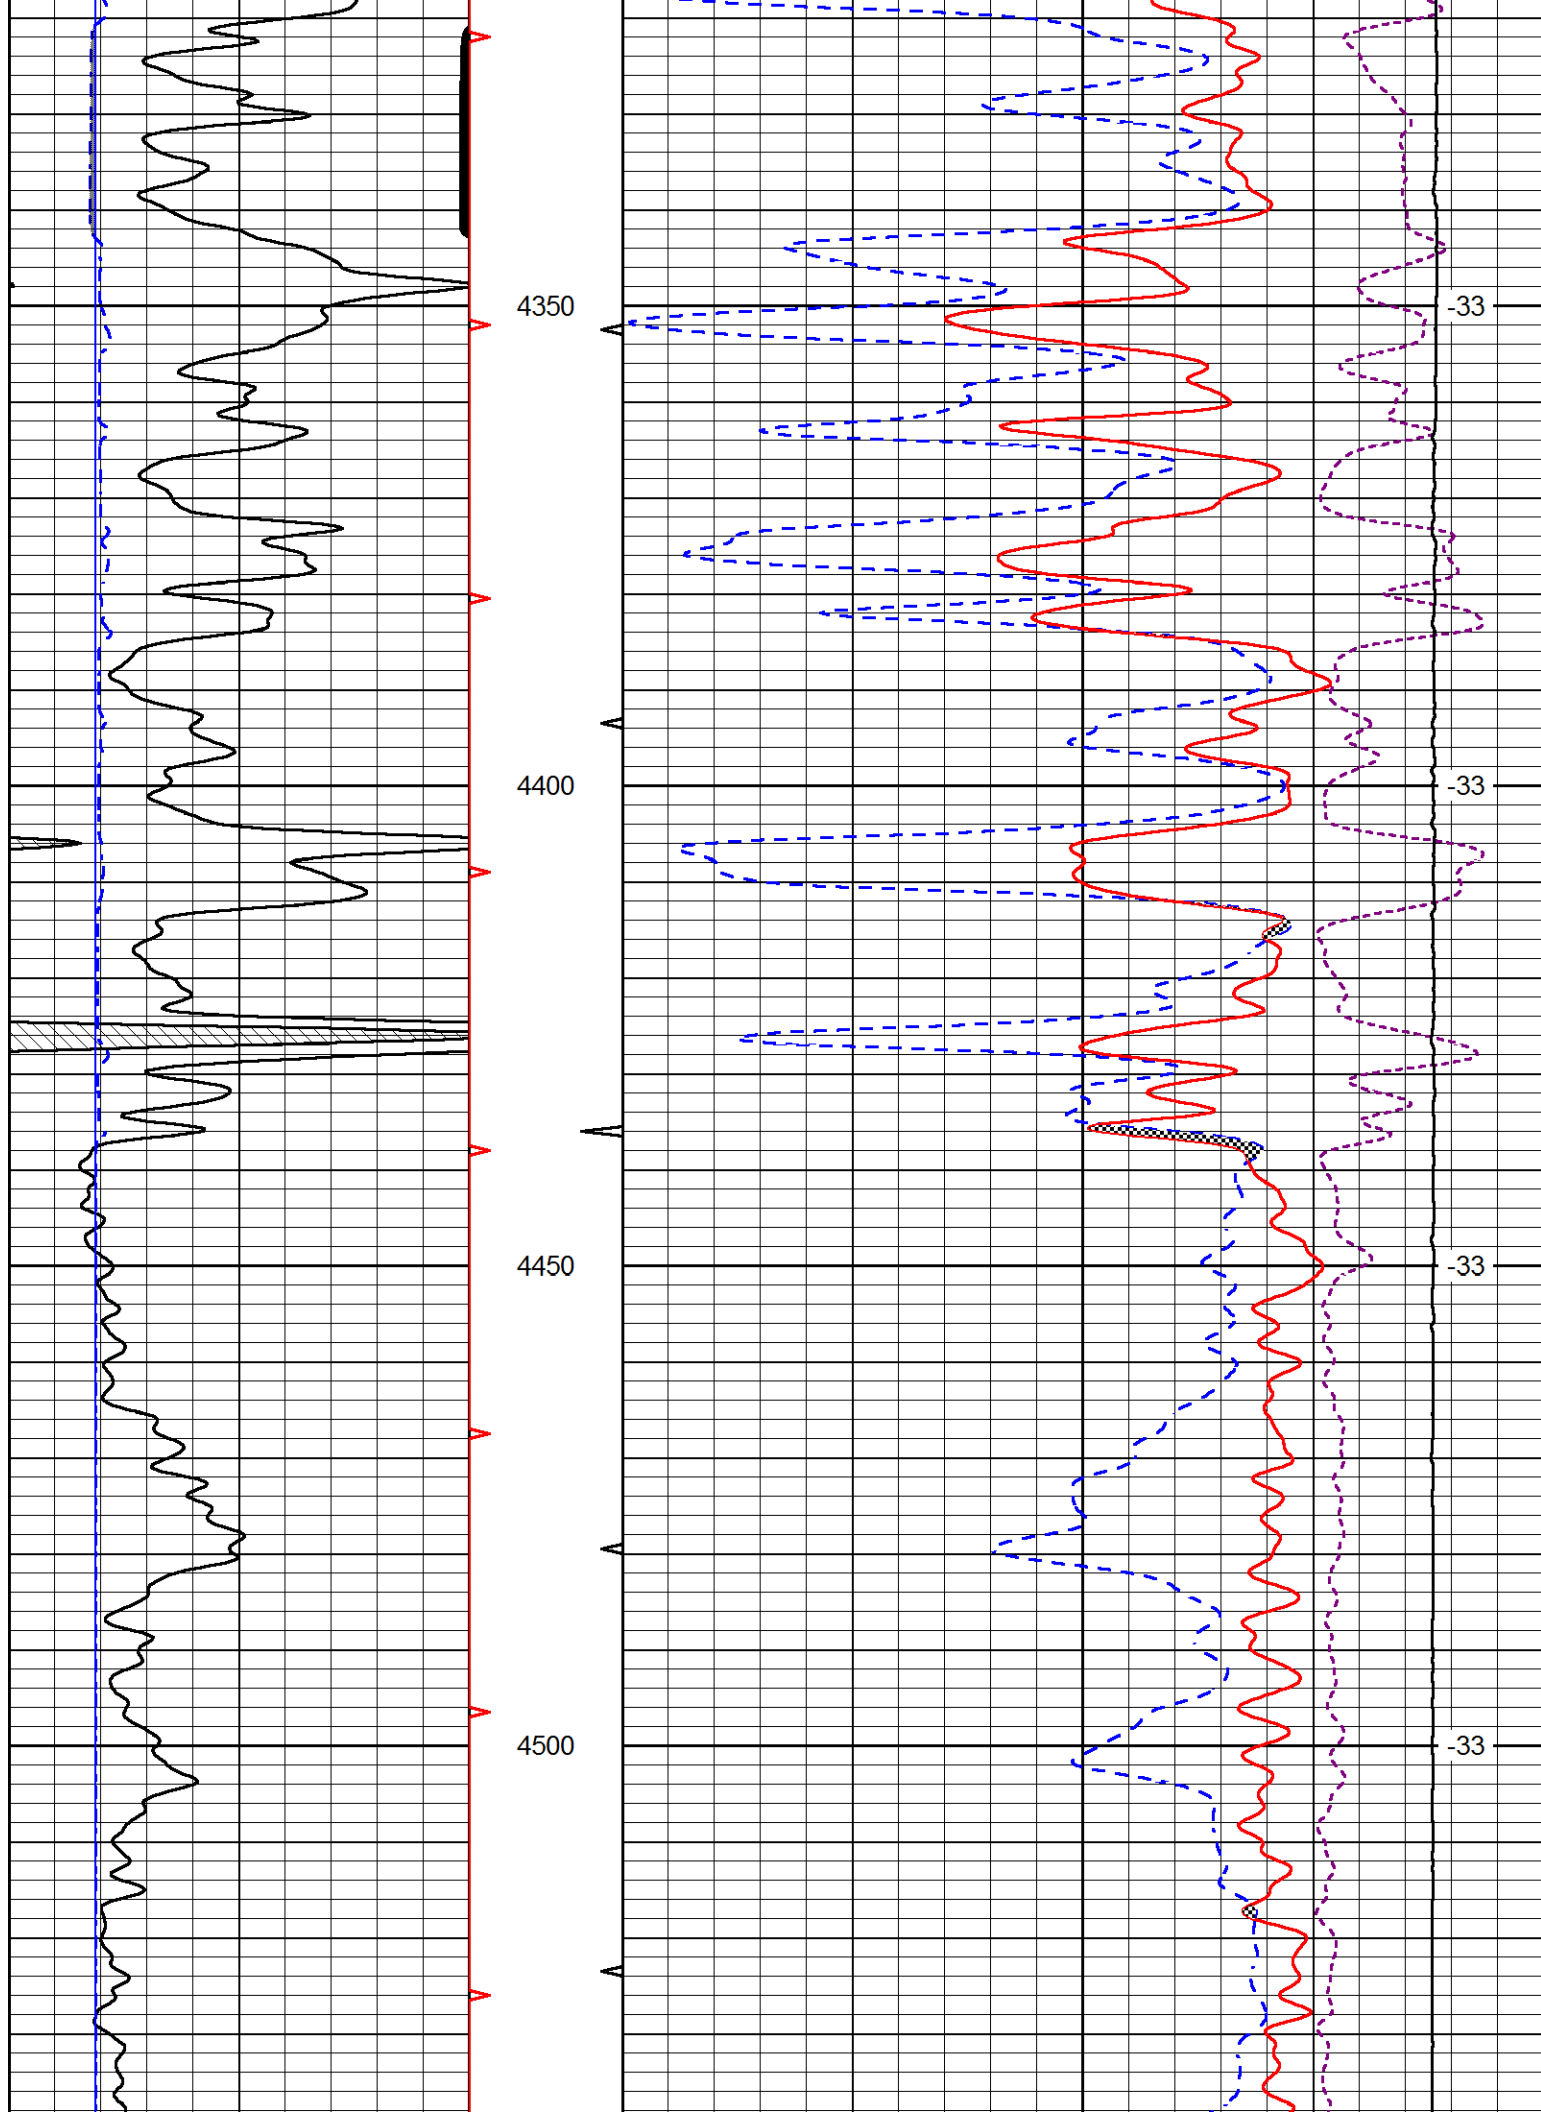

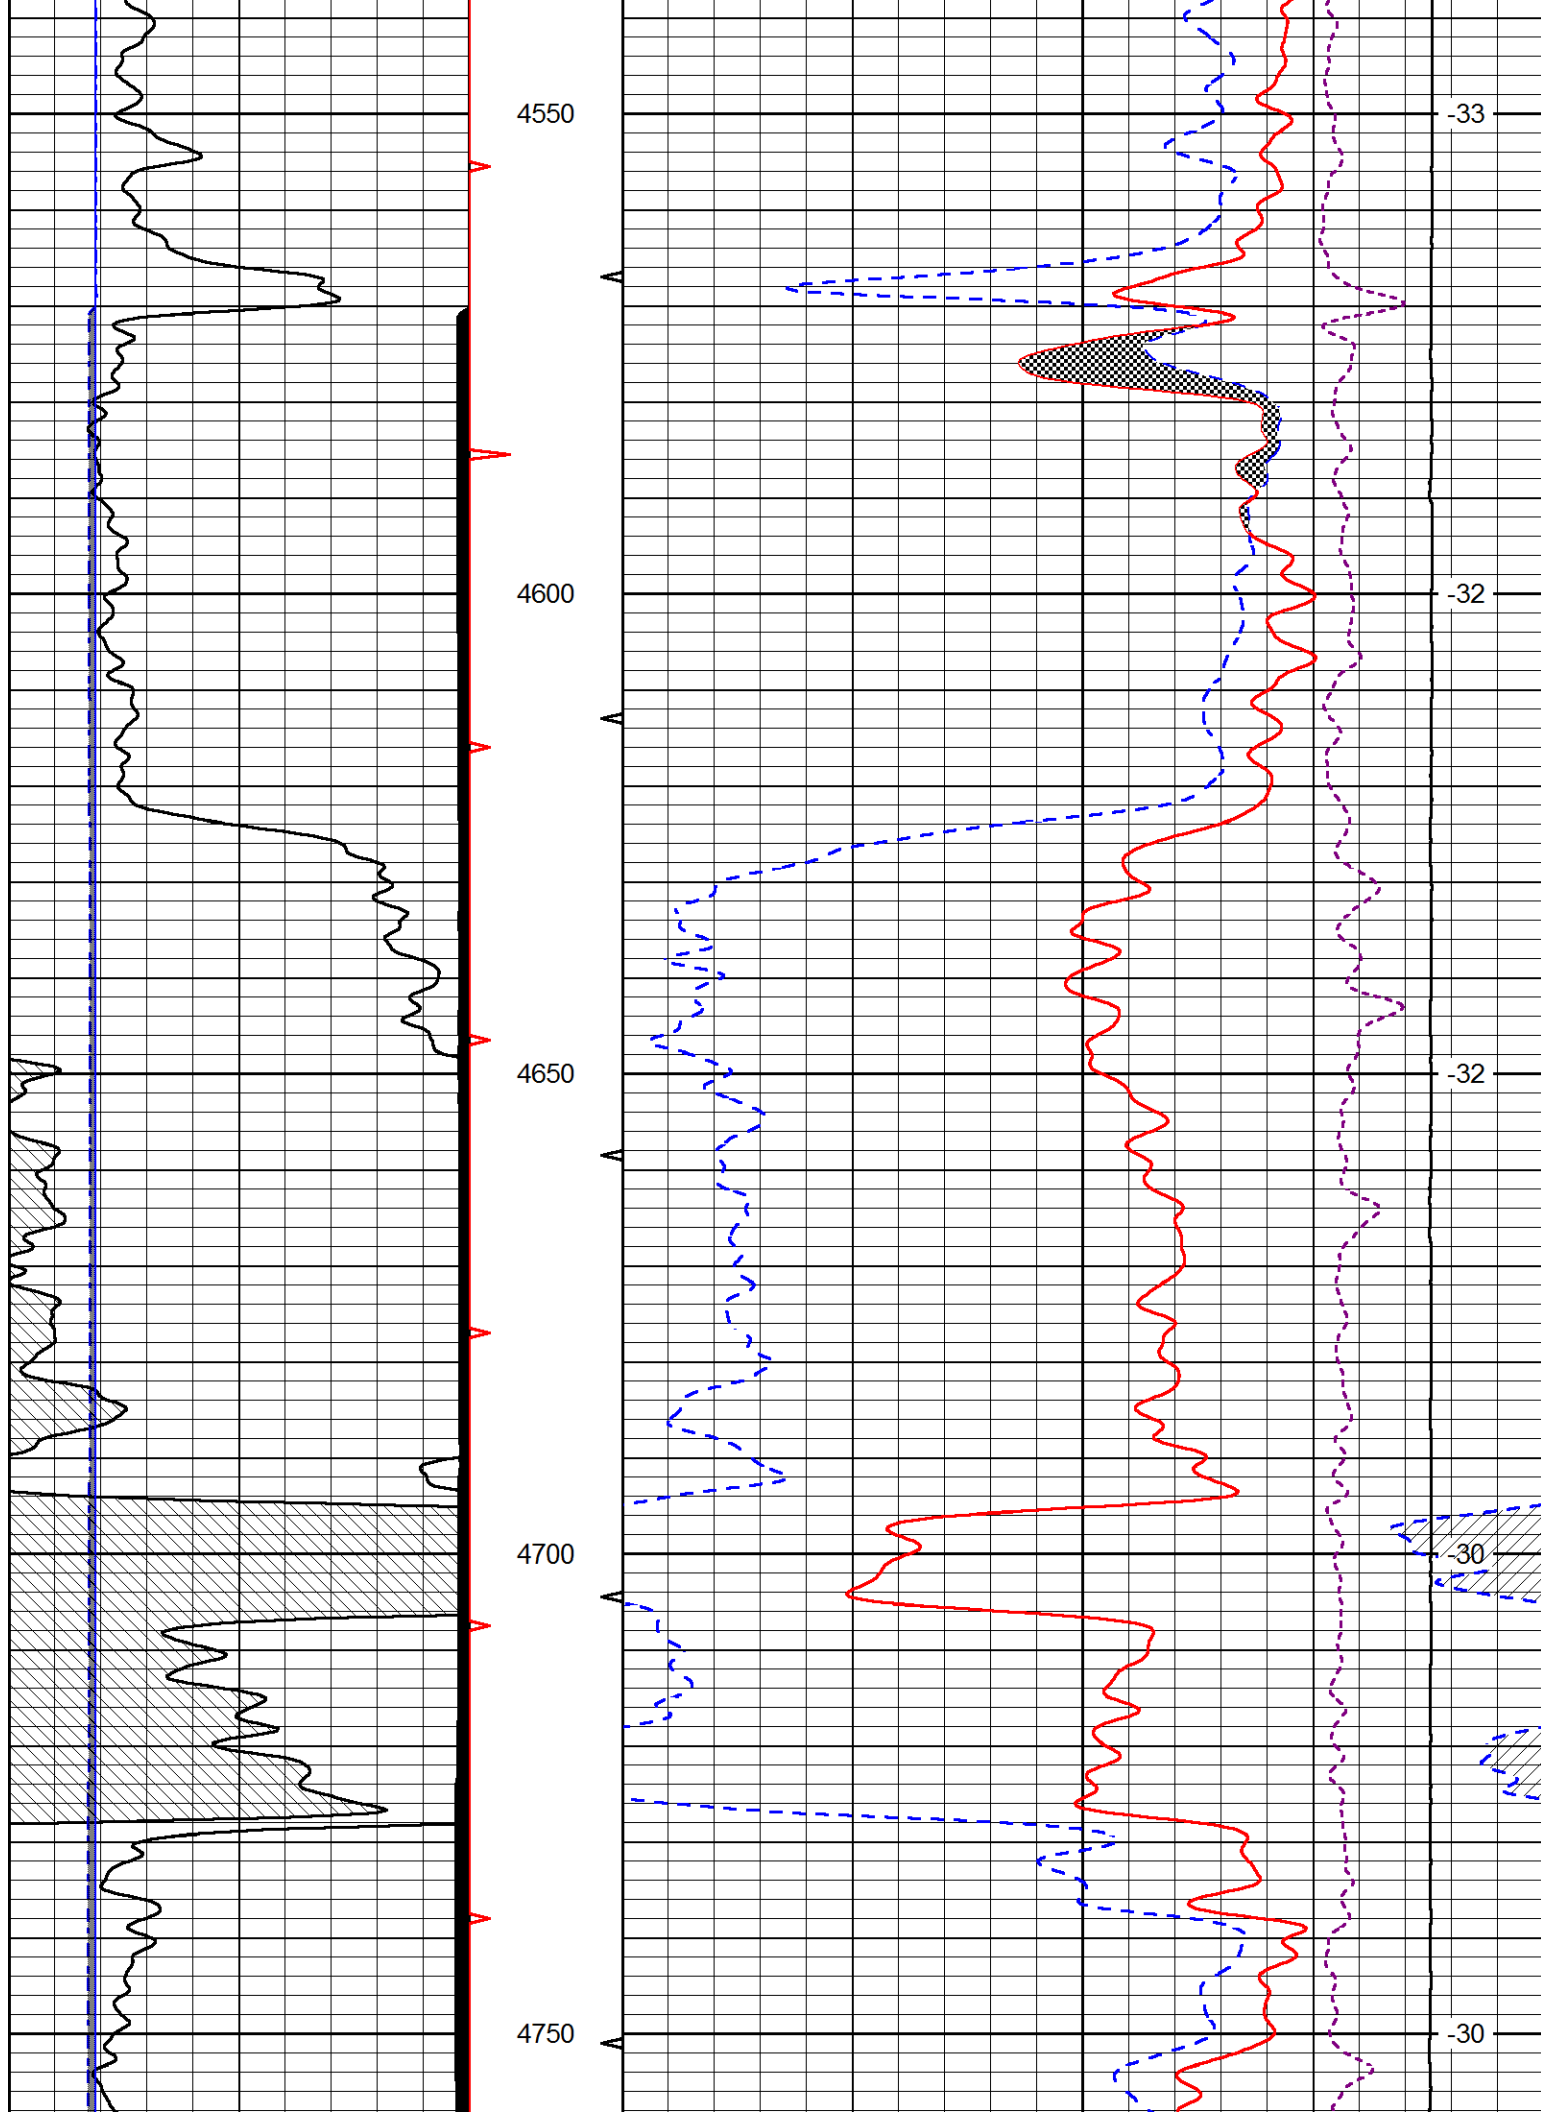


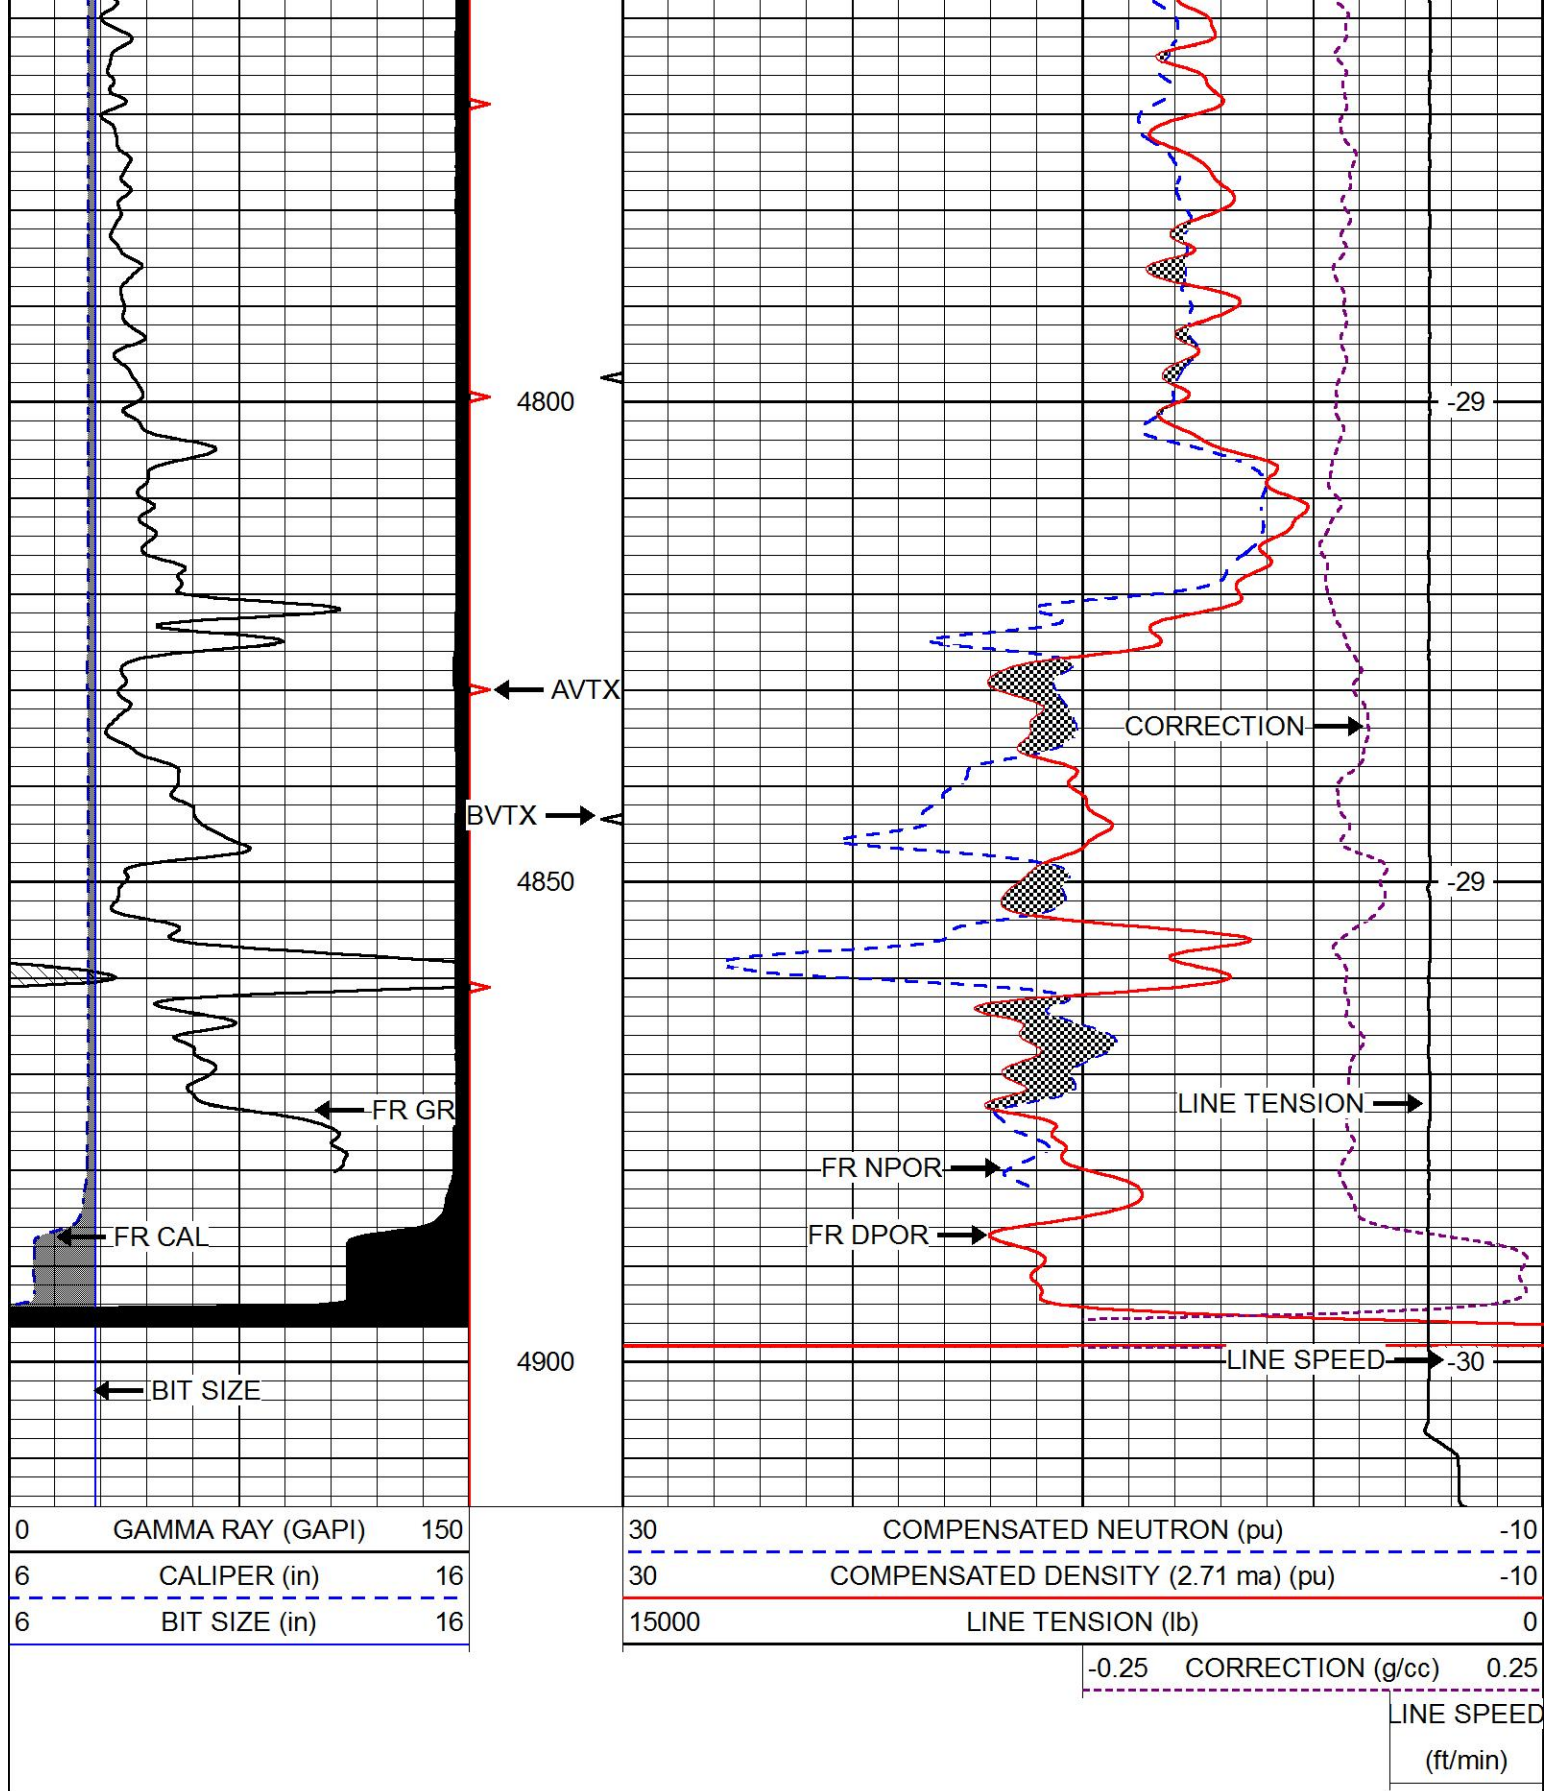




REPEAT SECTION

0	GAMMA RAY (GAPI)	150	30	COMPENSATED NEUTRON (pu)	-10
6	CALIPER (in)	16	30	COMPENSATED DENSITY (2.71 ma) (pu)	-10
6	BIT SIZE (in)	16	15000	LINE TENSION (lb)	0
			-0.25	CORRECTION (g/cc)	0.25
			LINE SPEED		
			(ft/min)		

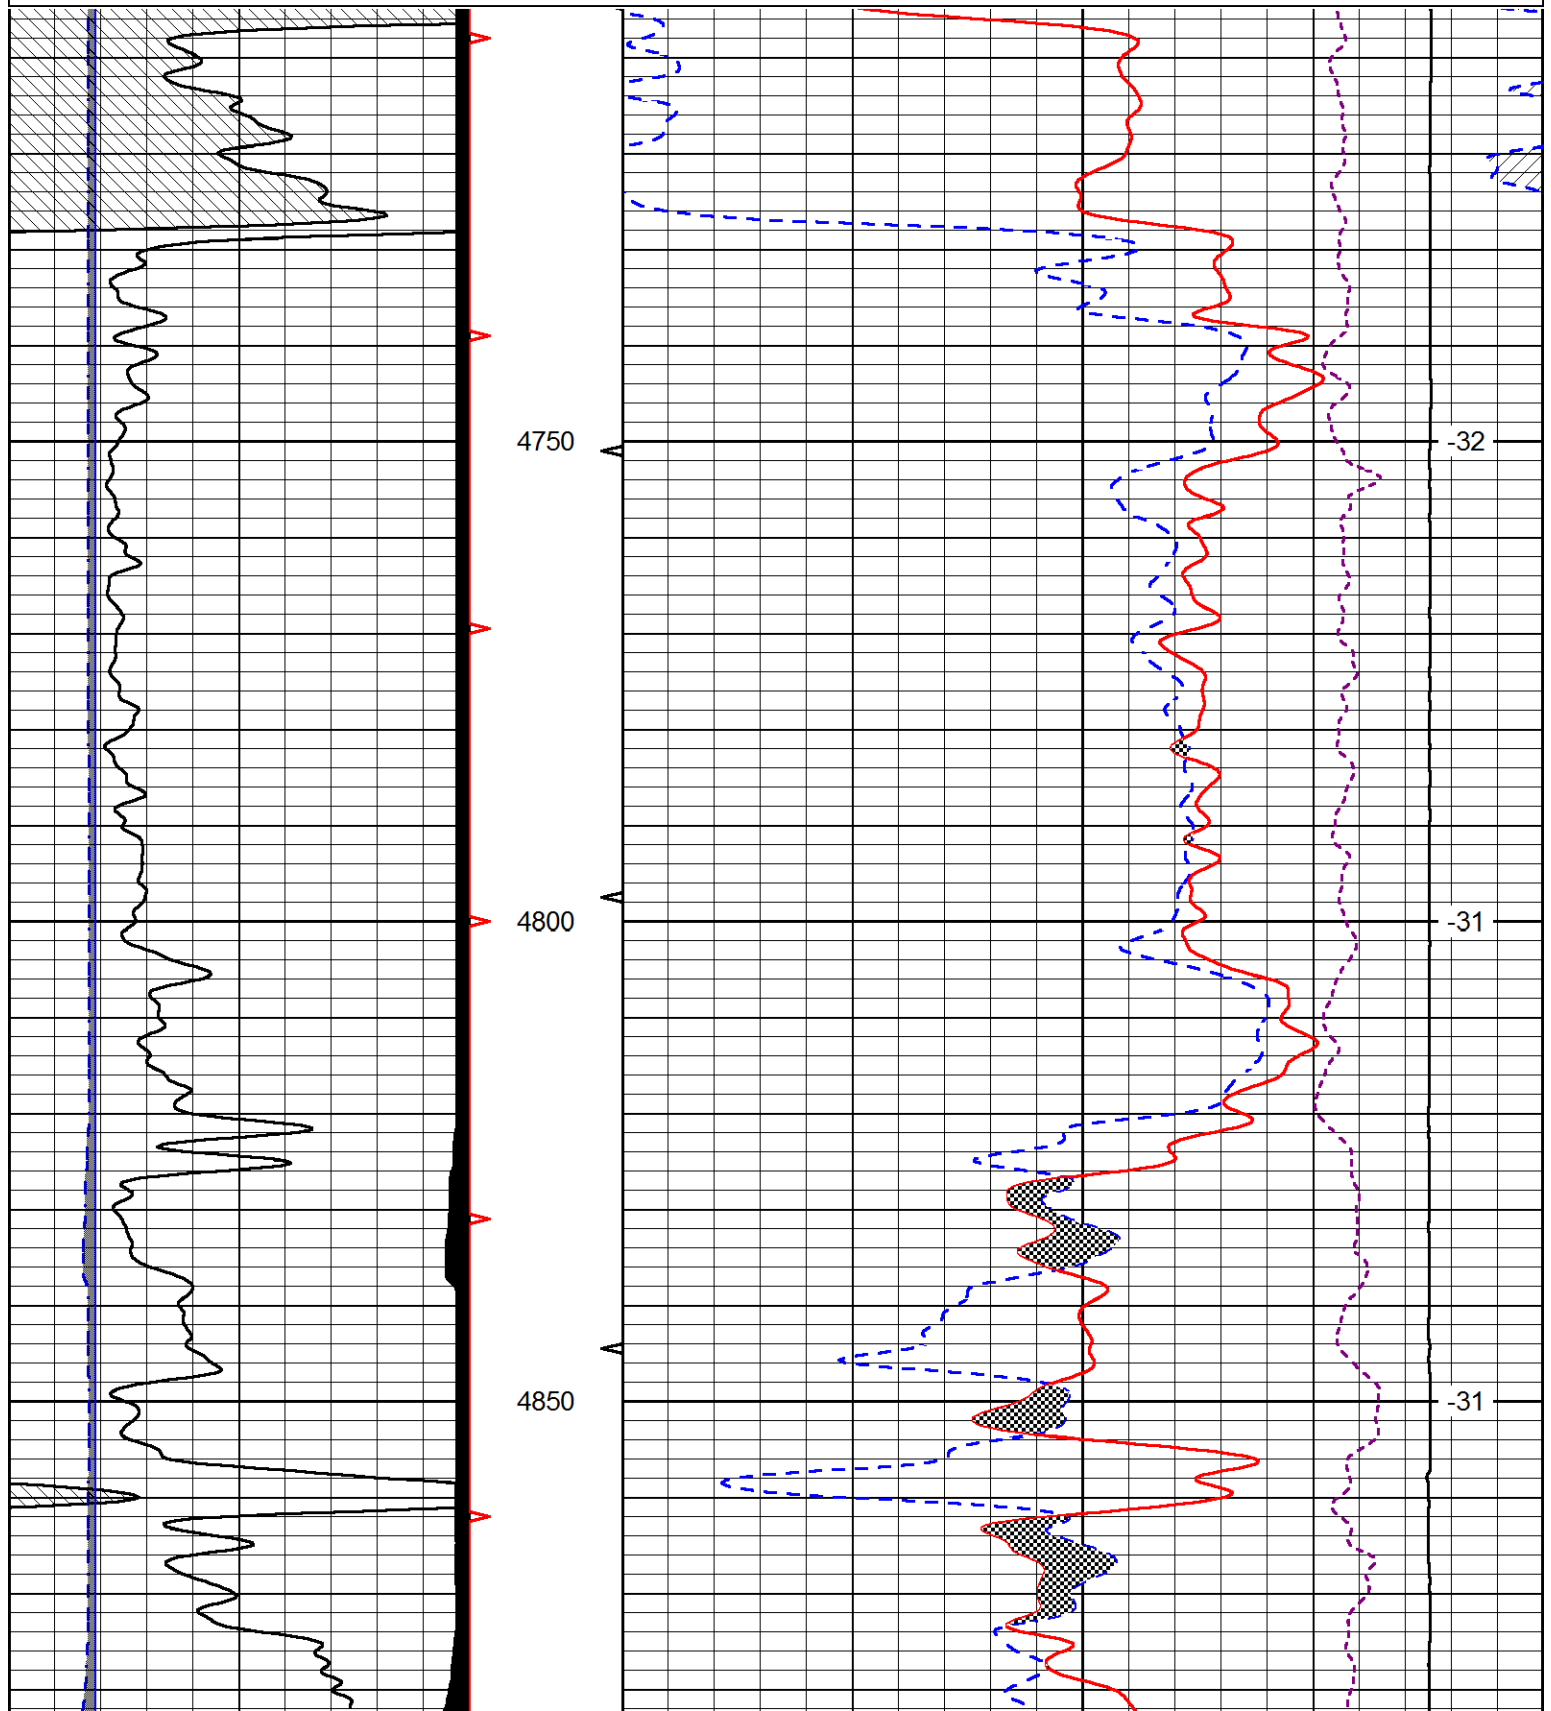

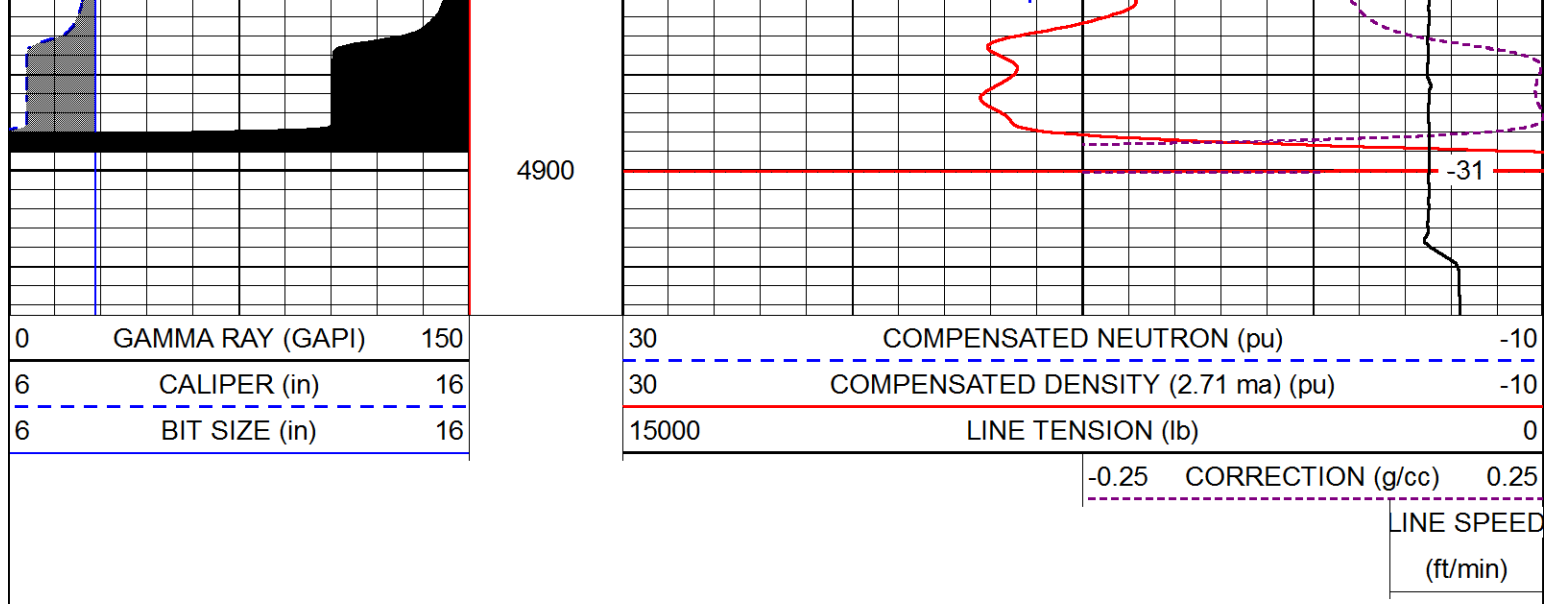

Calibration Report							
Database File	charlesngriffin_jazmyne_1.db						
Dataset Pathname	stack/pass3.1						
Dataset Creation	Thu May 12 16:20:38 2016						
Dual Induction Calibration Report							
Serial-Model:				1987-M&W			
Calibration Performed:				Thu May 05 13:07:05 2016			
		Readings		References		Results	
Loop:	Air	Loop		Air	Loop	Gain	Offset
Deep	178.615	710.235		0.000	255.800 mmho/m	0.530	-37.500
Medium	161.982	1441.110		0.000	255.800 mmho/m	0.440	-111.500
Compensated Density Calibration Report							
Serial-Model:				71-914-M&W			
Source / Verifier:				/			
Master Calibration Performed:				Thu Mar 31 16:30:19 2016			
Master Calibration							
		Density		Far Detector		Near Detector	
Magnesium		1.755 g/cc		4314.49		5307.52 cps	
Aluminum		2.670 g/cc		822.19		3456.36 cps	
Spine Angle = 75.49				Density/Spine Ratio = 0.534			
		Size		Reading			
Small Ring		4.00 in		1.16			
Large Ring		14.00 in		1.57			
Compensated Neutron Calibration Report							
Serial Number:				tk10-MW			
Tool Model:				M&W			
Calibration Performed:				Wed May 4 11:04:05 2016			

Detector	Readings	Target	Normalization
Short Space	6240.00 cps	1000.00 cps	1.6025
Long Space	460.00 cps	1000.00 cps	1.9500
Gamma Ray Calibration Report			
Serial Number:	89-M&W		
Tool Model:	M&W		
Calibration Performed:	Thu Mar 31 15:29:33 2016		
Calibrator Value:	1000.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	6.2	cps	
Sensitivity:	0.5200	GAPI/cps	

 PIONEER Pioneer Energy Services	Company	CHARLES N. GRIFFIN
	Well	JAZMYNE NO. 1
	Field	TONI-MIKE
	County	BARBER
	State	KANSAS