

#4

API NUMBER 15-163-20,035 -00-00

LEASE NAME Bird

WELL NUMBER 14

4785 Ft. from S Section Line

2640 Ft. from E Section Line

SEC. 30 TWP. 8s RGE. 17 (E) or (W)

COUNTY Rooks

Date Well Completed 7/28/1967

Plugging Commenced 10:00 A.M. 7/23/92

Plugging Completed 12:00 P.M. 7/23/92

TYPE OR PRINT  
 NOTICE: Fill out completely  
 and return to Cons. Div.  
 office within 30 days.

LEASE OPERATOR The Dane G. Hansen Trust

ADDRESS P. O. Box 187, Logan, Kansas 67646

PHONE#(913) 689-4816 OPERATORS LICENSE NO. 5285

Character of Well Oil

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on July 23, 1992 (date)

by Dennis Hamel (KCC District Agent's Name).

Is ACO-1 filed? \_\_\_\_\_ If not, Is well log attached? Yes

Producing Formation LKC Depth to Top \_\_\_\_\_ Bottom T.D. 3409  
3421 DDTD

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8 5/8"	185'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from    feet to    feet each set.  
Tubing to 1330'. Cir. cement to surface w/150 sx cement, 400% hulls.  
Squeeze 30 sx down annulua, 150 sx down 4 1/2" casing. Inj. rate 300%.  
Shut in PSI 100%.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Allied Cementing Co., Inc. License No. \_\_\_\_\_

Address P. O. Box 31, Russell, Kansas 67665

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: The Dane G. Hansen Trust

STATE OF Kansas COUNTY OF Phillips, ss.

Dane G. Bales, Manager (Employee of Operator) or (Operator) of above-described well, being first July sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Dane G. Bales

(Address) P. O. Box 187, Logan, Kansas 67646


SUBSCRIBED AND SWORN TO before me this 18 day of August, 19 92

Betty Jane Bittel  
 Betty Jane Bittel Notary Public

My Commission Expires: July 17, 1996.

RECEIVED  
 STATE CORPORATION COMMISSION

AUG 19 1992  
 8-19-92



WELL LOG

15-163-20035-00-00

OPERATOR: DANE G HANSEN TR

WELL NAME: BIRD #14 LOCATION: S $\frac{1}{2}$  N $\frac{1}{2}$  N $\frac{1}{2}$  SEC 30-8-17W

COUNTY: ROOKS STATE: KANSAS

WELL COMMENCED: 7/10/67 WELL COMPLETED: 7/28/67

ELEVATION: 1983 KB TOTAL DEPTH: 3409'

PRODUCTION: PRODUCING RIG NO: 1

CASING - 8-5/8": 9 jts 185.44' W/135 sacks cement + 2 sx ca. cl.

~~XXXX~~: 4 $\frac{1}{2}$ " 106 jts 3409.49 Set 8' off bottom at 3401'  
Cement W/175 salt sat. pozmix

All Measurements taken from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
185	295	SHALE	3/4°	500'
295	830	SHALE	1/2°	1500'
830	1000 S	SAND	1 1/4°	2500'
1000	1281	SHALE & RED BED	1 1/4°	2780'
1281	1304	RED BED	1°	3025'
1304	1341	ANHYDRITE		
1341	1680	SHALE & SHELLS		
1680	1915	SHELLS & LIME		
1915	2985	LIME		
2985	3075	LIME & SHALE		
3075	3405	LIME		


STATE OF KANSAS  
 COUNTY OF SEDGWICK) SS:

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By G F Galloway  
 G F GALLOWAY

SUBSCRIBED AND SWORN TO, BEFORE ME, This 8th day of AUGUST, 1967.

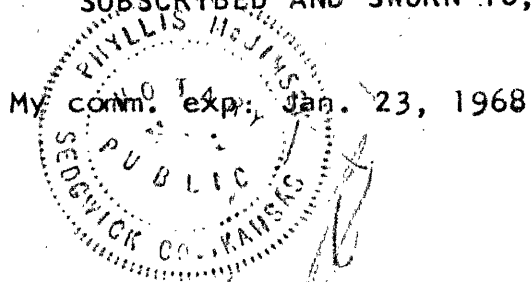

Phyllis McJimsey  
 Phyllis McJimsey ---Notary Public

RECEIVED  
 STATE CORPORATION COMMISSION  
 8-19-1992  
 AUG 19 1992