


Jan 21
**STATE OF KANSAS
STATE CORPORATION COMMISSION**

NORTH

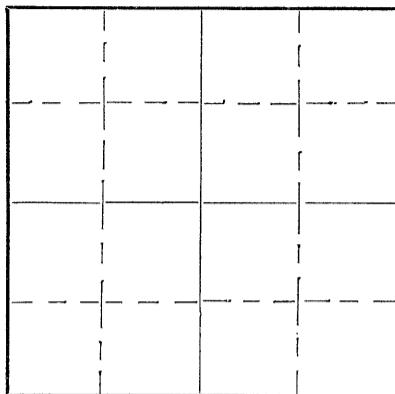

**Locate well correctly on above
Section Plat**

Name of Conservation Agent who supervised plugging of this well **Mr. C.T. Alexander**
Producing formation **Arbuckle Lime** Depth to top **3453'** Bottom **3485'** Total Depth of Well **3485'** Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Hole filled w/ mud laden fluid from 3485', TD., to 300'. Filled w/ 23 sax cement from 300' to 273'. Filled w/ mud laden fluid from 273' to 26', and filled w/ 7 sax cement from 26' to cellar.

30 8 17W
50 38

9-26-42

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Box 779, Great Bend, Kansas.

STATE OF **KANSAS**, COUNTY OF **BARTON**, ss.
F.W. SHELTON (employee of owner) or (owner or employee)

..... (employee or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. *[Signature]*

(Signature).

BOX 779, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this **25th**, day of **September**, **1842**.

My commission expires **March 27, 1946**

18-357

Notary Public.

15-163-63655-06-00

Form No. 875

Formation Record

Lease #1810

Well No. 015

FROM	TO	Formation	REMARKS
0	40	Sand rock	
40	284	Shale and shells	
284	376	Shale and shells	
376	656	Sand, shale and shells	
656	705	Sand	
705	818	Sand, shale and pyrite	
818	848	Pyrite	
848	1020	Sand	
1020	1095	Shale and shells	
1095	1120	Hard sand	
1120	1309	Red bed and shale - Anhydrite	TOP ANHYDRITE 1290'.
1309	1388	Anhydrite	8-8/8" seg. @ 1303' w/ 500 max. cut.
1388	1649	Red bed and gray shale	
1649	1673	Shale and lime	
1673	2946	Shale and lime, shells.	
2946	2994	Lime	
2994	3293	Lime	
3293	3366	Lime and shale	
3366	3411	Lime	
3411	3444	Sandy shale and sherty lime shells	
3444	3453	Shale and chert	
3453	3485	Lime Arbuckle	

TOP ARBUCKLE 3453. No shows.
 Plugged in accordance w/ instructions
 of Mr. C.P. Alexander, State plugging
 Inspector. PLUGGED 9-26-42.

9-26-42

30 8 17W
 50 38