



MICRO LOG

Company	BECKER OIL CORPORATION		
Well	LADENBERGER #2		
Field	CAMPUS SIDING NORTH		
County	THOMAS	State	KANSAS
Location:	APL # : 15-193-21019-0000 700' FSL & 600' FVL SE - NW - SW - SW		Other Services CDL/CNL/PE DIL
Permanent Datum	GROUND LEVEL	Elevation	2957
Log Measured From	KELLY BUSHING 5' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	5/4/18		
Run Number	TWO		
Depth Driller	4650		
Depth Logger	4646		
Bottom Logged Interval	4644		
Top Log Interval	3700		
Casing Driller	8 5/8"@260'		
Casing Logger	260		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,000 PPM	
Density / Viscosity	9.2/53		
pH / Fluid Loss	10.0/7.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.950@90F		
Rmf @ Meas. Temp	.713@90F		
Rmc @ Meas. Temp	1.14@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.701@122F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	9:30 P.M.		
Maximum Recorded Temperature	122F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CLYDE BECKER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
CAMPUS EXIT & I-70, 2N. TO "RD.EE", JOG E. OF CURVE THEN N. INTO




MAIN SECTION

Database File: 2490pe.db
Dataset Pathname: pass6.1
Presentation Format: micro
Dataset Creation: Fri May 04 22:00:44 2018 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

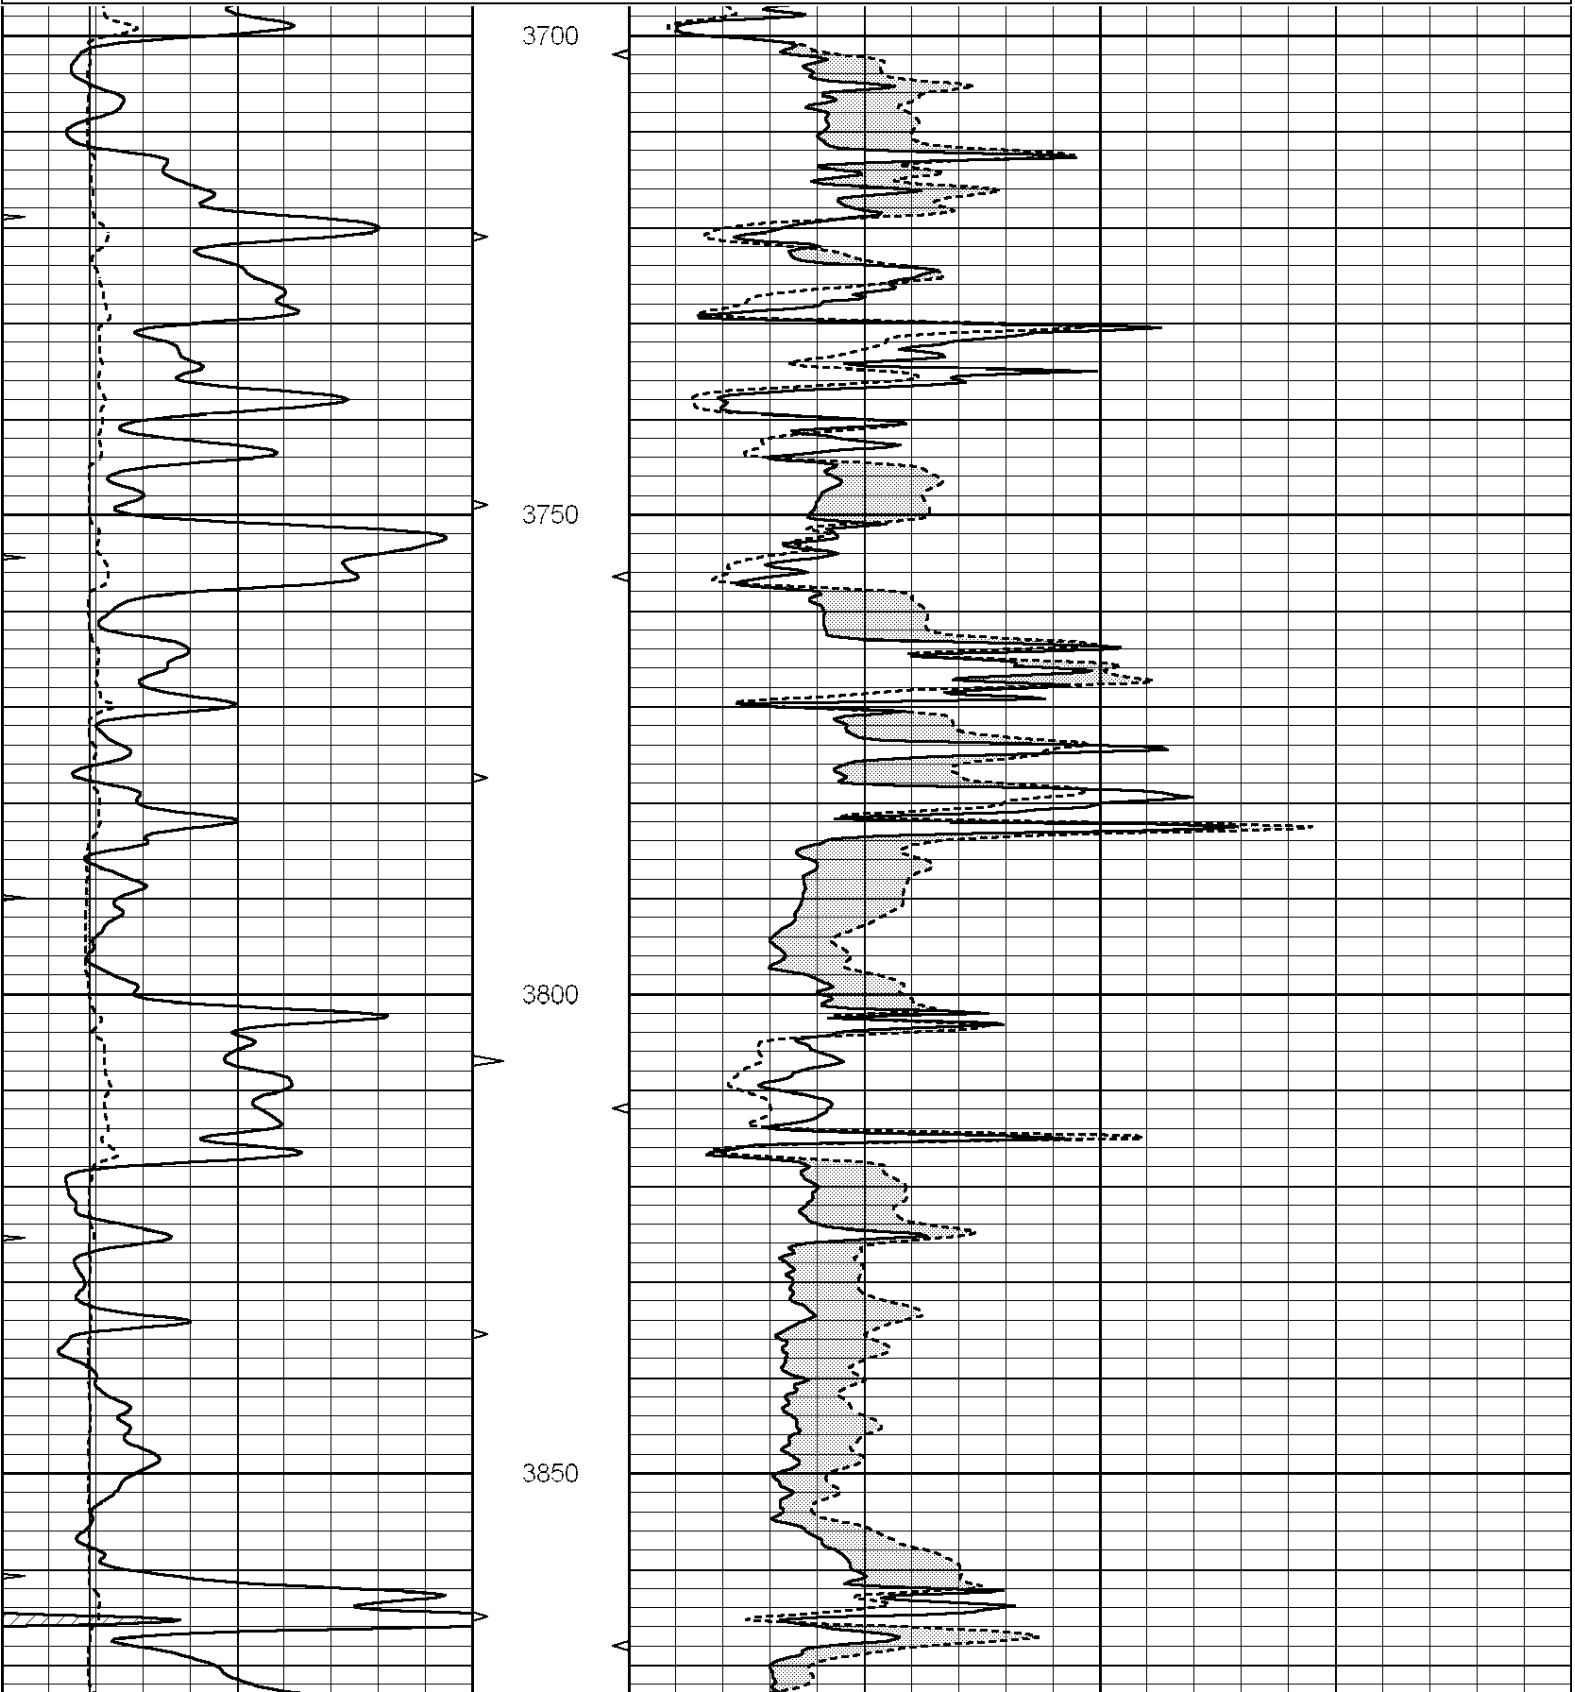

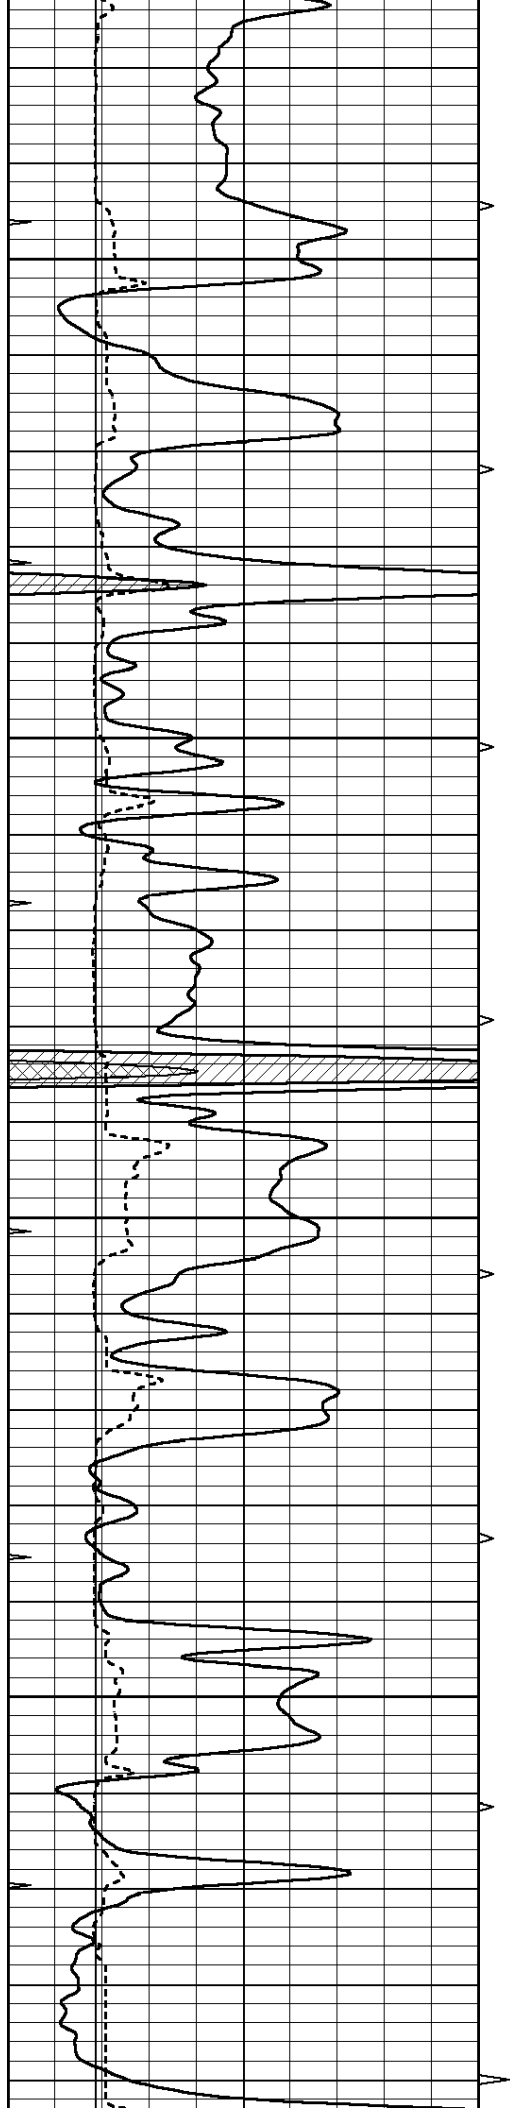



3900

3950

4000

4050

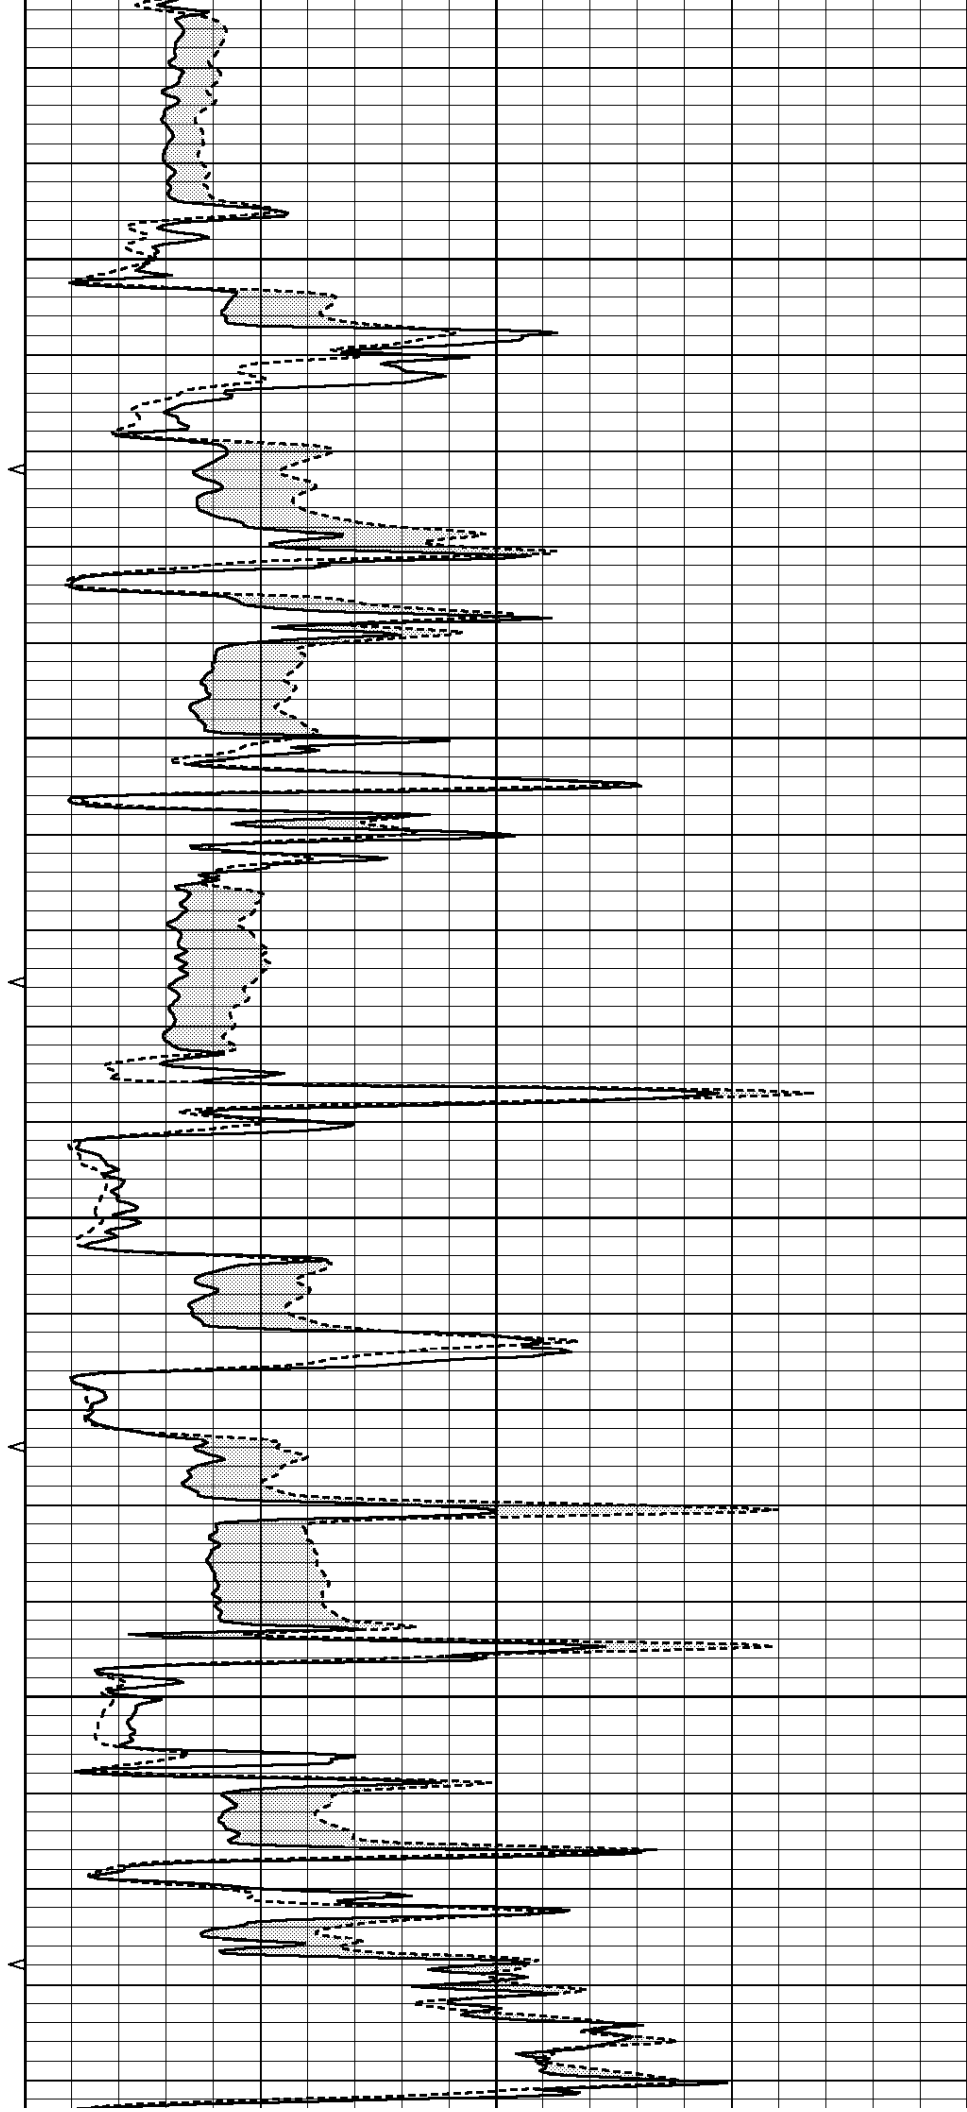

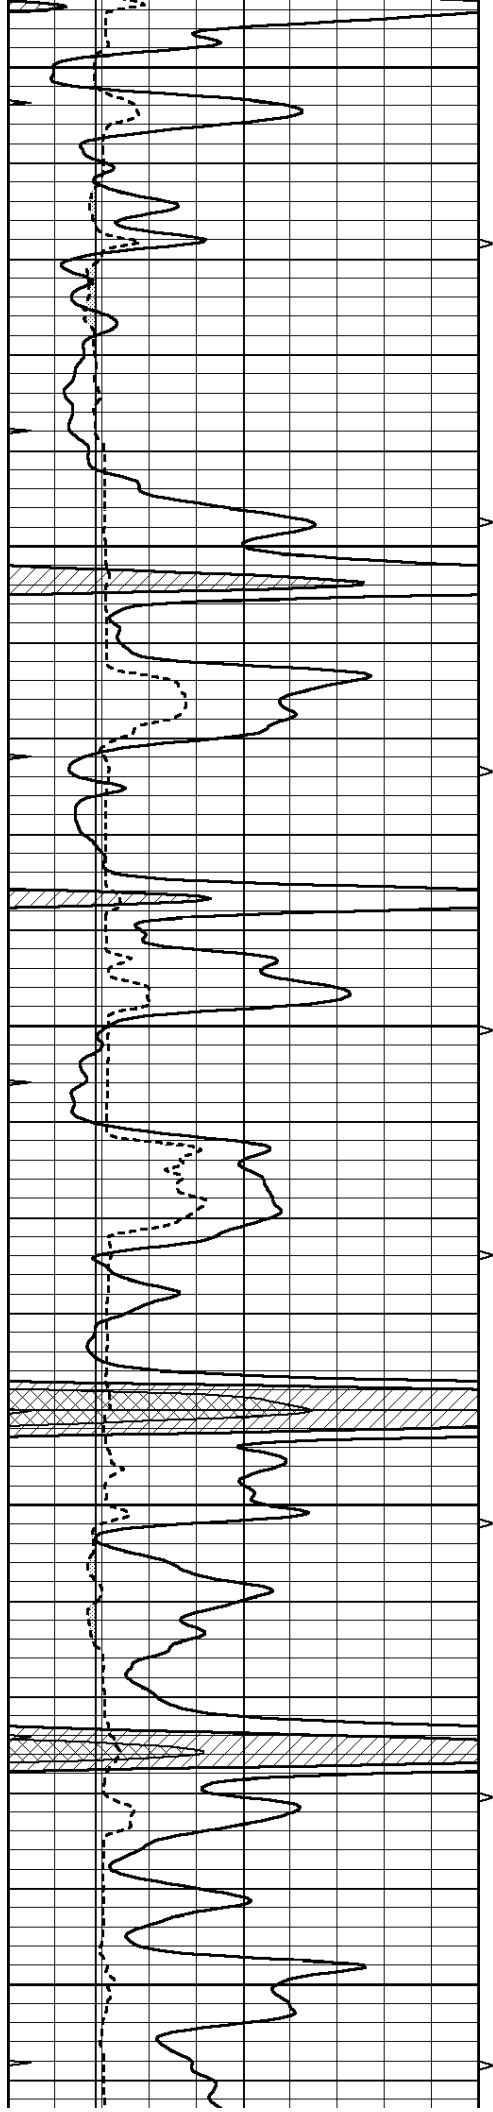


4100


4150

4200

4250

4300

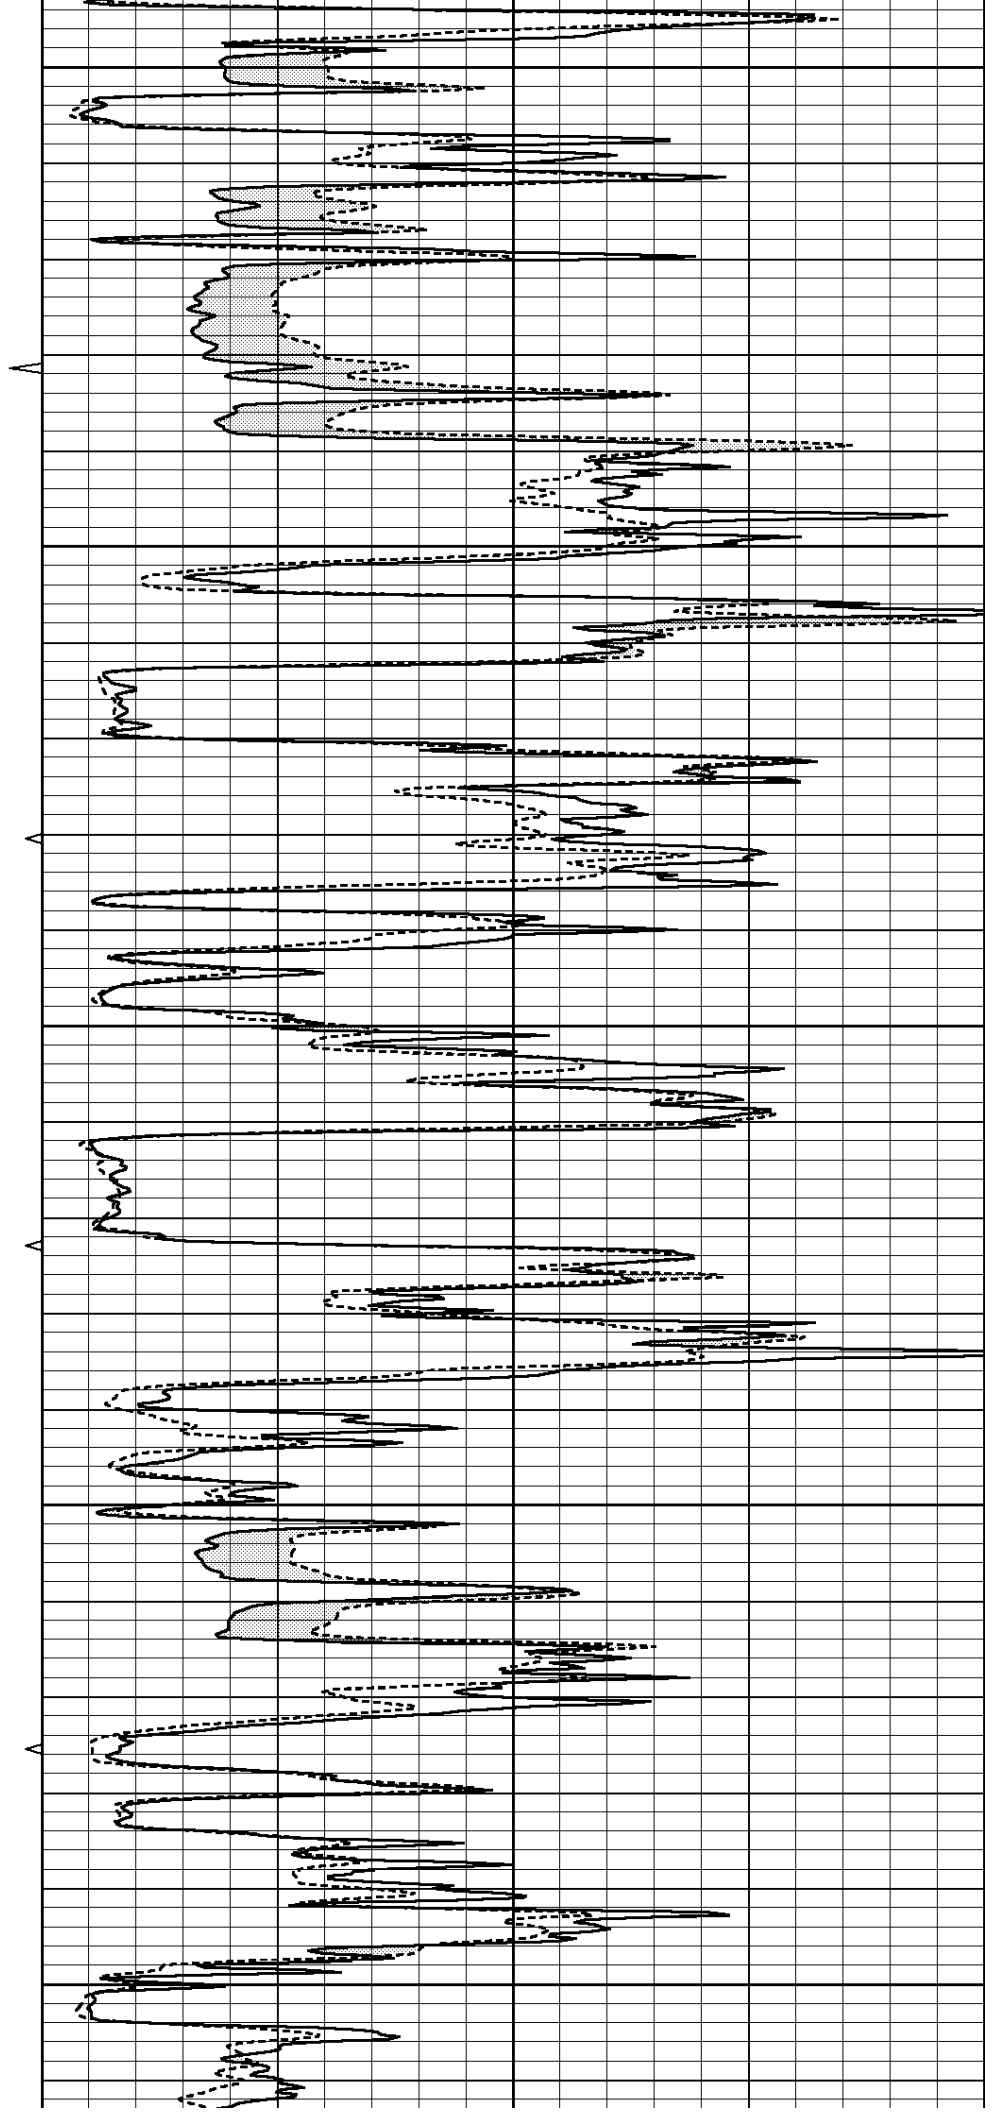

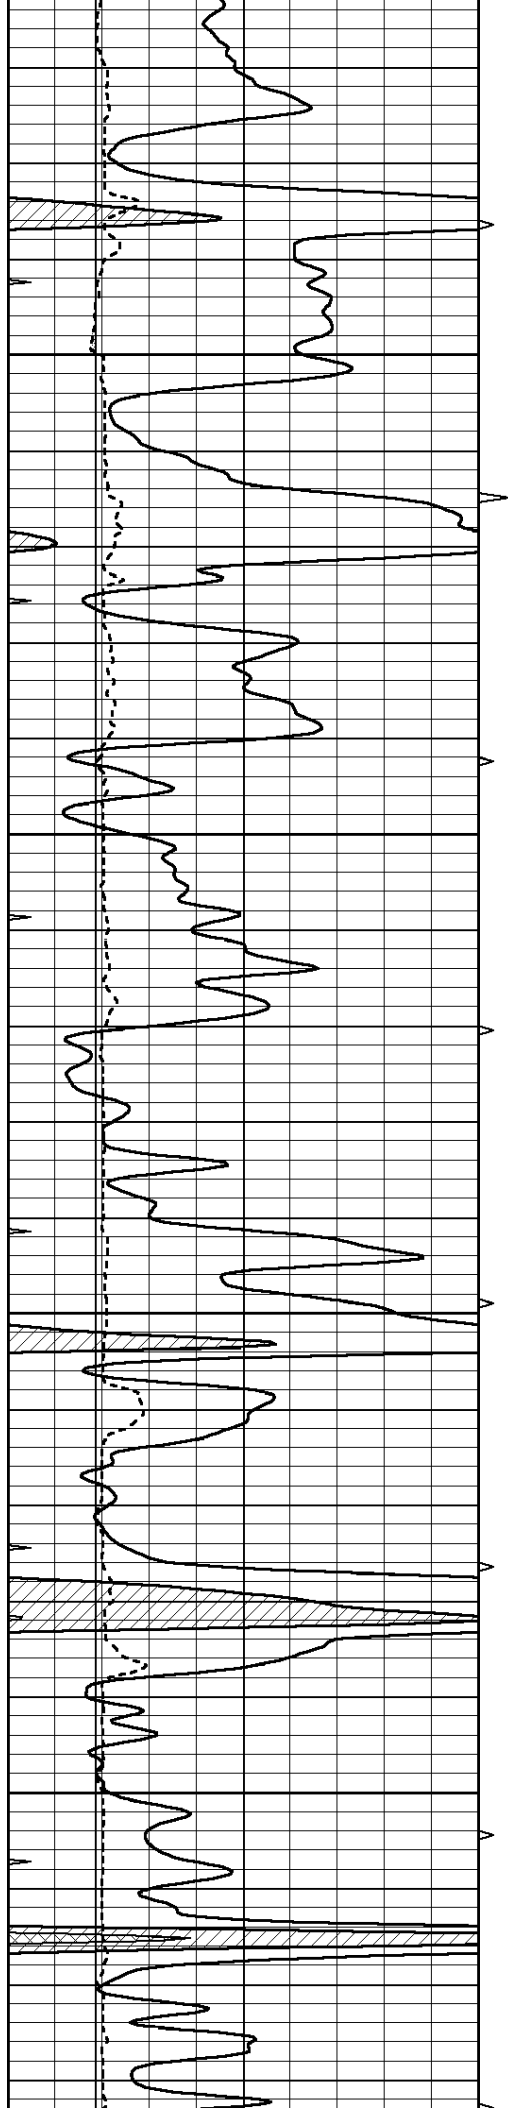




4350

4400

4450


4500

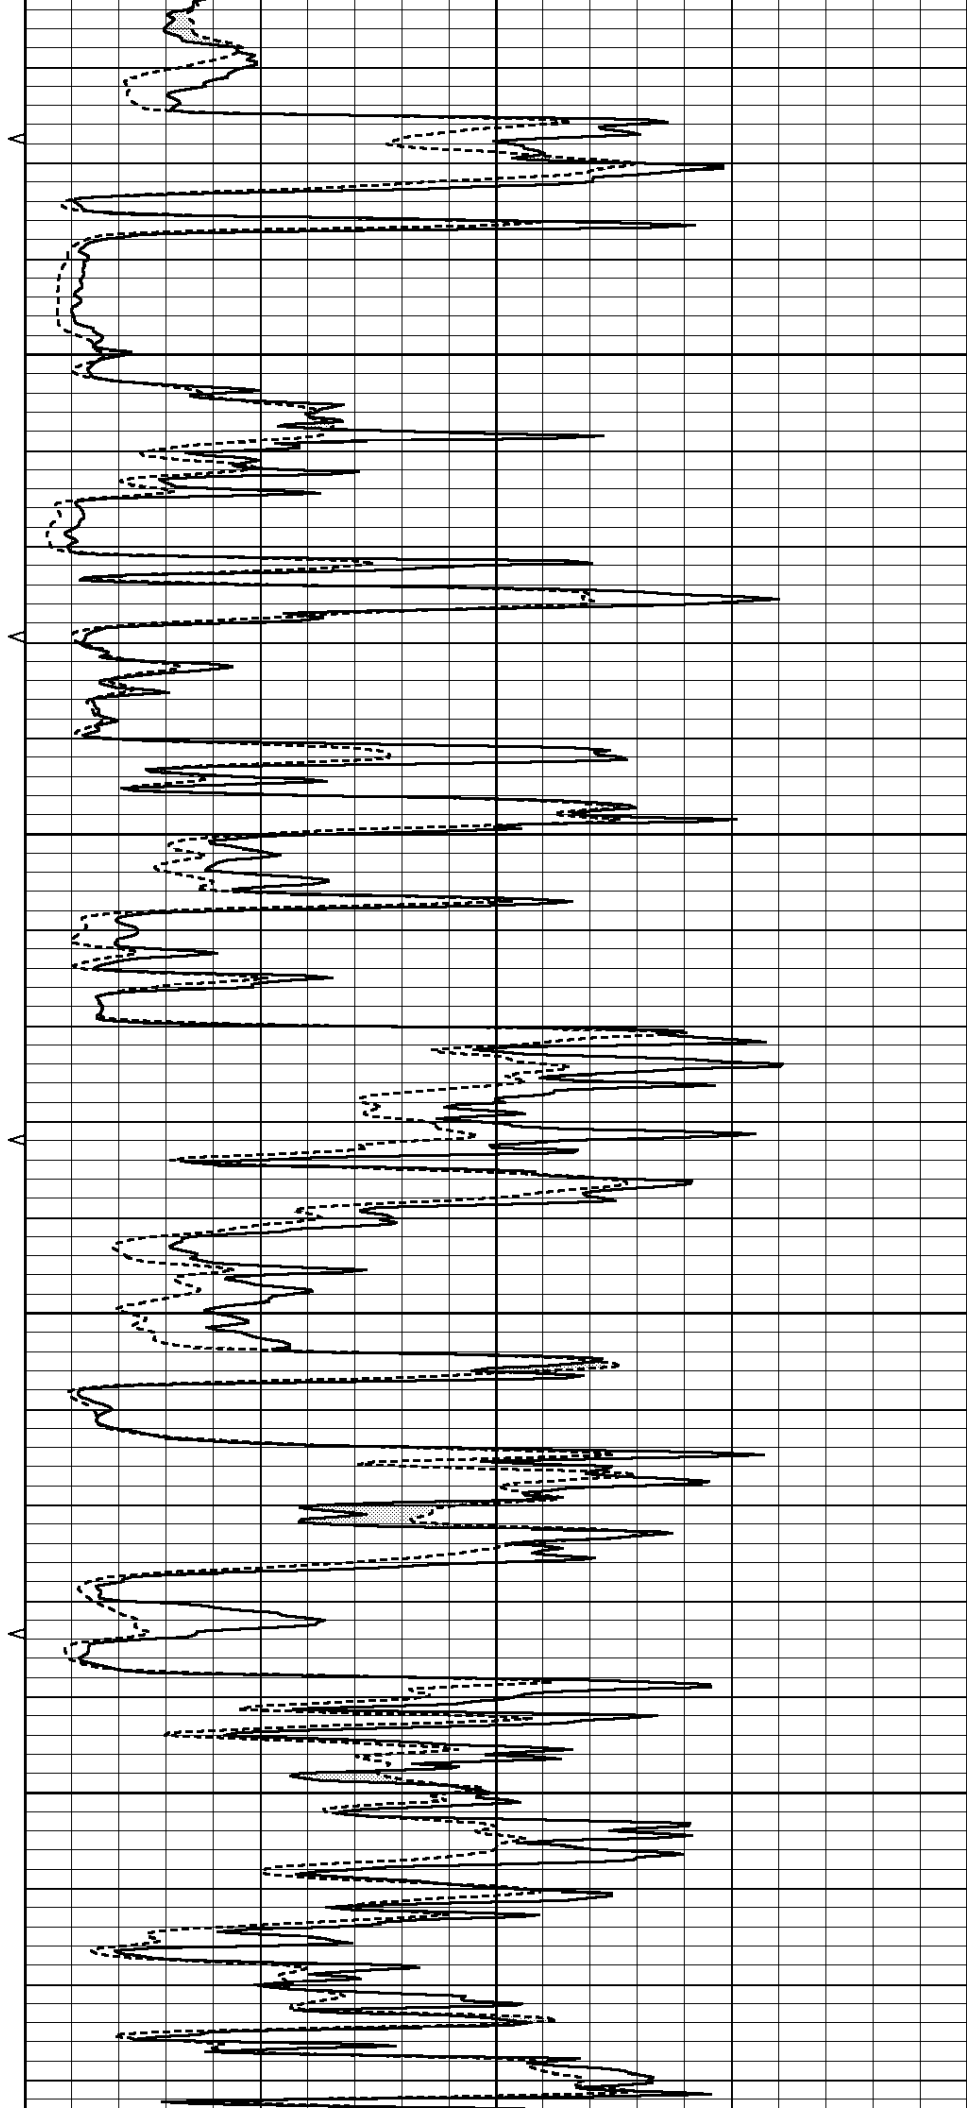


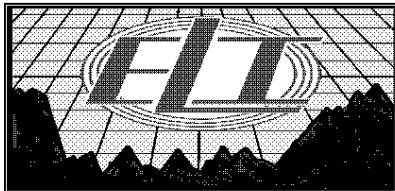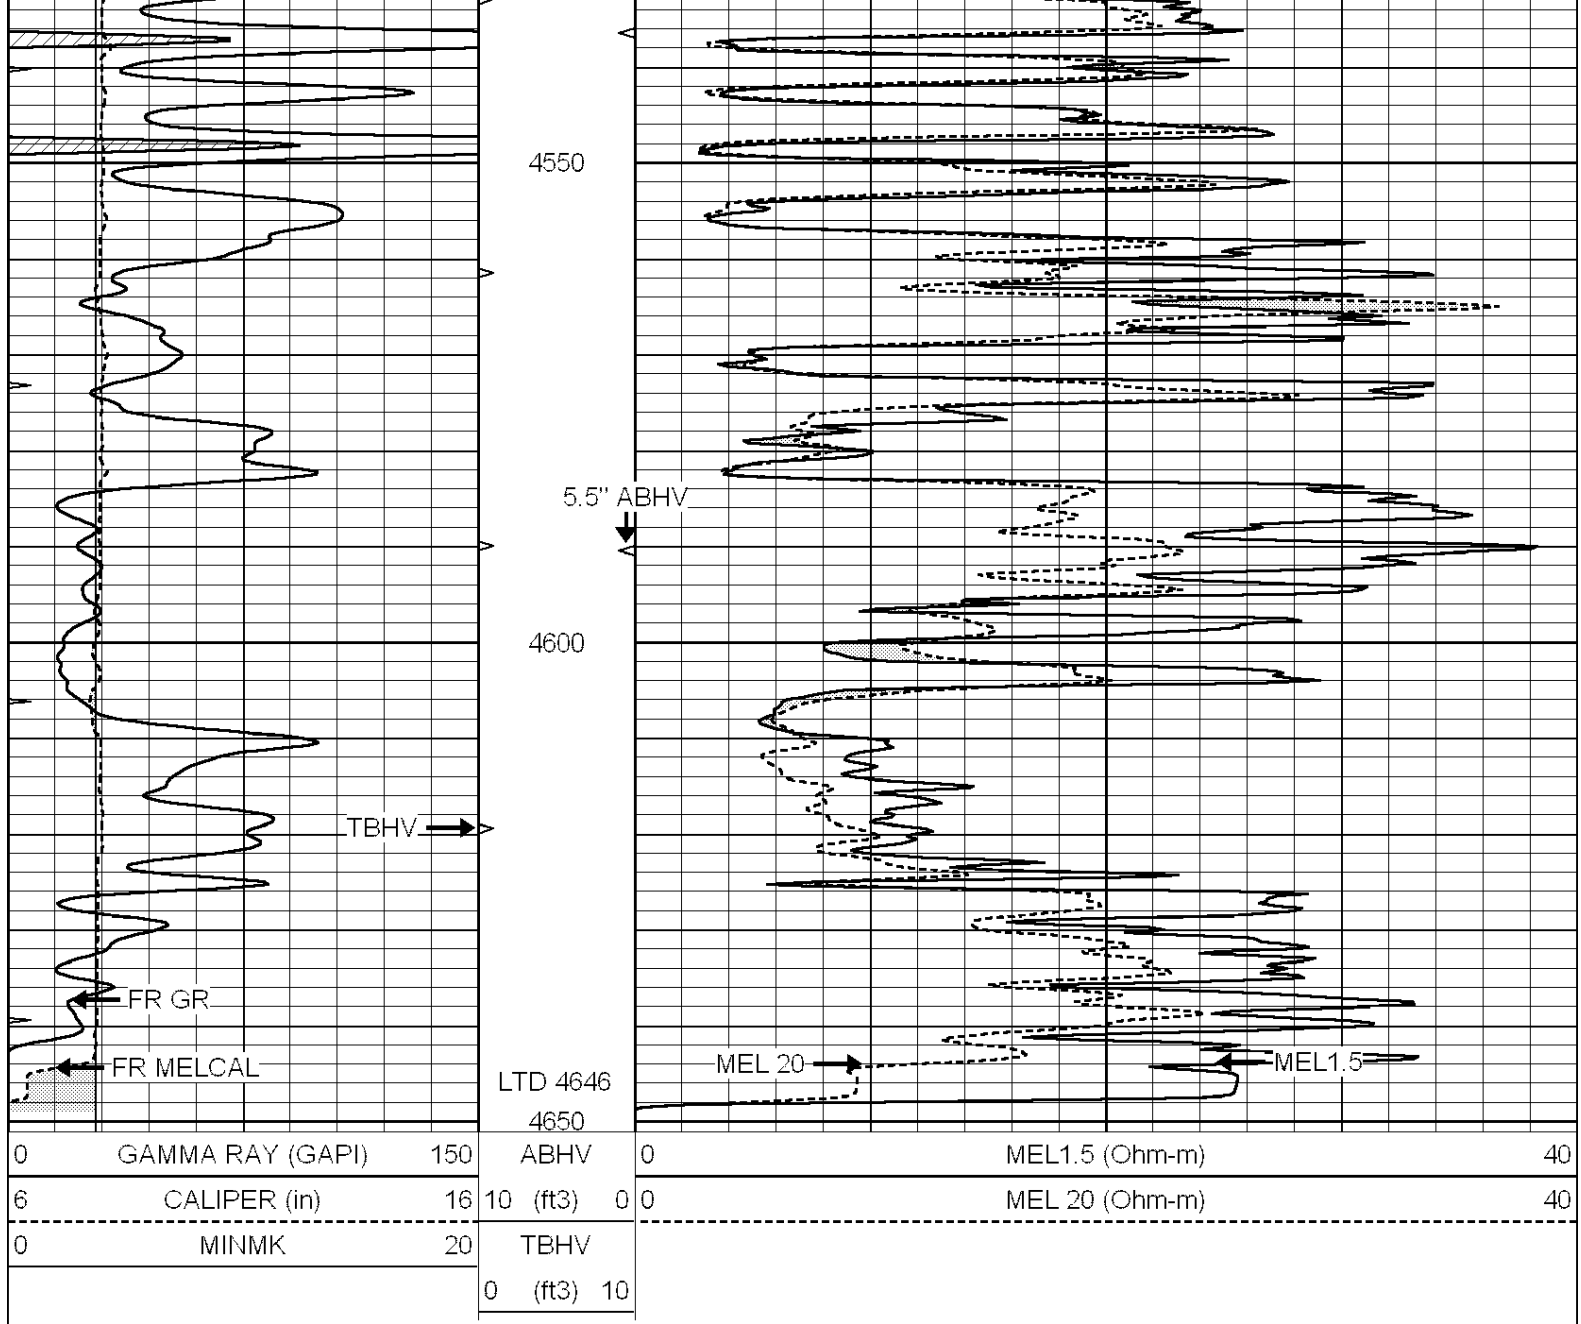

REPEAT SECTION

Database File: 2490pe.db
 Dataset Pathname: pass5.3
 Presentation Format: micro
 Dataset Creation: Fri May 04 21:57:04 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

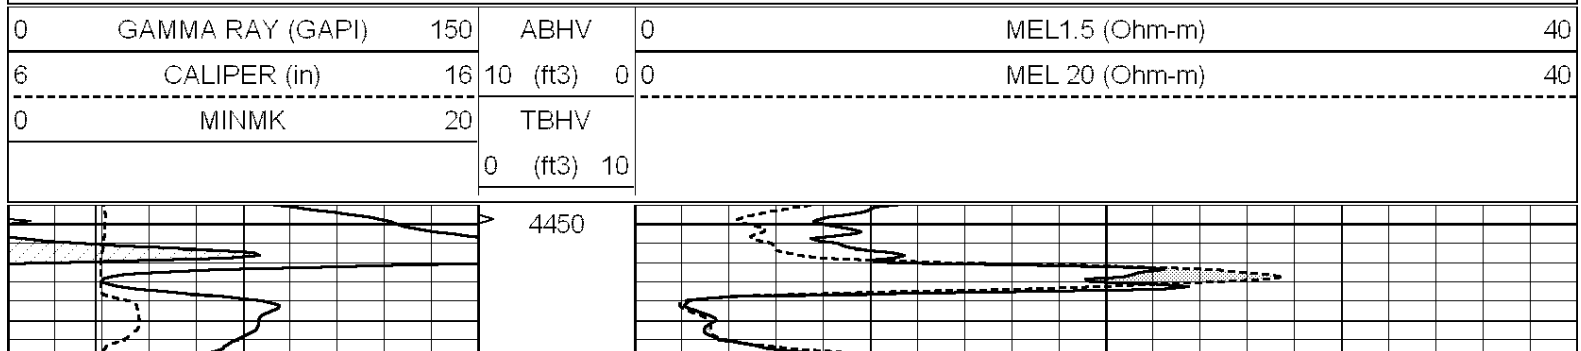

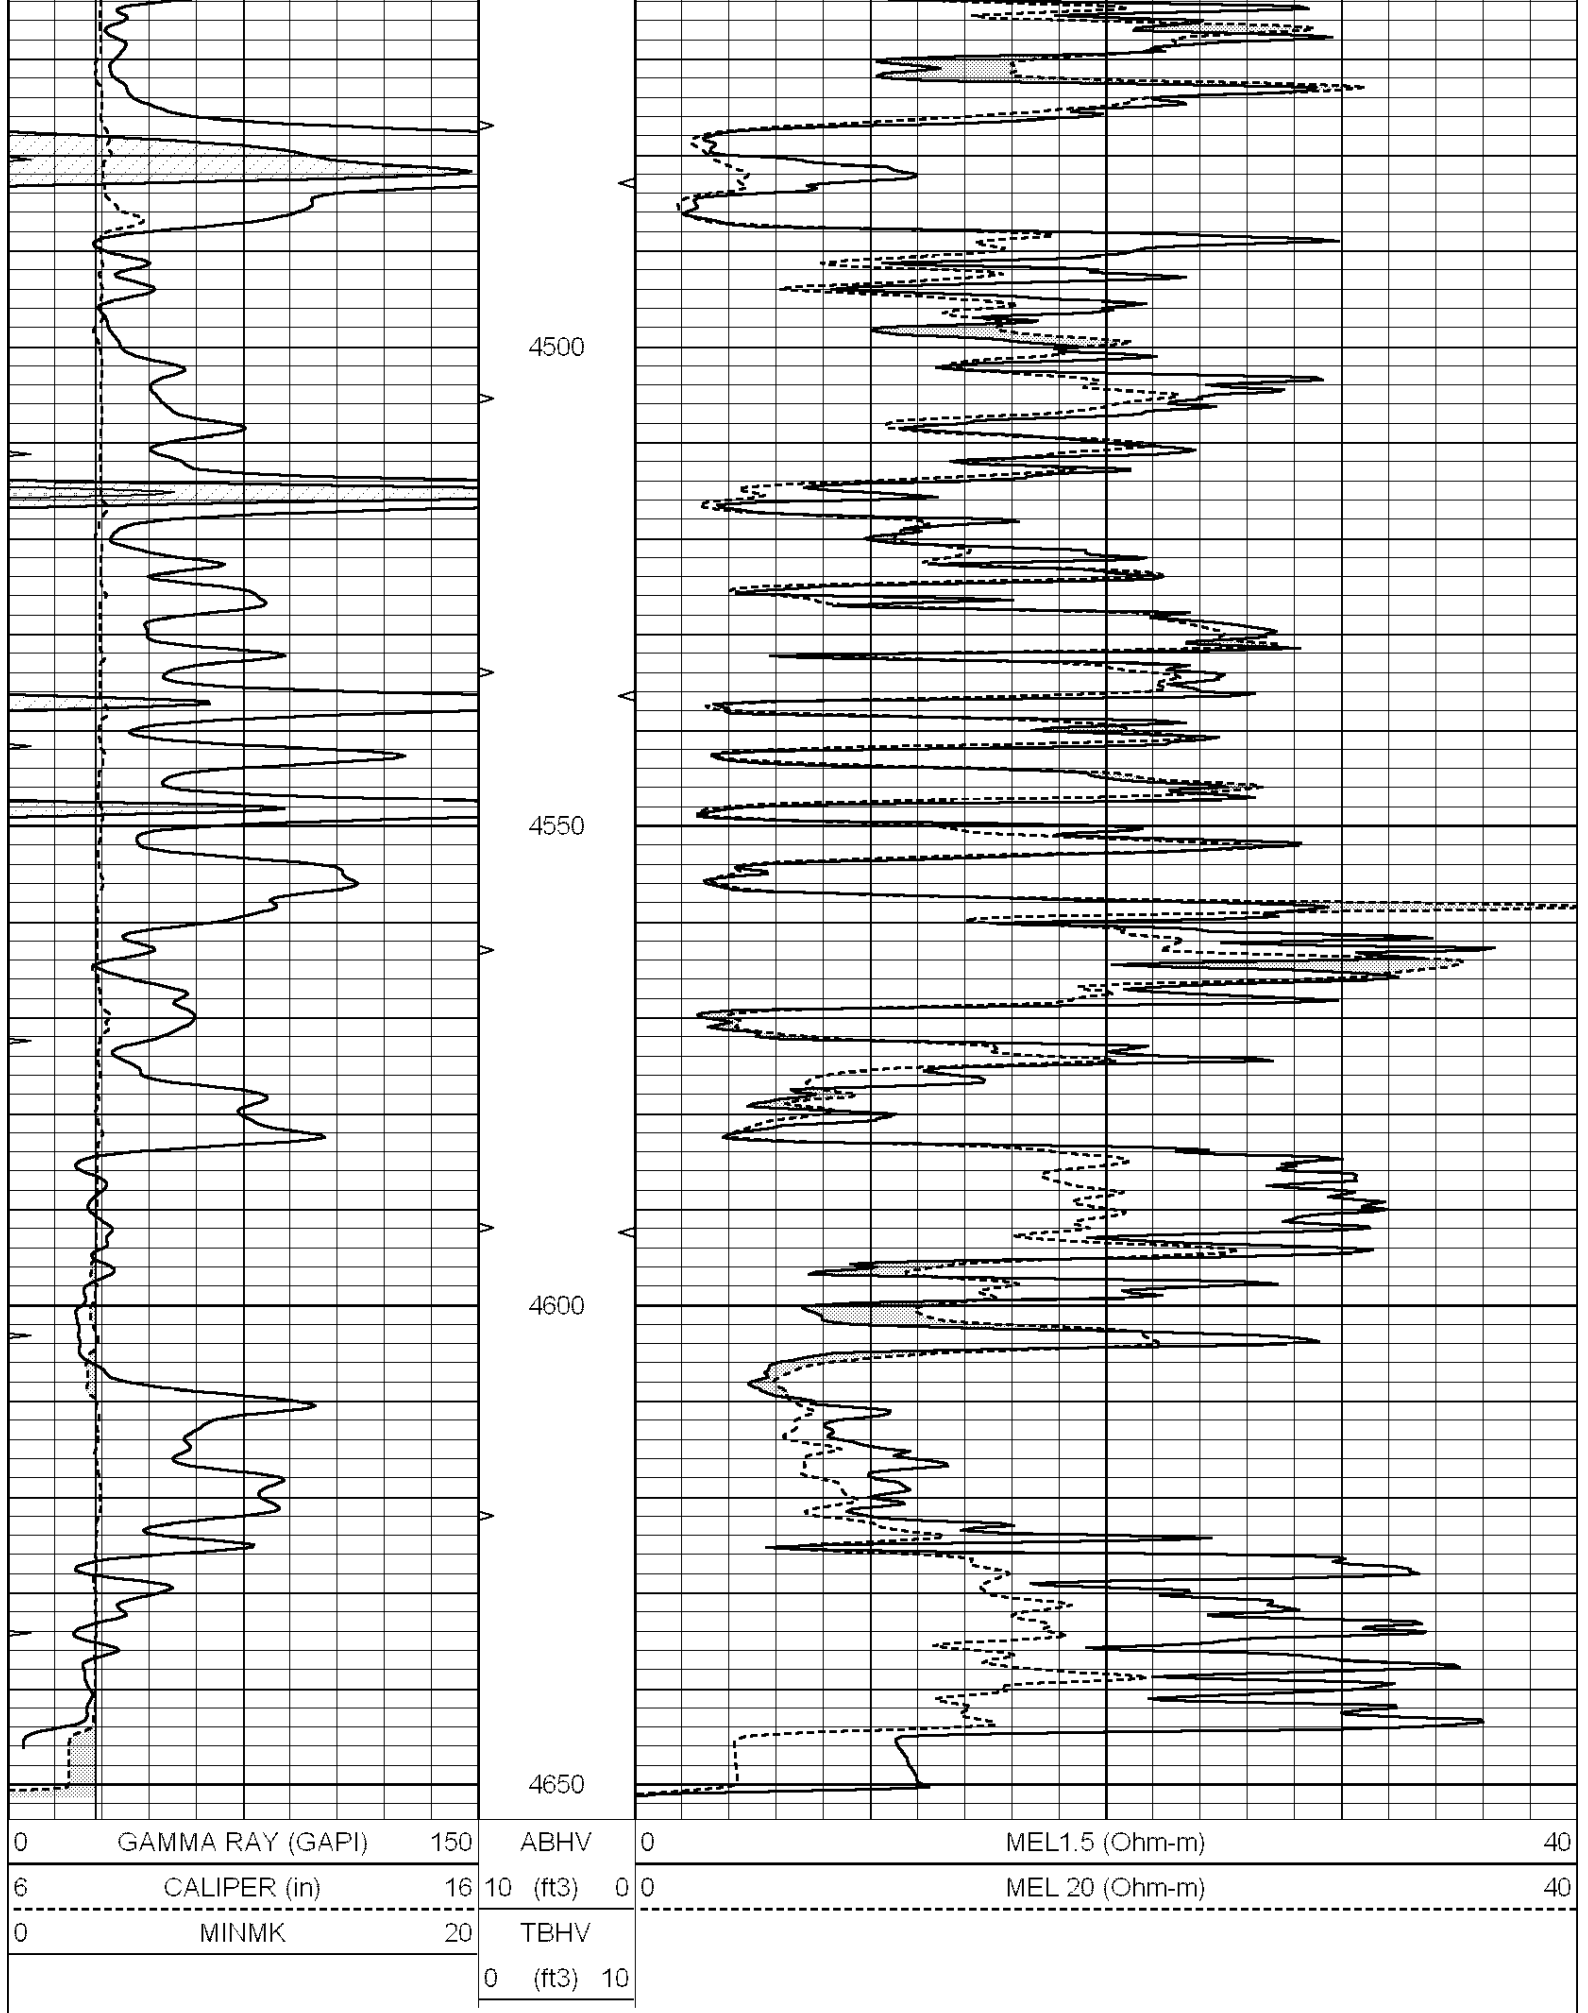

Database File: 2490pe.db
Dataset Pathname: pass6.1
Dataset Creation: Fri May 04 22:00:44 2018 by Calc SOC 120430

MICRO Calibration Report

Serial Number: 070912
Tool Model: ProbeN
Performed: Fri May 04 21:29:46 2018

Caliper Calibration: Gain=3.623 Offset=-0.333

	Low Cal	High Cal
References	8.000	18.000
Readings	2.300	5.060

1.5" Calibration: Gain=26.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	1.239

2" Calibration: Gain=38.000 Offset=-0.700

	Low Cal	High Cal
References	0.000	20.000
Readings	0.003	1.075

Gamma Ray Calibration Report

Serial Number: 070559
Tool Model: OPEN_GR
Performed: Fri May 04 21:47:27 2018

Calibrator Value: 1.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 0.2500 GAPI/cps