


15-163-20815-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

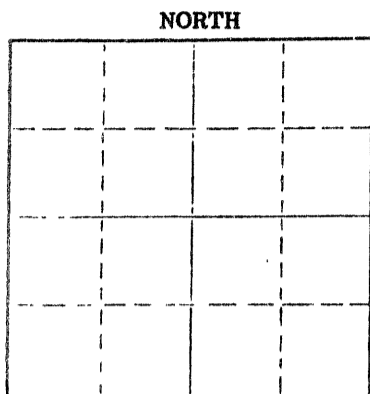

Locate well correctly on above Section Plat

Rooks _____ County. Sec. 27 Twp. 8 Rge. 17 (E) W (W)
Location as "NE/CNW/SE/SW" or footage from lines C W/2 W/2 SE/4
Lease Owner Black Petroleum Co.
Lease Name Bemis "A" Well No. 1
Office Address Suite 545 Olive W. Garvey Bldg., Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 6-25 1978
Application for plugging filed 6-25 1978
Application for plugging approved 6-25 1978
Plugging commenced 6-25 1978
Plugging completed 6-25 1978
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,480 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

7-11-78

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	246'	Cmtd. w/155 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud
Set bridge plug @550'
Pump 70 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Set bridge plug @240'
Pump 20 sax cement on plug thru 4 1/2" drill pipe
Set bridge plug @40' w/1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas 67665

STATE OF KANSAS COUNTY OF RUSSELL contractor
R.L. Shields (employee of owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.
(Signature) R.L. Shields
Shields Bldg., Russell, Kansas (Address)

Subscribed and sworn to before me this 30th day of June, 1978

My commission expires May 26, 1979
Keith Phillips
Notary Public.




Shields

Russell, Kansas

WELL LOG

Operator: Black Petroleum Company
 Well: Bemis "A" #1
 Commenced: June 18, 1978
 Completed: June 25, 1978
 Contractor: Shields Drilling Co., Inc.

Well Description: C W/2 W/2 SE/4
 Sec. 27-8S-17W
 Rooks Co., Kansas



Elevation: 2,016' KB
 Treatment:
 Production: D & A
 Tops:

CASING RECORD

Size	Run	Pulled
8 5/8"	246'	Cmtd. w/155 sax

..... Figures Indicate Bottom of Formations

Surface clay, post rock & shale	254'	
Shale & shells	400'	
Shale	800'	
Sand	1,040'	
Shale & shells	1,339'	
Anhydrite	1,376'	
Shale & shells	1,640'	
Shale	1,854'	
Shale & lime	3,024'	
Lime	3,480'	RTD

RECEIVED
 STATE OF KANSAS COMMISSION
 JUL 11 1978
 CONSERVATION DIVISION
 Wichita, Kansas
 7-11-78

Notes