



MICRO LOG

Company		DIXON OPERATING COMPANY, LLC.	
Well		#1-4 EDNA MAE	
Field		RATTLESNAKE CREEK	
County		STAFFORD	
State		KANSAS	
Location:		APL # : 15-185-24023-0000 990' FSL & 330' FEL NE - SE - SE	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 11' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 4		TWP 23S RGE 12W	
Elevation		K.B. 1849 D.F. 1847 G.L. 1838	
Date		7/26/18	
Run Number		TWO	
Depth Driller		3800	
Depth Logger		3798	
Bottom Logged Interval		3782	
Top Log Interval		2700	
Casing Driller		8 5/8"@306"	
Casing Logger		306	
Bit Size		7 7/8"	
Type Fluid in Hole		CHEMICAL MUD	
Density / Viscosity		9.0/60	
pH / Fluid Loss		10.5/11.6	
Source of Sample		FLOWLINE	
Rim @ Meas. Temp		.400@92F	
Rmf @ Meas. Temp		.300@92F	
Rmc @ Meas. Temp		.480@92F	
Source of Rmf / Rmc		MEASUREMENT	
Rim @ BHT		.323@114F	
Time Circulation Stopped		3.5 HOURS	
Time Logger on Bottom		9:15 P.M.	
Maximum Recorded Temperature		114F	
Equipment Number		922339	
Location		HAYS, KANSAS	
Recorded By		JEFF LUEBBERS	
Witnessed By		BRUCE A. REED	
		T.J. DIXON	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
ST. JOHN, KS., N. TO "RD. NE70", 6E. TO "60TH RD.", 1 1/4N., W. INTO






MAIN SECTION

Database File: 2666pe.db
 Dataset Pathname: pass6.2
 Presentation Format: micro
 Dataset Creation: Thu Jul 26 22:32:32 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

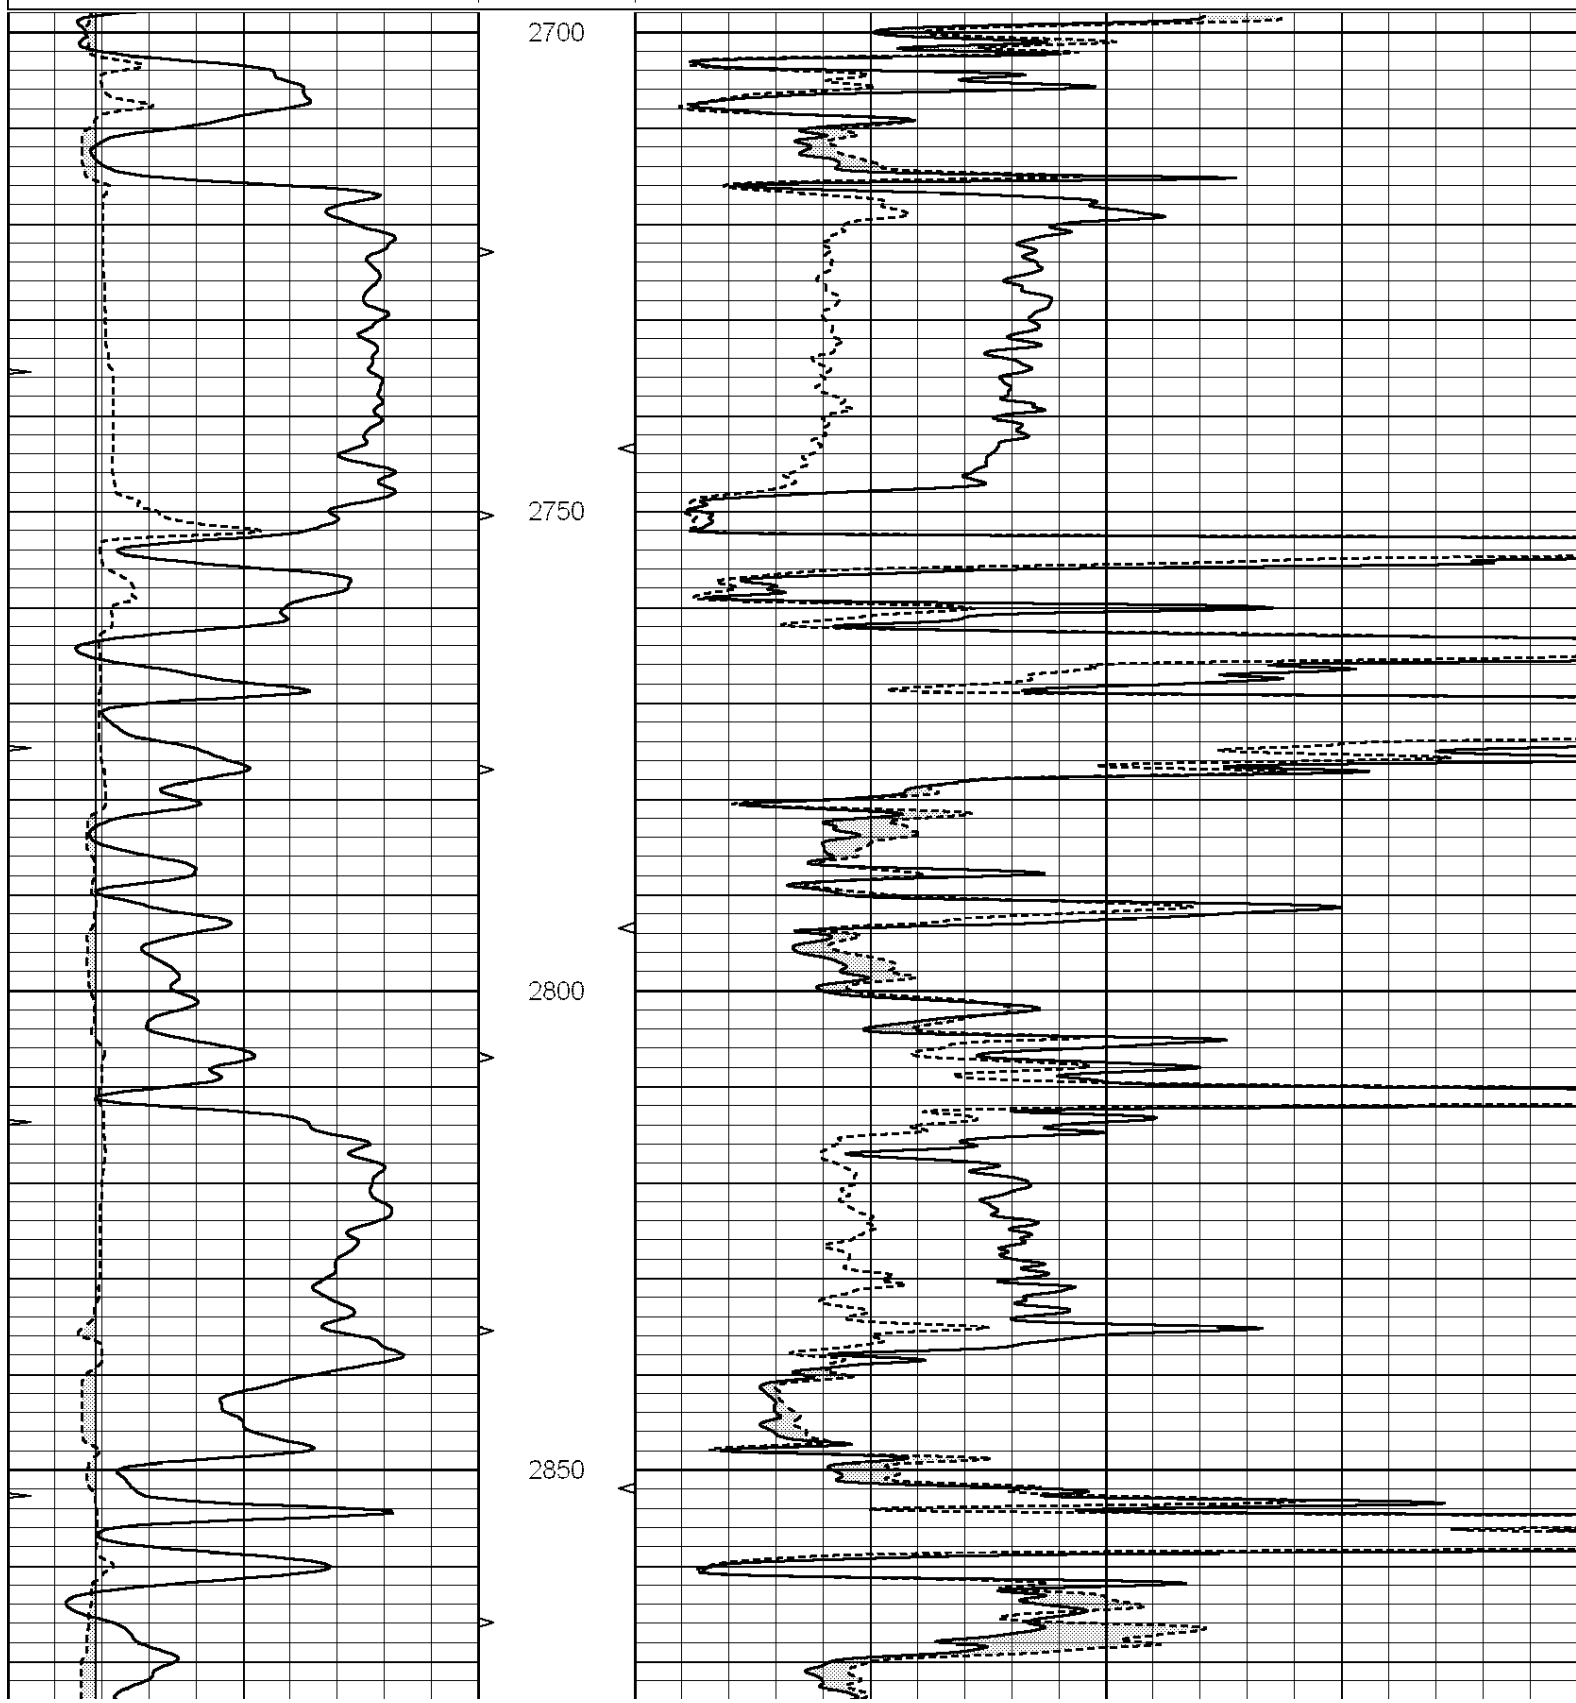

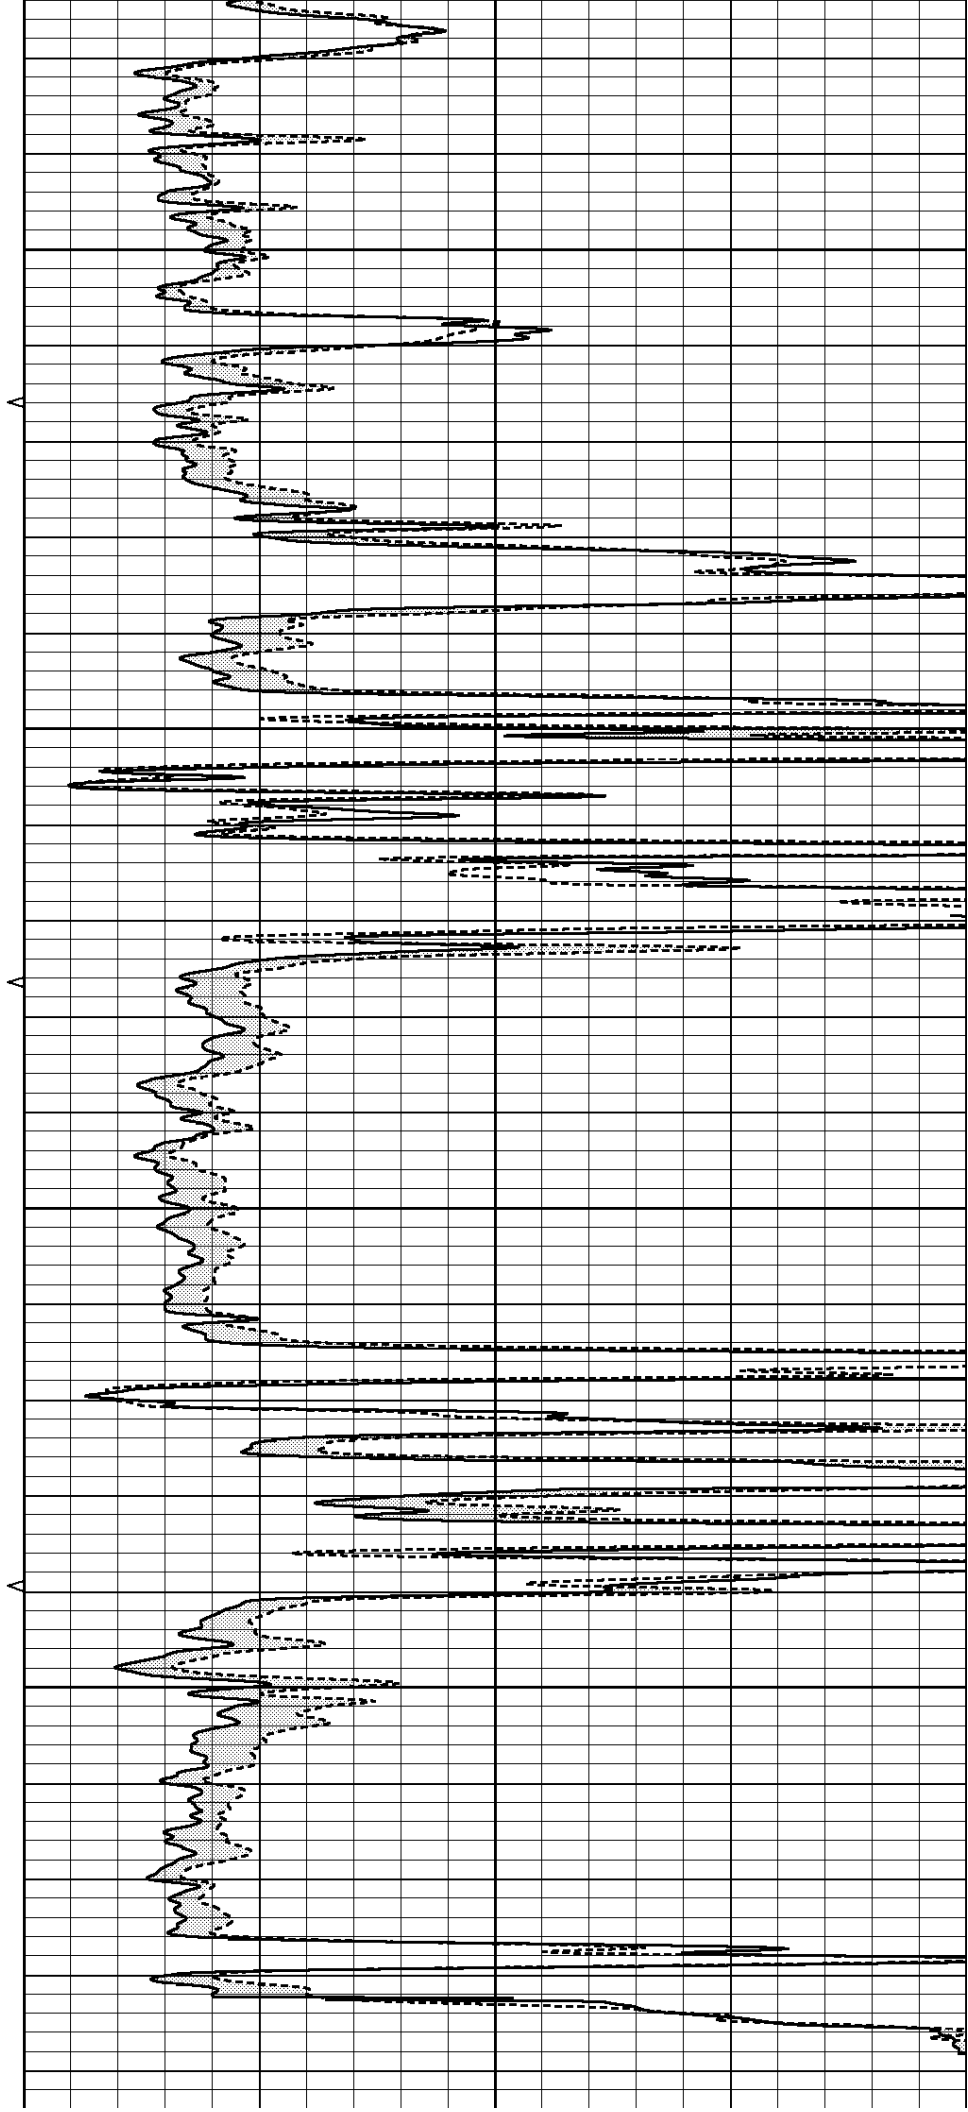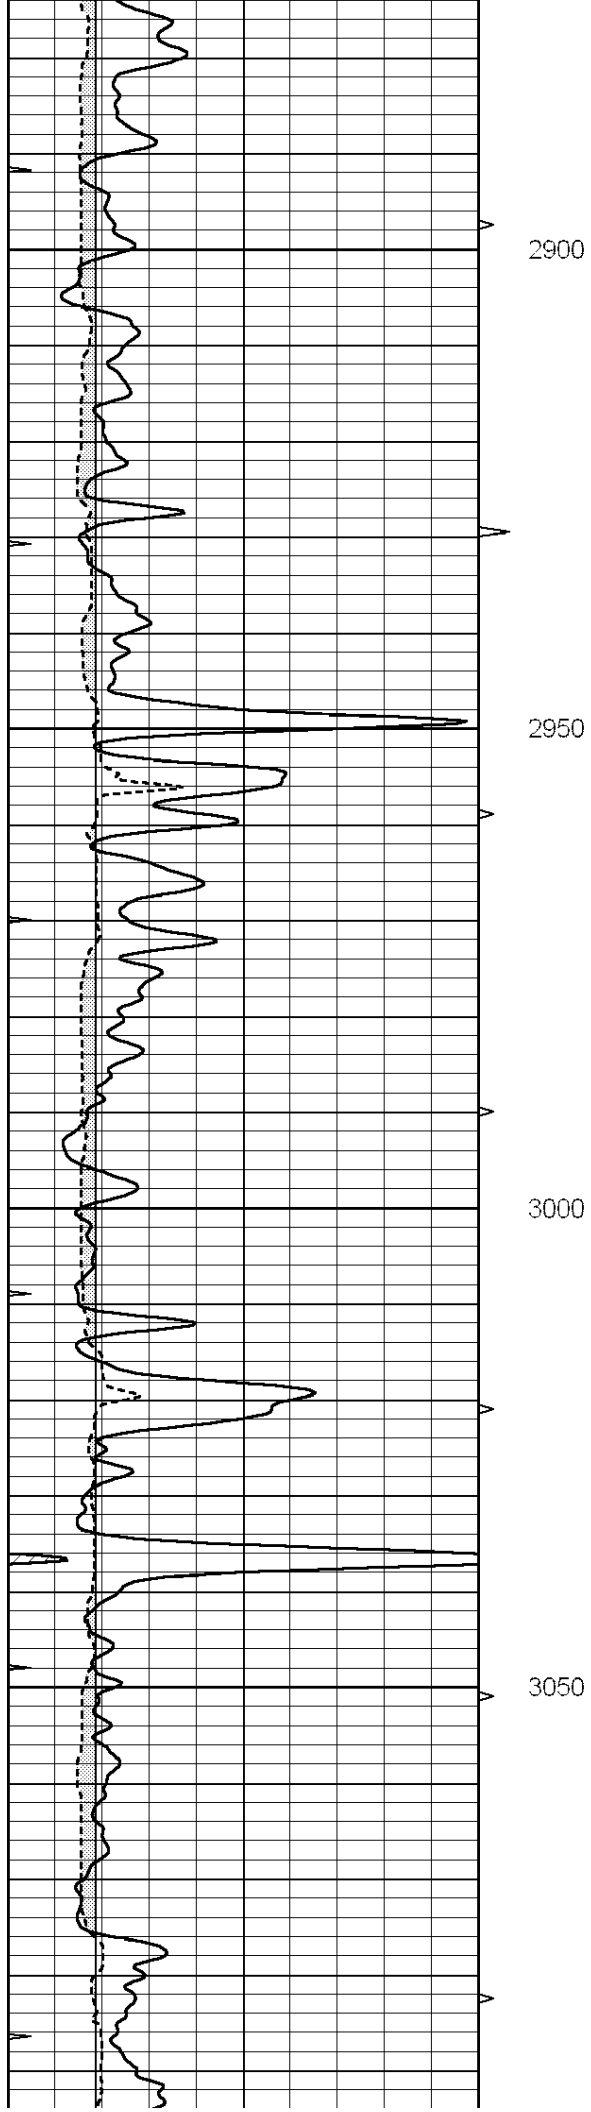

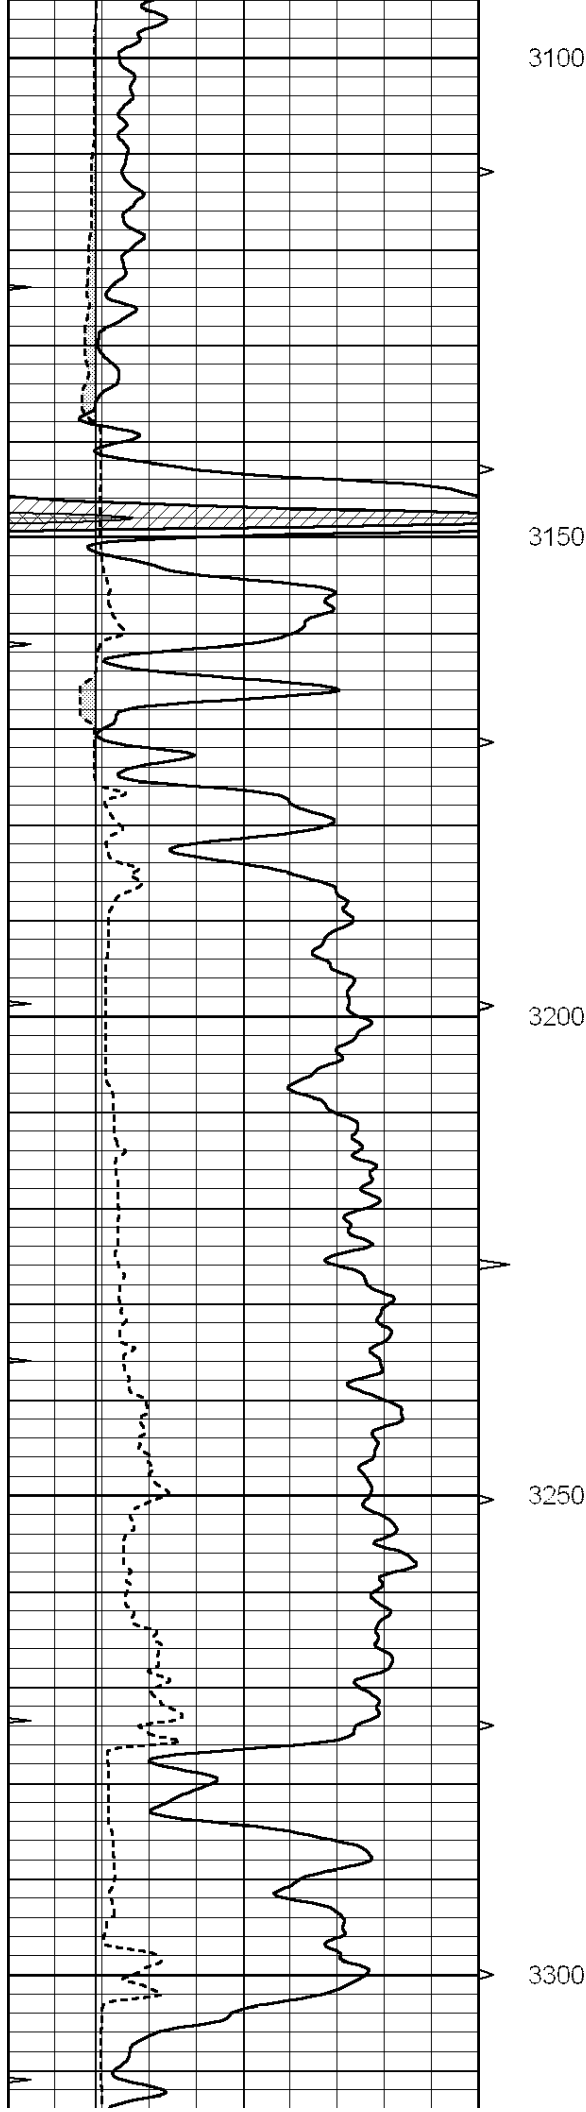


3100


3150

3200

3250

3300

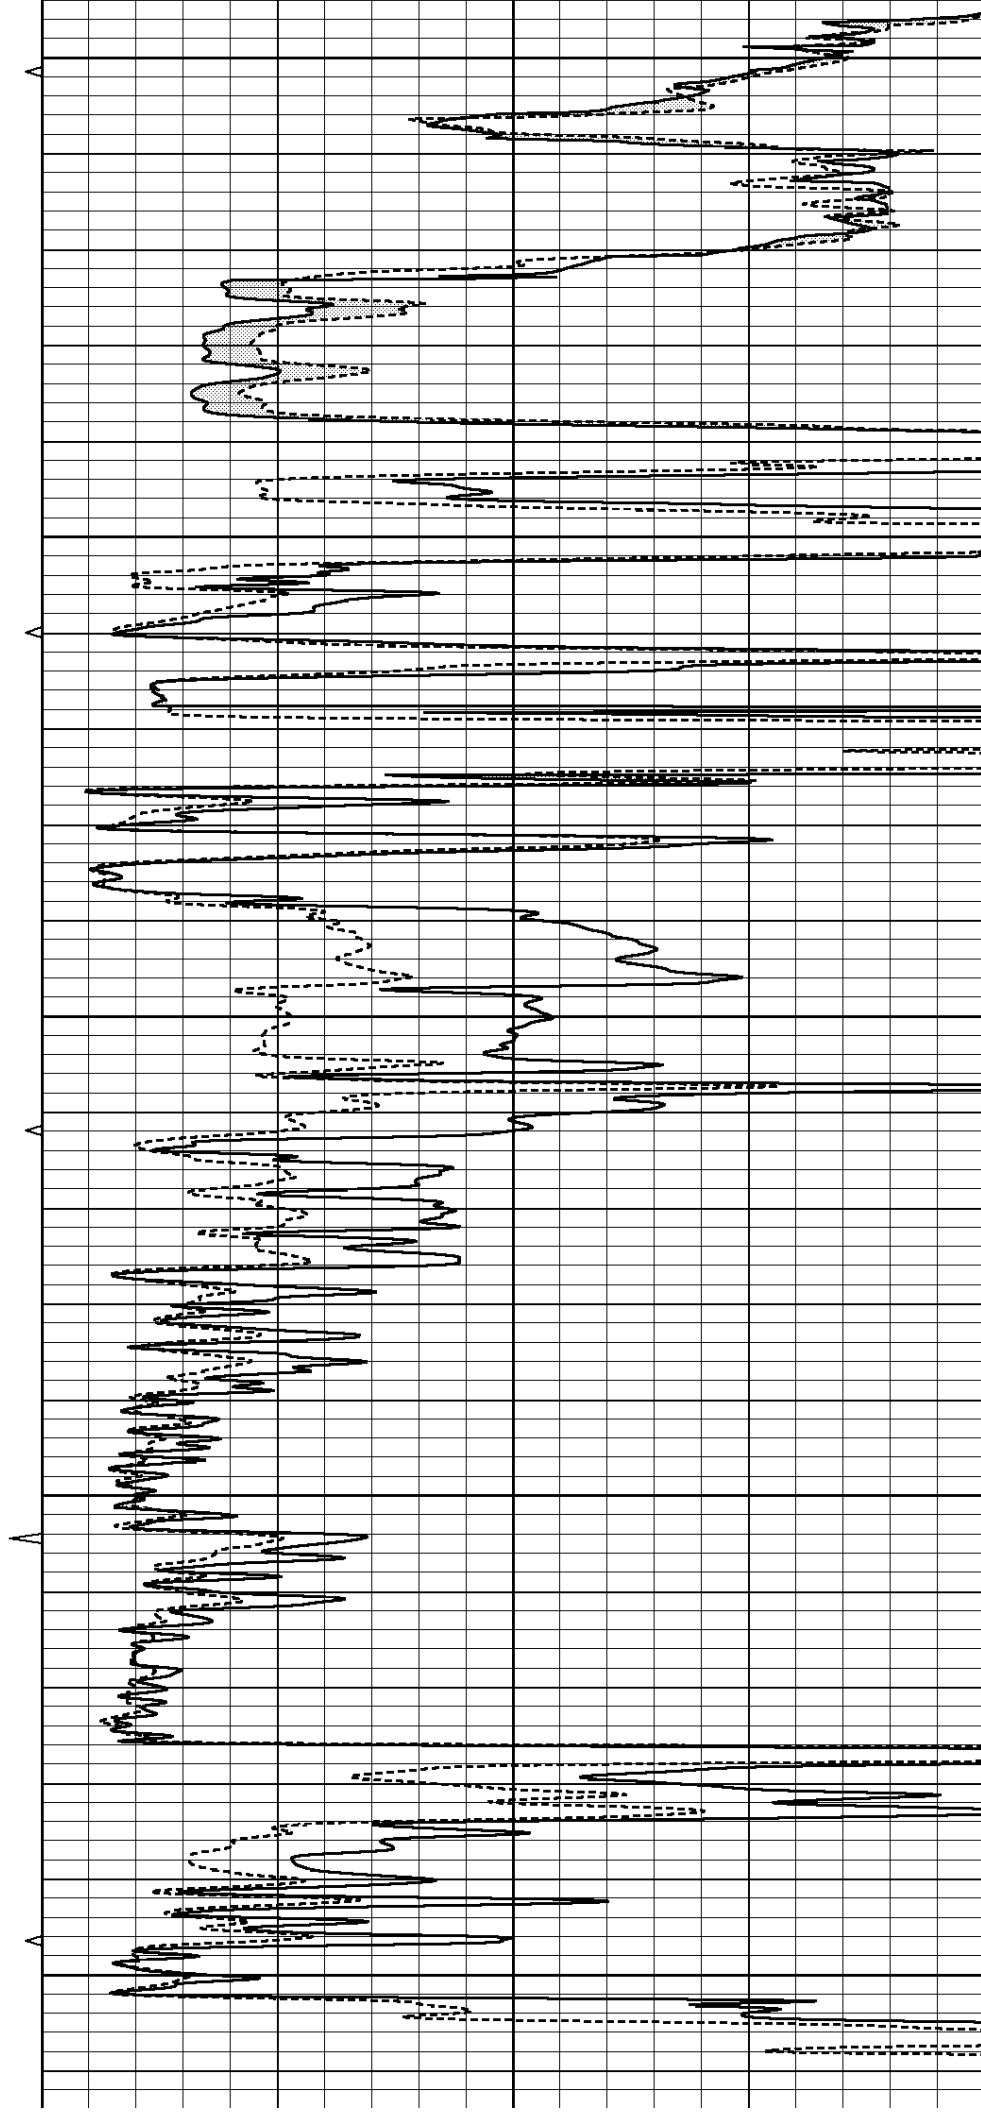

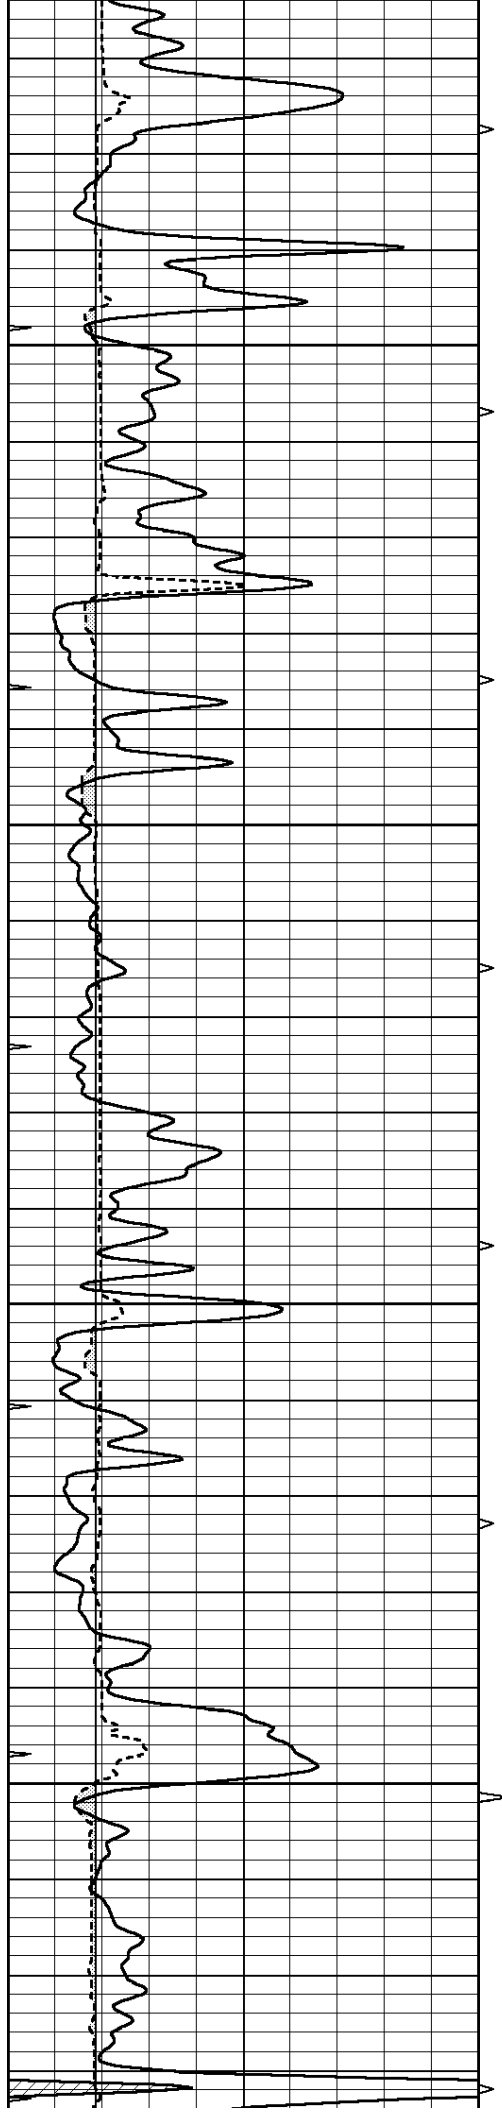



3350

3400

3450

3500

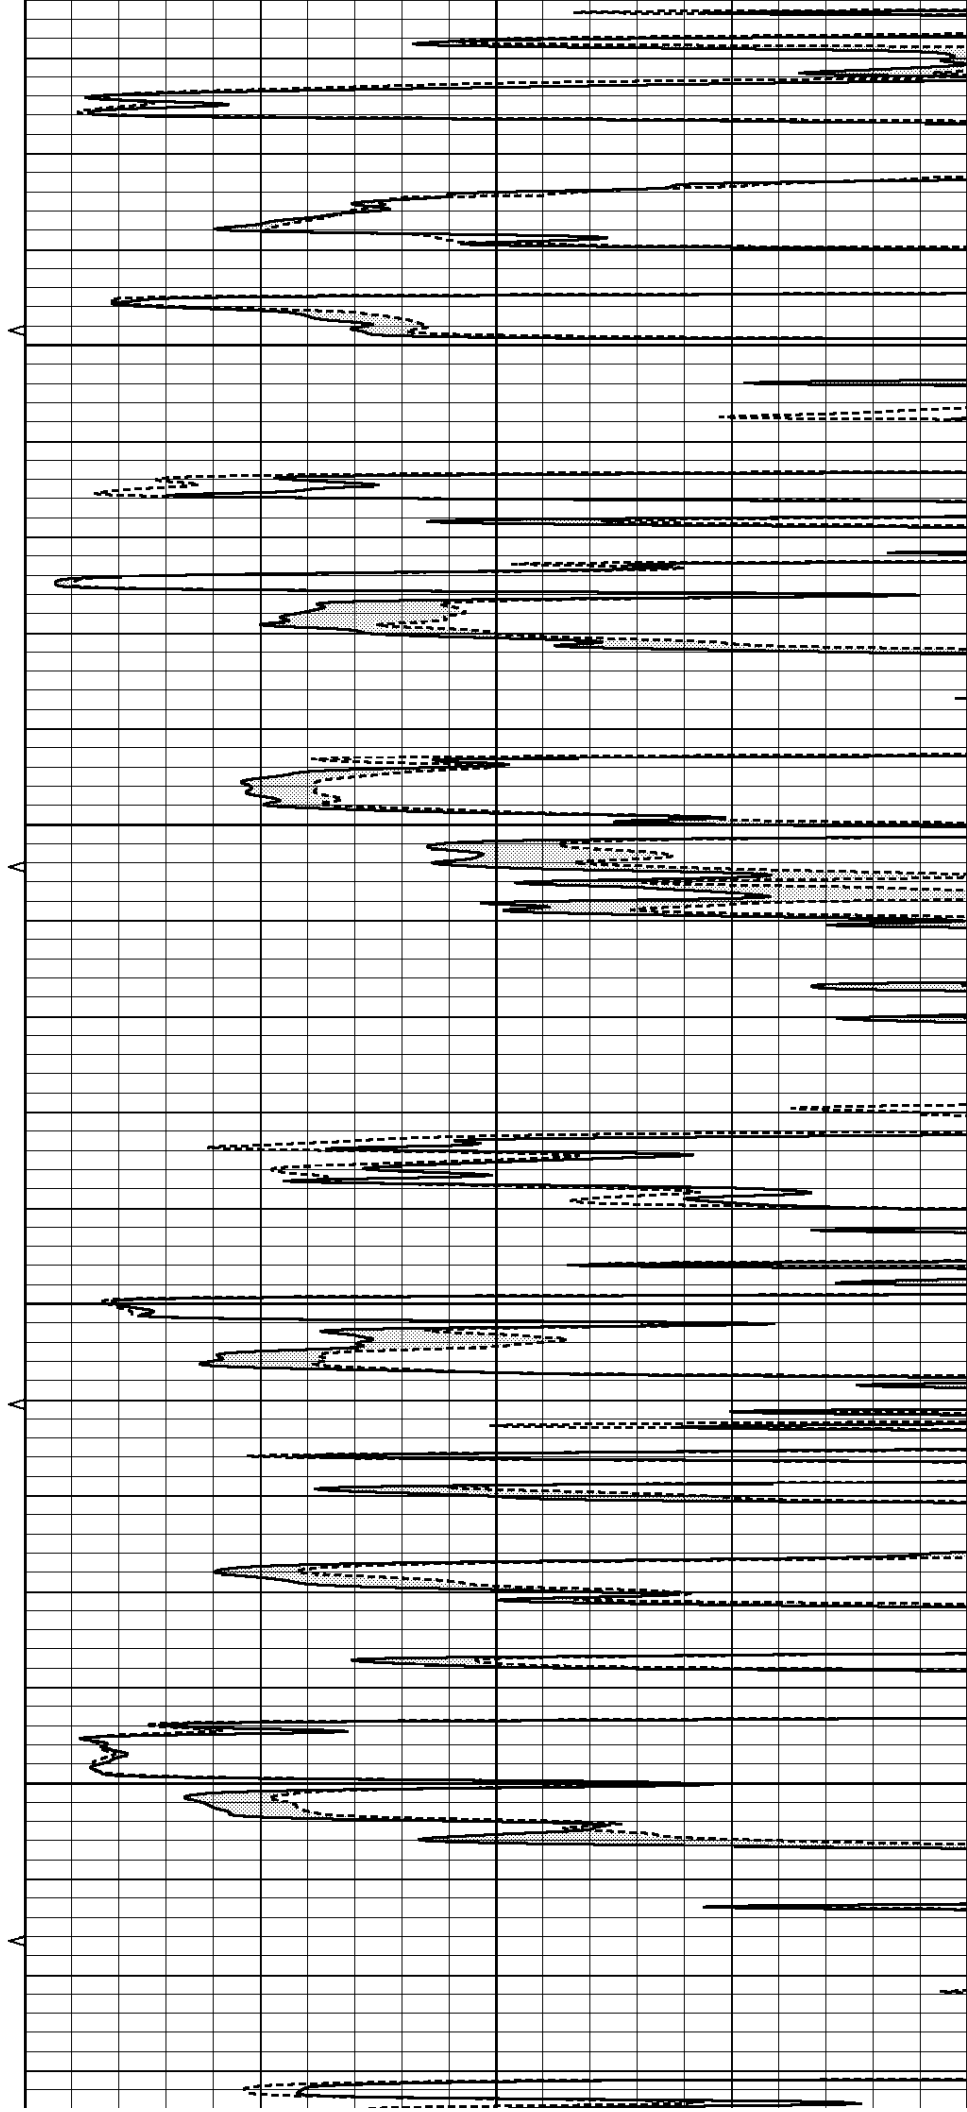

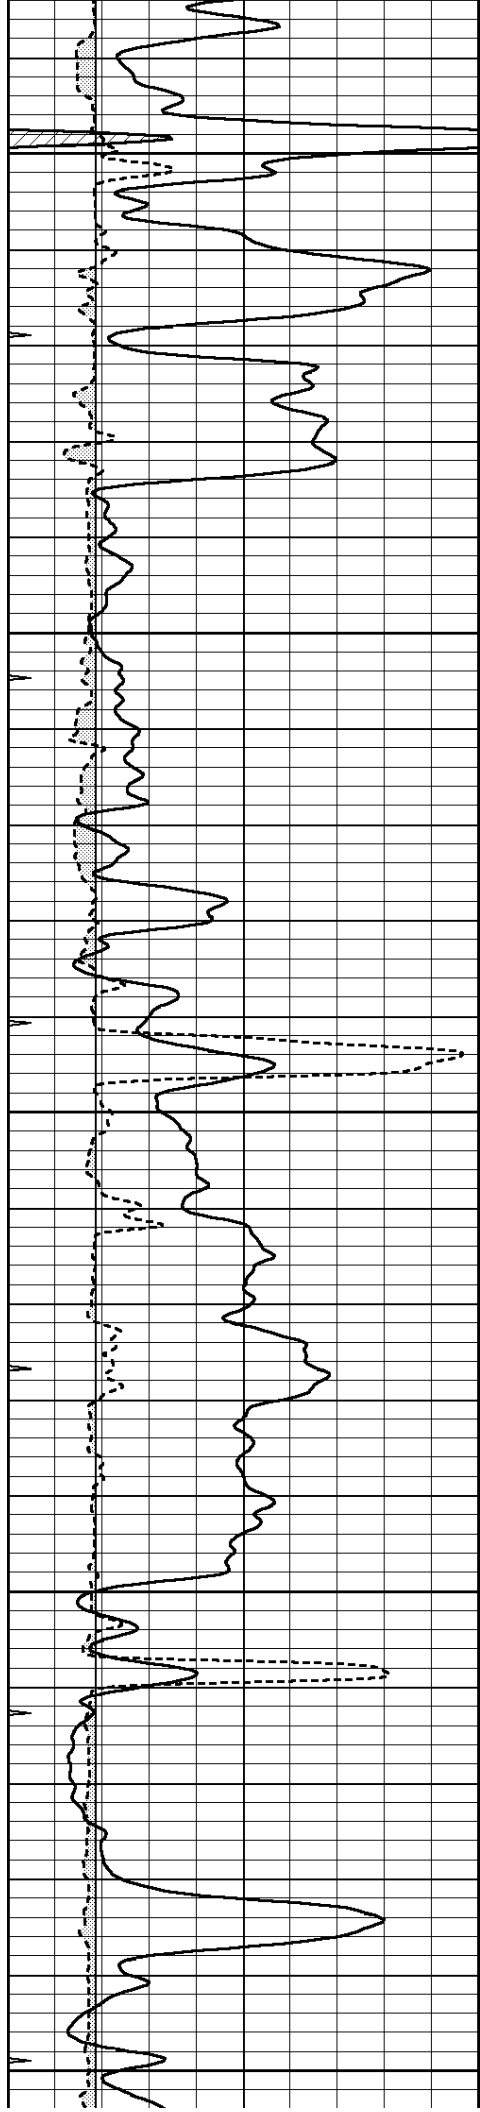

3550


3600


3650

3700


3750

5.5" ABHV

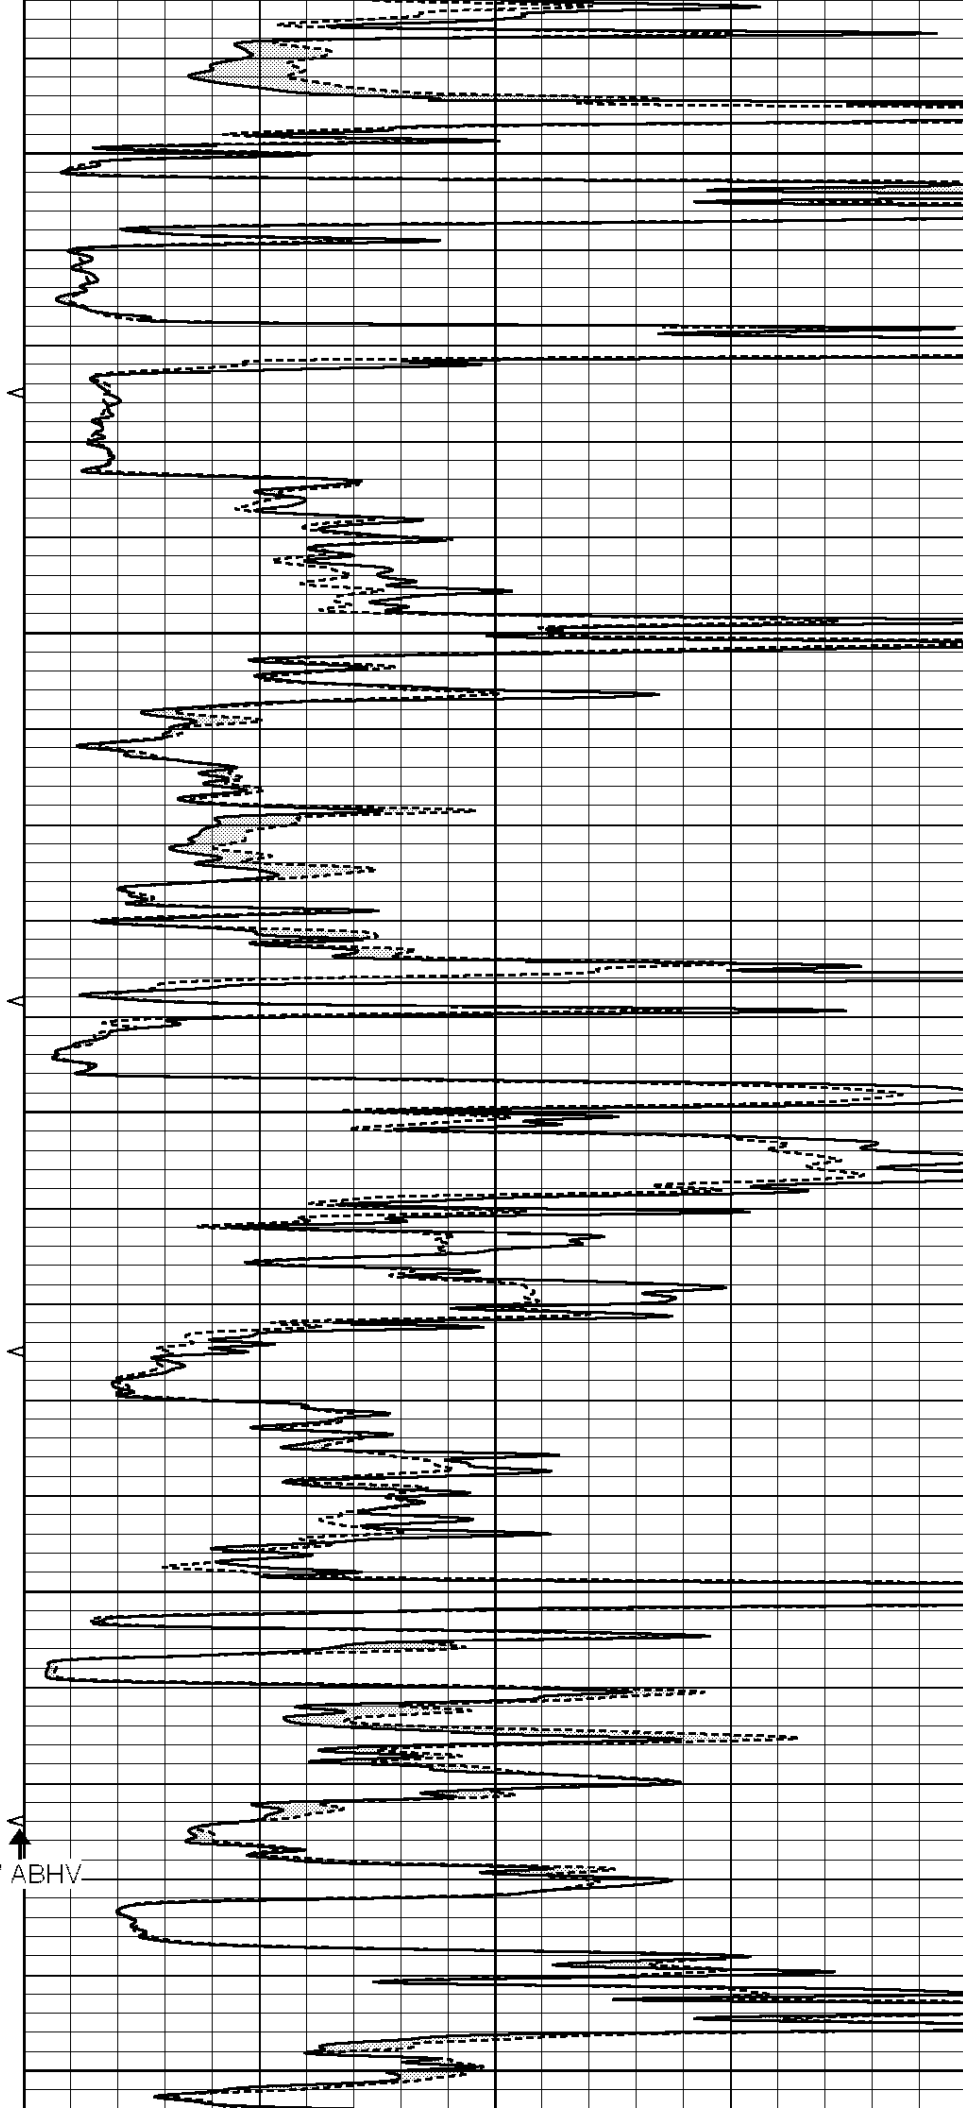

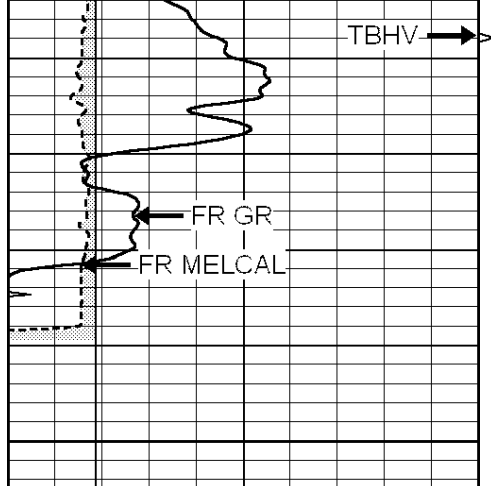


3800

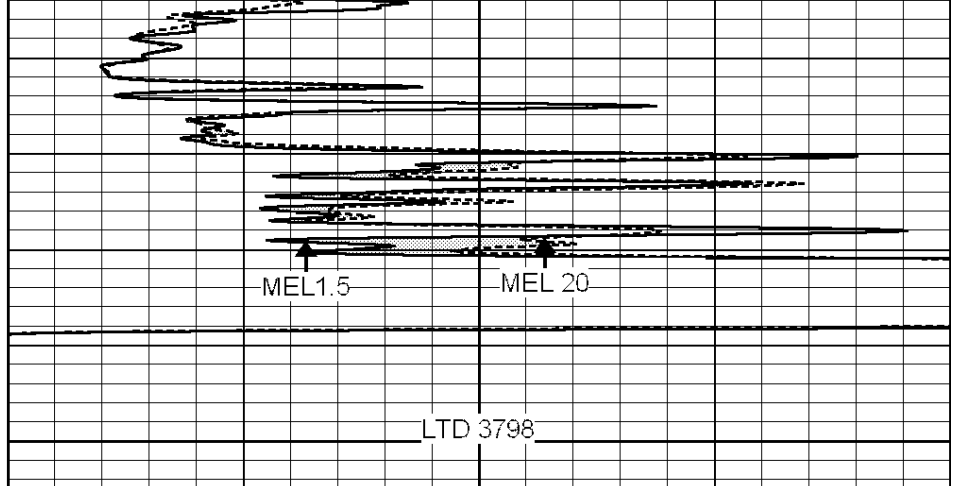

LTD 3798


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

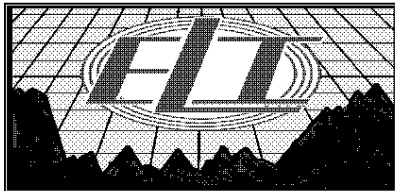

REPEAT SECTION


Database File: 2666pe.db
 Dataset Pathname: pass5.6
 Presentation Format: micro
 Dataset Creation: Thu Jul 26 21:50:45 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240



0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

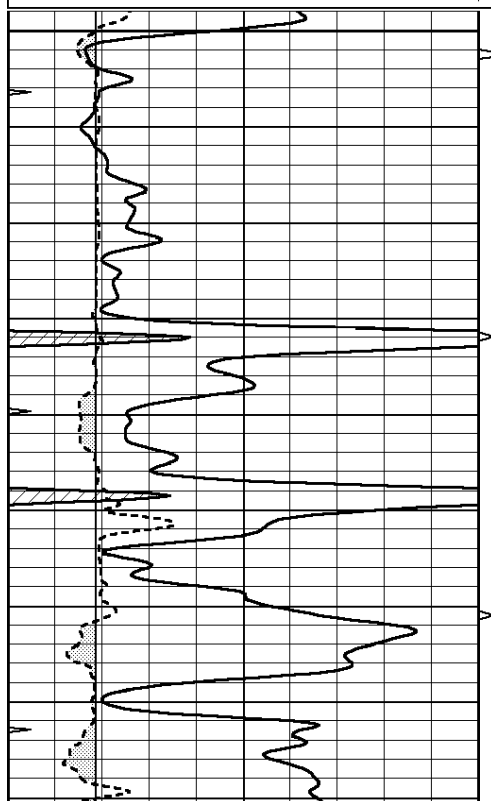

3500

3550

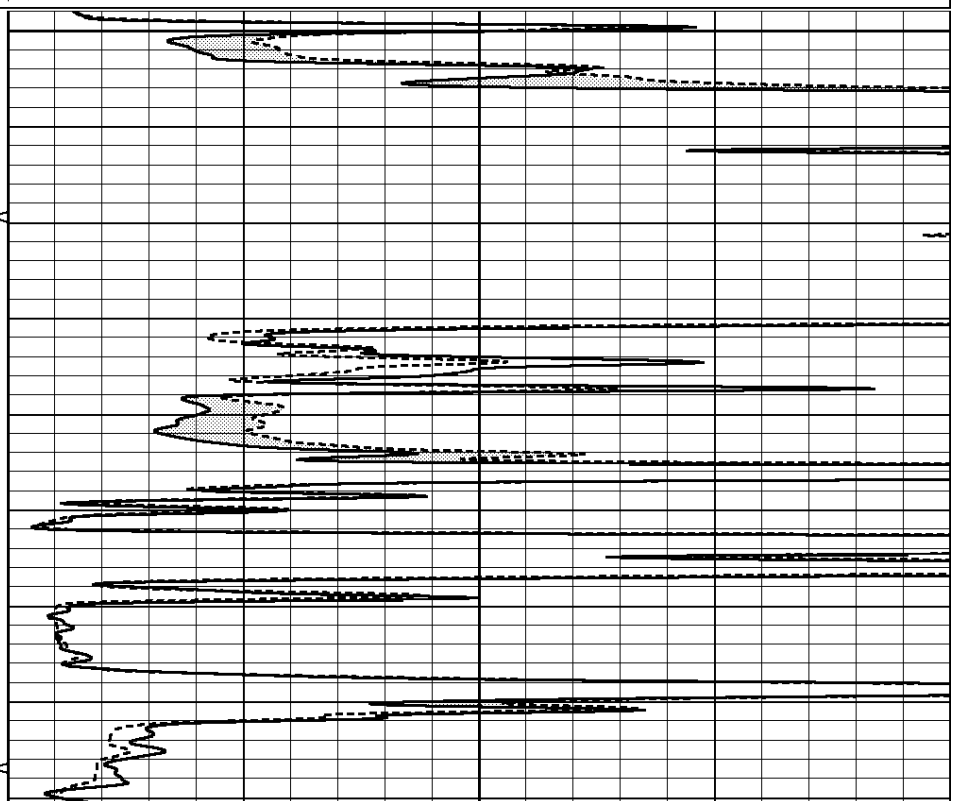

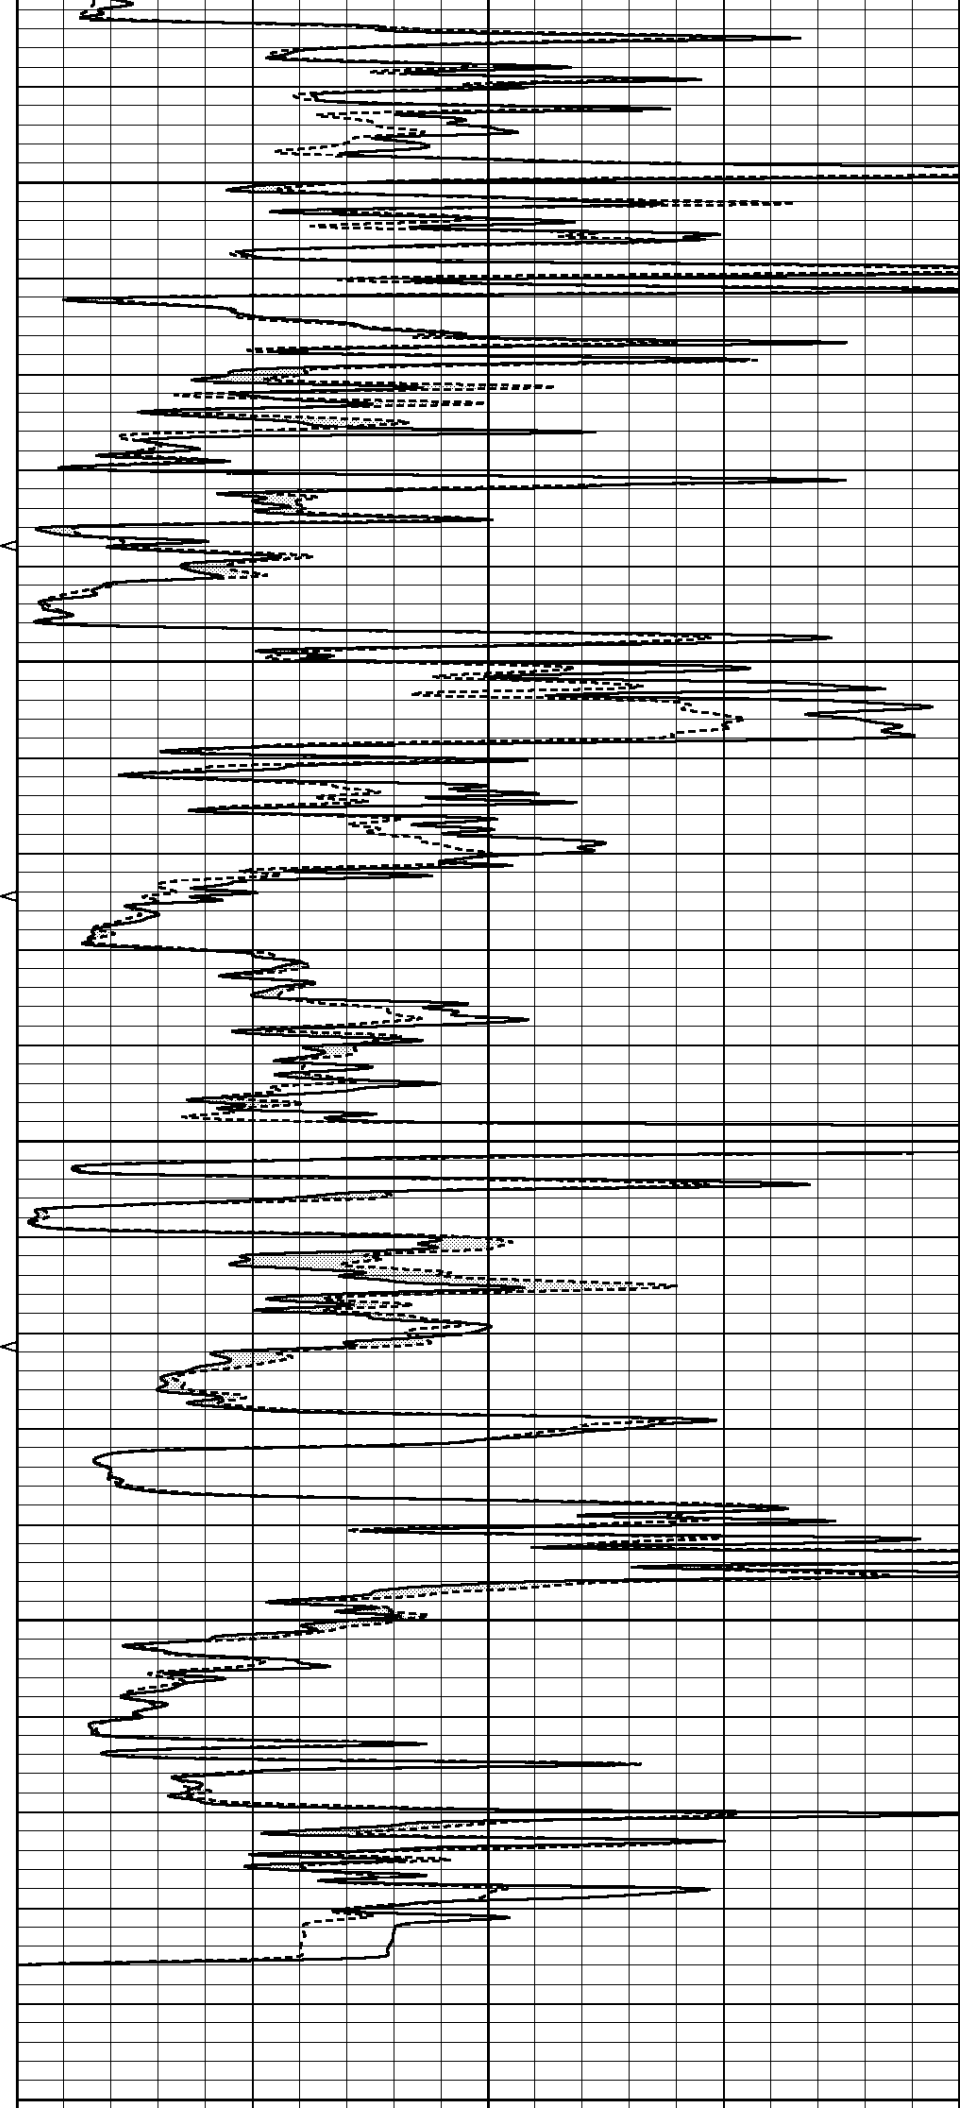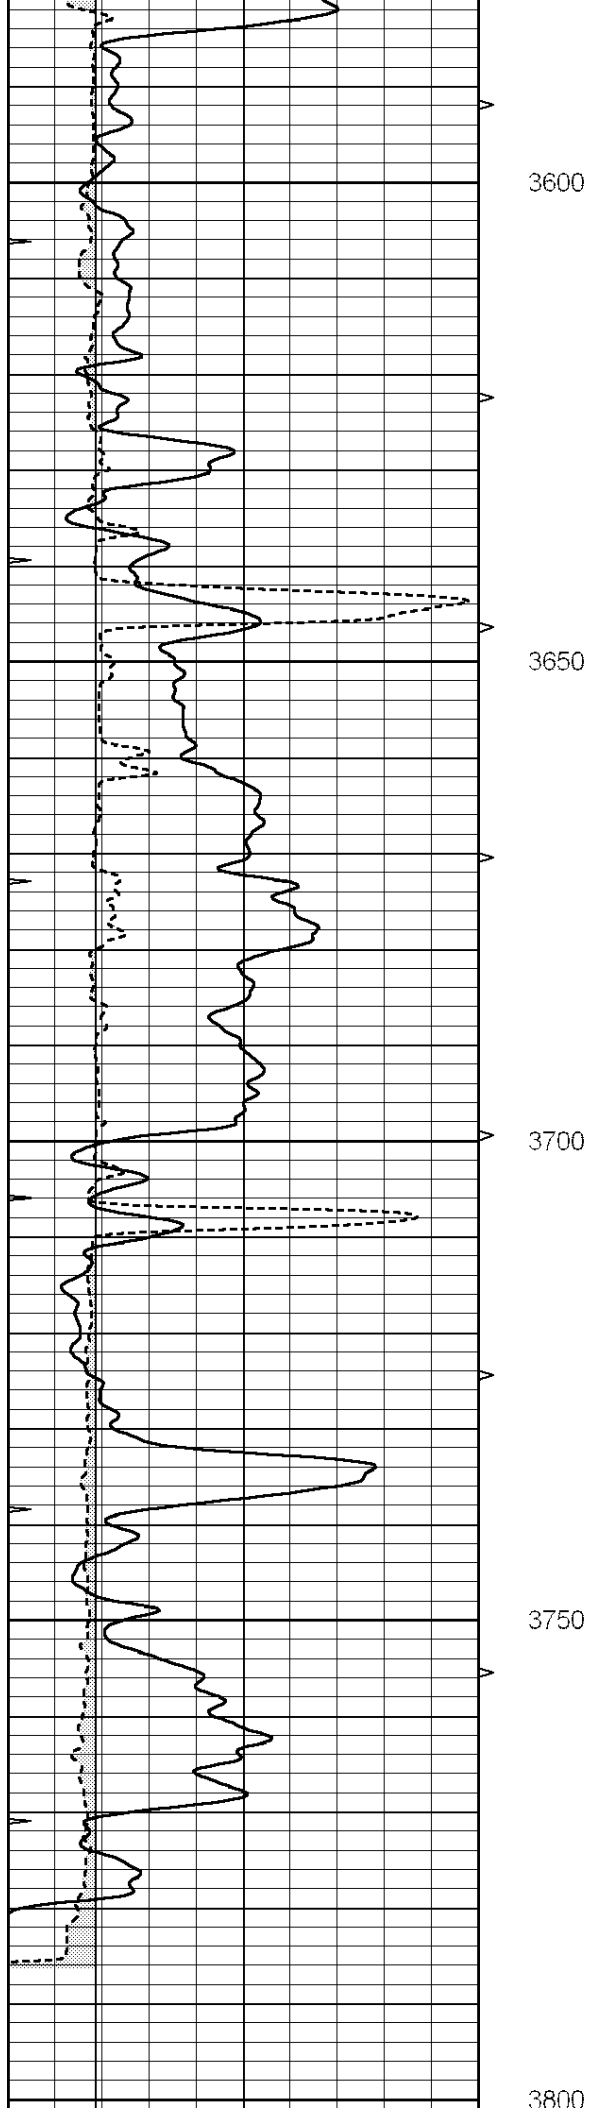

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

Calibration Report					
Database File:	2666pe.db				
Dataset Pathname:	pass6.2				
Dataset Creation:	Thu Jul 26 22:32:32 2018				
MICRO Calibration Report					
Serial Number:	070911				
Tool Model:	ProbeN				
Performed:	Tue Jul 17 14:52:02 2018				
Caliper Calibration:	Gain=3.894	Offset=2.131			
	Low Cal	High Cal			
References	7.700	18.000			
Readings	1.430	4.075			
1.5" Calibration:	Gain=77.000	Offset=-0.500			
	Low Cal	High Cal			
References	0.000	20.000			
Readings	0.001	1.240			
2" Calibration:	Gain=82.000	Offset=-0.500			
	Low Cal	High Cal			
References	0.000	20.000			
Readings	0.001	1.076			
Gamma Ray Calibration Report					
Serial Number:	110959				
Tool Model:	OPEN_GR				
Performed:	Mon Jul 09 12:30:59 2018				
Calibrator Value:	1.0	GAPI			
Background Reading:	0.0	cps			
Calibrator Reading:	1.0	cps			
Sensitivity:	0.2400	GAPI/cps			