



MICRO LOG

Company VESS OIL CORPORATION
 Well SCULLY "A" #26
 Field AUGUSTA
 County BUTLER
 State KANSAS

Company VESS OIL CORPORATION
 Well SCULLY "A" #26
 Field AUGUSTA
 County BUTLER State KANSAS

Location: 900' FSL & 2170' FEL
 API #: 15-015-24104-00-00
 SEC 9 TWP 28S RGE 4E
 Permanent Datum GROUND LEVEL Elevation 1214
 Log Measured From KELLY BUSHING 6' A.G.L.
 Drilling Measured From KELLY BUSHING
 Other Services CDL/CNL/DIL
 Elevation K.B. 1220
 D.F. 1218
 G.L. 1214

Date	08/18/18
Run Number	THREE
Depth Driller	2482
Depth Logger	2480
Bottom Logged Interval	2478
Top Log Interval	1300
Casing Driller	8 5/8" @ 263
Casing Logger	263
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.2/55
pH / Fluid Loss	8.5/8.0
Source of Sample	FLOWLINE
Rm @ Meas. Temp	1.3@82
Rmt @ Meas. Temp	.96@82
Rmc @ Meas. Temp	1.56@82
Source of Rmf / Rmc	MEASURED
Rm @ BHT	1.04@102
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	102F
Equipment Number	1523
Location	HAYS, KANSAS
Recorded By	GUS PFANENSTIEL
Witnessed By	ROGER MARTIN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
 AUGUSTA, 3S ON HWY 77 TO 130 RD., W & S 1 1/2 MILES
 W AT POLE , CROSS RR TRACKS, N INTO.





MAIN PASS


Database File: 2905pe.db
 Dataset Pathname: pass8.1
 Presentation Format: _micro
 Dataset Creation: Sat Aug 18 16:51:36 2018
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

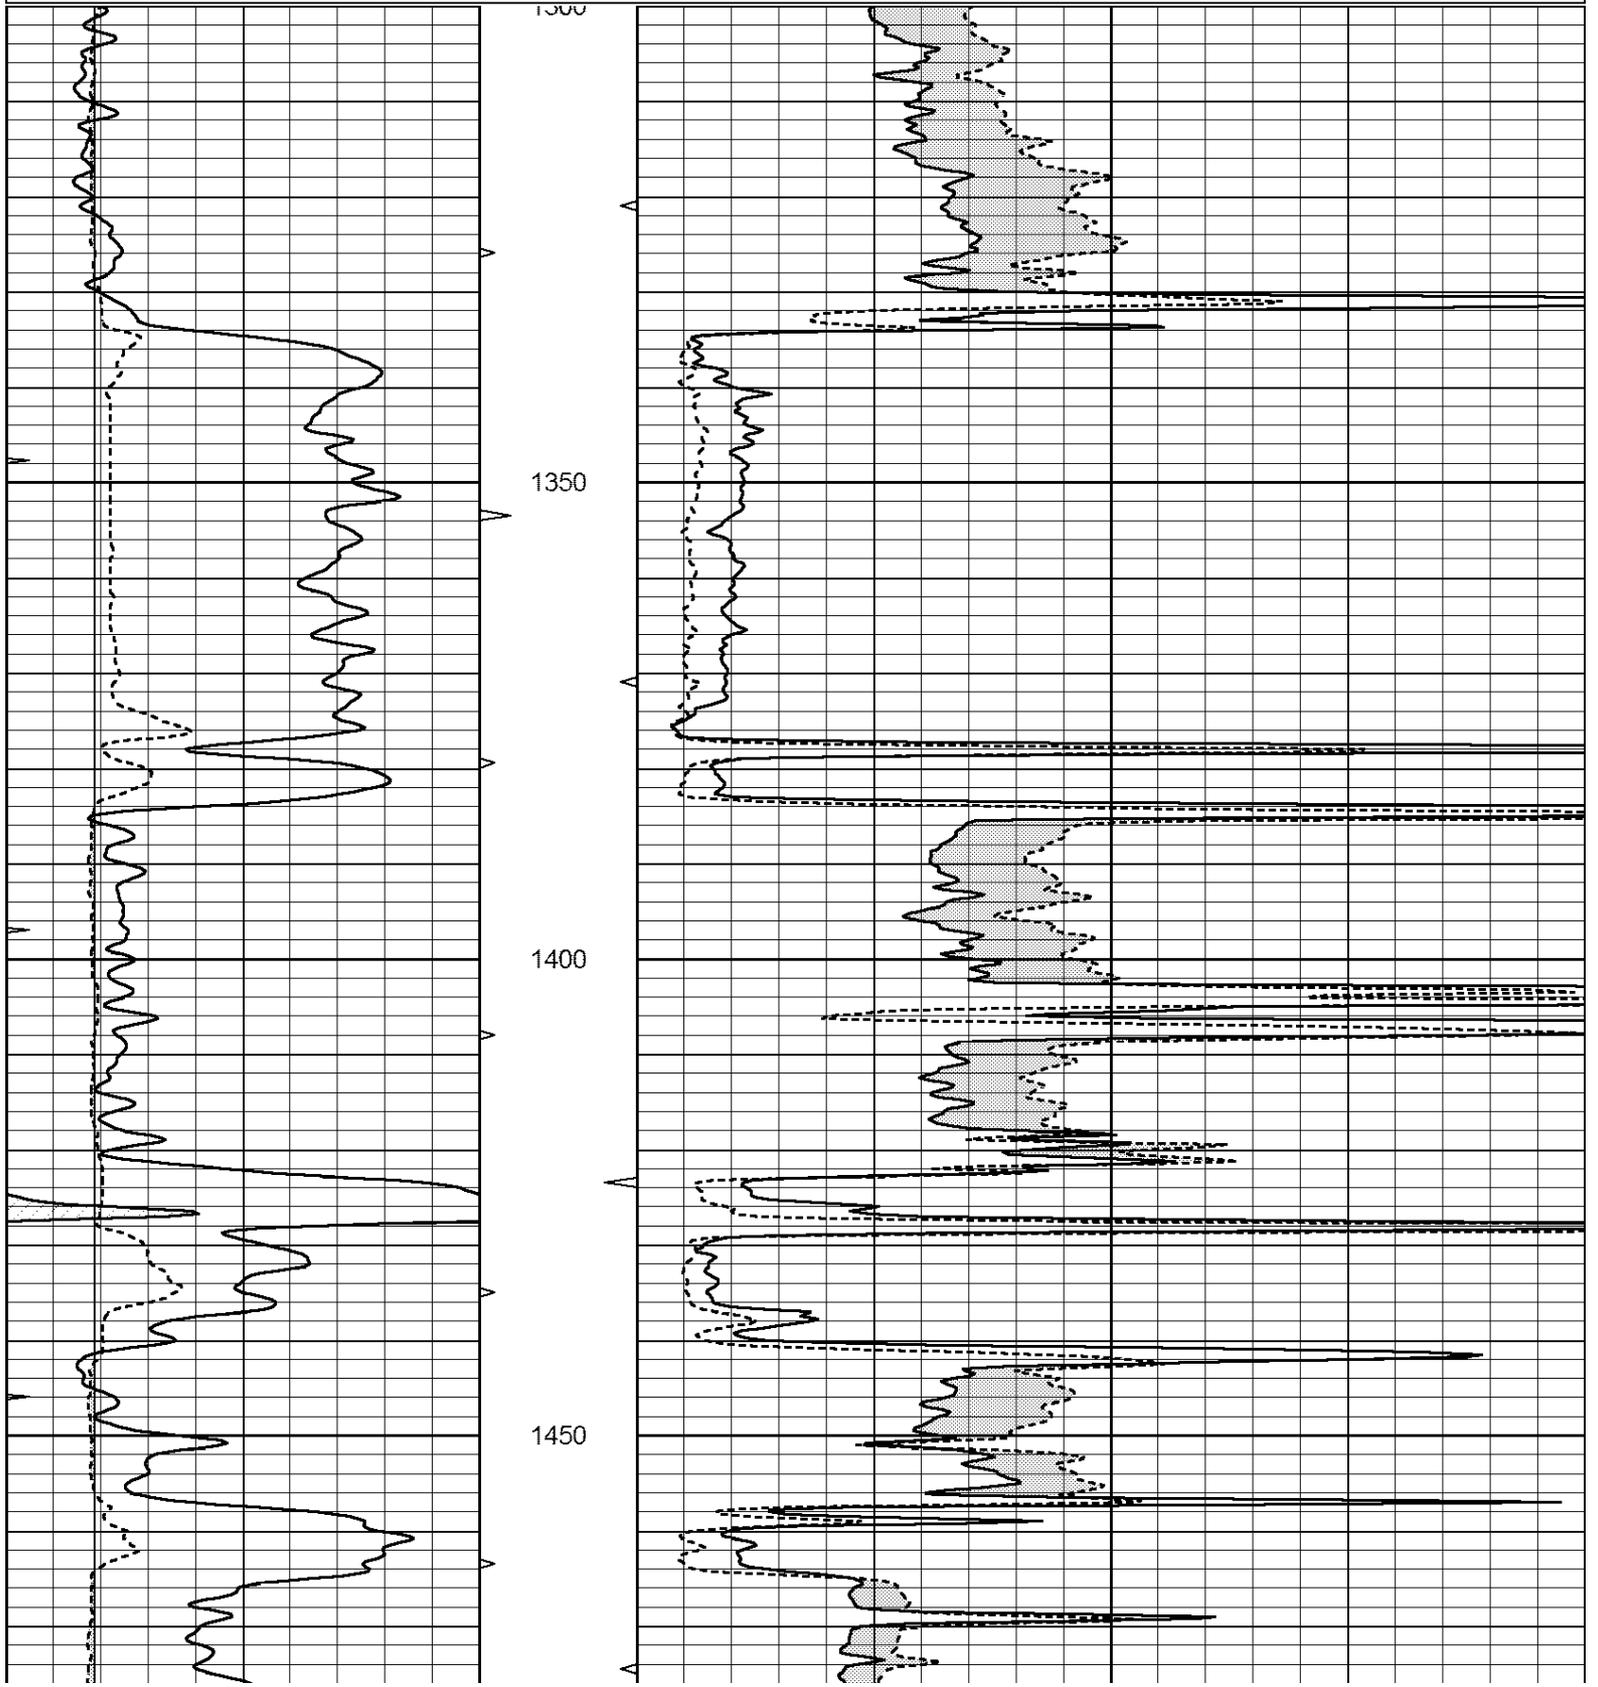


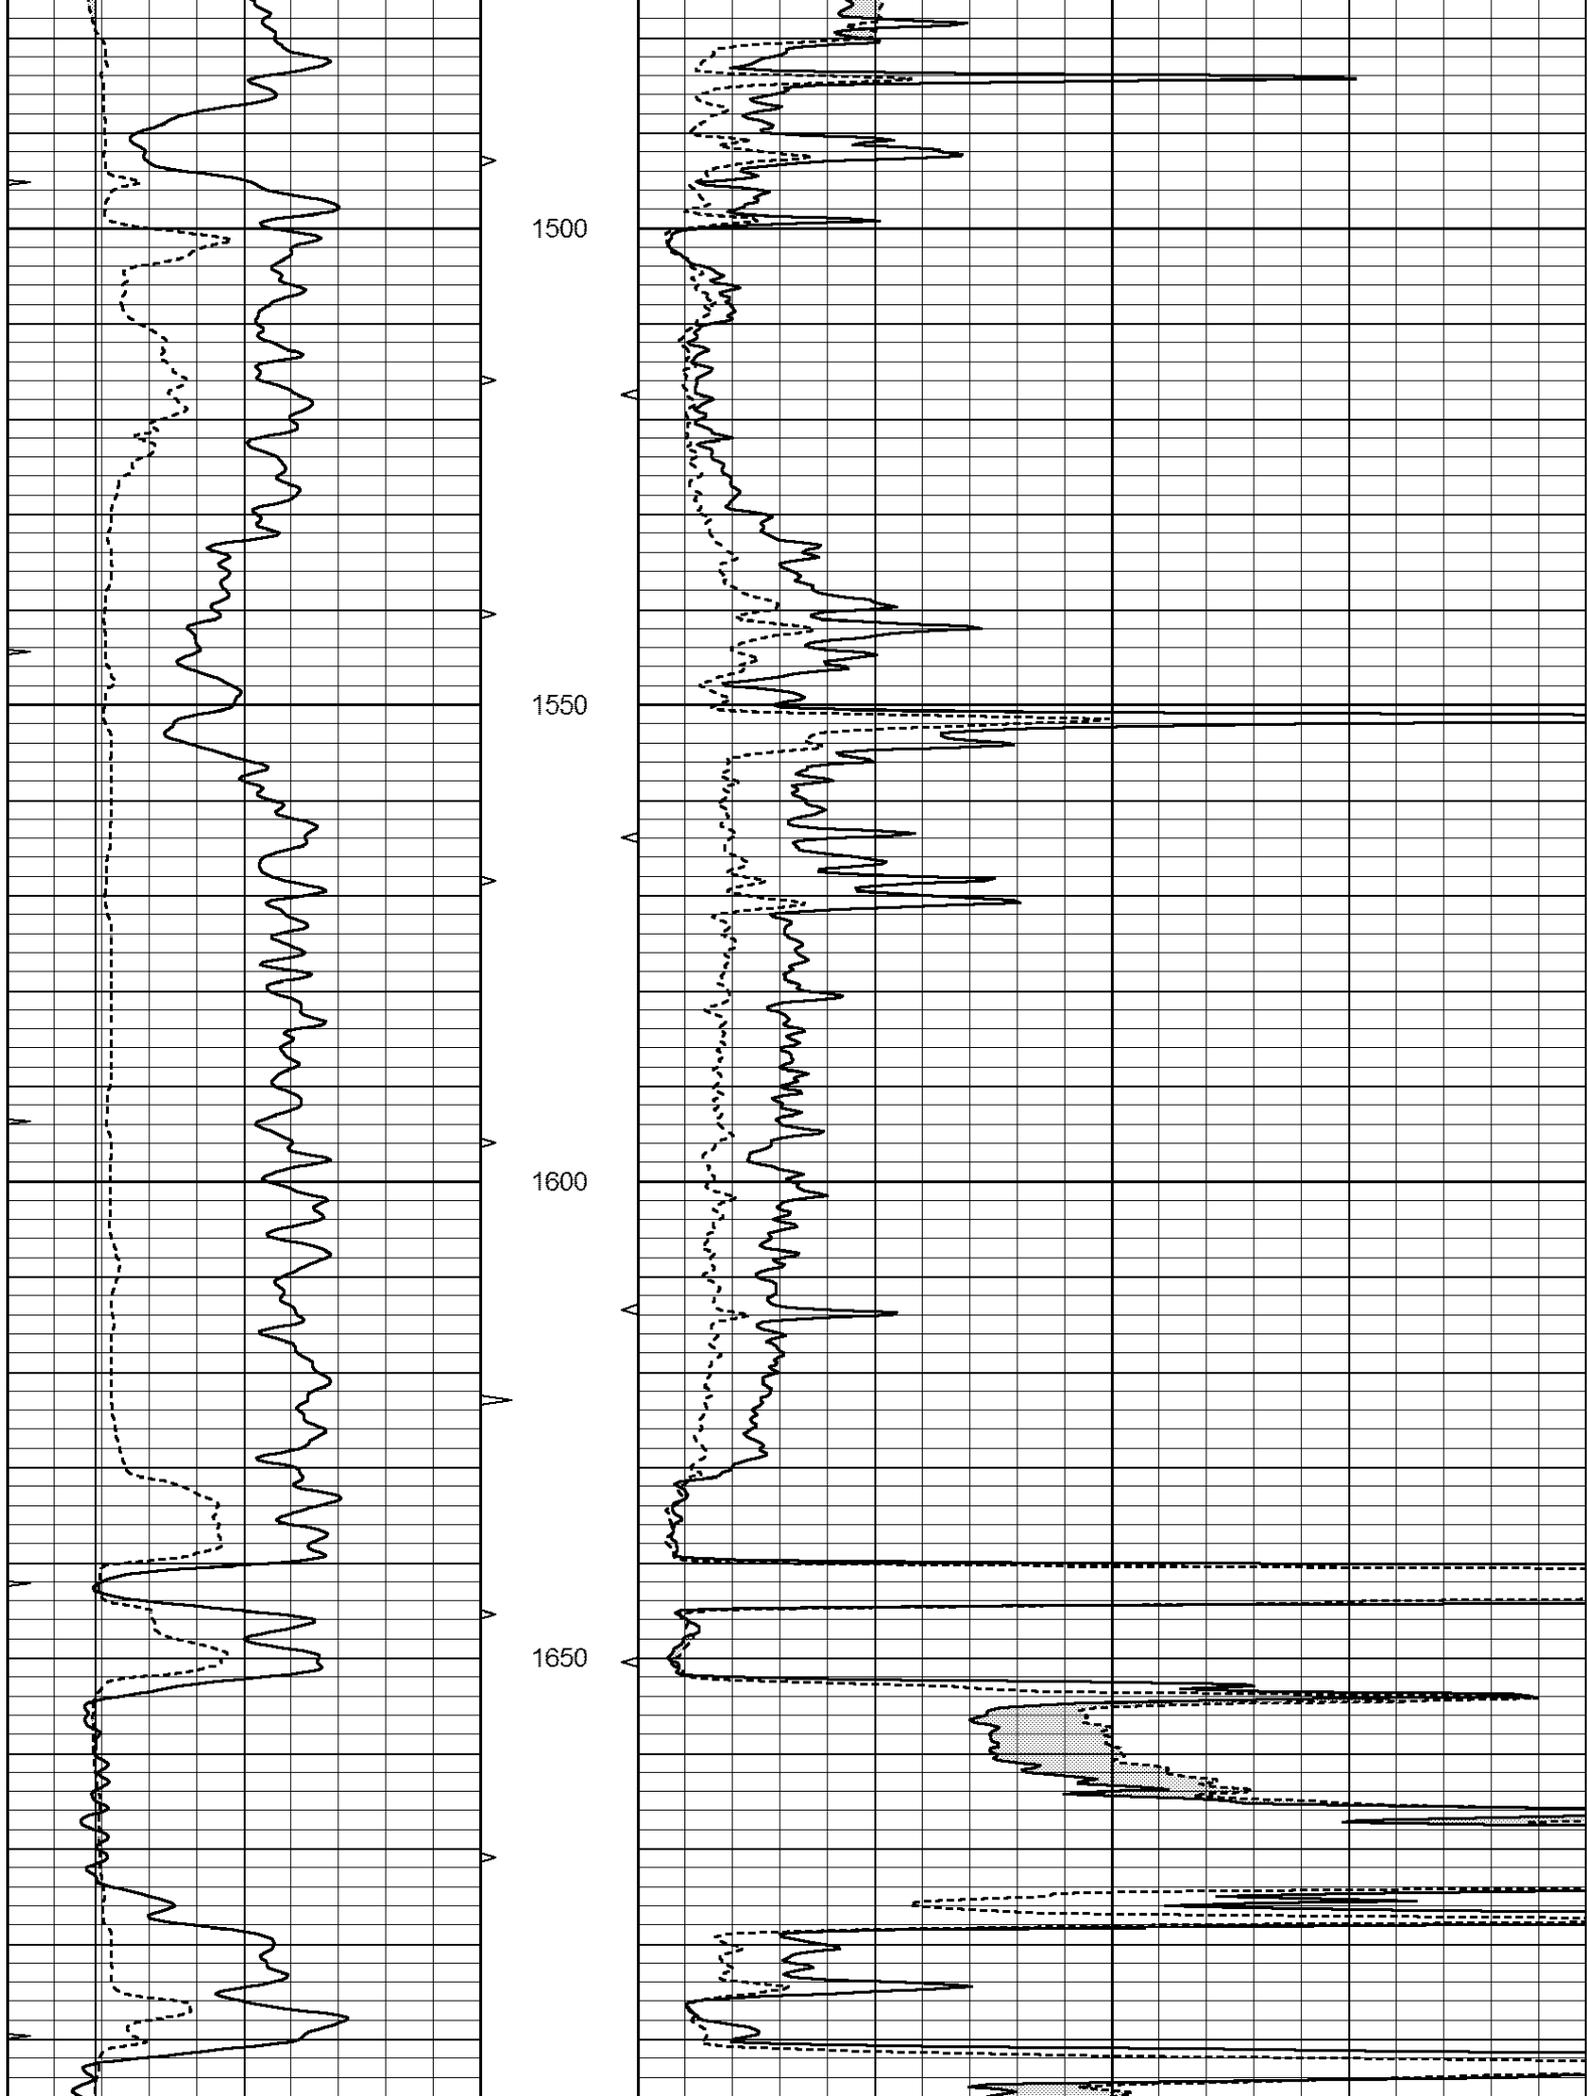

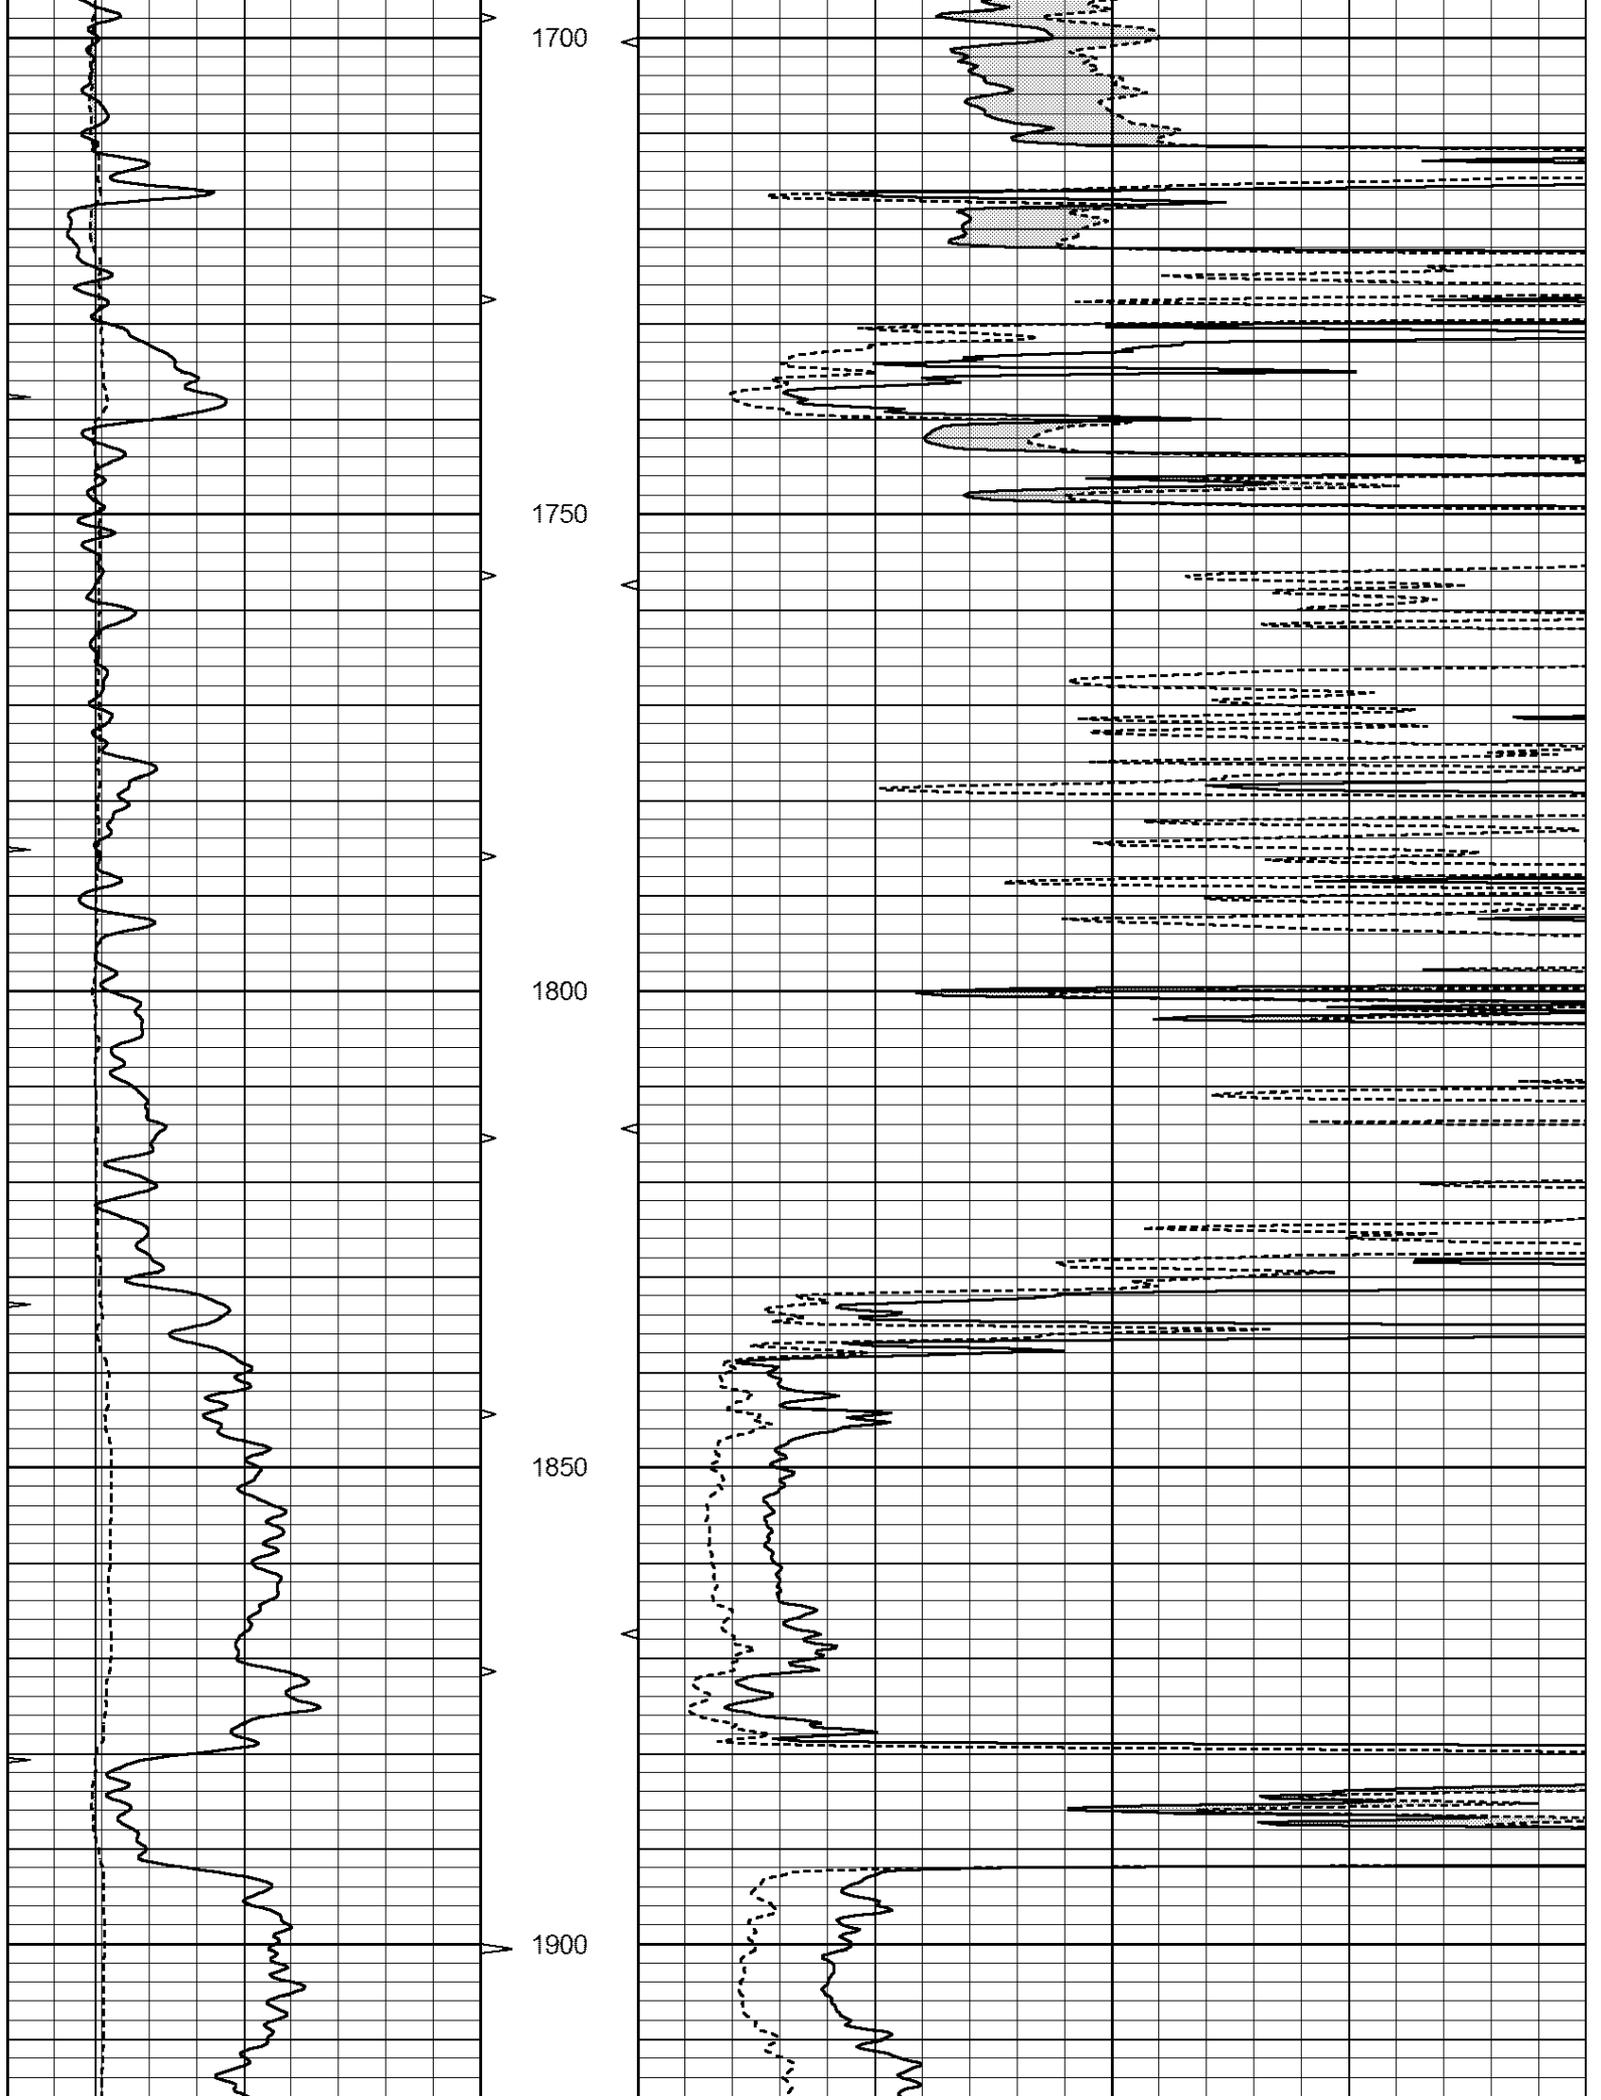

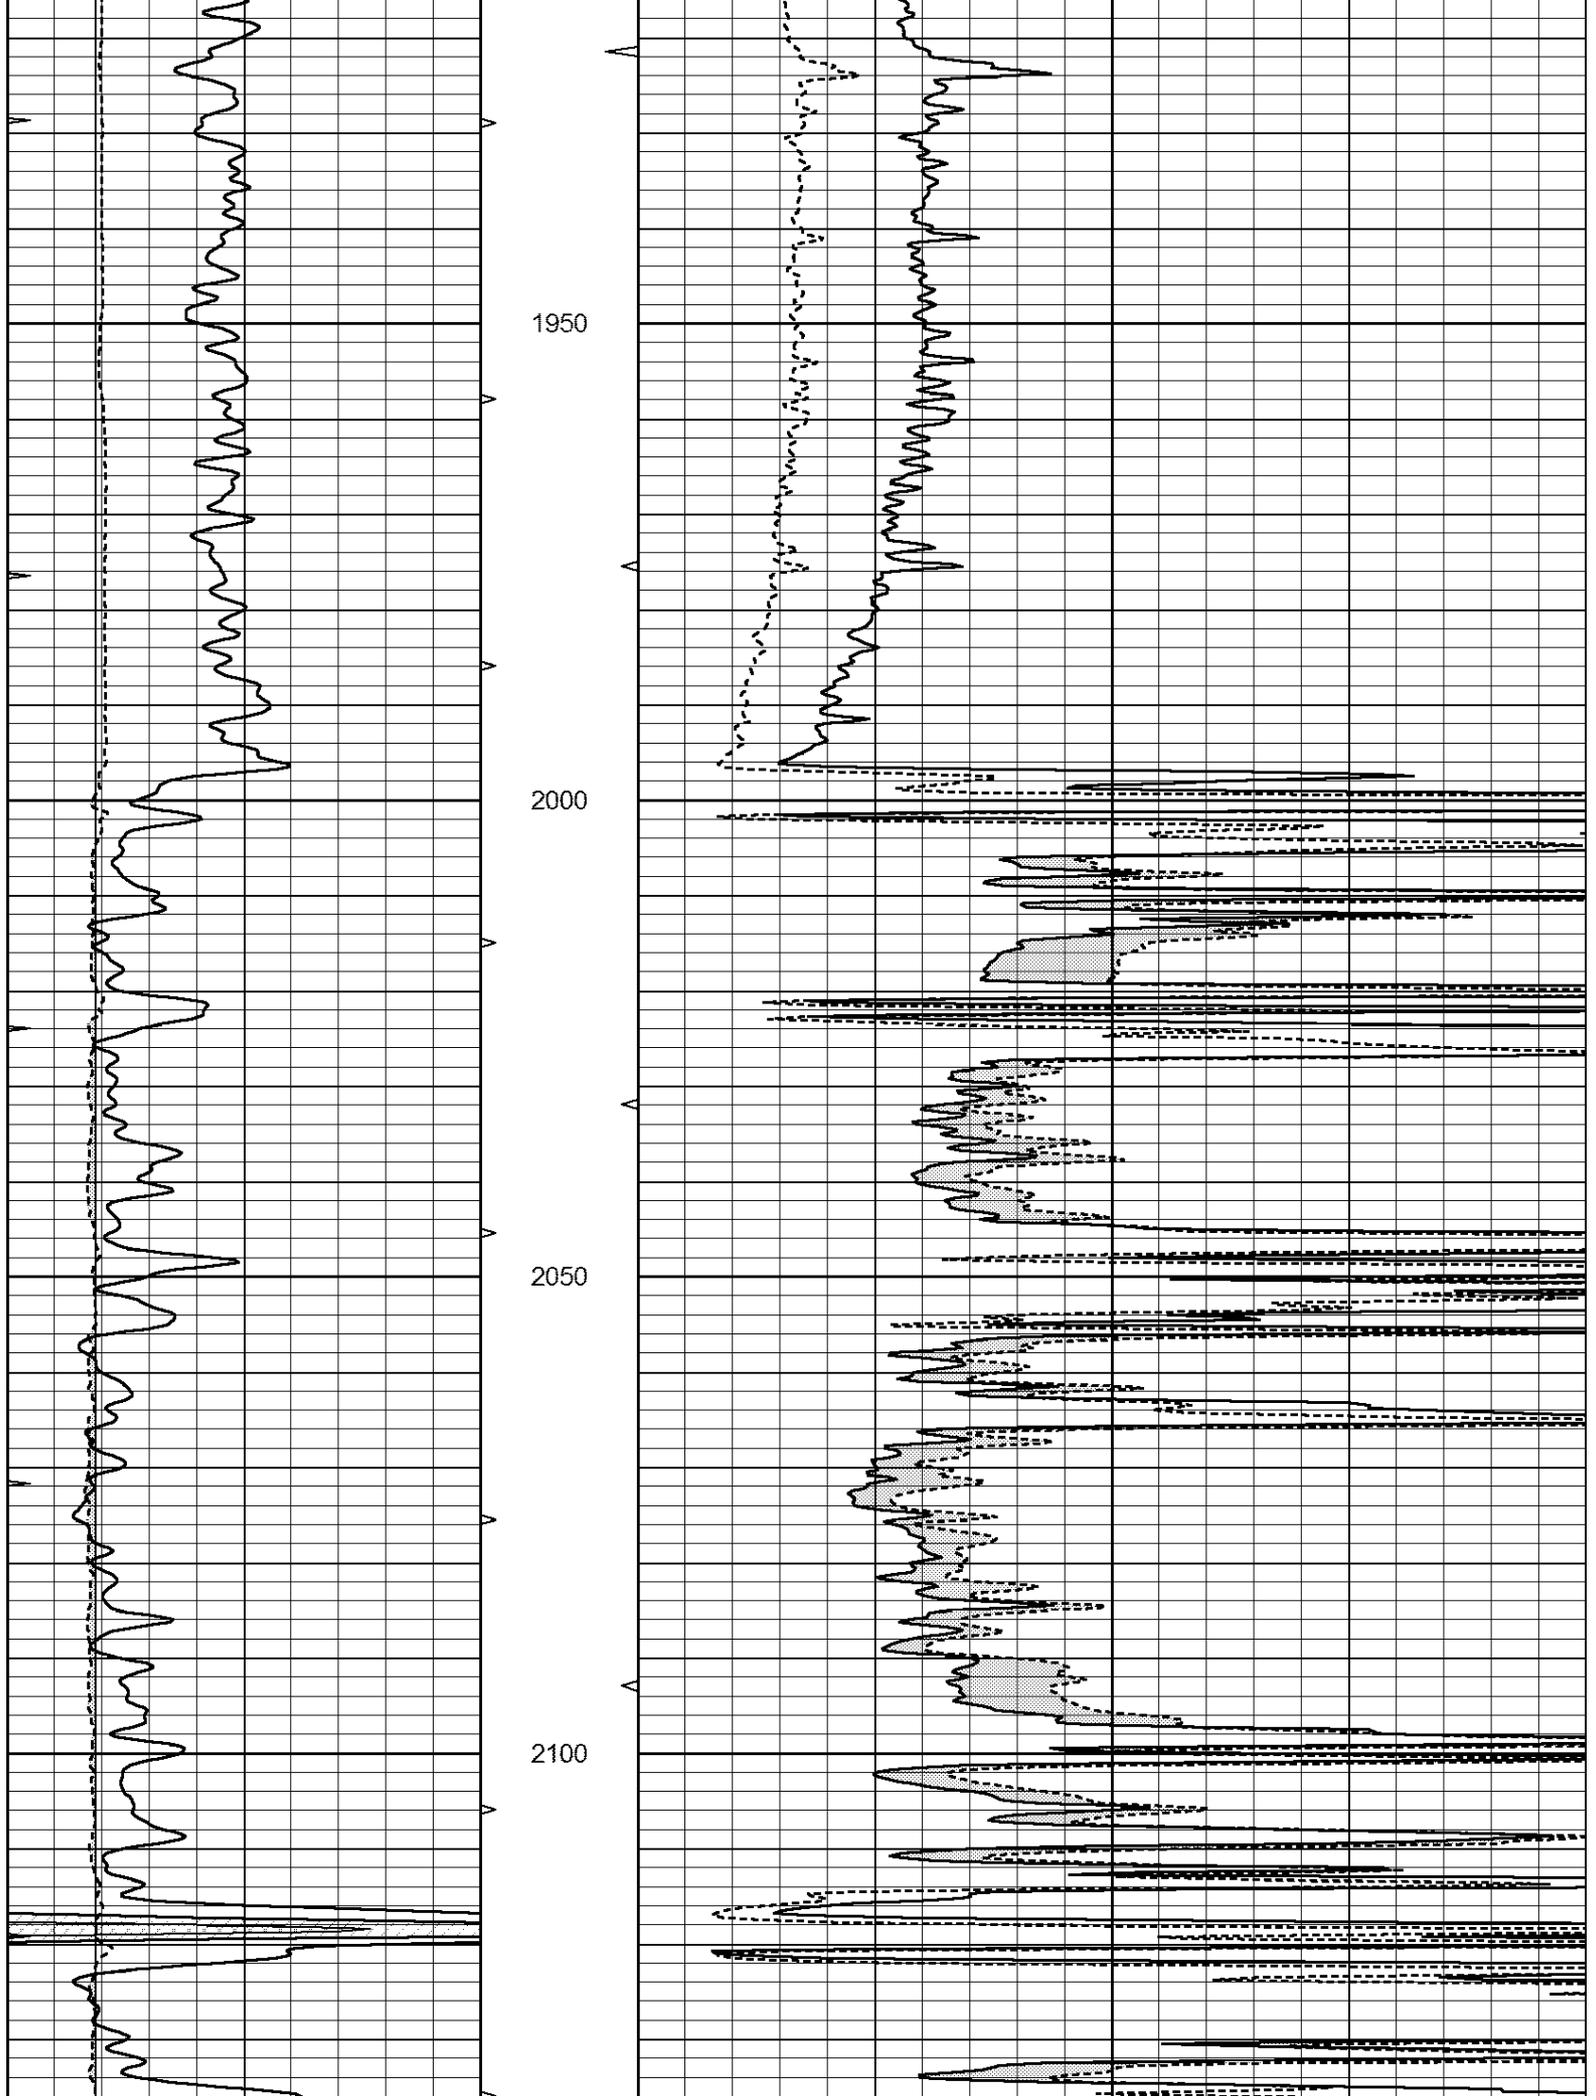

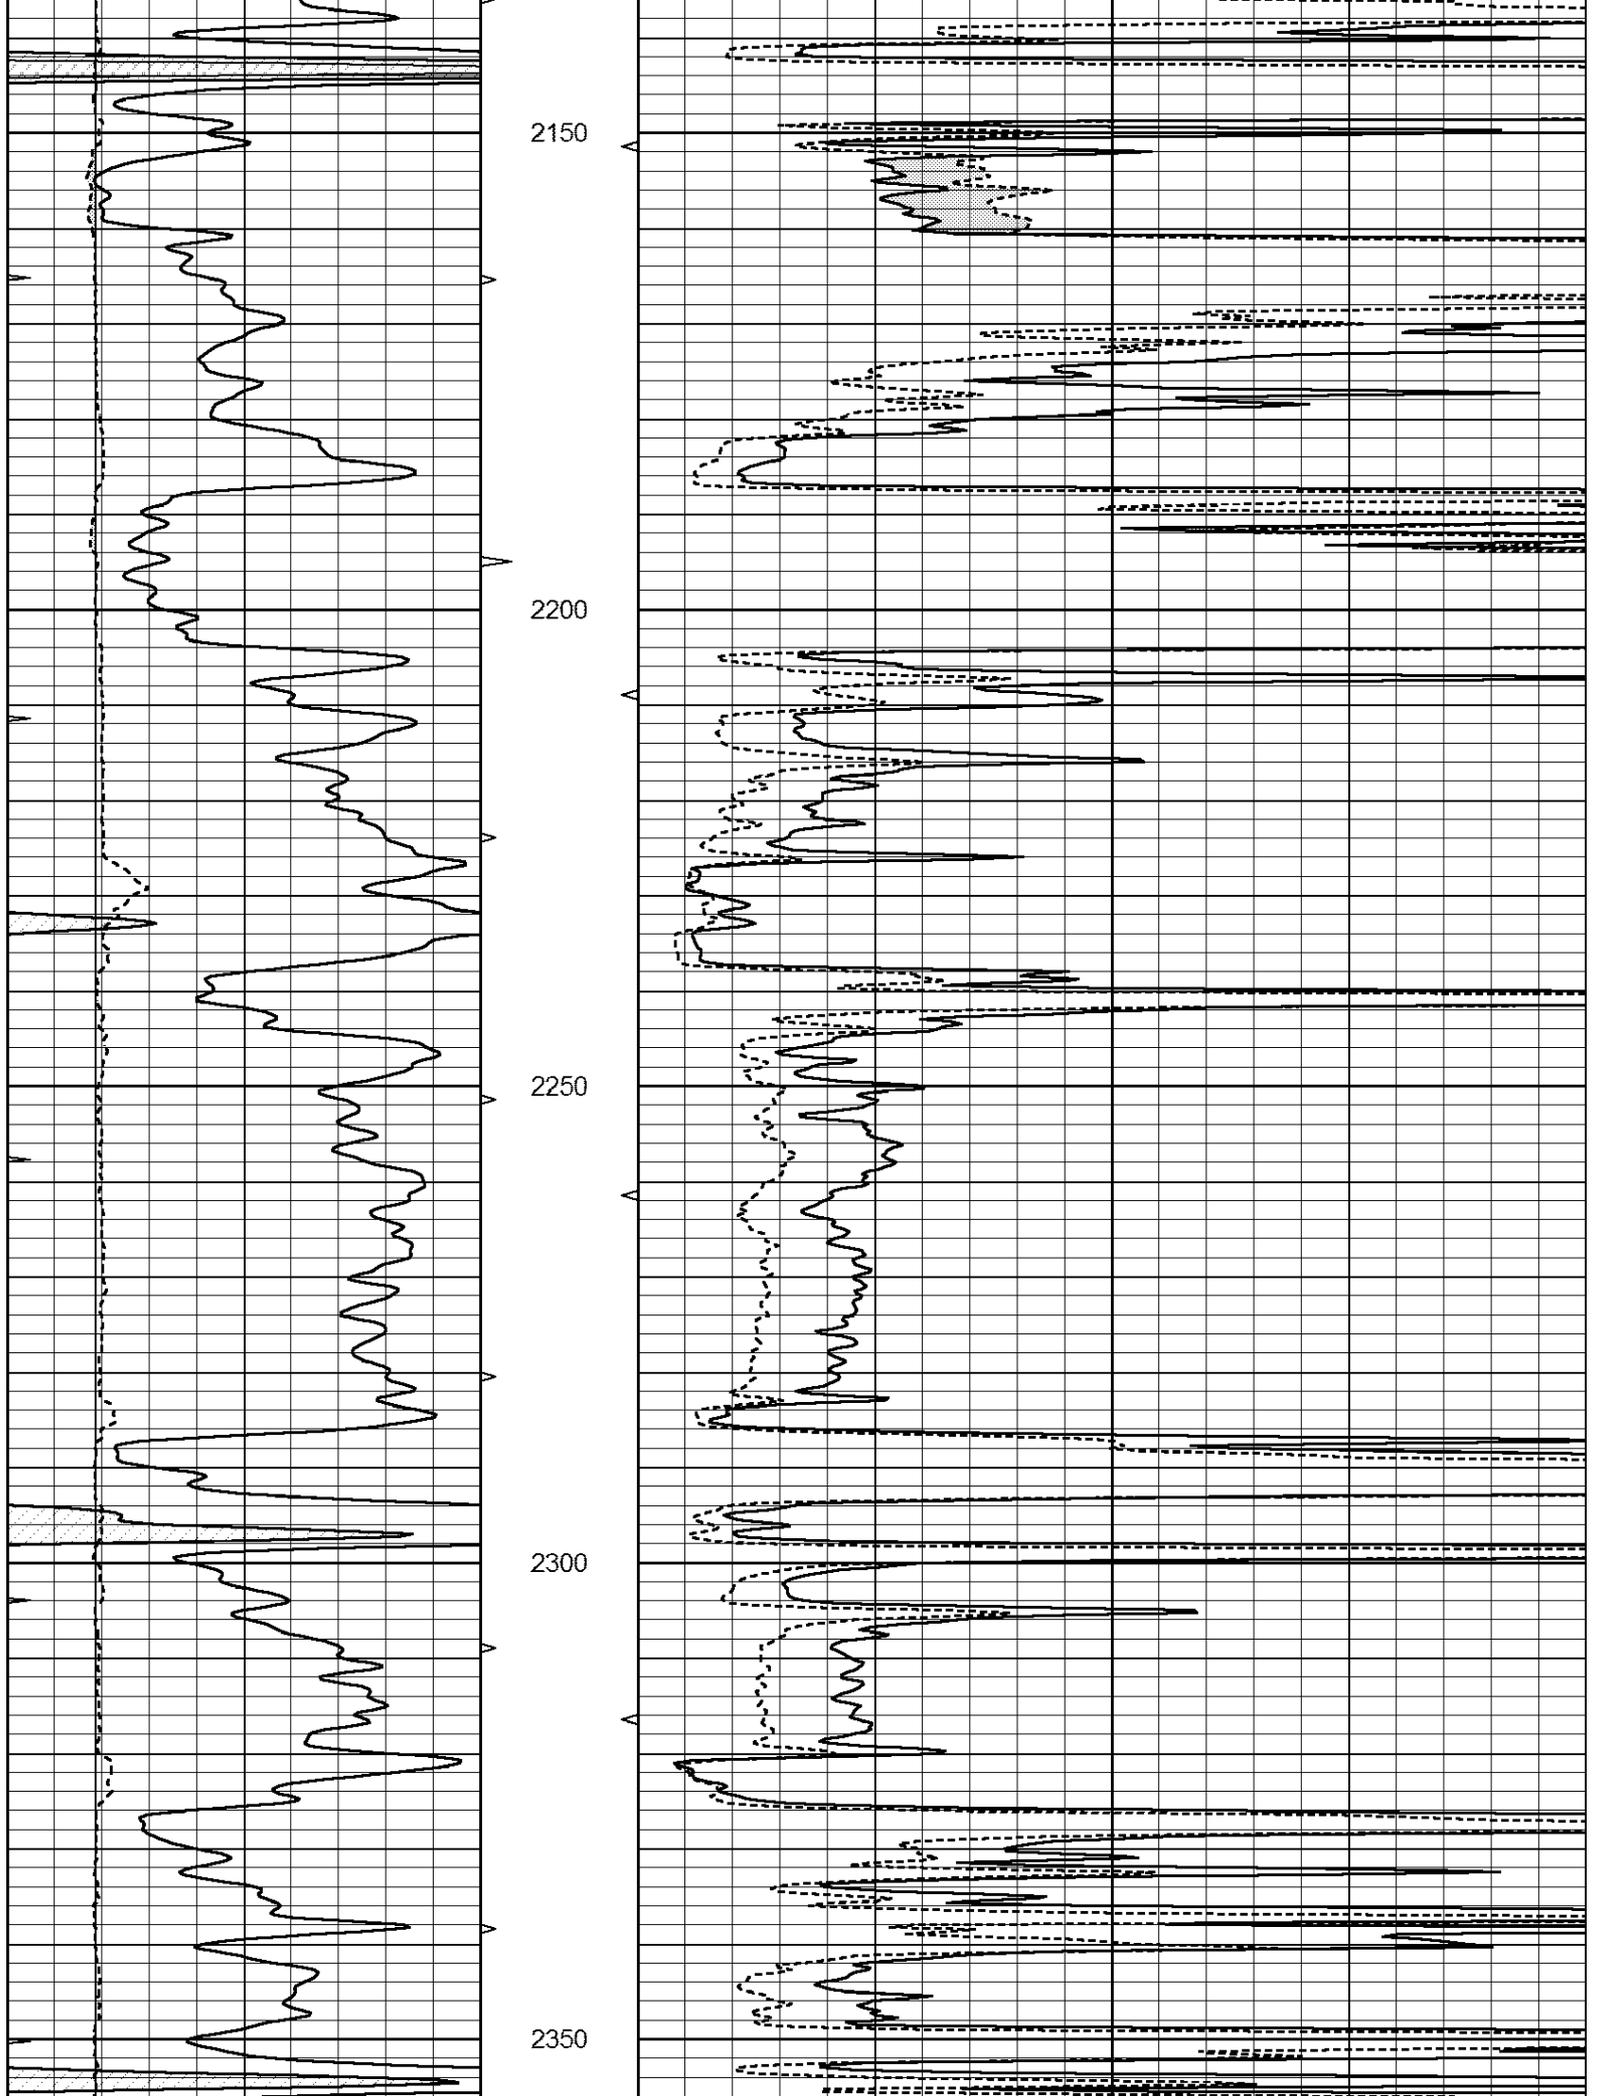


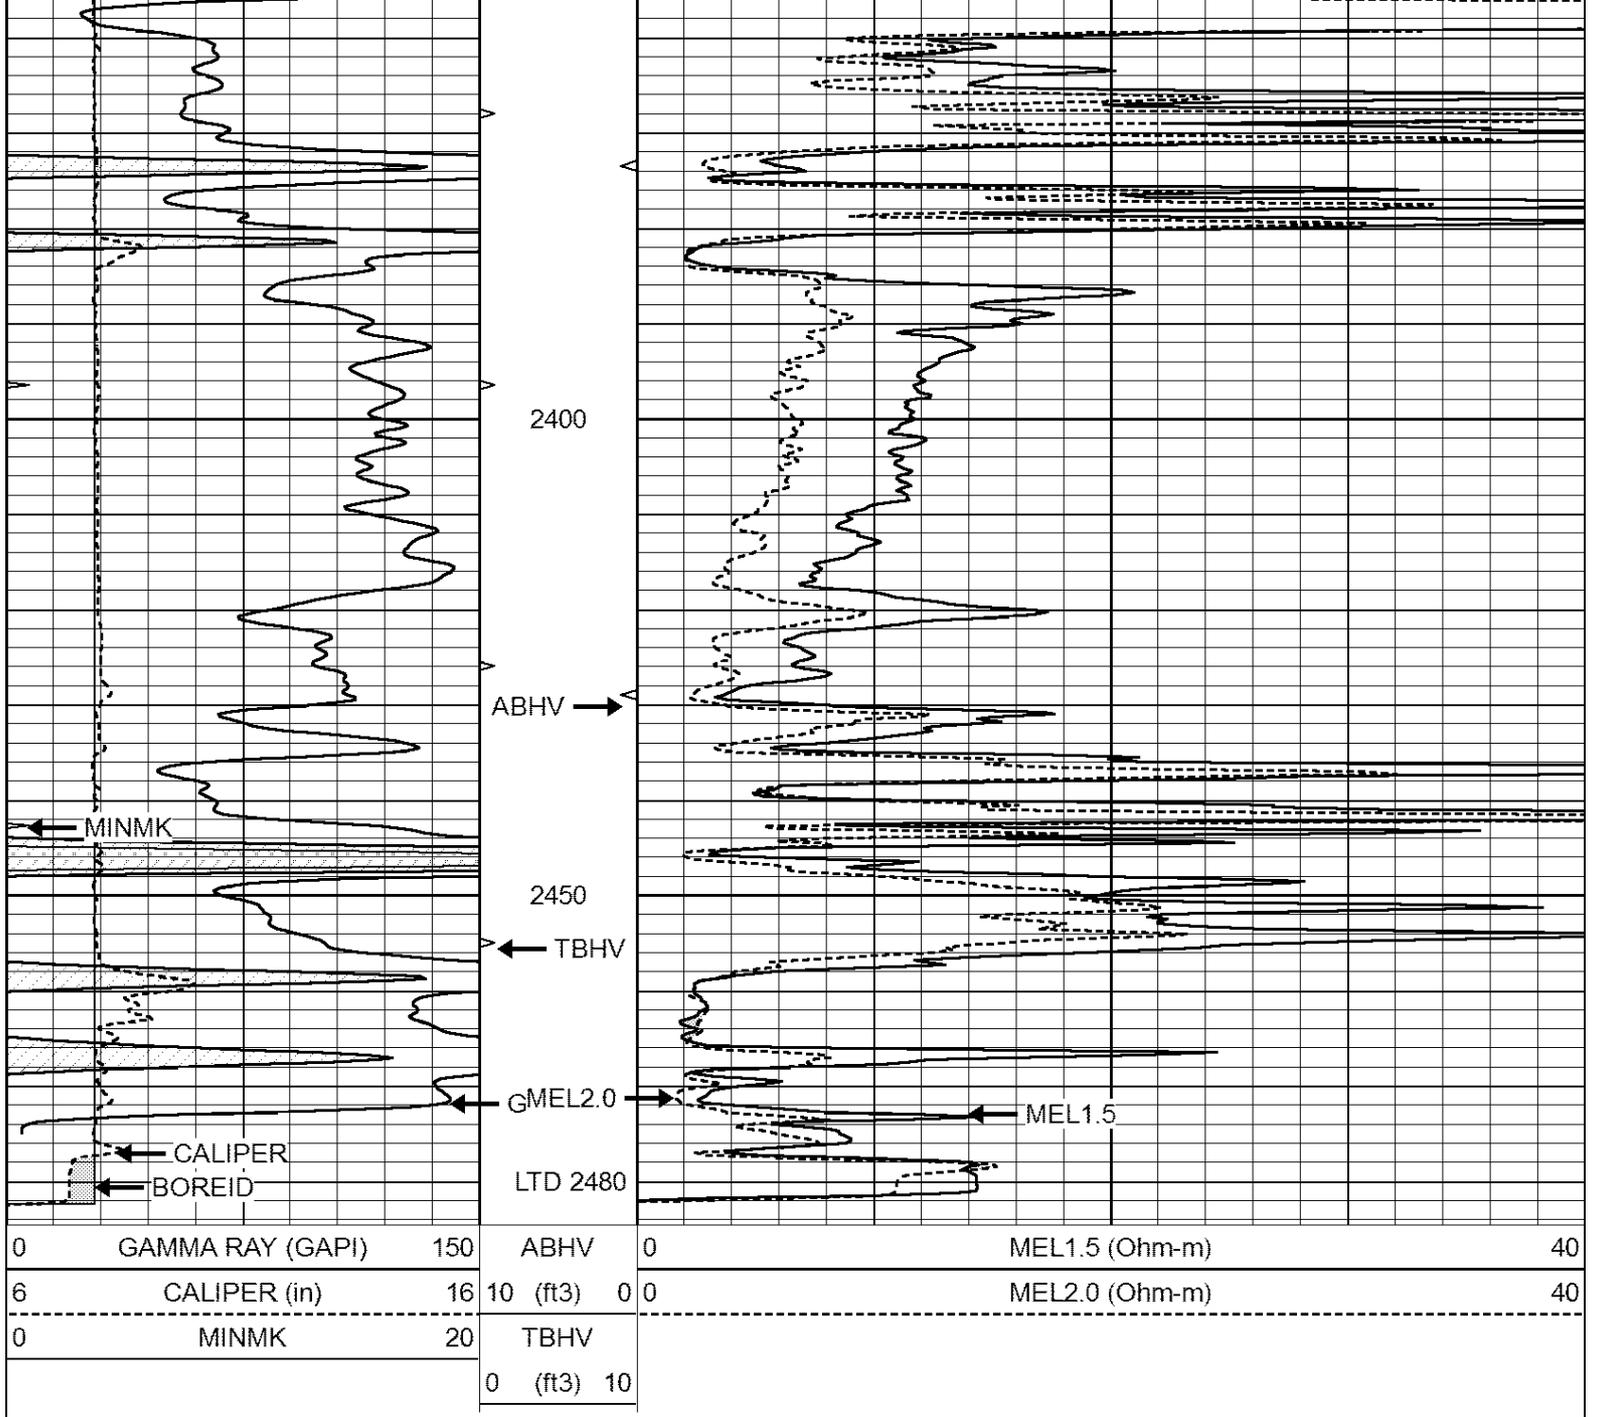


REPEAT SECTION

Database File: 2905pe.db
 Dataset Pathname: pass7.1RP
 Presentation Format: _micro
 Dataset Creation: Sat Aug 18 16:34:08 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		



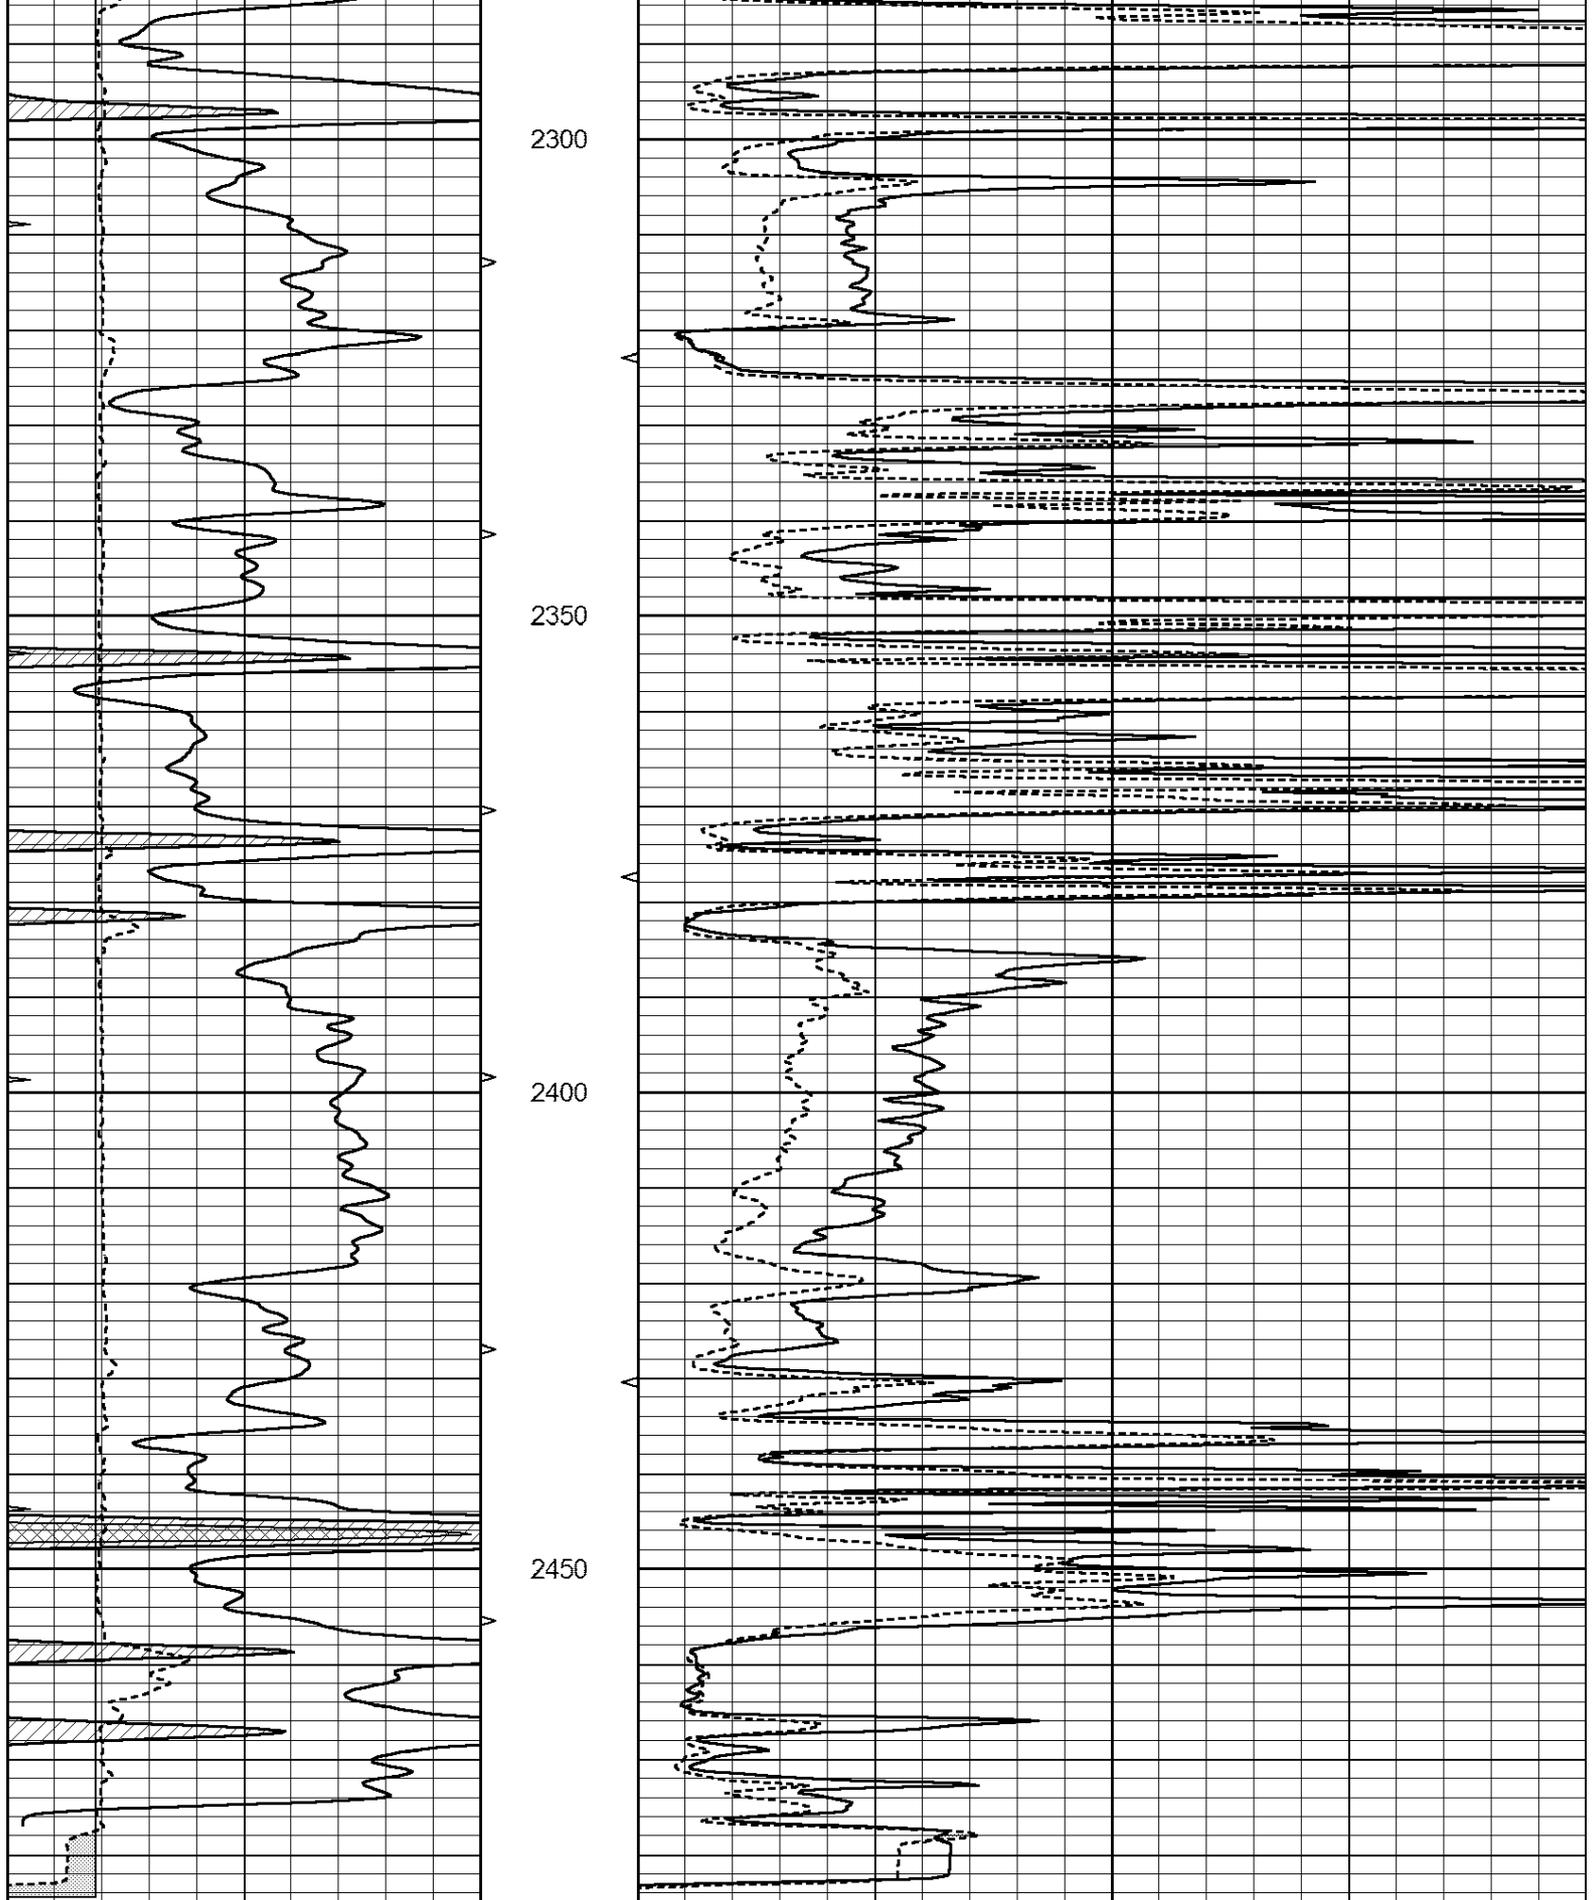

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

Calibration Report

Database File: 2905pe.db
 Dataset Pathname: pass7.1RP
 Dataset Creation: Sat Aug 18 16:34:08 2018

MICRO Calibration Report

Serial Number: MICRO5
 Tool Model: PROBE
 Performed: Thu Aug 16 21:42:11 2018

Caliper Calibration: Gain=6.774 Offset=-3.304

	Low Cal	High Cal
References	7.000	15.500
Readings	1.521	2.776

1.5" Calibration: Gain=30.334 Offset=-1.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.025	1.009

2" Calibration: Gain=40.390 Offset=-1.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.012	1.807

Gamma Ray Calibration Report

Serial Number: GR5
 Tool Model: OPEN
 Performed: Mon Jul 02 20:05:37 2018

Calibrator Value: 1.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 0.8000 GAPI/cps