

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-077-21090-00-01
Spot: SWNWSE Sec/Twnshp/Rge: 24-32S-9W
1815 feet from S Section Line, 2120 feet from E Section Line
Lease Name: HOSPITAL Well #: 4
County: HARPER Total Vertical Depth: 2950 feet

Operator License No.: 5039
Op Name: AGV CORP.
Address: 123 N. MAIN
ATTICA, KS 67009

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	2950		
SURF	8.625	260		

95.88

Well Type: SWD UIC Docket No: D25085.0 Date/Time to Plug: 02/28/2006 2:00 PM
Plug Co. License No.: 33204 Plug Co. Name: BASYE WELL SERVICE, INC.
Proposal Rcvd. from: LARRY MANNIS Company: AGV CORP. Phone: (620) 254-7222

Proposed Plugging Method: Perfs 2826' - 2906'; CIBP @ 2750' w/ 2 sxs; rec pipe; 35 sxs @ 1350'; 35 sxs @ 900'; and circ @ 310' - 0'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: NONE
Date/Time Plugging Completed: 02/28/2006 5:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

Perfs:

A CIBP was set at 2750' and capped with 2 sacks of cement. The casing was recovered from 1865' and pulled to 1334' where 35 sacks of cement was spotted. The casing was pulled to 887' where 35 sacks of cement was spotted. The casing was pulled to 321' where cement was circulated to surface.

60/40 posmix with 4% gel

Allied Cement #23170

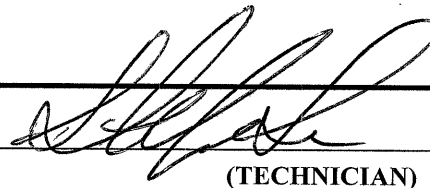
RECEIVED
KCC DISTRICT #2
MAR 13 2006
WICHITA, KS

Remarks:

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

INVOICED
DATE 3-21-06
2006061300

RECEIVED
MAR 20 2006
KCC WICHITA