

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-057-30060-00-00  
Spot: SWNE Sec/Twnshp/Rge: 33-25S-21W  
1980 feet from N Section Line, 1980 feet from E Section Line  
Lease Name: BUTLER A Well #: 1  
County: FORD Total Vertical Depth: 4785 feet

Operator License No.: 7864  
Op Name: INDIEK, JOHN  
Address: RR 1, BOX 62  
OFFERLE, KS 67563

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4150		WITH 2 SX CMT
PROD	4.5	4778	0	WITH 150 SX CMT
SURF	8.625	250		WITH 200 SX CMT

155.51

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/09/2006 10:00 AM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: CURTIS KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: ACCORDING TO STATE REGULATIONS. SET CIBP @ 4150 & 5 SX. PERF @ 600' CIRCULATE CEMENT W/300 SX CMT. IF PULLING PIPE 1000' W/15 SX GEL, 50SX 600' W/50SX C,T. 280 W/50SX, 40 W/10SX, 60/40 POZ MIX 6% GEL.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/09/2006 4:45 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

NO CASING RECOVERED: REPEATED ATTEMPTS AT 630' & 590' FAILED. SET CIBP @ 4150' WITH 2 SX CMT. 1ST PLUG RAN TUBING TO 600' & CIRCULATED CMT TO SURFACE WITH 70 SX CMT. 2ND PLUG MIXED & PUMPED 130 SX CMT DOWN 8 5/8" ANNULUS. MAXIMUM PRESSURE 525#. SHUT IN PRESSURE 250#.


Perfs:

Top	Bot	Thru	Comments
4205	4207		

Remarks: USED 60/40 POZMIX 65 GEL BY COPELAND ACID.

Plugged through: TBG

District: 01

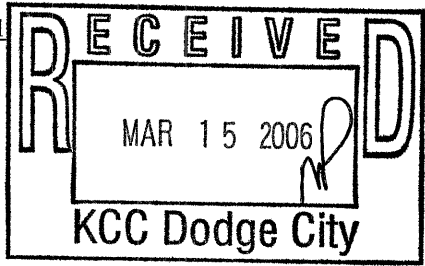

Signed Jerry W. Stapleton  
PART II (TECHNICIAN)

RECEIVED  
MAR 20 2006  
KCC WICHITA

INVOICED Form 9-2  
3-21-06  
200.6061303