

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-22137-00-00  
Spot: NWSESE Sec/Twnshp/Rge: 4-26S-11W  
990 feet from S Section Line, 990 feet from E Section Line  
Lease Name: ZINK Well #: 1  
County: PRATT Total Vertical Depth: 4170 feet

Operator License No.: 30128  
Op Name: WHITE, KENNETH S.  
Address: 2400 N. WOODLAWN, SUITE 115  
WICHITA, KS 67220

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4166	1735	WITH 175 SX CMT
SURF	10.75	255		WITH 225 SX CMT <b>\$135.53</b>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/09/2006 2:30 PM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Revd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: FILL WITH SAND TO 3900' AND DUMP 5 SX CMT, SHOOT CASING FOR RECOVERY, PULL CASING AND PLUG @ 650' W/50 SX CMT, 10 SX GEL & 75 SX @ 290', 25 SX @ 40', 60/40 POZMIX, 6% GEL.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/09/2006 5:05 PM KCC Agent: RICHARD LACEY

**Actual Plugging Report:**

ANHYDRITE: 630-600'. PUMPED 30 SX CMT THROUGH TUBING & DISPLACED TO 4000'. STARTED PIPE LOOSE @ 2400'. PULLED TO 2030'. WELL BLEW OUT UP 5 1/2". PUMPED 25 SX CMT DOWN 5 1/2". PRESSURE WOULD NOT COME OFF. SHUT IN OVERNIGHT. RIPPED PIPE LOOSE @ 1735'. PUMPED 50 SX CMT DOWN 5 1/2" @ 1735'. PULLED PIPE TO 650' PUMPED 10 SX GEL - 50 SX CMT. PULLED TO 290' & PUMPED 75 SX CMT. PULLED TO 40' & PUMPED 20 SX CMT.


**Perfs:**

Top	Bot	Thru	Comments
4038	4044		
4036			
4034			
4032			
4010	4030		

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.  
Plugged through: CSG

**INVOICED**  
DATE 3-21-06  
BY 2006061312

District: 01

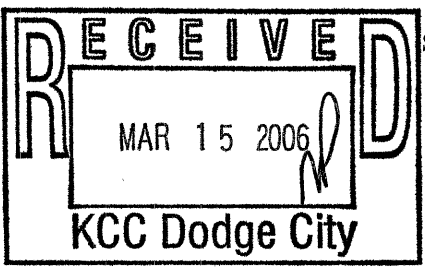

Signed Richard W. Lacey  
(TECHNICIAN)

RECEIVED  
MAR 20 2006  
KCC WICHITA

Form C-28